
An Experimental Study of Dynamic Stall on Advanced Airfoil Sections Volume 2. Pressure and Force Data

K. W. McAlister, S. L. Pucci, W. J. McCroskey,
and L. W. Carr

September 1982



National Aeronautics and
Space Administration

United States Army
Aviation Research
and Development
Command



An Experimental Study of Dynamic Stall on Advanced Airfoil Sections

Volume 2. Pressure and Force Data

K. W. McAlister

S. L. Pucci

W. J. McCroskey

L. W. Carr, Aeromechanics Laboratory

AVRADCOM Research and Technology Laboratories

Ames Research Center, Moffett Field, California



National Aeronautics and
Space Administration

Ames Research Center
Moffett Field, California 94035

United States Army
Aviation Research and
Development Command
St. Louis, Missouri 63166



TABLE OF CONTENTS

	<u>Page</u>
SYMBOLS	ix
SUMMARY	1
INTRODUCTION	1
DATA ACQUISITION	1
DATA REDUCTION	3
DATA PRESENTATION	4
APPENDIX — PROGRAM FOR READING DATA TAPES ON THE CDC 7600 COMPUTER	6
TABLES	10
FIGURES	43

FIGURES

	<u>Page</u>
1 Airfoil profiles tested	43
2 Upper and lower surface-pressure transducer locations	44
3 Plumbing for reference pressures	45
4 Static data for NACA 0012 airfoil	46
5 Static data for Ames A-01 airfoil	48
6 Static data for Wortmann FX-098 airfoil	54
7 Static data for Sikorsky SC-1095 airfoil	60
8 Static data for Hughes HH-02 airfoil	66
9 Static data for Vertol VR-7 airfoil	72
10 Static data for NLR-1 airfoil	78
11 Static data for NLR-7301 airfoil	84
12 Dynamic data for NACA 0012 airfoil	90
13 Dynamic data for Ames A-01 airfoil	212
14 Dynamic data for Wortmann FX-098 airfoil	281
15 Dynamic data for Sikorsky SC-1095 airfoil	330
16 Dynamic data for Hughes HH-02 airfoil	381
17 Dynamic data for Vertol VR-7 airfoil	442
18 Dynamic data for NLR-1 airfoil	516
19 Dynamic data for NLR-7301 airfoil	583

TABLES

	<u>Page</u>
1 AIRFOIL COORDINATES: NACA 0012 AND AMES A-01 AIRFOILS	10
2 AIRFOIL COORDINATES: WORTMANN FX-098 AND SIKORSKY SC-1095 AIRFOILS	11
3 AIRFOIL COORDINATES: HUGHES HH-02 (-5° TAB) AND VERTOL VR-7 (-3° TAB) AIRFOILS	12
4 AIRFOIL COORDINATES: NLR-1 AND NLR-7301 AIRFOILS	13
5 TRANSDUCER LOCATIONS ON THE AIRFOILS	14
6 LIST OF DATA FRAMES	15
7 LIST OF STATIC DATA	31
8 MACH NUMBER SWEEP AT $\alpha = 15^{\circ} + 10^{\circ} \sin \omega t$, $k = 0.10$	32
9 FREQUENCY SWEEP AT $M_{\infty} = 0.29$, $\alpha = 15^{\circ} + 10^{\circ} \sin \omega t$	32
10 FREQUENCY SWEEP AT $M_{\infty} = 0.30$, $\alpha = 10^{\circ} + 10^{\circ} \sin \omega t$	33
11 FREQUENCY SWEEP AT $M_{\infty} = 0.30$, $\alpha = 15^{\circ} + 5^{\circ} \sin \omega t$	33
12 FREQUENCY SWEEP AT $M_{\infty} = 0.30$, $\alpha = 10^{\circ} + 5^{\circ} \sin \omega t$	33
13 STALL ONSET AT $M_{\infty} = 0.30$, $\alpha = \alpha_0 + 10^{\circ} \sin \omega t$, $k = 0.10$	34
14 STALL SUPPRESSION AT $M_{\infty} = 0.30$, $\alpha = \alpha_0 + 10^{\circ} \sin \omega t$	34
15 STALL SUPPRESSION AT $M_{\infty} = 0.18$, $\alpha = \alpha_0 + 10^{\circ} \sin \omega t$	34
16 PITCH DAMPING STUDIES AT $M_{\infty} = 0.30$, $\alpha = \alpha_0 + 2^{\circ} \sin \omega t$	35
17 NO SEPARATION: $M_{\infty} = 0.30$, $\alpha = 5^{\circ} + 5^{\circ} \sin \omega t$	37
18 DYNAMIC BOUNDARY-LAYER TRIP DATA	37
19 MISCELLANEOUS DYNAMIC DATA	38
20 TEST CASES FOR NUMERICAL ANALYSIS (ref. 1)	41
21 ARCHIVED TAPE ASSIGNMENT	42
22 MAGNETIC TAPE ATTRIBUTES	42

SYMBOLS

c	airfoil chord, m
C_D	drag coefficient derived from surface pressures, drag/qcs
C_L	lift coefficient derived from surface pressures, lift/qcs
C_M	moment coefficient derived from surface pressures, moment/qc ² s
C_p	pressure coefficient, $(p - p_\infty)/q$
k	reduced frequency, $\omega c/2U_\infty$
M	Mach number
p	surface pressure, N/m ²
p_∞	free-stream static pressure, N/m ²
p_T	free-stream total pressure, N/m ²
q	free-stream dynamic pressure, N/m ²
Re	Reynolds number based on chord and free-stream conditions
s	airfoil span, m
t	time, sec
U_∞	free-stream velocity, m/sec
x	chordwise coordinate, m
y	normal coordinate, m
α	airfoil incidence, deg
α_0	mean angle of oscillation, deg
α_1	amplitude of oscillation, deg
ζ	aerodynamic pitch damping coefficient, $-\frac{1}{4\alpha_1^2} \oint C_M d\alpha$
ω	circular frequency, rad/sec

AN EXPERIMENTAL STUDY OF DYNAMIC STALL ON ADVANCED AIRFOIL SECTIONS

VOLUME 2. PRESSURE AND FORCE DATA

K. W. McAlister, S. L. Pucci, W. J. McCroskey, and L. W. Carr

U.S. Army Aeromechanics Laboratory (AVRADCOM), Ames Research Center

SUMMARY

Experimentally derived force and moment data are presented for eight airfoil sections that were tested at fixed and varying incidence in a subsonic two-dimensional stream. Airfoil incidence was varied through sinusoidal oscillations in pitch over a wide range of amplitude and frequency. The surface pressure distribution, as well as the lift, drag, and pitching moment derived therefrom, are displayed in a uniform fashion to delineate the static and dynamic characteristics of each airfoil both in and out of stall.

INTRODUCTION

The experiment reported in these volumes was undertaken to investigate the effects of airfoil geometry and free-stream Mach number on the phenomenon of dynamic stall. The experiment and its principal results are summarized in volume 1 (Summary of the Experiment), and boundary-layer transition, flow reversal, and reattachment results are presented in volume 3 (Hot-Wire and Hot-Film Measurements). Pressure, force, and moment data are contained in this volume.

Eight airfoil profiles, consisting of a NACA 0012 section, six rotor-blade sections, and a fixed-wing supercritical section (fig. 1 and tables 1-4), were tested at both fixed incidence and varying incidence, $\alpha = \alpha_0 + \alpha_1 \sin \omega t$, over a range of Mach numbers to 0.30. Because the intention was to fulfill the requirement for a data base applicable to the retreating-blade stall problem on helicopter rotors, most of the unsteady data accumulated can be classified as large amplitude (typically $\alpha_1 = 10^\circ$) and at fundamental reduced frequencies (typically $k \leq 0.20$). Although numerous diagnostic techniques were employed during the course of this study, the purpose of the present volume is to describe the pressure reduction phase of the experiment and to present both steady and unsteady results in a uniform graphical format.

DATA ACQUISITION

Although differential pressure measurements (obtained by referencing the upper surface to the lower surface at the same chord location) would have sufficed for deriving the normal force and pitching moment on the airfoil, single surface-pressure measurements were preferred because (1) they provided a more definitive observation of the formation and passage of the stall vortex over the upper surface of the airfoil and (2) they enabled the calculation of chord force (due to pressure only) and, later, the construction of lift and drag forces. These two considerations, in turn, strongly influenced the distribution of the pressure transducers around the airfoil (fig. 2 and table 5).

In all, 30 quantities were recorded in analog form on magnetic tape. These consisted of (1) airfoil incidence, α , (2) tunnel dynamic pressure, $p_T - p_\infty$, (3) airfoil surface pressures, p_1 through p_{26} , (4) 200/rev pulse train synchronous with ωt , and (5) 1/rev pulse synchronous with the beginning of each cycle of airfoil oscillation. The total pressure, p_T , was essentially invariant during the course of any given test case, and was therefore recorded by hand in the test log. Other quantities that originally appeared in the test log include (1) airfoil designation code; (2) type code for identifying the data as relating to reference voltage, amplifier gain, transducer calibration, reference zero, steady test data, or unsteady test data; (3) frequency, mean angle, and amplitude of oscillation; (4) free-stream and model-core temperatures; and (5) the real time at the beginning of each data frame. This information was later appended to the test data during the analog-to-digital conversion phase of the data reduction.

All analog signals were conditioned by amplifiers and recorded on a 32-channel magnetic tape machine at a tape speed of 0.4 m/sec. Approximately 65 analog tapes were required for the entire experiment. Because of the large quantity of data to be acquired and the impracticality of reviewing a test recording before proceeding to the next case, certain standards were adopted. At the discretion of the test engineer, transducers were mechanically exercised and allowed to reach the mean environmental temperature by operating the tunnel and airfoil at the test condition of interest. This pre-run rehearsal provided an opportunity not only for identifying anomalous transducer responses, but also for adjusting the gains for maximum output voltages in order to maximize the signal-to-noise ratio. The tunnel and airfoil were then brought to rest so that transducer signals could be rebalanced to near-zero output voltage. If the gain of any amplifier needed to be changed, all channels were switched to sense a fixed reference voltage and a brief recording made on analog tape. From this record the corresponding gains could be inferred and properly accounted for during the data-reduction phase.

Another practice, considered of equal importance, was to obtain zero-flow records on a frequent basis. Careful calibrations before the experiment indicated that acceptable transducer drifts due to time and temperature could be bounded by allowing no more than 20 min or a change of 1°F between zero records. Although individual transducer temperatures were not monitored, the model-core temperature was taken to be representative for the purpose of scheduling a zero record.

A standard procedure was also adopted for configuring data on magnetic tape so that each tape could be independently processed as well as reduced in an automatic fashion. These two requirements led to the following test procedures:

1. Initialize each tape with recordings of an electrical short and ± 1 V references
2. Record transducer gain evaluation voltages
3. Record prescribed sequence of pressure transducer calibrations
4. Record transducer gain evaluation voltages (if changed) before test cases
5. Record zero-flow signals before test cases (initial zero)
6. Record test cases
7. Record zero-flow signals following test cases (final zero)

8. Repeat (4) through (7) until near the end of the tape
9. Repeat (2) and (3) at the end of the tape

The technique used for systematically subjecting the transducers to given pressure levels is shown in figure 3. Shop air was used to continuously supply a tank to which six pressure regulators were attached. The regulators were preset to pressures of 0.3, 0.6, 1.0, 2.0, 3.0, and 5.0 psig. These six pressures, along with that from the tunnel pitot probe, were used as the pressure references for the test. By selecting any one of these seven pressure sources, the reference side of all pressure transducers in the model could be simultaneously exposed to either a calibration pressure or to the tunnel total-pressure. By using positive gage pressures for calibration references, the transducer diaphragms were deformed in the same direction as when the airfoil-surface sides of the transducers were exposed to suction during a test run. This procedure eliminated the need for calibrating through zero pressure. A detailed estimation of the uncertainty and accuracy of the pressure measurements is given in volume 1.

DATA REDUCTION

The first step in the data reduction process was the conversion of analog data to digital form. This required that each frame of data be replayed in real time, digitized using the 200/rev and 1/rev synchronizing signals, and stored on a digital tape. It was during this latter step that various test parameters recorded by hand in the log were coded and appended to each corresponding frame of data. A hardware incompatibility prevented the digitizer from responding to the 200/rev signal directly, and a synthetic pulse train based on this signal had to be substituted. Since the computed period for the synthetic signal was dependent on the period of the test data just completed on the analog tape, a slight fluctuation from cycle to cycle during the original recording of unsteady data sometimes resulted in a slightly incorrect synthetic period. As a result, ensemble averages of the digital data would correspond to specific values of ωt only in the mean, and the resulting periods would either fall short or go beyond the correct completion of the cycle. In order to render the data more amenable to analysis, it was decided that the unsteady data would be interpolated and reordered (to begin at mean angle) during the final stage of reduction. As explained in volume 1, the final data appear at convenient increments, but suffer an effective "smearing" that at worst would be equivalent to having sampled at a rate of 100 points per cycle instead of 200 points per cycle.

Once the data were placed on digital tape, they were transferred to a more versatile computer where (1) the unsteady data were ensemble-averaged, (2) the gain factors were divided out, (3) the time-averaged zero-flow values were calculated and subtracted, and (4) the calibrations were applied to scale the data to coefficient form. After imposing a Mach number correction to the pitot-static measurement, the instantaneous value of the dynamic pressure was used to calculate the pressure coefficients.

Airloads were computed using a simple trapezoidal rule integration around the airfoil. Since the pressure was not actually measured at the trailing edge, a value was calculated based on the average between upper and lower surface extrapolations from neighboring points. Curve-fitting the data was not attempted because of the possibility of irregular results as the vortex passed over the rear of the airfoil where transducers were relatively far apart.

The pressure was integrated over x to give the normal force and over y to give the chord force. Given the airfoil incidence, the normal and chord forces were used to calculate the lift and drag forces. Although the chord force contributes little to the pitching moment, its effect was included for completeness. Since viscous forces were not measured, the calculated chord force is incomplete, and hence the lift and drag forces must be regarded as approximate. This approximation is considered good, however, under conditions of unsteady large-amplitude motion where pressure forces are dominant. On the other extreme, the steady-flow drag data at low incidence should be interpreted with caution.

DATA PRESENTATION

Both steady and unsteady data have been graphically displayed (figs. 4-19) in a uniform format to facilitate comparison between cases. The axes scales for the lift, drag, and pitching-moment coefficients have been fixed. All unsteady cases have been plotted against ωt (beginning at minimum incidence) to more clearly show the resulting loads around maximum incidence. The unsteady loops that are created when the data are plotted against α have been divided into two parts, the solid portion corresponding to $\dot{\alpha} > 0$, and the dashed portion corresponding to $\dot{\alpha} < 0$. The dotted line appearing in the lift versus incidence plots represents an approximation of the quasi-static lift behavior at low incidence for the given flow condition (see vol. 1).

To simplify the presentation of pressure, the sign of the coefficient has been changed, the lower-surface values have been suppressed, and the upper-surface values skewed over time in a carpet fashion. The pressures at each x/c have been connected by a straight line and the leading-edge pressure has been identified by a bold-appearing dot. The first curve shows the pressure distribution at minimum incidence, and the succeeding curves correspond to equal increments in time ($\omega t = 18^\circ$) over one full cycle of airfoil oscillation. The scale of the ordinate is either 10 or 20, depending on the range of pressures to be displayed. The symbol $*$ appearing on the ordinate denotes the sonic pressure corresponding to the free-stream Mach number for that test case. A number of quantities characterizing a particular unsteady case have been included on each display. These are

1. Airfoil name and frame number
2. Average Reynolds number
3. Maximum lift force and the angle at which it occurs
4. Angle at which the minimum chord force occurs
5. Mean angle and amplitude of oscillation
6. Minimum value of pitching moment
7. Pitch-damping coefficient
8. Maximum suction detected during the cycle
9. Reduced frequency of oscillation
10. Free-stream Mach number

11. Maximum pressure drag

12. Maximum local Mach number based on minimum pressure, and the angle at which it occurs.

In the case of the steady-data displays, dashed lines denote data points reached from a stalled condition. The pressure distribution covers both upper and lower surface and corresponds to that obtained just before stall. References to the data, either by frame number (ordered according to their position of an archival tape) or test condition, are given in tables 6 to 19. Test cases for numerical analysis are shown in table 20.

All of the data presented in this volume have been archived on magnetic tape, according to airfoil. Although NASA is not responsible for the data, these data can be obtained by submitting a written request to the Computer Documentation Service, Ames Research Center, NASA, Moffett Field, California 94035. Archived data tape numbers for the eight airfoils are shown in table 21. The magnetic tapes were written in a widely compatible format, the attributes for which are given in table 22. The organization and format of the data on magnetic tape are given in the appendix, along with a definition of the argument symbols.

APPENDIX

PROGRAM FOR READING DATA TAPES ON THE CDC 7600 COMPUTER

SUBROUTINE RECALL (FRAME, INIT, LIST, INUNIT, LSUNIT, ID, X, Y, NPTS, TRIP,
1 ALPHA0, ALPHA1, AVEQ, AVEM, REC, RF, FREQ, NPARTS, ALPHA, Q, CP, CL, CD, CM,
2 PT, ERR)

C
C
C Module Name: RECALL
C Author: Ken McAlister
C Date: February 1981
C Modifications: July 1981 by Steve Pucci
C December 1981 by Steve Pucci
C Purpose: This routine was designed to read one data frame
C from the data tapes produced from the 1979 oscillating
C airfoil experiment.
C Inputs: FRAME : The identifying number of the frame desired.
C If this number is input as zero, the next frame
C on the tape will be read.
C INIT : If true, the subroutine will read off the
C initial data on the tape. For the normal
C airfoil tapes, this should be set to true for
C the first frame read from the tape, and false
C for all others. For the special tape generated
C for the AIAA paper 81-0051, this should be set
C to true for all frames.
C LIST : If true, the subroutine will write a summary of
C the frame read.
C INUNIT: The unit number associated with the tape to be
C read.
C LSUNIT: The unit number associated with the listing, if
C one is desired.
C
C Outputs: ID : The name of the airfoil tested in the data
C frame. Note that this, the following two
C arrays X and Y, and the value of NPTS are
C only changed in the subroutine if the input
C parameter INIT has been set to true (see
C Inputs, above).
C X,Y : The coordinates of the pressure transducers,
C normalized by the chord length, where 0,0 is
C at the leading edge of the airfoil.
C NPTS : The length of the X,Y arrays, and the number
C of pressure transducers.
C TRIP : This parameter is set to true if a boundary
C layer trip is present on the airfoil tested.
C ALPHA0: The mean angle of attack of the airfoil, in
C degrees.
C ALPHA1: The amplitude of the angle of attack oscilla-
C tion of the airfoil, also in degrees.
C AVEQ : Average free-stream dynamic pressure, in PSI.
C AVEM : Average free-stream Mach number.

C REC : Average Reynolds number based on chord.
 C RF : Reduced frequency of oscillation.
 C FREQ : Frequency of oscillation, Hz.
 C NPARTS: Number of time increments describing data.
 C ALPHA : Instantaneous airfoil angle of attack, degrees:
 Vector of length NPARTS.
 C Q : Instantaneous free-stream dynamic pressure, PSI:
 Vector of length NPARTS.
 C CP : Instantaneous surface pressure coefficient:
 Matrix of length (NPARTS,NPTS).
 C CL : Instantaneous lift coefficient:
 Vector of length NPARTS.
 C CD : Instantaneous drag coefficient:
 Vector of length NPARTS.
 C CM : Instantaneous moment coefficient:
 Vector of length NPARTS.
 C PT : Total pressure, PSI.
 C ERR : Returned true if:
 (1) FRAME was input as zero, and there are no
 more frames on the tape, OR
 (2) a specific FRAME was input, and that frame
 was not found on the tape.
 If ERR is returned as true, the tape has been
 rewound (but not yet initialized).
 C FRAME : If a frame has been found, this is its
 identifying number.

LOGICAL TRIP, INIT, ERR, LIST
 INTEGER FRAME

DIMENSION X(28), Y(28), ALPHA(200), Q(200), CP(200, 28)
 DIMENSION CL(200), CD(200), CM(200), ID(40), WORDS(80)

DATA ITOTLN /45/

ITOTLN is the total number of lines that will fit on one page of
 output.

1000 FORMAT(1X, I5)
 1001 FORMAT(1X, 80A1)
 1002 FORMAT(1X, I5, 1X, L1, 1X, I5, 3(1X, E14.7))
 1003 FORMAT(5E14.7)

2000 FORMAT(1H1, 32H...BRIEF SUMMARY OF DATA TAPE..., /)
 2001 FORMAT(/7H FRAME, 1X, 4HTRIP, 3X, 4HTYPE, 5X, 2HA0, 9X, 2HA1, 8X, 1HQ,
 1 10X, 1HM, 6X, 2HRE, 8X, 1HK, 8X, 4HFREQ)
 2002 FORMAT(2X, I5, 2X, L1, 3X, 8H STEADY, 2X, 2(F5.1, 4H DEG, 2X), F5.3, 4H PSI,
 1 2X, F5.3, 2X, F8.0, 2X, F6.4, 2X, F5.2, 3H HZ)
 2003 FORMAT(2X, I5, 2X, L1, 3X, 8HUNSTEADY, 2X, 2(F5.1, 4H DEG, 2X), F5.3, 4H PSI,
 1 2X, F5.3, 2X, F8.0, 2X, F6.4, 2X, F5.2, 3H HZ)
 2004 FORMAT(/1X, 11HDATA FOR..., 80A1)
 2005 FORMAT(/1X, 23HTRANSDUCER COORDINATES: /)
 2006 FORMAT(1X, 3HNO., I2, 3X, 4HX/C=, F10.6, 3X, 4HY/C=, F10.6)

```

2007 FORMAT(1H1,6H ALPHA,3X,1HQ,3X,13(2X,2HCP,I2,1X),4X,2HCL,
1          5X,2HCD,5X,2HCM)
2008 FORMAT(14X,13(2X,2HCP,I2,1X)/)
2009 FORMAT(2X,F5.1,1X,F5.3,1X,13(F6.2,1X),1X,F6.3,1X,F6.3,2X,F6.4)
2010 FORMAT(14X,13(F6.2,1X)/)
C
3000 FORMAT(///5X,13HFRAME NUMBER ,I6,24H NOT FOUND ON THIS TAPE)
3001 FORMAT (47H END OF PRIVATE DATA TAPE ENCOUNTERED ON UNIT 1)
C
C
C
      IF (.NOT.INIT) GO TO 100
C...The following section initializes the tape by reading off the header info.
      IF (LIST) WRITE (LSUNIT,2000)
      READ(INUNIT,1000) LINES
      IF(EOF(INUNIT).NE.0) GO TO 9000
      DO 10 N=1,LINES
        READ(INUNIT,1000) NUMBER
        READ(INUNIT,1001) (WORDS(I),I=1,NUMBER)
        IF (LIST) WRITE(LSUNIT,1001) (WORDS(I),I=1,NUMBER)
10      CONTINUE
      DO 20 N=1,40
        ID(N)=1H
20      CONTINUE
C...      ( initialize ID array )
      READ(INUNIT,1000) IDLEN
      READ(INUNIT,1001) (ID(I),I=1,IDLEN)
      IF (LIST) WRITE(LSUNIT,2004) (ID(I),I=1,IDLEN)
      READ(INUNIT,1000) NPTS
      READ(INUNIT,1003) (X(I),I=1,NPTS)
      READ(INUNIT,1003) (Y(I),I=1,NPTS)
      IF (LIST) WRITE(LSUNIT,2005)
      IF (LIST) WRITE(LSUNIT,2006) ((I,X(I),Y(I)),I=1,NPTS)
C
100 CONTINUE
C
      READ(INUNIT,1002) NUMBER,TRIP,NPARTS,ALPHA0,ALPHA1,PT
      IF(EOF(INUNIT).NE.0) GO TO 9000
      READ(INUNIT,1003) AVEQ,AVEM,REC,RF,FREQ
      DO 110 J=1,NPARTS
        READ(INUNIT,1003) ALPHA(J),Q(J),(CP(J,K),K=1,NPTS)
        READ(INUNIT,1003) CL(J),CD(J),CM(J)
110      CONTINUE
      IF(NUMBER.NE.FRAME.AND.FRAME.NE.0) GO TO 100
C
      FRAME=NUMBER
      ERR=.FALSE.
C
C
      IF(.NOT.LIST) RETURN
C
      WRITE(LSUNIT,2001)
      IF(NPARTS.EQ.1) WRITE(LSUNIT,2002) FRAME,TRIP,ALPHA0,ALPHA1,

```



```

1  AVEQ,AVEM,REC,RF,FREQ
   IF(NPARTS.NE.1) WRITE(LSUNIT,2003) FRAME,TRIP,ALPHA0,ALPHA1,
1  AVEQ,AVEM,REC,RF,FREQ
   NCOUNT=1
   ITOTCT = ITOTLN/3 - 1
   DO 200 J=1,NPARTS
     IF(NCOUNT.EQ.1) WRITE(LSUNIT,2007) (K,K=1,13)
     IF(NCOUNT.EQ.1) WRITE(LSUNIT,2008) (K,K=14,26)
     WRITE(LSUNIT,2009) ALPHA(J),Q(J),(CP(J,K),K=1,13),CL(J),CD(J),
1     CM(J)
     WRITE(LSUNIT,2010) (CP(J,K),K=14,26)
     NCOUNT=NCOUNT+1
     IF(NCOUNT.GT.ITOTCT) NCOUNT=1
200  CONTINUE
     RETURN
C
C
C...This routine is used when the end of the tape is reached.
9000 CONTINUE
     ERR = .TRUE.
C
   IF (FRAME.EQ.0) GO TO 600
   WRITE(LSUNIT,3000)FRAME
   REWIND INUNIT
   RETURN
C
600  WRITE (LSUNIT,3001)
     RETURN
     END

```

TABLE 1.- AIRFOIL COORDINATES: NACA 0012 AND AMES A-01 AIRFOILS

x/c	NACA 0012, y/c		AMES A-01, y/c	
	upper	lower	upper	lower
0.0000	0.00000	0.00000	0.00000	0.00000
0.0005	0.00395	-0.00395	0.00377	-0.00338
0.0010	0.00556	-0.00556	0.00541	-0.00472
0.0020	0.00781	-0.00781	0.00766	-0.00651
0.0035	0.01027	-0.01027	0.01013	-0.00844
0.0050	0.01221	-0.01221	0.01214	-0.00994
0.0065	0.01386	-0.01386	0.01388	-0.01120
0.0080	0.01531	-0.01531	0.01543	-0.01227
0.0100	0.01704	-0.01704	0.01732	-0.01350
0.0125	0.01894	-0.01894	0.01945	-0.01481
0.0160	0.02127	-0.02127	0.02214	-0.01634
0.0200	0.02360	-0.02360	0.02490	-0.01777
0.0250	0.02615	-0.02615	0.02801	-0.01922
0.0350	0.03043	-0.03043	0.03335	-0.02137
0.0500	0.03555	-0.03555	0.03991	-0.02365
0.0650	0.03966	-0.03966	0.04523	-0.02549
0.0800	0.04307	-0.04307	0.04961	-0.02710
0.1000	0.04683	-0.04683	0.05421	-0.02902
0.1250	0.05055	-0.05055	0.05829	-0.03104
0.1500	0.05345	-0.05345	0.06098	-0.03277
0.2000	0.05737	-0.05737	0.06344	-0.03551
0.2500	0.05941	-0.05941	0.06431	-0.03727
0.3000	0.06002	-0.06002	0.06446	-0.03828
0.3500	0.05949	-0.05949	0.06409	-0.03866
0.4000	0.05803	-0.05803	0.06316	-0.03848
0.4500	0.05581	-0.05581	0.06154	-0.03782
0.5000	0.05294	-0.05294	0.05924	-0.03665
0.5500	0.04952	-0.04952	0.05623	-0.03501
0.6000	0.04563	-0.04563	0.05249	-0.03297
0.6500	0.04132	-0.04132	0.04792	-0.03056
0.7000	0.03664	-0.03664	0.04246	-0.02785
0.7500	0.03160	-0.03160	0.03600	-0.02486
0.8000	0.02623	-0.02623	0.02860	-0.02153
0.8500	0.02053	-0.02053	0.02064	-0.01786
0.9000	0.01448	-0.01448	0.01260	-0.01374
0.9250	0.01132	-0.01132	0.00899	-0.01144
0.9500	0.00807	-0.00807	0.00598	-0.00888
0.9750	0.00472	-0.00472	0.00392	-0.00603
0.9900	0.00265	-0.00265	0.00322	-0.00421
1.0000	0.00126	-0.00126	0.00299	-0.00300
	$r_o/c = 0.0158$		$r_o/c = 0.012$	

TABLE 2.- AIRFOIL COORDINATES: WORTMANN FX-098 AND SIKORSKY SC-1095 AIRFOILS

x/c	WORTMANN FX-098, y/c		SIKORSKY SC-1095, y/c	
	upper	lower	upper	lower
0.0000	0.00000	0.00000	0.00000	0.00000
0.0005	0.00293	-0.00249	0.00307	-0.00257
0.0010	0.00426	-0.00343	0.00443	-0.00368
0.0020	0.00619	-0.00471	0.00640	-0.00535
0.0035	0.00837	-0.00609	0.00865	-0.00724
0.0050	0.01017	-0.00717	0.01054	-0.00880
0.0065	0.01175	-0.00807	0.01221	-0.01016
0.0080	0.01319	-0.00886	0.01374	-0.01138
0.0100	0.01494	-0.00978	0.01560	-0.01285
0.0125	0.01692	-0.01079	0.01771	-0.01450
0.0160	0.01944	-0.01202	0.02041	-0.01657
0.0200	0.02204	-0.01321	0.02320	-0.01865
0.0250	0.02501	-0.01451	0.02635	-0.02092
0.0350	0.03021	-0.01664	0.03140	-0.02454
0.0500	0.03681	-0.01913	0.03677	-0.02842
0.0650	0.04234	-0.02111	0.04070	-0.03108
0.0800	0.04705	-0.02277	0.04374	-0.03295
0.1000	0.05222	-0.02464	0.04680	-0.03464
0.1250	0.05714	-0.02658	0.04963	-0.03619
0.1500	0.06073	-0.02819	0.05174	-0.03739
0.2000	0.06491	-0.03059	0.05447	-0.03884
0.2500	0.06650	-0.03198	0.05548	-0.03933
0.3000	0.06630	-0.03251	0.05524	-0.03918
0.3500	0.06515	-0.03242	0.05437	-0.03858
0.4000	0.06336	-0.03184	0.05299	-0.03760
0.4500	0.06097	-0.03096	0.05105	-0.03622
0.5000	0.05798	-0.02982	0.04854	-0.03446
0.5500	0.05445	-0.02843	0.04555	-0.03234
0.6000	0.05040	-0.02678	0.04212	-0.02985
0.6500	0.04586	-0.02487	0.03819	-0.02702
0.7000	0.04085	-0.02273	0.03375	-0.02384
0.7500	0.03543	-0.02034	0.02887	-0.02034
0.8000	0.02962	-0.01768	0.02362	-0.01658
0.8500	0.02337	-0.01473	0.01808	-0.01265
0.9000	0.01642	-0.01134	0.01235	-0.00865
0.9250	0.01253	-0.00932	0.00943	-0.00664
0.9500	0.00856	-0.00702	0.00642	-0.00454
0.9750	0.00476	-0.00423	0.00328	-0.00233
0.9900	0.00255	-0.00237	0.00132	-0.00093
1.0000	0.00110	-0.00110	0.00000	0.00000
	$r_o/c = 0.007$		$r_o/c = 0.008$	

TABLE 3.- AIRFOIL COORDINATES: HUGHES HH-02 (-5° TAB) AND VERTOL VR-7 (-3° TAB) AIRFOILS

x/c	HUGHES HH-02, y/c		VERTOL VR-7, y/c	
	upper	lower	upper	lower
0.0000	0.00000	0.00000	0.00000	0.00000
0.0005	0.00283	-0.00284	0.00337	-0.00330
0.0010	0.00405	-0.00388	0.00483	-0.00460
0.0020	0.00594	-0.00532	0.00696	-0.00633
0.0035	0.00819	-0.00683	0.00943	-0.00800
0.0050	0.01009	-0.00800	0.01149	-0.00919
0.0065	0.01176	-0.00895	0.01330	-0.01010
0.0080	0.01327	-0.00978	0.01494	-0.01086
0.0100	0.01510	-0.01072	0.01695	-0.01172
0.0125	0.01717	-0.01172	0.01923	-0.01263
0.0160	0.01975	-0.01290	0.02213	-0.01367
0.0200	0.02237	-0.01404	0.02512	-0.01467
0.0250	0.02531	-0.01524	0.02846	-0.01575
0.0350	0.03029	-0.01714	0.03423	-0.01751
0.0500	0.03640	-0.01943	0.04144	-0.01966
0.0650	0.04137	-0.02127	0.04759	-0.02154
0.0800	0.04553	-0.02276	0.05299	-0.02320
0.1000	0.05012	-0.02432	0.05922	-0.02516
0.1250	0.05468	-0.02575	0.06565	-0.02709
0.1500	0.05828	-0.02675	0.07091	-0.02855
0.2000	0.06328	-0.02793	0.07887	-0.03055
0.2500	0.06608	-0.02843	0.08378	-0.03186
0.3000	0.06738	-0.02834	0.08592	-0.03273
0.3500	0.06750	-0.02755	0.08574	-0.03308
0.4000	0.06640	-0.02600	0.08365	-0.03271
0.4500	0.06391	-0.02377	0.07984	-0.03148
0.5000	0.06008	-0.02104	0.07451	-0.02952
0.5500	0.05504	-0.01797	0.06781	-0.02712
0.6000	0.04891	-0.01482	0.05996	-0.02464
0.6500	0.04174	-0.01176	0.05171	-0.02207
0.7000	0.03344	-0.00952	0.04322	-0.01929
0.7500	0.02403	-0.00851	0.03442	-0.01639
0.8000	0.01436	-0.00889	0.02527	-0.01346
0.8500	0.00481	-0.00984	0.01575	-0.01050
0.9000	-0.00431	-0.01041	0.00558	-0.00744
0.9250	-0.00394	-0.00777	0.00117	-0.00609
0.9500	-0.00203	-0.00583	-0.00016	-0.00512
0.9750	-0.00006	-0.00387	0.00115	-0.00380
0.9900	0.00112	-0.00269	0.00194	-0.00300
1.0000	0.00190	-0.00190	0.00247	-0.00247
	$r_o/c = 0.008$		$r_o/c = 0.011$	

TABLE 4.- AIRFOIL COORDINATES: NLR-1 AND NLR-7301 AIRFOILS

x/c	NLR-1, y/c		NLR-7301, y/c	
	upper	lower	upper	lower
0.0000	0.00000	0.00000	0.00000	0.00000
0.0005	0.00359	-0.00288	0.00730	-0.00748
0.0010	0.00499	-0.00388	0.01051	-0.01020
0.0020	0.00687	-0.00518	0.01518	-0.01373
0.0035	0.00890	-0.00643	0.02030	-0.01735
0.0050	0.01053	-0.00730	0.02424	-0.02016
0.0065	0.01194	-0.00799	0.02756	-0.02252
0.0080	0.01321	-0.00858	0.03043	-0.02455
0.0100	0.01475	-0.00929	0.03375	-0.02688
0.0125	0.01648	-0.01006	0.03729	-0.02935
0.0160	0.01868	-0.01101	0.04140	-0.03225
0.0200	0.02097	-0.01196	0.04514	-0.03502
0.0250	0.02358	-0.01301	0.04873	-0.03794
0.0350	0.02799	-0.01477	0.05372	-0.04264
0.0500	0.03328	-0.01688	0.05920	-0.04806
0.0650	0.03750	-0.01859	0.06321	-0.05229
0.0800	0.04093	-0.02007	0.06636	-0.05576
0.1000	0.04435	-0.02179	0.06985	-0.05962
0.1250	0.04701	-0.02363	0.07347	-0.06358
0.1500	0.04905	-0.02522	0.07648	-0.06689
0.2000	0.05200	-0.02775	0.08115	-0.07194
0.2500	0.05386	-0.02958	0.08441	-0.07527
0.3000	0.05489	-0.03082	0.08649	-0.07713
0.3500	0.05528	-0.03154	0.08755	-0.07763
0.4000	0.05511	-0.03185	0.08764	-0.07672
0.4500	0.05443	-0.03176	0.08678	-0.07412
0.5000	0.05327	-0.03126	0.08495	-0.06934
0.5500	0.05164	-0.03025	0.08206	-0.06237
0.6000	0.04948	-0.02882	0.07789	-0.05386
0.6500	0.04677	-0.02707	0.07212	-0.04397
0.7000	0.04348	-0.02503	0.06458	-0.03316
0.7500	0.03892	-0.02276	0.05551	-0.02227
0.8000	0.03172	-0.02028	0.04523	-0.01221
0.8500	0.02368	-0.01756	0.03415	-0.00409
0.9000	0.01562	-0.01427	0.02269	0.00108
0.9250	0.01179	-0.01199	0.01696	0.00228
0.9500	0.00811	-0.00903	0.01129	0.00246
0.9750	0.00454	-0.00511	0.00577	0.00153
0.9900	0.00244	-0.00253	0.00258	0.00042
1.0000	0.00103	-0.00103	0.00055	-0.00055
	$r_o/c = 0.007$		$r_o/c = 0.055$	

TABLE 5.- TRANSDUCER LOCATIONS ON THE AIRFOILS

Transducer Number ^a	Nominal ^b x/c		Actual pressure transducer location							
	Pressure	Hot wire	0012	A-01	FX-098	SC-1095	VR-7	NLR-1	NLR-7301	HH-02
1 LE	0.	(0.)	0.	0.	0.0002U	0.	0.	0.	0.0015U	0.
2 U	.005 (.004)		.0060	.0054	.0038	.0040	.0044	.0054	.0101	.0050
3	.010 (.010)		.0103	.010	.0067	.0110	.0083	.0108	.0165	.0087
4	.025 (.030)	0.025 (.025)	.0242	.024	.0196	.0275	.0225	.028	.0335	.0326
5	.050 (.06)		.052	.050	.051	.053	.050	.051	.0512	.0581
6	.100 (.12)	.10 (.12)	.102	.100	.101	.1025	.100	.101	.102	.1167
7	.175 (.18)		.176	.175	.177	.178	.175	.177	.177	.183
8	.25 (.25)		.252	.250	.252	.252	.250	.250	.252	.250
9	.325 (.32)		.326	.325	.326	.325	.325	.325	.326	.317
10	.40 (.38)	.40 (.38)	.40	.40	.40	.40	.40	.40	.40	.383
11	.50 (.48)		.50	.50	.50	.50	.50	.50	.50	.472
12	.60 (.56)	.60 (.56)	.60	.60	.60	.60	.60	.60	.60	.561
13	.70 (.65)		.70	.70	.70	.70	.70	.70	.70	.650
14	.80 (.74)	.80 (.74)	.80	.80	.80	.80	.80	.80	.80	.739
15	.90 (.84)		.899	.90	.90	.90	.90	.90	.90	.840
16 U	.98 (.93)		.98	.98	.98	.98	.98	.98	.98	.925
17 L	.98 (.93)		.979	.98	.98	.98	.98	.98	.98	.925
18	.90 (.84)		.90	.90	.90	.90	.90	.90	.90	.840
19	.70 (.65)		.70	.70	.70	.70	.70	.70	.70	.650
20	.50 (.48)		.50	.50	.50	.50	.50	.50	.50	.472
21	.30 (.29)		.30	.30	.30	.30	.30	.30	.30	.294
22	.15 (.16)		.153	.150	.153	.150	.150	.150	.155	.161
23	.05 (.072)		.0504	.050	.051	.052	.050	.051	.0517	.0730
24	.025 (.030)		.023	.026	.027	.028	.0246	.0220	.0194	.0293
25	.010 (.010)		.0093	.0130	.0125	.009	.0094	.0108	.0051	.0081
26 L	.005 (.004)		.0049	.0073	.0061	.005	.0040	.0062	.0021	.0044

^aLE = leading edge; U = upper surface; L = lower surface.^bLocations for HH-02, for which c = 68.6 cm, are shown in parentheses; for all other airfoils shown, c = 61.0 cm.

(a) NACA 0012 airfoil.

7020
7022
7100

TABLE 6.- Continued.

(a) Concluded.

A FRAME	TRIP	TYPE	AD	A1	Q	H	RE	K	FREQ	B FRAME
10105	N	US	12.0	8.0	.878	.302	3694271.	.0968	5.35	
10108	N	US	12.0	8.0	.847	.293	3635589.	.1253	6.81	
10113	N	US	15.0	5.0	.876	.302	3896845.	.0098	.53	
10114	N	US	15.0	5.0	.841	.295	3901337.	.0252	1.34	
10118	N	US	15.0	5.0	.823	.291	3749526.	.1020	5.36	
10120	N	US	15.0	5.0	.845	.294	3785165.	.1511	8.04	
10123	N	US	15.0	5.0	.532	.293	3758528.	.2024	10.72	
10202	N	US	10.0	5.0	.877	.301	3558103.	.0098	.54	
10203	N	US	10.0	5.0	.877	.301	3547481.	.0246	1.34	
10204	N	US	10.0	5.0	.870	.300	3826414.	.0493	2.68	
10207	N	US	10.0	5.0	.877	.302	3824529.	.0740	4.02	
10208	N	US	10.0	5.0	.870	.300	3359785.	.0990	5.36	
10211	N	US	10.0	5.0	.870	.300	3663353.	.1486	8.04	
10212	N	US	10.0	5.0	.870	.300	3650737.	.1979	10.72	
10218	N	US	5.0	5.0	.880	.300	3933484.	.0098	.53	
10221	N	US	5.0	5.0	.878	.301	3925387.	.0993	5.36	
10222	N	US	5.0	5.0	.878	.301	3912114.	.1983	10.72	
10303	N	US	5.0	10.0	.877	.301	3910580.	.0991	5.36	
10305	N	US	3.8	10.0	.877	.301	3911328.	.0991	5.36	
10309	N	US	2.8	10.0	.877	.301	3896361.	.0989	5.36	
12020	N	US	20.0	10.0	.718	.270	3490909.	.0010	.05	12023
12022	N	US	5.0	10.0	.882	.302	3920000.	.0009	.05	12105
12109	N	US	6.0	10.0	.756	.279	3455755.	.0010	.05	12112
12118	N	US	20.0	10.0	.676	.262	3246704.	.0010	.05	12121
12203	N	US	20.0	10.0	.531	.231	2587477.	.0011	.05	12121
12208	N	US	7.0	10.0	.587	.244	3269975.	.0010	.05	12212
12300	N	US	20.0	10.0	.421	.204	2706734.	.0011	.04	12301
12305	N	US	20.0	10.0	.292	.169	2252844.	.0011	.03	12306
12310	N	US	7.0	10.0	.350	.186	2469266.	.0010	.03	
13021	N	US	7.0	10.0	.120	.108	1502757.	.0017	.03	13104
13107	N	US	20.0	10.0	.113	.105	1421201.	.0017	.03	13108
13115	N	US	20.0	10.0	.048	.063	915563.	.0027	.03	13116
13120	N	US	5.0	10.0	.053	.072	962303.	.0025	.03	13202
13205	N	US	5.0	10.0	.014	.036	488772.	.0025	.02	13213
13217	N	US	20.0	10.0	.013	.036	485631.	.0026	.02	
13222	N	US	20.0	10.0	.749	.276	3656957.	.0010	.05	
13303	N	US	7.0	10.0	.603	.247	3298109.	.0010	.05	
13308	N	US	7.0	10.0	.461	.215	2884310.	.0010	.04	
13310	N	US	7.0	10.0	.466	.216	2884723.	.0010	.04	
13313	Y	US	7.0	10.0	.332	.181	2404930.	.0010	.03	13316
13321	Y	US	7.0	10.0	.639	.294	3740364.	.0009	.05	13405
14019	Y	US	15.0	10.0	.339	.183	2456840.	.0499	1.65	14020
14021	Y	US	15.0	10.0	.336	.182	2454182.	.1001	3.30	14022
14023	Y	US	15.0	10.0	.335	.182	2426579.	.1504	4.95	14100
14104	Y	US	15.0	10.0	.338	.183	2443651.	.0499	1.65	14105
14106	Y	US	15.0	10.0	.340	.184	2449389.	.0994	3.30	14107
14109	Y	US	15.0	10.0	.339	.183	2443079.	.1493	4.95	14109
14117	Y	US	15.0	10.0	.837	.293	3843264.	.0257	1.35	14118
14119	Y	US	15.0	10.0	.836	.293	3818432.	.0509	2.68	14120
14200	Y	US	15.0	10.0	.843	.294	3822179.	.0253	1.34	14201
14202	Y	US	15.0	10.0	.839	.293	3792702.	.0506	2.68	14203
14208	Y	US	15.0	10.0	.828	.291	3764396.	.1019	5.36	14209
14210	Y	US	15.0	10.0	.832	.292	3760353.	.1014	5.36	14211
14218	N	US	15.0	10.0	.830	.292	3762738.	.0254	1.34	
14219	N	US	15.0	10.0	.824	.291	3735990.	.0509	2.68	
14220	N	US	15.0	10.0	.805	.287	3683317.	.1031	5.36	14221
15218	N	US	15.0	10.0	.818	.290	3678973.	.0994	5.24	
10117	N	US	15.0	5.0	.843	.295	3802563.	.0504	2.68	
7202	N	US	12.0	5.0	.877	.302	3861194.	.0246	2.70	7201
7222	N	US	10.0	5.0	.876	.298	3975490.	.0509	2.70	7223

TABLE 6.- Continued.

(b) Ames A-01 airfoil.

A FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	B FRAME	A FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	B FRAME
26020	N	ST	-5.0	0.0	.880	.301	3921512.	0.0000	0.00	26021	27307	N	ST	20.0	0.0	.342	.184	2418525.	0.0000	0.00	27401
26022	N	ST	-2.0	0.0	.881	.302	3907918.	0.0000	0.00	26100	27308	N	ST	16.0	0.0	.342	.184	2422139.	0.0000	0.00	27404
26023	N	ST	0.0	0.0	.882	.302	3900668.	0.0000	0.00		27309	N	ST	14.0	0.0	.342	.184	2422443.	0.0000	0.00	
26101	N	ST	2.0	0.0	.878	.302	3878703.	0.0000	0.00		27310	N	ST	13.0	0.0	.343	.185	2426621.	0.0000	0.00	
26107	N	ST	4.0	0.0	.879	.302	3839303.	0.0000	0.00		27311	N	ST	11.0	0.0	.341	.184	2422433.	0.0000	0.00	
26108	N	ST	8.0	0.0	.880	.302	3839762.	0.0000	0.00		27317	N	ST	5.0	0.0	.339	.184	2432566.	0.0000	0.00	
26109	N	ST	10.0	0.0	.879	.303	3826626.	0.0000	0.00	26113	27318	N	ST	0.0	0.0	.342	.184	2434309.	0.0000	0.00	
26114	N	ST	12.0	0.0	.884	.303	3832104.	0.0000	0.00	26115	27400	N	ST	-5.0	0.0	.121	.109	1538531.	0.0000	0.00	
26122	N	ST	13.0	0.0	.857	.298	3737465.	0.0000	0.00	26123	27402	N	ST	-2.0	0.0	.123	.110	1550354.	0.0000	0.00	
26200	N	ST	13.5	0.0	.833	.293	3667954.	0.0000	0.00	26201	27403	N	ST	0.0	0.0	.121	.108	1533751.	0.0000	0.00	
26205	N	ST	14.0	0.0	.857	.298	3720572.	0.0000	0.00	26206	27405	N	ST	2.0	0.0	.122	.109	1536087.	0.0000	0.00	
26207	N	ST	15.0	0.0	.862	.302	3754105.	0.0000	0.00	26208	27406	N	ST	4.0	0.0	.122	.109	1532038.	0.0000	0.00	
26209	N	ST	16.0	0.0	.870	.300	3715535.	0.0000	0.00	26210	27413	N	ST	8.0	0.0	.122	.110	1527397.	0.0000	0.00	
26215	N	ST	18.0	0.0	.875	.290	3589962.	0.0000	0.00		27414	N	ST	10.0	0.0	.121	.109	1522167.	0.0000	0.00	
26216	N	ST	20.0	0.0	.778	.282	3497091.	0.0000	0.00	26217	27416	N	ST	12.0	0.0	.122	.110	1525614.	0.0000	0.00	
26218	N	ST	25.0	0.0	.626	.252	3129086.	0.0000	0.00		28019	N	ST	13.0	0.0	.121	.109	1491021.	0.0000	0.00	
26219	N	ST	20.0	0.0	.773	.281	3465862.	0.0000	0.00	26222	28021	N	ST	14.0	0.0	.121	.109	1495106.	0.0000	0.00	
26220	N	ST	16.0	0.0	.832	.293	3591634.	0.0000	0.00		28023	N	ST	15.0	0.0	.122	.114	1541956.	0.0000	0.00	
26300	N	ST	14.0	0.0	.878	.302	3703082.	0.0000	0.00		28161	N	ST	16.0	0.0	.129	.112	1526677.	0.0000	0.00	
26301	N	ST	13.0	0.0	.828	.293	3590546.	0.0000	0.00		28165	N	ST	18.0	0.0	.124	.110	1489052.	0.0000	0.00	
26302	N	ST	11.0	0.0	.879	.302	3693921.	0.0000	0.00		28167	N	ST	20.0	0.0	.124	.110	1482163.	0.0000	0.00	
26306	N	ST	5.0	0.0	.883	.303	3706075.	0.0000	0.00		28169	N	ST	25.0	0.0	.122	.109	1479403.	0.0000	0.00	
26307	N	ST	0.0	0.0	.878	.302	3693264.	0.0000	0.00		28110	N	ST	20.0	0.0	.124	.109	1487571.	0.0000	0.00	
26313	N	ST	-5.0	0.0	.614	.250	3126375.	0.0000	0.00	26314	28115	N	ST	14.0	0.0	.122	.109	1476171.	0.0000	0.00	
26315	N	ST	-2.0	0.0	.612	.250	3113134.	0.0000	0.00		28116	N	ST	11.0	0.0	.123	.110	1474187.	0.0000	0.00	
26318	N	ST	0.0	0.0	.616	.250	3132011.	0.0000	0.00	26319	28117	N	ST	11.0	0.0	.121	.109	1456536.	0.0000	0.00	
26320	N	ST	2.0	0.0	.614	.249	31118900.	0.0000	0.00	26319	28119	N	ST	0.0	0.0	.123	.110	1476022.	0.0000	0.00	
26321	N	ST	4.0	0.0	.612	.250	3112889.	0.0000	0.00		28120	N	ST	14.5	0.0	.121	.108	1459593.	0.0000	0.00	
26414	N	ST	8.0	0.0	.618	.250	3371063.	0.0000	0.00		28207	Y	ST	0.0	0.0	.341	.184	2441332.	0.0000	0.00	
26415	N	ST	10.0	0.0	.612	.249	3345903.	0.0000	0.00	26416	28209	Y	ST	5.0	0.0	.338	.183	2424855.	0.0000	0.00	
26417	N	ST	12.0	0.0	.614	.249	3336283.	0.0000	0.00		28211	Y	ST	10.0	0.0	.342	.184	2439422.	0.0000	0.00	
26419	N	ST	13.0	0.0	.621	.249	3344961.	0.0000	0.00	26420	28213	Y	ST	12.0	0.0	.343	.185	2439577.	0.0000	0.00	
26421	N	ST	14.0	0.0	.615	.249	3327823.	0.0000	0.00	26422	28215	Y	ST	13.0	0.0	.343	.185	2439192.	0.0000	0.00	
27020	N	ST	15.0	0.0	.617	.250	3309153.	0.0000	0.00	27021	28217	Y	ST	14.0	0.0	.342	.184	2432247.	0.0000	0.00	
27022	N	ST	16.0	0.0	.616	.250	3293220.	0.0000	0.00	27023	28222	Y	ST	15.0	0.0	.341	.185	2427524.	0.0000	0.00	
27100	N	ST	18.0	0.0	.616	.250	3281426.	0.0000	0.00	27102	28230	Y	ST	16.0	0.0	.342	.184	2426509.	0.0000	0.00	
27101	N	ST	20.0	0.0	.618	.250	3281356.	0.0000	0.00		28302	Y	ST	20.0	0.0	.343	.185	2426376.	0.0000	0.00	
27103	N	ST	25.0	0.0	.613	.249	3256106.	0.0000	0.00		28304	Y	ST	0.0	0.0	.343	.185	2426376.	0.0000	0.00	
27107	N	ST	20.0	0.0	.630	.252	3304196.	0.0000	0.00		28312	Y	ST	0.0	0.0	.878	.301	3556655.	0.0000	0.00	
27108	N	ST	16.0	0.0	.615	.249	3259565.	0.0000	0.00	27108	28314	Y	ST	5.0	0.0	.866	.303	3559734.	0.0000	0.00	
27109	N	ST	14.0	0.0	.617	.250	3265185.	0.0000	0.00		28316	Y	ST	10.0	0.0	.894	.302	3539559.	0.0000	0.00	
27111	N	ST	13.0	0.0	.611	.249	3248047.	0.0000	0.00		28321	Y	ST	12.0	0.0	.878	.301	3513926.	0.0000	0.00	
27116	N	ST	11.1	0.0	.612	.249	3246751.	0.0000	0.00		28323	Y	ST	13.0	0.0	.870	.298	3563673.	0.0000	0.00	
27117	N	ST	5.0	0.0	.607	.248	3241861.	0.0000	0.00		28301	Y	ST	14.0	0.0	.827	.292	3779496.	0.0000	0.00	
27123	N	ST	0.0	0.0	.615	.249	3258729.	0.0000	0.00	27200	28303	Y	ST	15.0	0.0	.859	.289	3537643.	0.0000	0.00	
27201	N	ST	-5.0	0.0	.344	.185	2448549.	0.0000	0.00	27200	28303	Y	ST	16.0	0.0	.857	.298	3542021.	0.0000	0.00	
27202	N	ST	-2.0	0.0	.343	.184	2440864.	0.0000	0.00	27203	28402	N	US	15.0	10.0	.832	.289	3542021.	0.0000	0.00	
27204	N	ST	0.0	0.0	.340	.184	2428683.	0.0000	0.00		28402	N	US	15.0	10.0	.850	.296	3542021.	0.0000	0.00	
27205	N	ST	2.0	0.0	.343	.184	2436687.	0.0000	0.00		28402	N	US	15.0	10.0	.814	.290	3732983.	0.0000	0.00	
27206	N	ST	4.0	0.0	.343	.185	2436687.	0.0000	0.00		28402	N	US	15.0	10.0	.814	.290	3732983.	0.0000	0.00	
27211	N	ST	8.0	0.0	.347	.185	2460290.	0.0000	0.00		28402	N	US	15.0	10.0	.813	.289	3714740.	0.0000	0.00	
27212	N	ST	10.0	0.0	.344	.185	2444426.	0.0000	0.00	27213	28405	N	US	15.0	10.0	.779	.283	3625374.	0.0000	0.00	
27214	N	ST	12.0	0.0	.345	.185	2441417.	0.0000	0.00		28405	N	US	15.0	10.0	.765	.260	3592067.	0.0000	0.00	
27216	N	ST	13.0	0.0	.342	.184	2429710.	0.0000	0.00	27215	28401	N	US	15.0	10.0	.609	.248	3211200.	0.0000	0.00	
27218	N	ST	14.0	0.0	.340	.184	2418565.	0.0000	0.00	27217	28409	N	US	15.0	10.0	.480	.220	2845350.	0.0000	0.00	
27220	N	ST	14.9	0.0	.347	.186	2445054.	0.0000	0.00	27219	28427	N	US	15.0	10.0	.340	.184	2366118.	0.0000	0.00	
27301	N	ST	16.0	0.0	.344	.185	2441091.	0.0000	0.00	27302	28430	N	US	7.5	10.0	.340	.184	2366387.	0.0000	0.00	
27303	N	ST	18.0	0.0	.343	.184	2434869.	0.0000	0.00	27302	28436	N	US	7.5	10.0	.341	.184	2364970.	0.0000	0.00	
27304	N	ST	20.0	0.0	.343	.185	2424178.	0.0000	0.00	27305	28431	N	US	15.0	10.0	.123	.110	1504089.	0.0000	0.00	
27306	N	ST	25.0	0.0	.342	.184	2422378.	0.0000	0.00		28433	N	US	15.0	10.0	.054	.073	944352.	0.0000	0.00	
											28433	N	US	10.0	10.0	.861	.302	3844899.	0.0245	1.34	25023

TABLE 6.- Continued.
(b) Concluded.

A	FRAME	TRIP	TYPE	AC	A1	Q	M	RE	K	FREQ	B	FRAME
	25102	N	US	10.0	10.0	881	302	3831527	.0489	2.68		25103
	25104	N	US	10.0	10.0	880	302	3816708	.0978	5.36		25108
	25109	N	US	10.0	10.0	879	302	3810775	1.468	8.04		25110
	25117	N	US	10.0	5.0	884	303	3829075	.0244	1.34		
	25118	N	US	10.0	5.0	879	302	3803407	.0489	2.68		
	25119	N	US	10.0	5.0	863	303	3805390	.0975	5.36		
	25121	N	US	10.0	5.0	881	302	3813088	1.465	8.04		
	25122	N	US	10.0	5.0	884	303	3819827	1.462	8.04		
	29023	Y	US	15.0	10.0	820	291	3647799	.1947	10.72		29100
	29101	Y	US	15.0	10.0	805	288	3639654	.0500	2.62		29102
	29106	Y	US	15.0	10.0	806	288	3646183	1.001	5.24		29107
	29115	Y	US	15.0	10.0	340	194	2418131	.0494	1.65		29116
	29117	Y	US	15.0	10.0	341	184	2418248	.0987	3.30		29118
	29119	Y	US	15.0	10.0	341	184	2417060	1.481	4.95		29121
	29205	N	US	5.0	10.0	876	301	3947215	.0098	5.3		29206
	29207	N	US	5.0	10.0	877	301	3918856	.0496	2.68		29210
	29211	N	US	5.0	10.0	877	301	3902857	.0991	5.36		29212
	29213	N	US	5.0	10.0	879	301	3876095	1.483	8.04		29214
	29223	N	US	5.0	10.0	879	301	3891313	1.481	8.04		
	29225	N	US	13.5	2.0	876	301	3811977	1.965	10.72		29300
	29304	N	US	14.5	2.0	870	300	3777473	1.967	10.72		29306
	29309	N	US	16.5	2.0	852	296	3722411	1.986	10.72		29310
	29317	N	US	15.0	10.0	013	035	472349	1.021	65		29318
	30019	N	US	15.0	10.0	865	298	3856941	.0097	.52		30021
	30020	N	US	15.0	10.0	864	298	3828146	.0096	.52		30021
	30105	N	US	10.0	10.0	880	301	3844592	.0097	.53		30106
	30110	N	US	15.0	5.0	877	301	3817844	.0097	.53		30111
	30119	N	US	10.0	5.0	874	300	3819252	.0097	.53		30120
	30201	N	US	11.0	5.0	877	301	3814196	.0099	.54		30202
	30206	N	US	14.0	2.0	876	301	3818960	.0037	.53		30208
	30215	N	US	7.5	10.0	338	183	2415733	.0099	.33		30216
	31102	N	US	10.0	10.0	877	302	3880208	.0247	1.34		31103
	31104	N	US	10.0	10.0	878	302	3859857	.0492	2.68		31105
	31110	N	US	10.0	10.0	880	302	3841535	1.471	8.04		31111
	31112	N	US	10.0	10.0	860	302	3832051	1.469	8.04		31111
	31119	N	US	5.0	10.0	884	303	3856266	.0245	1.34		31120
	31121	N	US	5.0	10.0	880	302	3826584	.0489	2.68		31122
	31123	N	US	5.0	10.0	884	303	3823741	.0975	5.36		31200
	31201	N	US	5.0	10.0	883	303	3816523	1.463	8.04		31202
	31209	N	US	15.0	10.0	341	184	2421425	.0987	3.30		31210
	31215	N	US	7.5	10.0	341	184	2425459	.0494	1.65		31216
	31217	N	US	7.5	10.0	341	185	2423083	1.972	6.60		31218
	31302	N	US	14.5	2.0	852	247	3765532	1.990	10.72		31304
	31310	N	US	14.5	2.0	854	248	3731489	1.485	8.04		31312
	25204	N	US	15.0	5.0	877	301	3973275	.0249	1.34		
	25205	N	US	15.0	5.0	878	301	3952662	.0497	2.68		
	25208	N	US	15.0	5.0	878	301	3950602	.0994	5.36		
	25209	N	US	15.0	5.0	857	248	3697213	1.506	8.04		
	25210	N	US	15.0	5.0	852	247	3865306	2.013	10.72		
	25214	N	US	11.0	5.0	860	302	3926436	.0495	2.68		25215
	25216	N	US	11.0	5.0	883	302	3909711	.0986	5.36		25217
	25301	N	US	5.0	5.0	884	302	3903948	.0984	5.36		25302
	25303	N	US	5.0	5.0	865	303	3878688	1.962	10.72		25304
	25311	N	US	5.0	10.1	881	302	3852707	.0982	5.36		25312
	25319	N	US	5.5	10.0	881	302	3833693	.0980	5.36		25320

TABLE 6.- Continued.

(c) Wortmann FX-098 airfoil.

A										B										B										
FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	FRAME
17208	Y	ST	0.0	0.0	0.877	301	3975279	0.0000	0.00	17209	N	ST	13.0	0.0	0.340	185	2353097	0.0000	0.00	19407	N	ST	13.0	0.0	0.340	185	2353097	0.0000	0.00	19407
17212	Y	ST	5.0	0.0	0.880	301	3928557	0.0000	0.00	17213	N	ST	11.0	0.0	0.341	185	2354186	0.0000	0.00	19412	N	ST	11.0	0.0	0.341	185	2354186	0.0000	0.00	19412
17220	Y	ST	10.0	0.0	0.879	302	3911481	0.0000	0.00	17221	N	ST	5.0	0.0	0.340	185	2357348	0.0000	0.00	19414	N	ST	5.0	0.0	0.340	185	2357348	0.0000	0.00	19414
17303	Y	ST	12.0	0.0	0.847	296	3802285	0.0000	0.00	17304	N	ST	10.0	0.0	0.340	185	2354786	0.0000	0.00	19500	N	ST	10.0	0.0	0.340	185	2354786	0.0000	0.00	19500
17305	Y	ST	13.0	0.0	0.870	300	3835772	0.0000	0.00	17306	N	ST	13.0	0.0	0.614	250	3151118	0.0000	0.00	19505	N	ST	13.0	0.0	0.614	250	3151118	0.0000	0.00	19505
17310	Y	ST	14.0	0.0	0.866	299	3820036	0.0000	0.00	17311	N	ST	14.0	0.0	0.612	250	3138172	0.0000	0.00	19315	N	ST	14.0	0.0	0.612	250	3138172	0.0000	0.00	19315
17312	Y	ST	15.0	0.0	0.866	299	3805980	0.0000	0.00	17313	N	ST	15.0	0.0	0.612	250	3137611	0.0000	0.00	19318	N	ST	15.0	0.0	0.612	250	3137611	0.0000	0.00	19318
17314	Y	ST	16.0	0.0	0.828	292	3710084	0.0000	0.00	17315	N	ST	16.0	0.0	0.616	251	3309956	0.0000	0.00	19407	N	ST	16.0	0.0	0.616	251	3309956	0.0000	0.00	19407
18019	Y	ST	0.0	0.0	0.341	184	2398709	0.0000	0.00	18020	N	ST	0.0	0.0	0.616	251	3297074	0.0000	0.00	19412	N	ST	0.0	0.0	0.616	251	3297074	0.0000	0.00	19412
18102	Y	ST	5.0	0.0	0.343	185	2400750	0.0000	0.00	18103	N	ST	5.0	0.0	0.617	251	3287867	0.0000	0.00	19414	N	ST	5.0	0.0	0.617	251	3287867	0.0000	0.00	19414
18106	Y	ST	10.0	0.0	0.339	184	2378846	0.0000	0.00	18107	N	ST	10.0	0.0	0.614	250	3273608	0.0000	0.00	19416	N	ST	10.0	0.0	0.614	250	3273608	0.0000	0.00	19416
18108	Y	ST	12.0	0.0	0.343	185	2368927	0.0000	0.00	18109	N	ST	12.0	0.0	0.617	251	3278455	0.0000	0.00	19500	N	ST	12.0	0.0	0.617	251	3278455	0.0000	0.00	19500
18115	Y	ST	13.0	0.0	0.346	185	2394744	0.0000	0.00	18116	N	ST	13.0	0.0	0.618	251	3264994	0.0000	0.00	19505	N	ST	13.0	0.0	0.618	251	3264994	0.0000	0.00	19505
18117	Y	ST	14.0	0.0	0.345	185	2398872	0.0000	0.00	18118	N	ST	14.0	0.0	0.620	251	3235583	0.0000	0.00	20000	N	ST	14.0	0.0	0.620	251	3235583	0.0000	0.00	20000
18119	Y	ST	15.0	0.0	0.341	184	2374587	0.0000	0.00	18120	N	ST	15.0	0.0	0.613	250	3233310	0.0000	0.00	20119	N	ST	15.0	0.0	0.613	250	3233310	0.0000	0.00	20119
18121	Y	ST	16.0	0.0	0.340	184	2368089	0.0000	0.00	18122	N	ST	16.0	0.0	0.613	250	3228546	0.0000	0.00	20200	N	ST	16.0	0.0	0.613	250	3228546	0.0000	0.00	20200
18123	Y	ST	19.0	0.0	0.342	184	2370588	0.0000	0.00	18200	N	ST	19.0	0.0	0.612	250	3155666	0.0000	0.00	20310	N	ST	19.0	0.0	0.612	250	3155666	0.0000	0.00	20310
18206	Y	ST	0.0	0.0	0.341	184	2379635	0.0000	0.00	18207	N	ST	0.0	0.0	0.602	248	3162267	0.0000	0.00	20313	N	ST	0.0	0.0	0.602	248	3162267	0.0000	0.00	20313
18215	N	ST	-5.0	0.0	0.122	110	1500031	0.0000	0.00	18216	N	ST	-5.0	0.0	0.612	250	3163174	0.0000	0.00	20212	N	ST	-5.0	0.0	0.612	250	3163174	0.0000	0.00	20212
18217	N	ST	-2.0	0.0	0.123	110	1502458	0.0000	0.00	18219	N	ST	-2.0	0.0	0.614	250	3163970	0.0000	0.00	20214	N	ST	-2.0	0.0	0.614	250	3163970	0.0000	0.00	20214
18218	N	ST	0.0	0.0	0.121	109	1487692	0.0000	0.00	18304	N	ST	0.0	0.0	0.610	249	3150506	0.0000	0.00	20301	N	ST	0.0	0.0	0.610	249	3150506	0.0000	0.00	20301
18220	N	ST	2.0	0.0	0.122	110	1494149	0.0000	0.00	18306	N	ST	2.0	0.0	0.609	249	3157103	0.0000	0.00	20303	N	ST	2.0	0.0	0.609	249	3157103	0.0000	0.00	20303
18221	N	ST	4.0	0.0	0.121	109	1486754	0.0000	0.00	18308	N	ST	4.0	0.0	0.833	304	3774892	0.0000	0.00	20308	N	ST	4.0	0.0	0.833	304	3774892	0.0000	0.00	20308
18304	N	ST	8.0	0.0	0.121	109	1480425	0.0000	0.00	18313	N	ST	8.0	0.0	0.879	303	3759789	0.0000	0.00	20310	N	ST	8.0	0.0	0.879	303	3759789	0.0000	0.00	20310
18305	N	ST	10.0	0.0	0.122	110	1463466	0.0000	0.00	18318	N	ST	10.0	0.0	0.876	302	3741653	0.0000	0.00	20313	N	ST	10.0	0.0	0.876	302	3741653	0.0000	0.00	20313
18307	N	ST	12.0	0.0	0.122	109	1474483	0.0000	0.00	18330	N	ST	12.0	0.0	0.878	303	3768915	0.0000	0.00	20212	N	ST	12.0	0.0	0.878	303	3768915	0.0000	0.00	20212
18312	N	ST	13.0	0.0	0.121	109	1466753	0.0000	0.00	18332	N	ST	13.0	0.0	0.881	302	3764181	0.0000	0.00	20214	N	ST	13.0	0.0	0.881	302	3764181	0.0000	0.00	20214
18319	N	ST	13.5	0.0	0.123	109	1469738	0.0000	0.00	18400	N	ST	13.5	0.0	0.877	302	3759078	0.0000	0.00	20223	N	ST	13.5	0.0	0.877	302	3759078	0.0000	0.00	20223
18321	N	ST	14.0	0.0	0.124	110	1474082	0.0000	0.00	18402	N	ST	14.0	0.0	0.882	302	3745627	0.0000	0.00	20301	N	ST	14.0	0.0	0.882	302	3745627	0.0000	0.00	20301
18323	N	ST	14.0	0.0	0.122	110	1463922	0.0000	0.00	18401	N	ST	14.0	0.0	0.881	291	3820534	0.0000	0.00	20303	N	ST	14.0	0.0	0.881	291	3820534	0.0000	0.00	20303
18401	N	ST	15.0	0.0	0.122	109	1461183	0.0000	0.00	19021	N	ST	15.0	0.0	0.875	301	3916076	0.0000	0.00	20310	N	ST	15.0	0.0	0.875	301	3916076	0.0000	0.00	20310
18410	N	ST	16.0	0.0	0.122	109	1461183	0.0000	0.00	19100	N	ST	16.0	0.0	0.875	301	3916076	0.0000	0.00	20313	N	ST	16.0	0.0	0.875	301	3916076	0.0000	0.00	20313
18411	N	ST	18.0	0.0	0.124	111	1459953	0.0000	0.00	19118	N	ST	18.0	0.0	0.875	301	3916076	0.0000	0.00	16022	N	ST	18.0	0.0	0.875	301	3916076	0.0000	0.00	16022
18413	N	ST	20.0	0.0	0.123	110	1447617	0.0000	0.00	19120	N	ST	20.0	0.0	0.875	301	3916076	0.0000	0.00	16106	N	ST	20.0	0.0	0.875	301	3916076	0.0000	0.00	16106
18414	N	ST	0.0	0.0	0.123	109	1445110	0.0000	0.00	19122	N	ST	0.0	0.0	0.881	302	3823677	0.0000	0.00	16115	N	ST	0.0	0.0	0.881	302	3823677	0.0000	0.00	16115
18421	N	ST	20.0	0.0	0.122	110	1439675	0.0000	0.00	19205	N	ST	20.0	0.0	0.882	302	3859966	0.0000	0.00	16201	N	ST	20.0	0.0	0.882	302	3859966	0.0000	0.00	16201
18422	N	ST	16.0	0.0	0.123	109	1445948	0.0000	0.00	19207	N	ST	16.0	0.0	0.881	302	3859966	0.0000	0.00	16216	N	ST								

TABLE 6.- Continued.

(c) Concluded.

A								B			
FRAME	TRIP	TYPE	A0	A1	Q	M	RE	K	FREQ	FRAME	
17200	N	UN	15.0	10.0	.814	.290	3702477.	.0999	5.24	17201	
21109	N	UN	15.0	10.0	.823	.291	3718613.	.0099	.52	21102	
21107	N	UN	10.0	10.0	.857	.299	3792469.	.0098	.53	21201	
21200	N	UN	10.0	5.0	.875	.301	3932117.	.0098	.53	21209	
21208	N	UN	3.3	10.0	.882	.302	3299549.	.0097	.53	21220	
21219	N	UN	6.5	10.0	.339	.184	2455459.	.0098	.33	22100	
22023	N	UN	15.0	10.0	.827	.293	3727983.	.0247	1.31	22104	
22103	N	UN	15.0	10.0	.837	.294	3749080.	.0492	2.62	22202	
22201	N	UN	15.0	10.0	.785	.285	3554419.	.1008	5.24	22207	
22206	N	UN	15.0	10.0	.754	.279	3477029.	.1542	7.86	22209	
22208	N	UN	15.0	10.0	.763	.281	3483672.	.0969	4.98		
22216	N	UN	10.0	10.0	.875	.302	3732111.	.0243	1.34		
22217	N	UN	10.0	10.0	.875	.302	3720266.	.0495	2.68		
22218	N	UN	10.0	10.0	.862	.300	3684571.	.0977	5.36		
22219	N	UN	10.0	10.0	.835	.294	3618509.	.1490	8.04		
22307	N	UN	10.0	5.0	.875	.301	3954387.	.0246	1.34	22223	
22308	N	UN	10.0	5.0	.893	.303	3857324.	.0491	2.68	22300	
22309	N	UN	10.0	5.0	.881	.303	3853451.	.0960	5.36	22301	
22311	N	UN	10.0	5.0	.877	.302	3849798.	.1475	8.04	22302	
22312	N	UN	10.0	5.0	.882	.303	3849072.	.1957	10.72	22303	
23021	N	UN	15.0	5.0	.858	.298	3792196.	.0248	1.34		
23022	N	UN	15.0	5.0	.851	.297	3750472.	.0497	2.68		
23023	N	UN	15.0	5.0	.840	.295	3716391.	.1000	5.36		
23100	N	UN	15.0	5.0	.822	.292	3670934.	.1515	8.04	23108	
23107	N	UN	5.0	5.0	.867	.300	3822826.	.0986	5.36	23110	
23109	N	UN	5.0	5.0	.847	.300	3789174.	.1970	10.72	23118	
23117	N	UN	5.0	10.0	.869	.300	3803440.	.0985	5.36	23202	
23201	N	UN	3.8	10.0	.866	.299	3428210.	.1003	2.68	23207	
23206	N	UN	3.3	10.0	.871	.299	3924045.	.0500	5.36	23210	
23208	N	UN	3.3	10.0	.870	.300	3914485.	.0996	5.36	23212	
23211	N	UN	3.3	10.0	.870	.300	3895319.	.1492	8.04	23220	
23219	N	UN	12.0	2.0	.854	.299	3585609.	.1994	10.72	23306	
23305	N	UN	14.0	2.0	.858	.298	3631711.	.1995	10.72	23311	
23310	N	UN	16.0	2.0	.839	.294	3768762.	.2014	10.72		
23312	N	UN	15.0	5.0	.873	.301	3940131.	.0099	.53		
23101	N	UN	15.0	5.0	.800	.287	3617353.	.2049	10.72		

TABLE 6.- Continued.
(d) Sikorsky SC-1095 airfoil.

A										B									
FRAME	TRIP	TYPE	AO	A1	G	M	RE	K	FREQ	FRAME	TRIP	TYPE	AO	A1	G	M	RE	K	FREQ
34022	Y	ST	0.0	0.0	.878	.301	3485083.	0.0000	0.00	34023	Y	ST	0.0	0.0	.878	.301	3485083.	0.0000	0.00
34100	Y	ST	5.0	0.0	.880	.301	3476998.	0.0000	0.00	34101	Y	ST	5.0	0.0	.880	.301	3476998.	0.0000	0.00
34102	Y	ST	10.0	0.0	.884	.303	3469476.	0.0000	0.00	34103	Y	ST	10.0	0.0	.884	.303	3469476.	0.0000	0.00
34107	Y	ST	12.0	0.0	.879	.302	3461576.	0.0000	0.00	34109	Y	ST	12.0	0.0	.879	.302	3461576.	0.0000	0.00
34109	Y	ST	13.0	0.0	.883	.302	3456692.	0.0000	0.00	34110	Y	ST	13.0	0.0	.883	.302	3456692.	0.0000	0.00
34111	Y	ST	14.0	0.0	.856	.297	3463254.	0.0000	0.00	34112	Y	ST	14.0	0.0	.856	.297	3463254.	0.0000	0.00
34113	Y	ST	15.0	0.0	.866	.287	3475339.	0.0000	0.00	34114	Y	ST	15.0	0.0	.866	.287	3475339.	0.0000	0.00
34115	Y	ST	16.0	0.0	.880	.301	3462976.	0.0000	0.00	34116	Y	ST	16.0	0.0	.880	.301	3462976.	0.0000	0.00
34200	Y	ST	0.0	0.0	.841	.184	2464109.	0.0000	0.00	34201	Y	ST	0.0	0.0	.841	.184	2464109.	0.0000	0.00
34202	Y	ST	5.0	0.0	.842	.184	2463733.	0.0000	0.00	34203	Y	ST	5.0	0.0	.842	.184	2463733.	0.0000	0.00
34204	Y	ST	10.0	0.0	.842	.184	2455124.	0.0000	0.00	34205	Y	ST	10.0	0.0	.842	.184	2455124.	0.0000	0.00
34203	Y	ST	13.0	0.0	.842	.184	2449353.	0.0000	0.00	34209	Y	ST	13.0	0.0	.842	.184	2449353.	0.0000	0.00
34210	Y	ST	14.0	0.0	.842	.184	2447939.	0.0000	0.00	34211	Y	ST	14.0	0.0	.842	.184	2447939.	0.0000	0.00
34212	Y	ST	16.0	0.0	.841	.184	2441047.	0.0000	0.00	34213	Y	ST	16.0	0.0	.841	.184	2441047.	0.0000	0.00
34214	Y	ST	0.0	0.0	.841	.184	2444898.	0.0000	0.00	34215	Y	ST	0.0	0.0	.841	.184	2444898.	0.0000	0.00
35021	N	ST	-5.0	0.0	.690	.301	3835776.	0.0000	0.00	35022	N	ST	-5.0	0.0	.690	.301	3835776.	0.0000	0.00
35023	N	ST	-2.0	0.0	.678	.301	3819752.	0.0000	0.00	35101	N	ST	-2.0	0.0	.678	.301	3819752.	0.0000	0.00
35100	N	ST	0.0	0.0	.677	.301	3816485.	0.0000	0.00	35102	N	ST	0.0	0.0	.677	.301	3816485.	0.0000	0.00
35102	N	ST	2.0	0.0	.880	.301	3814931.	0.0000	0.00	35104	N	ST	2.0	0.0	.880	.301	3814931.	0.0000	0.00
35103	N	ST	5.0	0.0	.877	.301	3811571.	0.0000	0.00	35111	N	ST	5.0	0.0	.877	.301	3811571.	0.0000	0.00
35111	N	ST	8.0	0.0	.891	.302	4009323.	0.0000	0.00	35113	N	ST	8.0	0.0	.891	.302	4009323.	0.0000	0.00
35112	N	ST	10.0	0.0	.879	.302	3871392.	0.0000	0.00	35115	N	ST	10.0	0.0	.879	.302	3871392.	0.0000	0.00
35114	N	ST	12.0	0.0	.877	.301	3960357.	0.0000	0.00	35117	N	ST	12.0	0.0	.877	.301	3960357.	0.0000	0.00
35116	N	ST	13.0	0.0	.845	.295	3467672.	0.0000	0.00	35119	N	ST	13.0	0.0	.845	.295	3467672.	0.0000	0.00
35118	N	ST	13.5	0.0	.836	.293	3835959.	0.0000	0.00	35200	N	ST	13.5	0.0	.836	.293	3835959.	0.0000	0.00
35200	N	ST	14.0	0.0	.832	.293	3827789.	0.0000	0.00	35201	N	ST	14.0	0.0	.832	.293	3827789.	0.0000	0.00
35206	N	ST	14.0	0.0	.874	.301	3836314.	0.0000	0.00	35207	N	ST	14.0	0.0	.874	.301	3836314.	0.0000	0.00
35207	N	ST	13.0	0.0	.822	.291	3760893.	0.0000	0.00	35208	N	ST	13.0	0.0	.822	.291	3760893.	0.0000	0.00
35208	N	ST	12.5	0.0	.845	.295	3802021.	0.0000	0.00	35213	N	ST	12.5	0.0	.845	.295	3802021.	0.0000	0.00
35213	N	ST	5.0	0.0	.678	.302	3894639.	0.0000	0.00	35214	N	ST	5.0	0.0	.678	.302	3894639.	0.0000	0.00
35214	N	ST	0.0	0.0	.863	.302	3894747.	0.0000	0.00	35220	N	ST	0.0	0.0	.863	.302	3894747.	0.0000	0.00
35220	N	ST	-5.0	0.0	.610	.249	3240455.	0.0000	0.00	35221	N	ST	-5.0	0.0	.610	.249	3240455.	0.0000	0.00
35221	N	ST	-2.0	0.0	.611	.249	3231733.	0.0000	0.00	35222	N	ST	-2.0	0.0	.611	.249	3231733.	0.0000	0.00
35222	N	ST	0.0	0.0	.613	.250	3233553.	0.0000	0.00	35300	N	ST	0.0	0.0	.613	.250	3233553.	0.0000	0.00
35300	N	ST	5.0	0.0	.613	.249	3228312.	0.0000	0.00	35309	N	ST	5.0	0.0	.613	.249	3228312.	0.0000	0.00
35305	N	ST	8.0	0.0	.612	.249	3229749.	0.0000	0.00	35310	N	ST	8.0	0.0	.612	.249	3229749.	0.0000	0.00
35306	N	ST	10.0	0.0	.614	.249	3194450.	0.0000	0.00	35313	N	ST	10.0	0.0	.614	.249	3194450.	0.0000	0.00
35307	N	ST	12.0	0.0	.610	.249	3194532.	0.0000	0.00	35314	N	ST	12.0	0.0	.610	.249	3194532.	0.0000	0.00
35308	N	ST	13.0	0.0	.609	.249	3176162.	0.0000	0.00	35309	N	ST	13.0	0.0	.609	.249	3176162.	0.0000	0.00
35310	N	ST	13.5	0.0	.605	.247	3151475.	0.0000	0.00	35311	N	ST	13.5	0.0	.605	.247	3151475.	0.0000	0.00
35313	N	ST	14.1	0.0	.615	.250	3175031.	0.0000	0.00	35314	N	ST	14.1	0.0	.615	.250	3175031.	0.0000	0.00
35314	N	ST	16.0	0.0	.614	.249	3171847.	0.0000	0.00	35315	N	ST	16.0	0.0	.614	.249	3171847.	0.0000	0.00
35315	N	ST	18.0	0.0	.611	.249	3155127.	0.0000	0.00	35316	N	ST	18.0	0.0	.611	.249	3155127.	0.0000	0.00
35316	N	ST	25.0	0.0	.612	.250	3135333.	0.0000	0.00	35317	N	ST	25.0	0.0	.612	.250	3135333.	0.0000	0.00
35318	N	ST	14.0	0.0	.611	.249	3142583.	0.0000	0.00	35319	N	ST	14.0	0.0	.611	.249	3142583.	0.0000	0.00
35319	N	ST	13.0	0.0	.612	.250	3142100.	0.0000	0.00	35400	N	ST	13.0	0.0	.612	.250	3142100.	0.0000	0.00
35400	N	ST	12.5	0.0	.611	.249	3137223.	0.0000	0.00	35401	N	ST	12.5	0.0	.611	.249	3137223.	0.0000	0.00
35401	N	ST	5.0	0.0	.611	.249	3153505.	0.0000	0.00	35402	N	ST	5.0	0.0	.611	.249	3153505.	0.0000	0.00
35409	N	ST	-5.0	0.0	.342	.184	2509809.	0.0000	0.00	35410	N	ST	-5.0	0.0	.342	.184	2509809.	0.0000	0.00
35420	N	ST	0.0	0.0	.341	.185	2503010.	0.0000	0.00	35421	N	ST	0.0	0.0	.341	.185	2503010.	0.0000	0.00
35422	N	ST	5.0	0.0	.341	.185	2493247.	0.0000	0.00	35423	N	ST	5.0	0.0	.341	.185	2493247.	0.0000	0.00
35424	N	ST	10.0	0.0	.341	.185	2467697.	0.0000	0.00	35425	N	ST	10.0	0.0	.341	.185	2467697.	0.0000	0.00
35426	N	ST	12.0	0.0	.341	.185	2451702.	0.0000	0.00	35427	N	ST	12.0	0.0	.341	.185	2451702.	0.0000	0.00
35428	N	ST	13.5	0.0	.340	.184	2452406.	0.0000	0.00	35429	N	ST	13.5	0.0	.340	.184	2452406.	0.0000	0.00
35430	N	ST	14.0	0.0	.341	.185	2447787.	0.0000	0.00	35431	N	ST	14.0	0.0	.341	.185	2447787.	0.0000	0.00
35432	N	ST	15.0	0.0	.338	.183	2429196.	0.0000	0.00	35433	N	ST	15.0	0.0	.338	.183	2429196.	0.0000	0.00

TABLE 6.- Continued.

(d) Concluded.

(a) continued.										
A					B					
FRAME	TRIP	TYPE	A0	A1	Q	M	RE	K	FREQ	FRAME
39110	N	UN	11.0	5.0	.869	.299	3896687.	.0099	.53	
39115	N	UN	14.0	2.0	.865	.298	3838622.	.0100	.54	
38110	N	UN	16.0	2.0	.832	.293	3754517.	.2023	10.72	38111
39107	N	UN	10.0	5.0	.876	.300	3939495.	.0098	.53	

TABLE 6.- Continued.

[illegible]

TABLE 6.- Continued.

(e) Concluded.

A	FRAME	TRIP	TYPE	AO	A1	Q	H	RE	K	FREQ	B
											FRAME
	44112	N	US	10.0	5.0	.880	.303	4003278.	.1989	10.72	44113
	44118	N	US	10.0	5.0	.880	.302	4037890.	.0999	5.36	
	44119	N	US	10.0	5.0	.876	.302	4019097.	.0250	1.34	
	44120	N	US	10.0	5.0	.878	.302	4007236.	.1997	10.72	
	44202	N	US	14.0	2.0	.875	.301	4004232.	.1001	5.36	44203
	44204	N	US	14.0	2.0	.872	.301	3987136.	.2002	10.72	44205
	44209	N	US	17.5	2.0	.773	.282	3756572.	.2132	10.72	
	44212	N	US	15.5	2.0	.854	.297	3961107.	.0102	.54	
	44214	N	US	15.5	2.0	.851	.297	3917470.	.0253	1.34	
	44215	N	US	15.5	2.0	.849	.296	3904494.	.0506	2.68	
	44216	N	US	15.5	2.0	.829	.293	3854581.	.1024	5.36	
	44217	N	US	15.5	2.0	.820	.291	3826794.	.1545	8.04	
	44218	N	US	15.5	2.0	.824	.292	3832243.	.2054	10.72	
	44221	N	US	12.5	2.0	.871	.301	3955305.	.0101	.54	
	44222	N	US	12.5	2.0	.877	.302	3943321.	.0248	1.34	
	44223	N	US	12.5	2.0	.871	.301	3926000.	.0493	2.68	
	44300	N	US	12.5	2.0	.874	.301	3929775.	.0994	5.36	
	44303	N	US	12.5	2.0	.877	.302	3952217.	.1490	8.04	
	44304	N	US	12.5	2.0	.878	.302	3945318.	.1984	10.72	
	43308	N	US	15.0	5.0	.813	.290	3809287.	.1549	8.04	

TABLE 6.- Continued.

(f) Vertol VR-7 airfoil.

A FRAME	TRIP	TYPE	AO	AI	Q	M	RE	K	FREQ	B FRAME	TRIP	TYPE	AO	AI	Q	M	RE	K	FREQ	B FRAME
46018	N	ST	-5.0	0.0	.121	.108	1551001.	0.0000	0.00	46018	N	ST	13.0	0.0	.876	.299	4071175.	0.0000	0.00	46018
46019	N	ST	0.0	0.0	.121	.108	1546271.	0.0000	0.00	46019	N	ST	12.0	0.0	.881	.299	4055190.	0.0000	0.00	46019
46020	N	ST	5.0	0.0	.123	.109	1557517.	0.0000	0.00	46020	N	ST	0.0	0.0	.881	.300	4097411.	0.0000	0.00	46020
46101	N	ST	10.0	0.0	.118	.107	1512699.	0.0000	0.00	46101	N	ST	5.0	0.0	.340	.183	2522757.	0.0000	0.00	46101
46102	N	ST	12.0	0.0	.122	.109	1540366.	0.0000	0.00	46102	N	ST	10.0	0.0	.340	.183	2514978.	0.0000	0.00	46102
46103	N	ST	12.5	0.0	.123	.109	1547844.	0.0000	0.00	46103	N	ST	12.0	0.0	.341	.183	2513421.	0.0000	0.00	46103
46104	N	ST	13.0	0.0	.123	.109	1543789.	0.0000	0.00	46104	N	ST	13.0	0.0	.340	.183	2506104.	0.0000	0.00	46104
46105	N	ST	13.5	0.0	.123	.109	1543255.	0.0000	0.00	46105	N	ST	14.0	0.0	.338	.182	2501582.	0.0000	0.00	46105
46106	N	ST	14.0	0.0	.122	.109	1535872.	0.0000	0.00	46106	N	ST	15.0	0.0	.340	.183	2518275.	0.0000	0.00	46106
46107	N	ST	15.0	0.0	.122	.109	1537932.	0.0000	0.00	46107	N	ST	16.0	0.0	.341	.184	2516975.	0.0000	0.00	46107
46108	N	ST	17.0	0.0	.123	.109	1541148.	0.0000	0.00	46108	N	ST	20.0	0.0	.343	.184	2517610.	0.0000	0.00	46108
46109	N	ST	20.0	0.0	.122	.109	1534206.	0.0000	0.00	46109	N	ST	0.0	0.0	.342	.183	2519323.	0.0000	0.00	46109
46110	N	ST	25.0	0.0	.120	.108	1533001.	0.0000	0.00	46110	N	ST	5.0	0.0	.881	.300	4204772.	0.0000	0.00	46110
46116	N	ST	-5.0	0.0	.341	.184	2535698.	0.0000	0.00	46116	N	ST	5.0	0.0	.881	.300	4185103.	0.0000	0.00	46116
46117	N	ST	0.0	0.0	.342	.183	2532563.	0.0000	0.00	46117	N	ST	10.0	0.0	.886	.301	4170536.	0.0000	0.00	46117
46119	N	ST	5.0	0.0	.341	.183	2545369.	0.0000	0.00	46119	N	ST	12.0	0.0	.862	.300	4146330.	0.0000	0.00	46119
46203	N	ST	10.0	0.0	.343	.184	2562110.	0.0000	0.00	46203	N	ST	13.0	0.0	.863	.301	4139719.	0.0000	0.00	46203
46205	N	ST	12.0	0.0	.341	.183	2551368.	0.0000	0.00	46205	N	ST	14.0	0.0	.881	.300	4137342.	0.0000	0.00	46205
46207	N	ST	12.5	0.0	.342	.183	2553262.	0.0000	0.00	46207	N	ST	15.0	0.0	.877	.300	4108330.	0.0000	0.00	46207
46209	N	ST	13.0	0.0	.342	.184	2537943.	0.0000	0.00	46209	N	ST	16.0	0.0	.877	.299	4091352.	0.0000	0.00	46209
46211	N	ST	13.5	0.0	.341	.183	2550511.	0.0000	0.00	46211	N	ST	20.0	0.0	.806	.287	3893404.	0.0000	0.00	46211
46217	N	ST	14.0	0.0	.342	.183	2637541.	0.0000	0.00	46217	N	ST	0.0	0.0	.881	.300	4085157.	0.0000	0.00	46217
46219	N	ST	15.0	0.0	.341	.183	2630320.	0.0000	0.00	46219	N	ST	15.0	0.0	.873	.300	4062142.	0.0000	0.00	46219
46221	N	ST	17.0	0.0	.340	.183	2624424.	0.0000	0.00	46221	N	ST	15.0	0.0	.830	.292	3937973.	0.0000	0.00	46221
46223	N	ST	20.0	0.0	.340	.183	2622591.	0.0000	0.00	46223	N	ST	15.0	0.0	.835	.293	3931111.	0.0000	0.00	46223
46301	N	ST	25.0	0.0	.340	.183	2612669.	0.0000	0.00	46301	N	ST	15.0	0.0	.793	.285	3924374.	0.0000	0.00	46301
46307	N	ST	-2.0	0.0	.612	.248	3482182.	0.0000	0.00	46307	N	ST	10.0	0.0	.973	.301	4033486.	0.0000	0.00	46307
46308	N	ST	-2.0	0.0	.613	.249	3476509.	0.0000	0.00	46308	N	ST	10.0	0.0	.975	.301	4010314.	0.0000	0.00	46308
46309	N	ST	0.0	0.0	.612	.248	3458801.	0.0000	0.00	46309	N	ST	10.0	0.0	.878	.301	4010372.	0.0000	0.00	46309
46310	N	ST	2.0	0.0	.611	.248	3461144.	0.0000	0.00	46310	N	ST	10.0	0.0	.875	.301	4019136.	0.0000	0.00	46310
46311	N	ST	5.0	0.0	.614	.248	3462655.	0.0000	0.00	46311	N	ST	10.0	0.0	.879	.302	4015256.	0.0000	0.00	46311
46317	N	ST	8.0	0.0	.615	.249	3457898.	0.0000	0.00	46317	N	ST	10.0	0.0	.869	.300	4019028.	0.0000	0.00	46317
46318	N	ST	10.0	0.0	.611	.248	3435015.	0.0000	0.00	46318	N	ST	15.0	0.0	.876	.301	4006473.	0.0000	0.00	46318
46319	N	ST	12.0	0.0	.613	.248	3433344.	0.0000	0.00	46319	N	ST	15.0	0.0	.877	.301	4005939.	0.0000	0.00	46319
46320	N	ST	12.5	0.0	.615	.249	3429325.	0.0000	0.00	46320	N	ST	15.0	0.0	.871	.301	3986030.	0.0000	0.00	46320
46321	N	ST	13.0	0.0	.612	.248	3417429.	0.0000	0.00	46321	N	ST	15.0	0.0	.860	.298	3957187.	0.0000	0.00	46321
46322	N	ST	13.5	0.0	.610	.243	3407795.	0.0000	0.00	46322	N	ST	15.0	0.0	.841	.295	3903733.	0.0000	0.00	46322
46323	N	ST	14.0	0.0	.613	.249	3417715.	0.0000	0.00	46323	N	ST	10.0	0.0	.878	.302	4054475.	0.0000	0.00	46323
46400	N	ST	15.0	0.0	.613	.249	3413348.	0.0000	0.00	46400	N	ST	10.0	0.0	.877	.301	4032781.	0.0000	0.00	46400
46403	N	ST	17.0	0.0	.616	.249	3427697.	0.0000	0.00	46403	N	ST	10.0	0.0	.878	.301	4031948.	0.0000	0.00	46403
46404	N	ST	20.0	0.0	.615	.249	3412222.	0.0000	0.00	46404	N	ST	10.0	0.0	.879	.302	4030474.	0.0000	0.00	46404
46405	N	ST	25.0	0.0	.614	.248	3396768.	0.0000	0.00	46405	N	ST	10.0	0.0	.878	.301	4026973.	0.0000	0.00	46405
46406	N	ST	13.0	0.0	.613	.249	3398737.	0.0000	0.00	46406	N	ST	15.0	0.0	.859	.299	4059175.	0.0000	0.00	46406
46407	N	ST	12.0	0.0	.610	.248	3391942.	0.0000	0.00	46407	N	ST	15.0	0.0	.820	.292	3926381.	0.0000	0.00	46407
46412	N	ST	0.0	0.0	.614	.249	3394265.	0.0000	0.00	46412	N	ST	15.0	0.0	.839	.184	2577907.	0.0000	0.00	46412
46418	N	ST	-5.0	0.0	.877	.300	3996105.	0.0000	0.00	46418	N	ST	15.0	0.0	.242	.165	2566091.	0.0000	0.00	46418
46420	N	ST	-2.0	0.0	.878	.301	3986471.	0.0000	0.00	46420	N	ST	15.0	0.0	.342	.165	2566042.	0.0000	0.00	46420
46423	N	ST	2.0	0.0	.875	.300	3966554.	0.0000	0.00	46423	N	ST	15.0	0.0	.054	.073	1030887.	0.0000	0.00	46423
46500	N	ST	5.0	0.0	.877	.300	3965878.	0.0000	0.00	46500	N	ST	15.0	0.0	.123	.110	1553422.	0.0000	0.00	46500
46508	N	ST	8.0	0.0	.878	.300	4161706.	0.0000	0.00	46508	N	ST	15.0	0.0	.340	.185	2606965.	0.0000	0.00	46508
46509	N	ST	10.0	0.0	.870	.298	4126333.	0.0000	0.00	46509	N	ST	15.0	0.0	.479	.221	3036397.	0.0000	0.00	46509
46511	N	ST	12.0	0.0	.876	.299	4119351.	0.0000	0.00	46511	N	ST	15.0	0.0	.610	.250	3408483.	0.0000	0.00	46511
46513	N	ST	12.5	0.0	.874	.299	4098603.	0.0000	0.00	46513	N	ST	15.0	0.0	.760	.281	3783711.	0.0000	0.00	46513
46515	N	ST	13.0	0.0	.875	.298	4070743.	0.0000	0.00	46515	N	ST	10.0	0.0	.340	.183	2632969.	0.0000	0.00	46515
46517	N	ST	13.5	0.0	.879	.300	4037558.	0.0000	0.00	46517	N	ST	10.0	0.0	.340	.183	2616265.	0.0000	0.00	46517
46519	N	ST	14.0	0.0	.878	.300	4077474.	0.0000	0.00	46519	N	ST	10.0	0.0	.339	.184	2607326.	0.0000	0.00	46519
46600	N	ST	15.0	0.0	.873	.299	4093463.	0.0000	0.00	46600	N	ST	10.0	0.0	.341	.184	2597940.	0.0000	0.00	46600
46602	N	ST	17.0	0.0	.878	.300	4078318.	0.0000	0.00	46602	N	ST	10.0	0.0	.341	.184	2588267.	0.0000	0.00	46602
46604	N	ST	20.0	0.0	.831	.291	3955770.	0.0000	0.00	46604	N	ST	10.0	0.0	.341	.184	2588267.	0.0000	0.00	46604
46608	N	ST	25.0	0.0	.690	.265	3626593.	0.0000	0.00	46608	N	ST	10.0	0.0	.341	.184	2581336.	0.0000	0.00	46608

(f) Concluded.

26

TABLE 6.- Continued.

(g) NLR-1 airfoil.

A												B											
FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	FRAME	TRIP	TYPE	AO	A1	Q	M	RE	K	FREQ	FRAME			
61018	N	N	ST	-5.0	0.0	122	109	1524150.	0.0000	0.00	64223	Y	ST	5.0	0.0	339	184	2345411.	0.0000	0.00	64300		
61019	N	N	ST	0.0	0.0	123	110	1531313.	0.0000	0.00	64301	Y	ST	10.0	0.0	342	185	2349991.	0.0000	0.00	64302		
61020	N	N	ST	5.0	0.0	122	110	1529480.	0.0000	0.00	64303	Y	ST	12.0	0.0	341	185	2346533.	0.0000	0.00	64304		
61101	N	N	ST	10.0	0.0	125	111	1537127.	0.0000	0.00	64305	Y	ST	13.0	0.0	341	185	2344262.	0.0000	0.00	64306		
61102	N	N	ST	12.0	0.0	122	109	1517792.	0.0000	0.00	64307	Y	ST	14.0	0.0	349	187	2370314.	0.0000	0.00	64308		
61103	N	N	ST	14.0	0.0	122	110	1522421.	0.0000	0.00	64309	Y	ST	16.0	0.0	342	185	2345780.	0.0000	0.00	64310		
61104	N	N	ST	15.0	0.0	122	110	1517668.	0.0000	0.00	64311	Y	ST	16.0	0.0	344	186	2355621.	0.0000	0.00	64312		
61105	N	N	ST	16.5	0.0	122	110	1511515.	0.0000	0.00	65019	Y	ST	-11.0	0.0	875	301	3814433.	0.0000	0.00			
61106	N	N	ST	18.0	0.0	121	109	1502455.	0.0000	0.00	65020	Y	ST	-9.0	0.0	876	301	3804399.	0.0000	0.00			
61107	N	N	ST	20.0	0.0	123	110	1511233.	0.0000	0.00	65021	Y	ST	-7.0	0.0	875	301	3786094.	0.0000	0.00			
61108	N	N	ST	20.0	0.0	122	110	1509433.	0.0000	0.00	65022	Y	ST	-6.0	0.0	874	301	3795531.	0.0000	0.00			
61114	N	N	ST	-5.0	0.0	341	185	2466730.	0.0000	0.00	65023	Y	ST	-5.0	0.0	876	301	3792112.	0.0000	0.00			
61115	N	N	ST	0.0	0.0	342	185	2469459.	0.0000	0.00	65100	Y	ST	0.0	0.0	875	301	3766507.	0.0000	0.00			
61117	N	N	ST	5.0	0.0	341	184	2461681.	0.0000	0.00	65101	Y	ST	5.0	0.0	878	302	3783030.	0.0000	0.00			
61201	N	N	ST	10.0	0.0	341	184	243057.	0.0000	0.00	65103	Y	ST	10.0	0.0	875	301	3764560.	0.0000	0.00	65102		
61203	N	N	ST	12.0	0.0	345	185	2440090.	0.0000	0.00	65107	Y	ST	11.9	0.0	842	295	3697279.	0.0000	0.00	65108		
61205	N	N	ST	14.0	0.0	344	186	2430259.	0.0000	0.00	65109	Y	ST	13.0	0.0	858	298	3722261.	0.0000	0.00	65110		
61208	N	N	ST	15.4	0.0	338	184	2407482.	0.0000	0.00	65112	Y	ST	14.0	0.0	839	294	3665290.	0.0000	0.00	65111		
61212	N	N	ST	16.5	0.0	342	185	2420407.	0.0000	0.00	65113	Y	ST	16.0	0.0	800	283	3574574.	0.0000	0.00	65114		
61213	N	N	ST	18.0	0.0	341	184	2413757.	0.0000	0.00	65115	Y	ST	0.0	0.0	879	302	3745601.	0.0000	0.00			
61215	N	N	ST	20.0	0.0	342	184	2407546.	0.0000	0.00	62104	N	US	15.0	10.0	054	073	968160.	0.0985	1.30	62021		
61221	N	N	ST	-5.0	0.0	612	250	3194457.	0.0000	0.00	62104	N	US	15.0	10.0	121	109	1446202.	0.0987	1.96	62105		
61222	N	N	ST	-2.0	0.0	614	250	3197744.	0.0000	0.00	62112	N	US	15.0	10.0	340	184	2513401.	1.003	3.30	62113		
61223	N	N	ST	0.0	0.0	613	250	3194392.	0.0000	0.00	62114	N	US	15.0	10.0	396	199	2699892.	1.002	3.57	62115		
61300	N	N	ST	2.0	0.0	612	250	3191078.	0.0000	0.00	62121	N	US	10.0	10.0	398	200	2557024.	1.712	6.25			
61301	N	N	ST	5.0	0.0	612	250	3189258.	0.0000	0.00	62201	N	US	15.0	5.0	398	200	2540409.	2826	10.35			
61306	N	N	ST	8.0	0.0	616	251	3401455.	0.0000	0.00	62202	N	US	15.0	5.0	396	199	2534183.	1.710	6.25			
61307	N	N	ST	10.0	0.0	619	251	3402068.	0.0000	0.00	62203	N	US	15.0	10.0	480	220	2777505.	0.974	3.93			
61308	N	N	ST	12.0	0.0	613	249	3381325.	0.0000	0.00	62210	N	US	15.0	10.0	612	250	3113246.	0.972	4.46			
61309	N	N	ST	12.5	0.0	614	250	3381216.	0.0000	0.00	62218	N	US	15.0	10.0	760	280	3441581.	0.967	4.98			
61310	N	N	ST	13.0	0.0	610	249	3364760.	0.0000	0.00	62302	N	US	15.0	10.0	838	295	3859287.	0.048	1.31			
61311	N	N	ST	14.0	0.0	619	251	3365628.	0.0000	0.00	62304	N	US	15.0	10.0	834	294	3816841.	0.096	2.62			
61312	N	N	ST	15.0	0.0	611	249	3361196.	0.0000	0.00	62307	N	US	15.0	10.0	835	294	3810660.	0.091	5.24			
61315	N	N	ST	16.0	0.0	611	249	3363498.	0.0000	0.00	62309	N	US	15.0	10.0	794	287	3693269.	1.521	7.86			
61316	N	N	ST	20.0	0.0	612	250	3357544.	0.0000	0.00	62317	N	US	10.0	10.0	872	301	3735580.	0.098	5.4			
61317	N	N	ST	25.0	0.0	612	250	3344638.	0.0000	0.00	62320	N	US	10.0	10.0	874	302	3743354.	0.023	1.34			
61318	N	N	ST	14.0	0.0	612	250	3349019.	0.0000	0.00	62322	N	US	10.0	10.0	873	301	3685360.	0.044	2.68			
61319	N	N	ST	12.5	0.0	614	250	3357487.	0.0000	0.00	62400	N	US	10.0	10.0	878	302	3655928.	0.065	5.35			
61400	N	N	ST	5.0	0.0	613	249	3372794.	0.0000	0.00	62403	N	US	10.0	10.0	861	303	3701055.	1.156	6.43			
61401	N	N	ST	-5.0	0.0	612	250	3364756.	0.0000	0.00	62405	N	US	10.0	10.0	866	300	3656985.	1.457	8.04			
61407	N	N	ST	-2.0	0.0	876	302	3967620.	0.0000	0.00	63018	N	US	15.0	5.0	855	297	3912793.	0.102	5.4			
61409	N	N	ST	0.0	0.0	878	302	3963158.	0.0000	0.00	63019	N	US	15.0	5.0	862	299	3885789.	0.0250	1.34			
61410	N	N	ST	2.0	0.0	877	302	3954548.	0.0000	0.00	63020	N	US	15.0	5.0	862	299	3871332.	0.049	2.68			
61412	N	N	ST	5.0	0.0	879	303	3954345.	0.0000	0.00	63021	N	US	15.0	5.0	850	297	3836177.	1.004	5.36			
61413	N	N	ST	8.0	0.0	878	302	3953659.	0.0000	0.00	63100	N	US	15.0	5.0	848	296	3831403.	1.206	6.43			
61421	N	N	ST	10.0	0.0	869	300	3921408.	0.0000	0.00	63101	N	US	15.0	5.0	839	295	3820552.	1.515	8.04			
61422	N	N	ST	12.0	0.0	872	301	3911370.	0.0000	0.00	63102	N	US	15.0	5.0	812	289	3730364.	2.054	10.72			
61500	N	N	ST	12.5	0.0	879	302	3915401.	0.0000	0.00	63108	N	US	10.0	5.0	891	303	3797137.	0.044	1.34	63109		
61508	N	N	ST	13.0	0.0	882	302	4028604.	0.0000	0.00	63112	N	US	10.0	5.0	876	301	3755339.	0.076	5.36	63113		
61510	N	N	ST	13.0	0.0	882	302	4003007.	0.0000	0.00	63114	N	US	10.0	5.0	868	300	3748040.	1.1946	10.72	63115		
61512	N	N	ST	14.0	0.0	879	302	3962342.	0.0000	0.00	63122	N	US	12.0	8.0	879	302	3740346.	1.175	6.43	63123		
61513	N	N	ST	16.0	0.0	877	302	3963711.	0.0000	0.00	63208	N	US	16.4	2.0	789	286	2674699.	2.081	10.72	63209		
61519	N	N	ST	20.0	0.0	736	275	3622389.	0.0000	0.00	63213	N	US	17.0	2.0	780	284	3652598.	0.519	2.68	63214		
61521	N	N	ST	15.0	0.0	677	263	3458993.	0.0000	0.00	63215	N	US	17.0	2.0	780	284	3610518.	1.867	9.60	63216		
61522	N	N	ST	14.0	0.0	880	302	3939697.	0.0000	0.00	63220	N	US	15.0	2.0	633	294	3728644.	0.0503	2.68	63221		
61523	N	N	ST	12.5	0.0	870	300	3913953.	0.0000	0.00	63302	N	US	11.1	2.								

TABLE 6.- Continued.

(g) Concluded.

A	FRAME	TRIP	TYPE	A0	A1	Q	M	RE	K	FREQ	B
63320	N	US	US	2.5	10.0	.878	.303	3739575.	.0969	5.36	63321
63323	N	US	US	2.7	10.0	.880	.303	3746774.	.0969	5.36	63400
64019	Y	US	US	15.0	10.0	.844	.296	3865490.	.0247	1.31	64020
64021	Y	US	US	15.0	10.0	.840	.295	3813567.	.0493	2.62	64022
64023	Y	US	US	15.0	10.0	.821	.292	3752005.	.0997	5.24	64100
64107	Y	US	US	15.0	10.0	.340	.185	2448919.	.0496	1.65	64108
64109	Y	US	US	15.0	10.0	.340	.184	2439010.	.0991	3.30	64110
64111	Y	US	US	15.0	10.0	.341	.185	2439626.	.1481	4.95	64112
64119	Y	US	US	2.5	10.0	.876	.302	3823417.	.0099	.54	64120
64121	Y	US	US	2.5	10.0	.875	.302	3795031.	.0244	1.34	64122
64202	Y	US	US	2.5	10.0	.879	.303	3794515.	.0737	2.69	64203
64204	Y	US	US	2.5	10.0	.878	.302	3774318.	.0974	5.36	64205
64212	Y	US	US	-2.0	10.0	.877	.302	3717936.	.0098	.54	
64213	Y	US	US	-2.0	10.0	.878	.303	3695424.	.0241	1.34	
64214	Y	US	US	-2.0	10.0	.878	.302	3685179.	.0482	2.68	
64215	Y	US	US	-2.0	10.0	.880	.303	3683703.	.0963	5.36	
65121	N	US	US	-2.0	10.0	.899	.300	3717371.	.0098	.54	
65122	N	US	US	-2.0	10.0	.873	.301	3700235.	.0243	1.34	
65123	N	US	US	-2.0	10.0	.874	.301	3694893.	.0495	2.63	
65200	N	US	US	-3.0	10.0	.877	.302	3594943.	.0968	5.36	
65207	N	US	US	15.0	10.0	.355	.199	2644668.	.0937	3.57	
65209	N	US	US	15.0	10.0	.823	.292	3775170.	.1019	5.36	
65223	N	US	US	7.0	5.0	.121	.109	1475396.	.0249	.49	
65300	N	US	US	7.0	5.0	.121	.109	1472656.	.1996	3.92	
65311	N	US	US	7.0	5.0	.879	.301	3862901.	.1969	10.72	
65309	N	US	US	7.0	5.0	.876	.301	3889117.	.0100	.54	
63222	N	US	US	15.0	2.0	.818	.291	3675799.	.2028	10.72	63223

(h) NLR-7301.

29

TABLE 6.- Concluded.

(h) Concluded.

A				B			
FRAME	TRIP	TYPE	AO	AI	Q	M	RE
69100	N	US	10.0	10.0	.873	.300	3918788.
69102	N	US	10.0	10.0	.876	.300	3900043.
69105	N	US	10.0	10.0	.877	.301	3904003.
69107	N	US	10.0	10.0	.876	.300	3884160.
69119	N	US	16.8	2.0	.727	.273	382462.
69121	N	US	16.8	2.0	.710	.270	3820737.
69123	N	US	16.8	2.0	.700	.268	3896634.
69201	N	US	16.8	2.0	.692	.267	3866733.
69206	N	US	17.2	2.0	.734	.275	3860351.
69208	N	US	17.2	2.0	.745	.277	3869110.
69211	N	US	17.2	2.0	.709	.270	3370669.
69213	N	US	17.2	2.0	.719	.272	3397722.
69215	N	US	17.2	2.0	.753	.279	3459727.
69221	N	US	17.5	2.0	.726	.273	3804711.
69223	N	US	17.5	2.0	.694	.265	3826912.
69304	N	US	18.5	2.0	.688	.266	3825757.
69310	N	US	16.5	2.0	.671	.262	3218013.
70019	N	US	9.4	10.0	.341	.135	2844307.
70021	N	US	9.4	10.0	.340	.135	2835519.
70023	N	US	9.4	10.0	.340	.135	2836677.
70107	N	US	5.7	10.0	.875	.301	3916444.
70109	N	US	5.7	10.0	.876	.301	3876178.
70113	N	US	5.7	10.0	.872	.300	3851594.
70115	N	US	5.7	10.0	.875	.301	3854654.
70117	N	US	5.7	10.0	.874	.301	3843662.
				K	FREQ	FRAME	
				.0249	1.34	69101	
				.0296	2.68	69103	
				.0991	5.36	69106	
				.1484	8.04	69108	
				.0270	1.34	69120	
				.0546	2.68	69122	
				.1100	5.36	69200	
				.2208	10.72	69202	
				.0268	1.34	69207	
				.0530	2.68	69209	
				.1086	5.36	69212	
				.1616	8.04	69214	
				.2038	10.72	69216	
				.0536	2.68	69222	
				.2205	10.72	69300	
				.0549	2.68	69305	
				.0554	2.68	69311	
				.0245	.83	70020	
				.0973	3.30	70022	
				.1948	6.60	70100	
				.0104	.56	70108	
				.0247	1.34	70110	
				.0495	2.68	70114	
				.0986	5.36	70116	
				.1479	8.04	70118	

TABLE 7.- LIST OF STATIC DATA

Airfoil α	M_∞	First frame	Last frame	No. of frames	α_{\min}	α_{\max}	Figure	Airfoil α	M_∞	First frame	Last frame	No. of frames	α_{\min}	α_{\max}	Figure
N-0012	0.30	04019	04412	24	-5.0	20.0		FX-098T	0.30	17208	17314	8	0.0	20.0	
	.30	11018	11309	33	-5.0	30.0	9,12,16	FX-098T	.18	18019	18206	10	0.0	20.0	
	.30	12102	(quasi-steady)		-5.0	15.0	16	SC-1095	.30	35021	35214	17	-5.0	16.0	19
	.28	12109			-4.0	16.0		SC-1095	.25	35220	35401	20	-5.0	25.0	
	.28	13222			10.1	29.9		SC-1095	.18	36019	36120	10	-5.0	20.0	
	.27	12020			10.1	29.9		SC-1095	.11	36202	36218	11	-5.0	20.0	
	.26	12118			10.1	29.9		SC-1095T	.30	34022	34115	8	0.0	16.0	
	.25	12208			-3.0	17.0		SC-1095T	.18	34200	34214	7	0.0	16.0	
	.25	13303			-3.0	17.0		HH-02	.30	40222	41103	20	-5.0	20.0	20
	.23	12203			10.1	29.9		HH-02	.25	41110	41215	20	-5.0	20.0	
	.22	13308			-3.0	17.0		HH-02	.18	40114	40215	10	-5.0	20.0	
	.22	13310			-3.0	17.0		HH-02	.11	40018	40108	11	-5.0	20.0	
	.20	12300			10.1	29.9		HH-02T	.30	41221	41314	8	0.0	16.0	
	.18	12310			-3.0	17.0		HH-02T	.18	41401	41419	10	0.0	16.0	
	.17	12305			10.1	29.9		VR-7	.30	46418	46615	18	-5.0	25.0	11,21
	.11	13021			-3.0	17.0		VR-7	.25	46307	46412	19	-5.0	25.0	
	.11	13107			10.1	29.9		VR-7	.18	46116	46301	13	-5.0	25.0	
	.07	13120			-3.0	17.0		VR-7	.11	46018	46110	13	-5.0	25.0	
	.07	13115			10.1	29.9		VR-7T	.30	46802	46823	10	0.0	20.0	
	.04	13205			-5.0	15.0		VR-7T	.18	46621	46718	10	0.0	20.0	
	.04	13217			10.1	29.9		NLR-1	.30	61407	61606	19	-5.0	25.0	22
N-0012T	.29	13321			-3.0	17.0		NLR-1	.25	61221	61401	19	-5.0	25.0	
N-0012T	.18	13313			-3.0	17.0		NLR-1	.18	61114	61215	10	-5.0	20.0	
Ames-01	.30	26020	26307	23	-5.0	25.0	17	NLR-1	.11	61018	61108	11	-5.0	20.0	
Ames-01	.25	26313	27117	22	-5.0	25.0		NLR-1T	.30	65019	65115	13	-11.0	16.0	
Ames-01	.18	27123	27318	22	-5.0	25.0		NLR-1T	.18	64221	64311	8	0.0	16.0	
Ames-01	.11	27400	28120	21	-5.0	25.0		NLR-7301	.30	66019	66209	17	-5.0	20.0	23
Ames-01T	.30	28312	28410	9	0.0	16.0		NLR-7301	.25	66214	66314	17	-5.0	25.0	
Ames-01T	.19	28207	28304	10	0.0	20.0		NLR-7301	.18	66320	66511	18	-5.0	25.0	
FX-098	.30	20118	20322	21	-5.0	25.0	18	NLR-7301T	.11	66516	66617	17	-5.0	25.0	
FX-098	.25	19314	20112	22	-5.0	25.0		NLR-7301T	.30	66810	66822	6	0.0	13.0	
FX-098	.18	19020	19308	23	-5.0	25.0		NLR-7301T	.18	66623	66802	13	0.0	25.0	
FX-098	.11	18215	18502	23	-5.0	25.0	10								

 α_T = trip.

TABLE 8.- MACH NUMBER SWEEP AT $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$

M_∞^α	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301
0.035	8102		16019			58102		
.07	8114	24323	16105	33022	42121	47123	62020	
.11	8214	24314	16114	33106	42321	$\begin{cases} 47206 \\ 58111 \end{cases}$	62104	67120
.18	8220	$\begin{cases} 24217 \\ 31209 \end{cases}$	16200	33110	42302	$\begin{cases} 47213 \\ 58121 \end{cases}$	62112	67220
.18T	$\begin{cases} 14021 \\ 14106 \end{cases}$	29117	17103	34321	42110	47112	64109	67021
.20							$\begin{cases} 62114 \\ 65207 \end{cases}$	
.22	9202	24209	16300	33205	42309	47217	62208	
.25	9203	24201	16308	33207	42313	47301	62210	67305
.28	9208	24117	22208	33215	42218	47305	62218	
.29	$\begin{cases} 9217 \\ 14220 \end{cases}$	24105	22201	33300	42210	45023	$\begin{cases} 62307 \\ 65209 \end{cases}$	
.29T	$\begin{cases} 14208 \\ 14210 \end{cases}$	29106	17200	34308	42100	47100	64023	

 α_T = trip.TABLE 9.- FREQUENCY SWEEP AT $M_\infty = 0.29$, $\alpha = 15^\circ + 10^\circ \sin \omega t$

k^α	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301
0.01	9210	$\begin{cases} 30019 \\ 30020 \end{cases}$	21100	38300				
.025	$\begin{cases} 9213 \\ 14218 \end{cases}$	24022	22023	33217	42206	45019	62302	
.025T	$\begin{cases} 14117 \\ 14200 \end{cases}$	29023	17117		42019	47020	64019	
.05	$\begin{cases} 9214 \\ 14219 \end{cases}$	24100	22103	33222	42208	45021	62304	
.05T	$\begin{cases} 14119 \\ 14202 \end{cases}$	29101	17119	34306	42021	47022	64021	
.10	$\begin{cases} 9217 \\ 14220 \end{cases}$	24105	22201	33300	42210	45023	$\begin{cases} 62307 \\ 65209 \end{cases}$	
.10T	$\begin{cases} 14208 \\ 14210 \end{cases}$	29106	17200	34308	42100	47100	64023	
.15	9218	24109	22206	34409	$\begin{cases} 42212 \\ 42217 \end{cases}$	45101	62309	

 α_T = trip.

TABLE 10.- FREQUENCY SWEEP AT $M_{\infty} = 0.30$, $\alpha = 10^{\circ} + 10^{\circ} \sin \omega t$

k	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301
0.01	9221	30105	21107	38306	43019	45109	62317	69019
.025	9222	{25022 31102	22216	37023	43106	45111	62320	69100
.05	9223	{25102 31104	22217	37101	43108	45113	62322	69102
.10	9302	25104	22218	37107	43112	45117	62400	69105
.12							62403	
.15	9307	{25109 31110 31112	22219	37109	{43114 43117	45119	62405	69107

TABLE 11.- FREQUENCY SWEEP AT $M_{\infty} = 0.30$, $\alpha = 15^{\circ} + 5^{\circ} \sin \omega t$

k	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301
0.01	10113	30110	21112	39104		45203	63018	68019
.025	10114	25204	23021	38021	43303	45205	63019	68100
.05	10117	25205	23022	38022	43304	45207	63020	68102
.10	10118	25208	23023	38102	43305	45209	63021	68104
.12							63100	
.15	10120	25209	23100	38103	43308	45211	63101	68109
.20	10123	25210	23101	38104	43309	45213	63102	68111

TABLE 12.- FREQUENCY SWEEP AT $M_{\infty} = 0.30$, $\alpha = 10^{\circ} + 5^{\circ} \sin \omega t$

k	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301	NLR-7301T
0.01	10202	30119	21200	39107	44019			68119	
.025	{7112 10203	25117	22307	37207	{44021 44119	45221	63108	68121	67108
.05	{7222 10204	25118	22308	37208	44023	45223		68123	67110
.075	10207								
.10	{7113 10208	25119	22309	37210	{44104 44118	45300	63112	68201	67112
.15	{7300 10211	{25121 25122	22311	37213	44106	45302			
.20	{7114 10212	25123	22312	37215	{44112 44120	45303	63114	68203	

TABLE 13.- STALL ONSET AT $M_\infty = 0.30$, $\alpha = \alpha_o + 10^\circ \sin \omega t$, $k = 0.10$

NACA 0012, $\alpha_o = 3.8^\circ$	A-01, $\alpha_o = 5.5^\circ$	FX-098, $\alpha_o = 3.8^\circ$	SC-1095, $\alpha_o = 4.4^\circ$	HH-02, $\alpha_o = 4.0^\circ$	VR-7, $\alpha_o = 4.6^\circ$	NLR-1, $\alpha_o = 2.7^\circ$	NLR-7301, $\alpha_o = 5.7^\circ$
10305	25319	23201	34418	43219	63323	70115	

TABLE 14.- STALL SUPPRESSION AT $M_\infty = 0.30$, $\alpha = \alpha_o + 10^\circ \sin \omega t$

k	NACA 0012	A-01, $\alpha_o = 5.0^\circ$	FX-098, $\alpha_o = 3.3^\circ$	SC-1095, $\alpha_o = 4.1^\circ$	HH-02, $\alpha_o = 3.8^\circ$	VR-7, $\alpha_o = 4.1^\circ$	NLR-1, $\alpha_o = 2.5^\circ$	NLR-7301, $\alpha_o = 5.7^\circ$
0.01		29205	21208	39021	43215	48019	63312	70107
.025		31119			43202	48023	63314	70109
.05		{29207 31121	23206	37119	43204	48101	63318	70113
.10		{25311 29211 31123	23208	37121	43206	48103	63320	70115
.15		{29213 29215 31201	23211	37123	43209			70117

α See table 19.

TABLE 15.- STALL SUPPRESSION AT $M_\infty = 0.18$, $\alpha = \alpha_o + 10^\circ \sin \omega t$

k	NACA 0012, $\alpha_o = 8.0^\circ$	A-01, $\alpha_o = 7.5^\circ$	FX-098, $\alpha_o = 6.5^\circ$	SC-1095, $\alpha_o = 6.2^\circ$	HH-02	VR-7, $\alpha_o = 4.7^\circ$	NLR-1	NLR-7301, $\alpha_o = 9.4^\circ$
0.01	9110	30215	21219			50116		
.025						49216		70019
.05	9112	{24302 31215	16213	33118				
.10						49300		70021
.20	9118	{24306 31217	16215	33121		49307		70023
.25						49310		

TABLE 16.- PITCH DAMPING STUDIES AT $M_\infty = 0.30$, $\alpha = \alpha_o + 2^\circ \sin \omega t$

NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301a
k = 0.01							
$\alpha_o = 14.0^\circ$ 30206							
$\alpha_o = 14.0^\circ$ $\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ 39115 44221 48300							
$\alpha_o = 15.5^\circ$ 44212							
k = 0.025							
$\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ 44222 48301							
$\alpha_o = 15.5^\circ$ $\alpha_o = 13.0^\circ$ 44214 48116							
k = 0.05							
$\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ $\alpha_o = 11.1^\circ$ $\alpha_o = 16.5^\circ$ 44223 48302 63302 69310							
$\alpha_o = 15.5^\circ$ $\alpha_o = 13.0^\circ$ $\alpha_o = 15.0^\circ$ $\alpha_o = 16.8^\circ$ 44215 48118 63220 69121							
$\alpha_o = 14.0^\circ$ $\alpha_o = 17.0^\circ$ $\alpha_o = 17.2^\circ$ 48215 63213 69208							
$\alpha_o = 17.5^\circ$ 69221							
$\alpha_o = 18.5^\circ$ 69304							
k = 0.10							
$\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ 44300 48303							
$\alpha_o = 14.0^\circ$ $\alpha_o = 13.0^\circ$ 44202 48122							
$\alpha_o = 15.5^\circ$ $\alpha_o = 14.0^\circ$ 44216 48216							
$\alpha_o = 16.8^\circ$ 69123							
$\alpha_o = 17.2^\circ$ 69211							

TABLE 16.- Concluded.

NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301 ^a
k = 0.15							
$\alpha_o = 14.5^\circ$ 31310							
$\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ 44303 48304							
$\alpha_o = 15.5^\circ$ 44217							
$\alpha_o = 17.2^\circ$ 69213							
k = 0.20							
$\alpha_o = 13.5^\circ$ $\alpha_o = 12.0^\circ$ $\alpha_o = 12.3^\circ$ $\alpha_o = 12.5^\circ$ $\alpha_o = 12.5^\circ$ $\alpha_o = 11.1^\circ$ $\alpha_o = 16.8^\circ$ 29223 23219 38201 44304 48308 63304 69201							
$\alpha_o = 14.5^\circ$ $\alpha_o = 14.0^\circ$ $\alpha_o = 14.0^\circ$ $\alpha_o = 14.0^\circ$ $\alpha_o = 13.0^\circ$ $\alpha_o = 15.0^\circ$ $\alpha_o = 17.2^\circ$ 29304 23305 38119 44204 48200 63222 69215							
31302 $\alpha_o = 16.0^\circ$ $\alpha_o = 16.0^\circ$ $\alpha_o = 15.5^\circ$ $\alpha_o = 14.0^\circ$ $\alpha_o = 16.4^\circ$ $\alpha_o = 17.5^\circ$ 23310 38110 42218 48217 63208 69223							
$\alpha_o = 16.5^\circ$ 29309							
$\alpha_o = 17.5^\circ$ $\alpha_o = 16.0^\circ$ $\alpha_o = 17.0^\circ$ 44209 48209 63215							

^aSee table 19.

TABLE 17.- NO SEPARATION: $M_{\infty} = 0.30$, $\alpha = 5^{\circ} + 5^{\circ} \sin \omega t$

k	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1 ^a	NLR-7301 ^a
0.01	10218							
.10	10221	25301	23107					
.20	10222	25303	23109					68211

^aSee table 19.

TABLE 18.- DYNAMIC BOUNDARY-LAYER TRIP DATA

M_{∞}	k	NACA 0012	A-01	FX-098	SC-1095	HH-02	VR-7	NLR-1	NLR-7301
0.18	0.05	{14019 14104	29115	17100	34318	42108	47110	64107	67019
.18	.10	{14021 14106	29117	17103	34321	42110	47112	64109	67021
.18	.15	{14023 14108	29119	17109	34323	42113	47114	64111	
.18	.20								67023
.30	.025	{14117 14200	29023	17117		42019	47020	64019 ^a	(a)
.30	.05	{14119 14202	29101	17119	34306	42021	47022	64021 ^a	(a)
.30	.10	{14208 14210	29106	17200	34308	42100	47100	64023 ^a	(a)

^aSee table 19.

TABLE 19.- MISCELLANEOUS DYNAMIC DATA

Airfoil	Frame	M_∞	α_0	α_1	k	Remarks
N-0012	8019	0.035	10.0	10.0	0.10	Low Reynolds number, 0.5×10^6
	8021	.035	10.0	10.0	.15	
	8023	.035	10.0	10.0	.25	Match reference 3
	8104	.035	15.0	10.0	.15	
	8106	.035	15.0	14.0	.10	Match reference 3
	8116	.07	15.0	10.0	.15	
	8118	.07	15.0	10.0	.25	Match reference 3
	8123	.07	15.0	14.0	.10	
	8203	.07	10.0	10.0	.25	Match reference 3
	8210	.11	10.0	10.0	.25	
	8222	.18	15.0	10.0	.15	Match reference 3
	8306	.18	15.0	14.0	.10	
	9022	.18	15.0	6.0	.24	Match reference 3
	9101	.18	15.0	5.0	.29	
	9106	.18	10.0	10.0	.25	Variable α_0
	7108	.30	8.0	5.0	.025	
	7110		8.0		.10	See table 17
	7111		8.0		.20	
	7216		8.8		.05	See table 16
	7214		8.8		.10	
	7212		8.8		.15	See table 16
	7104		9.0		.025	
	7019		9.0		.05	See table 16
	7021		9.0		.10	
	7101		9.0		.15	See table 16
	7023		9.0		.20	
			10.0			See table 16
	7117		11.0		.025	
	7118		11.0		.05	See table 16
	7119		11.0		.10	
	7120		11.0		.15	See table 16
	7121		11.0		.20	
	7200		12.0		.025	See table 16
	7202		12.0		.05	
	7205		12.0		.10	See table 16
	7305		12.0		.15	
	7207		12.0		.20	See table 16
			15.0			
	10309		2.8	10.0	.10	Match reference 17
	10305		3.8			
	10303		5.0			Match reference 17
	9302		10.0			
	10022		12.0			Match reference 17
	9217	.29	15.0			
	14220	.29	15.0			Match reference 17
	10101	.27	20.0			
	10104	.30	12.0	8.0	.05	Match reference 17
	10105	.30	12.0	8.0	.10	
	10108	.30	12.0	8.0	.13	Match reference 17
	15218	.29	15.0	10.0	.10	

TABLE 19.- Continued.

Airfoil	Frame	M_∞	α_0	α_1	k	Remarks
N-0012	Many	Variable	Variable	10.0	0.001	Quasi-static; see table 12
W-098	23117	0.30	5.0	10.0	.10	
Ames-01	30201	↓	11.0	5.0	.01	
Ames-01	25214	↓	↓	↓	.05	
Ames-01	25216	↓	↓	↓	.10	
SC-1095	39110	↓	↓	↓	.01	
	37219	↓	↓	↓	.05	
	37221	↓	↓	↓	.10	
	37304	↓	12.0	8.0	.05	Match reference 18
	37305	↓	12.0	8.0	.10	Match reference 18
	37306	↓	12.0	8.0	.13	Match reference 18
HH-02	43314	↓	11.0	5.0	.025	
HH-02	43315	↓	11.0	5.0	.05	
HH-02	43316	↓	11.0	5.0	.10	
VR-7	54019	.18	10.0	10.0	.025	
	54022	↓	10.0	↓	.05	
	54101	↓	10.0	↓	.10	
	54110	↓	10.0	↓	.15	
	54113	↓	10.0	↓	.20	
	54116	↓	10.0	↓	.25	
	49023	↓	15.0	↓	.01	
	49110	↓	↓	↓	.025	
	49117	↓	↓	↓	.05	
	49120	↓	↓	↓	.10	
	58121	↓	↓	↓	.10	
	49203	↓	↓	↓	.15	
	54216	↓	↓	↓	.15	
	57018	↓	↓	↓	.15	
	58018	↓	↓	↓	.15	
	58120	↓	↓	↓	.15	
	49206	↓	↓	↓	.20	
NLR-1	65223	.11	7.0	5.0	.025	No separation
	65300	.11	7.0	5.0	.20	No separation
	62114	.20	15.0	10.0	.10	
	65207	.20	15.0	10.0	.10	
	62121	.20	10.0	10.0	.17	Match reference 19
	62202	.20	15.0	5.0	.17	
	62201	.20	15.0	5.0	.28	
	62403	.30	10.0	10.0	.12	
	63100	↓	15.0	5.0	.12	
	63122	↓	12.0	8.0	.12	
	65309	↓	7.0	5.0	.01	No separation
	65311	↓	7.0	5.0	.20	No separation
	65121	↓	-2.0	10.0	.01	Stall at negative α
	65122	↓	↓	↓	.025	Stall at negative α
	65123	↓	↓	↓	.05	Stall at negative α
	65200	↓	↓	↓	.10	Stall at negative α
NLR-1T	64212	↓	↓	↓	.01	Trip; stall at negative α
NLR-1T	64213	↓	↓	↓	.025	Trip; stall at negative α
NLR-1T	64214	↓	↓	↓	.05	Trip; stall at negative α

TABLE 19.- Concluded.

Airfoil	Frame	M_∞	α_0	α_1	k	Remarks
NLR-1T	64215	0.30	-2.0	10.0	0.10	Trip; stall at negative α
NLR-1T	64119	.30	2.5		.01	Trip; stall suppression
NLR-1T	64121	.30	2.5		.025	Trip; stall suppression
NLR-1T	64202	.30	2.5		.05	Trip; stall suppression
NLR-1T	64204	.30	2.5		.10	Trip; stall suppression
NLR-7	67201	.11	10.0		.10	
	67208	.18	10.0		.025	
	67210	.18	10.0		.10	
	67212	.18	10.0		.20	
	67218	.18	15.0		.025	
	67220	.18	15.0		.10	
	67222	.18	15.0		.20	
	67310	.25	10.0		.10	
	68219	.30	12.0	2.0	.05	No separation
	68221	.30	12.0	2.0	.10	No separation
	68304	.30	12.0	2.0	.20	No separation
NLR-7T	67108	.30	10.0	5.0	.025	Trip
NLR-7T	67110	.30	10.0	5.0	.05	Trip
NLR-7T	67112	.30	10.0	5.0	.10	Trip

TABLE 20.- TEST CASES FOR NUMERICAL ANALYSIS (ref. 1)

Case	Frame	Airfoil	α_0	α_1	k	Case	Frame	Airfoil	α_0	α_1	k
1	10222	NACA 0012	5	5	0.20	7	10212	NACA 0012	10	5	0.20
2	68211	NLR-7301	5			8	9302		10	10	.10
3	7111	NACA 0012	8			9	10113		15	5	.01
4	68203	NLR-7301	10				10114				.025
5	7023	NACA 0012	9				10117				.05
6	45221	VR-7	10		.025		10118				.10
	45223				.05		10120				.15
	45300				.10		10123				.20
	45302				.15	10	45203	VR-7			.01
	45303				.20		45205				.025
7	10202	NACA 0012			.01		45207				.05
	10203				.025		45209				.10
	10204				.05		45211				.15
	10208				.10		45213				.20
	10211				.15						

TABLE 21.- ARCHIVED TAPE ASSIGNMENT

Airfoil	Tape number
NACA 0012	03462B
Ames A-01	C1065C
Wortmann FX 69-H-098	C1064C
Hughes HH-02 (with tab)	C1066C
Sikorsky SC-1095	C1067C
Vertol VR-7 (with tab)	03469B
NLR-1	C1069C
NLR-7301	C1074C

TABLE 22.- MAGNETIC TAPE
ATTRIBUTES

Unlabeled file sequence 2400-ft reel 9 Track 1600 Bits/in. Odd parity EBCDIC mode Blocked (4000 bytes - 50 records) Fixed-length records (80 bytes) Formatted data
--


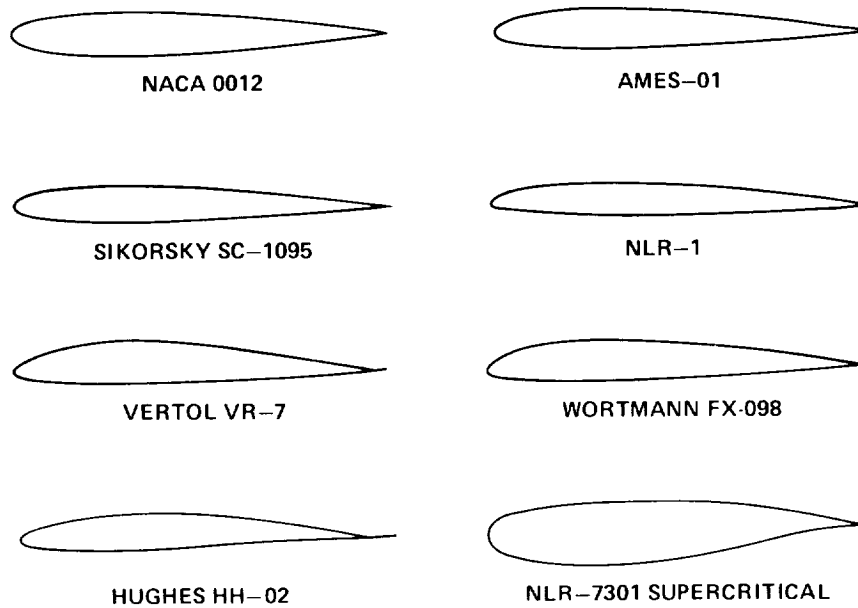


Figure 1.- Airfoil profiles tested.

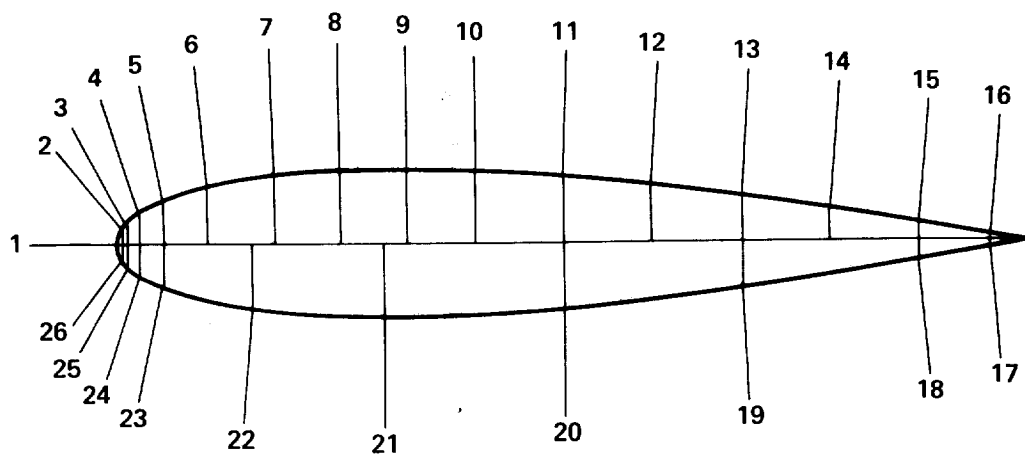

NOMINAL LOCATIONS OF PRESSURE TRANSDUCERS

1:0.000	5:0.050	9:0.325	13:0.700	17:0.980	21:0.300	25:0.010
2:0.005	6:0.100	10:0.400	14:0.800	18:0.900	22:0.150	26:0.005
3:0.010	7:0.175	11:0.500	15:0.900	19:0.700	23:0.050	
4:0.025	8:0.250	12:0.600	16:0.980	20:0.500	24:0.025	

Figure 2.- Upper and lower surface-pressure transducer locations.

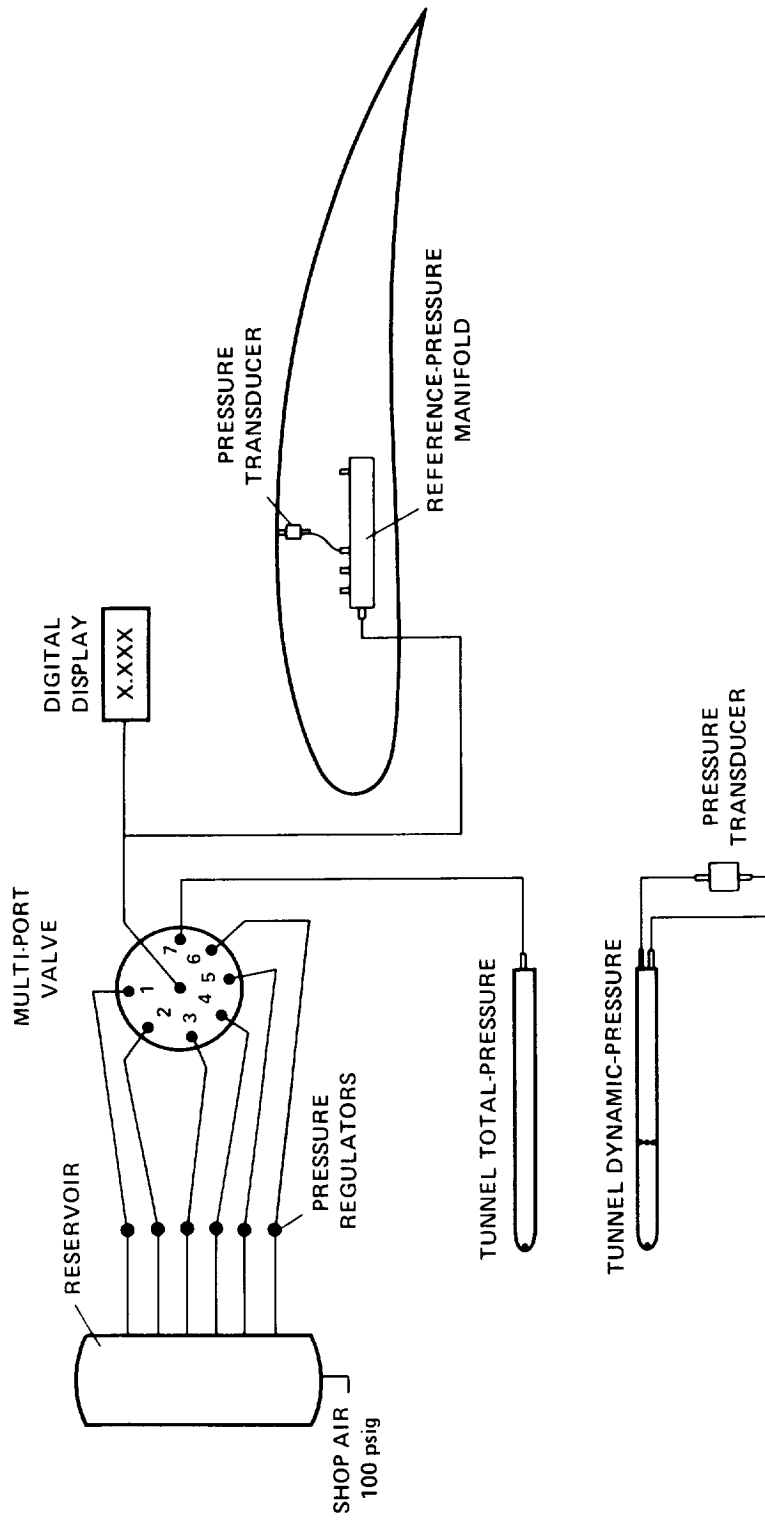


Figure 3.- Plumbing for reference pressures.

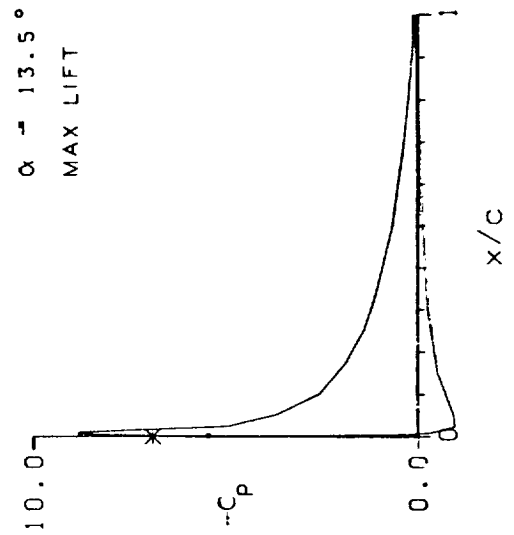
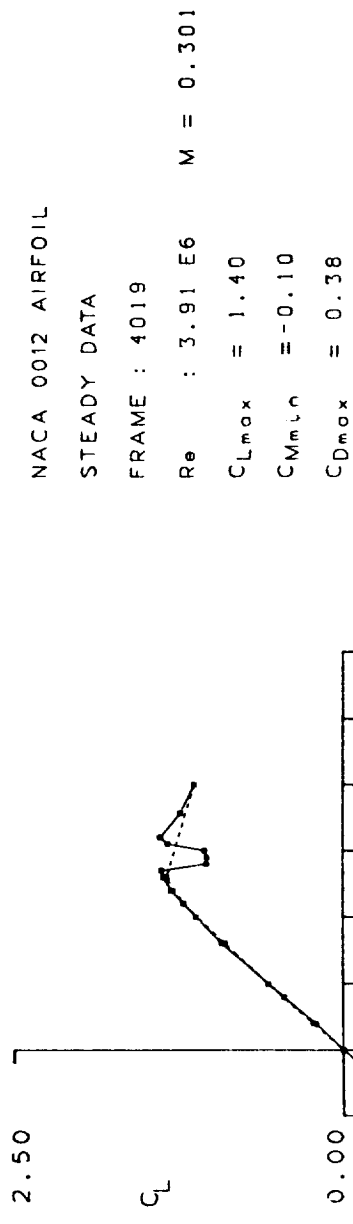


Figure 4.- Static data for NACA 0012 airfoil.

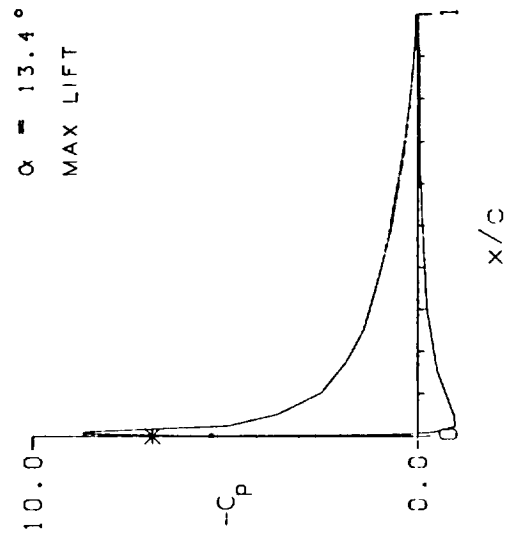
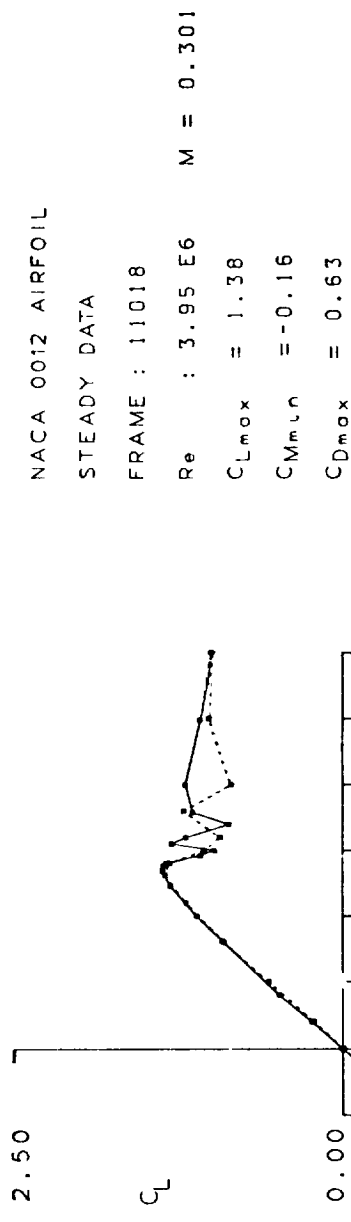


Figure 4.- Concluded.

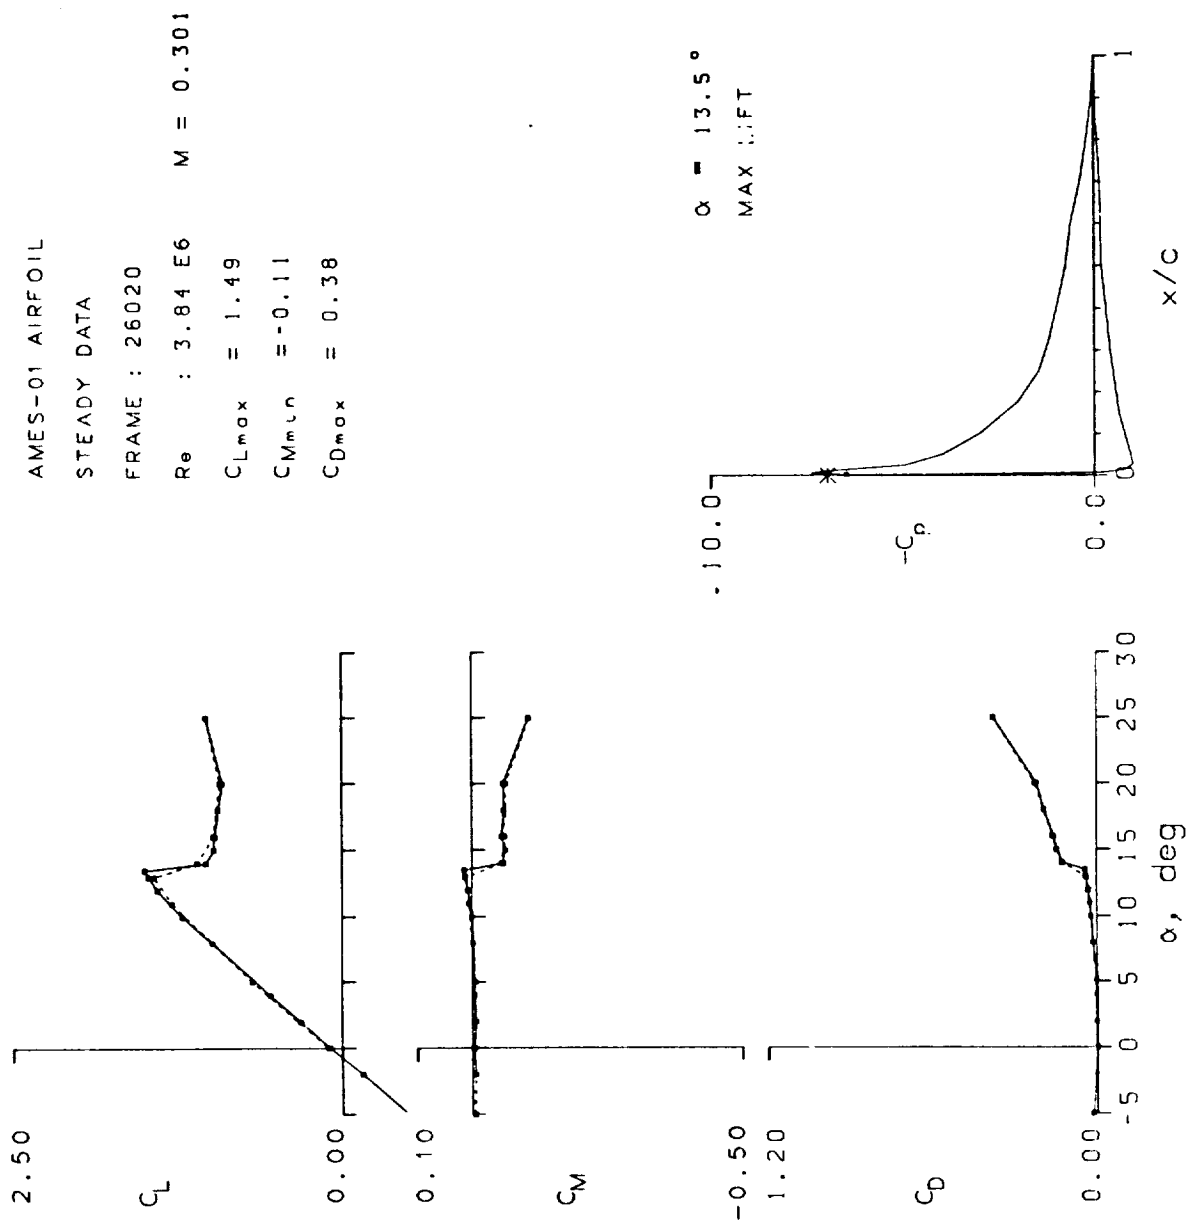


Figure 5.- Static data for Ames A-01 airfoil.

AMES-01 AIRFOIL
 STEADY DATA
 FRAME : 26313
 Re : 3.23 E6 M = 0.250
 $C_{Lmax} = 1.59$
 $C_{Mmin} = -0.10$
 $C_{Dmax} = 0.38$

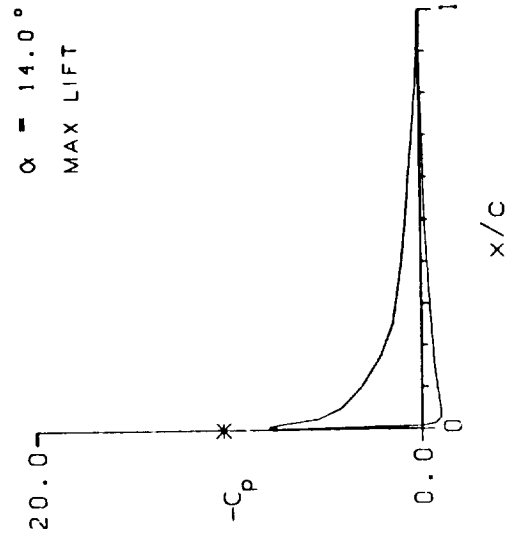
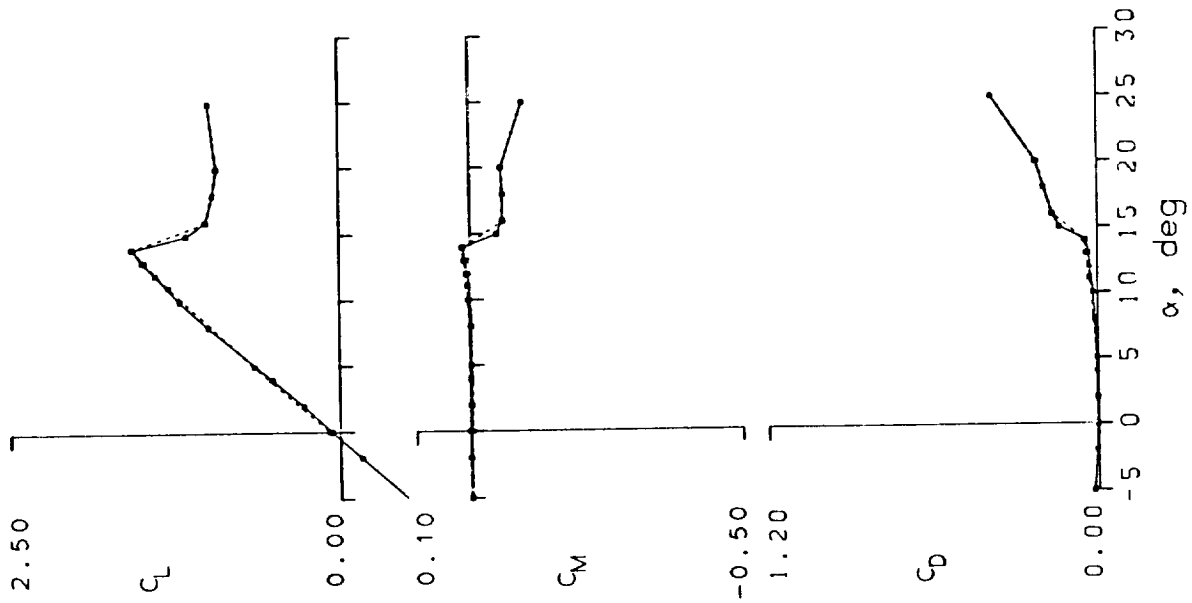


Figure 5.- Continued.

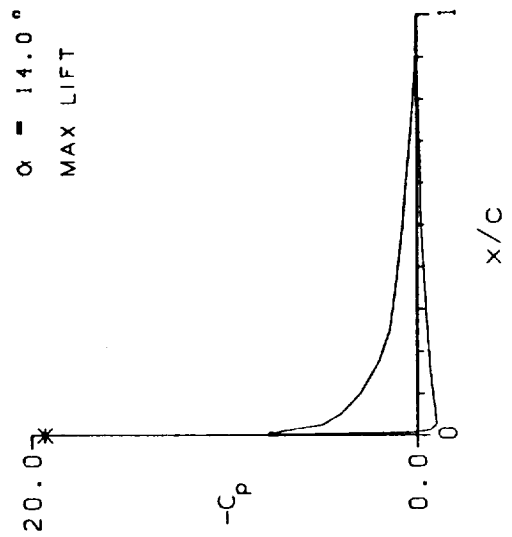
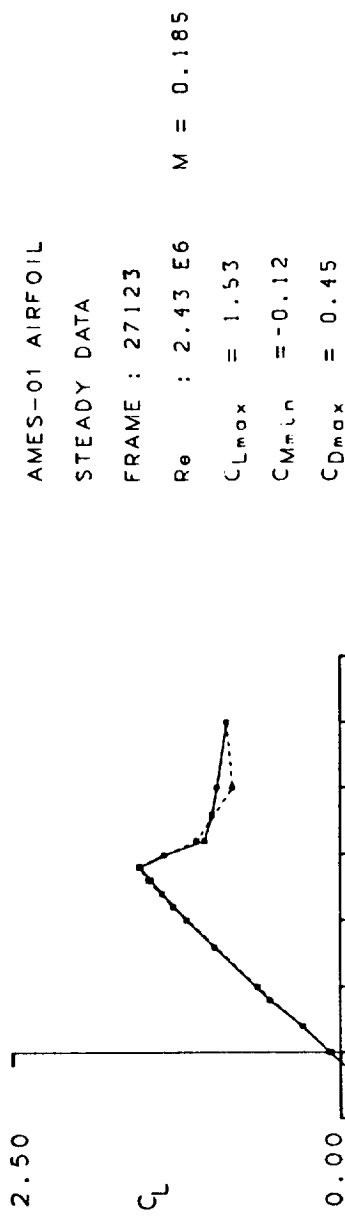


Figure 5.- Continued.

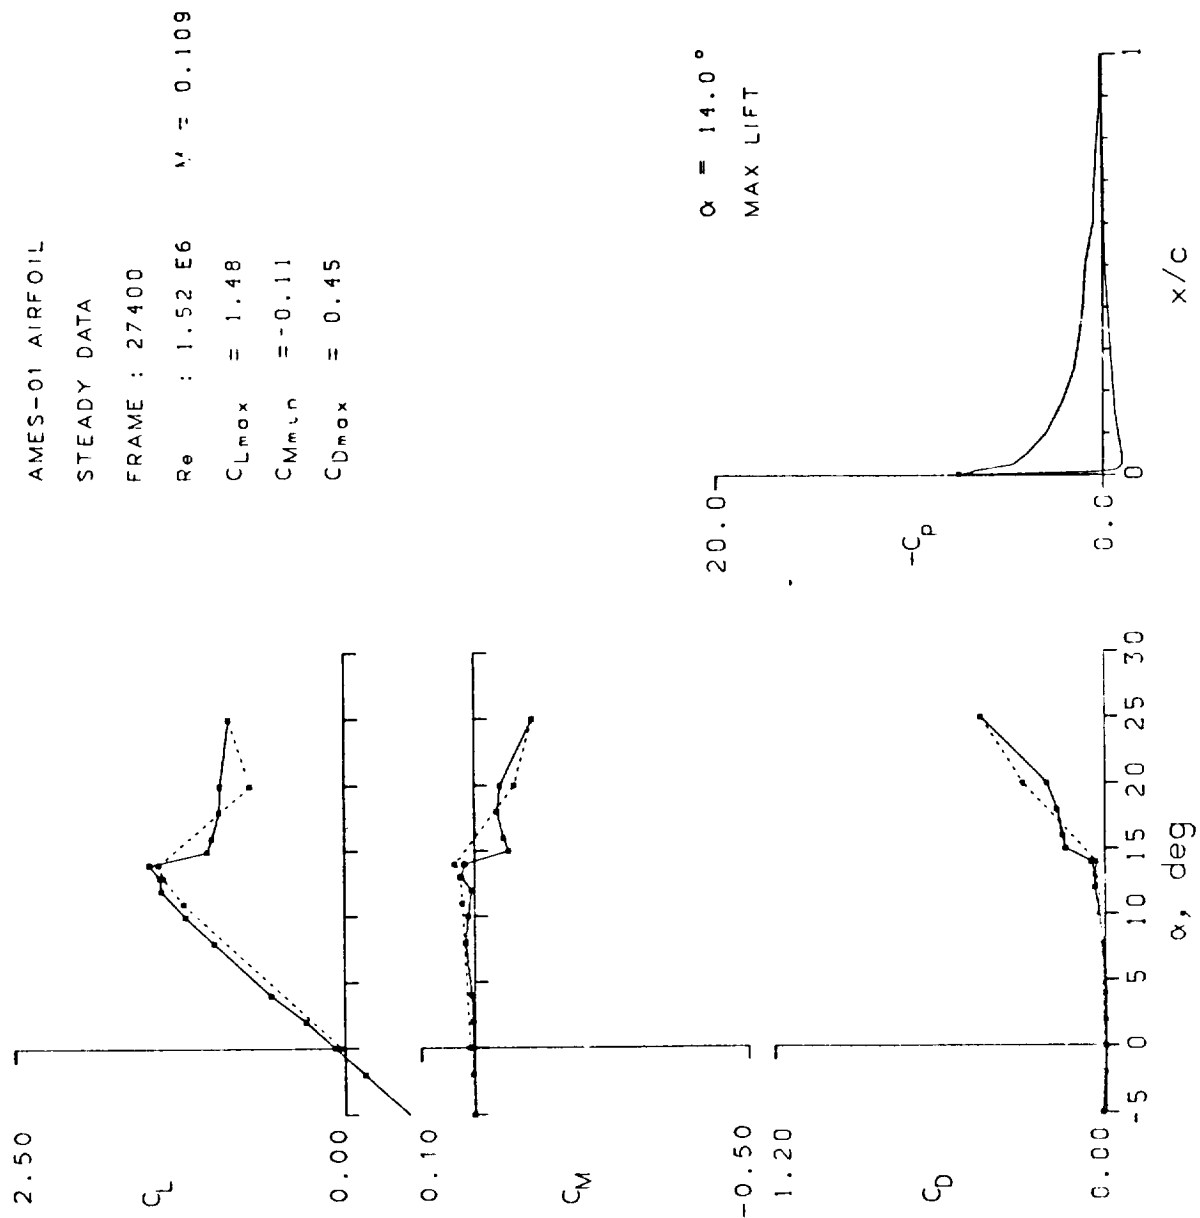


Figure 5.- Continued.

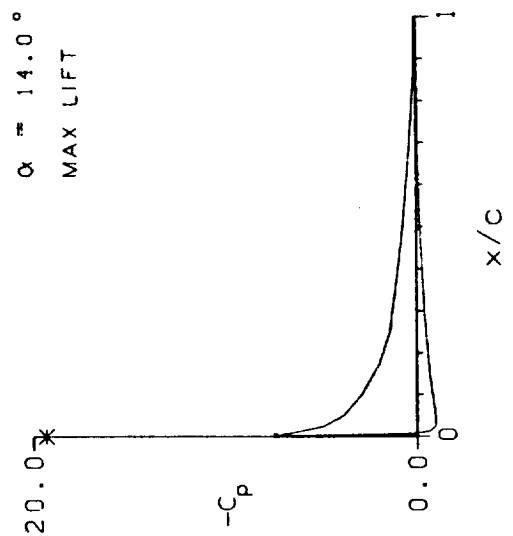
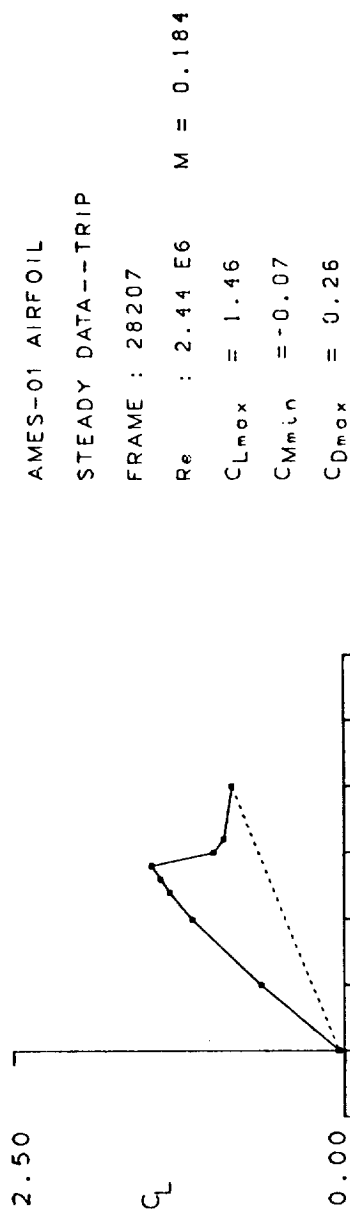


Figure 5.- Continued.

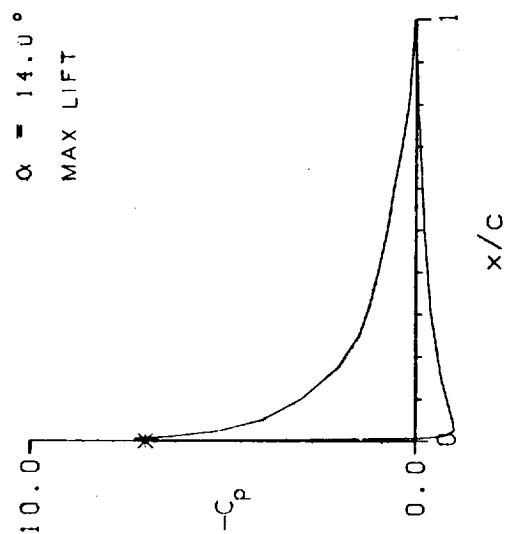
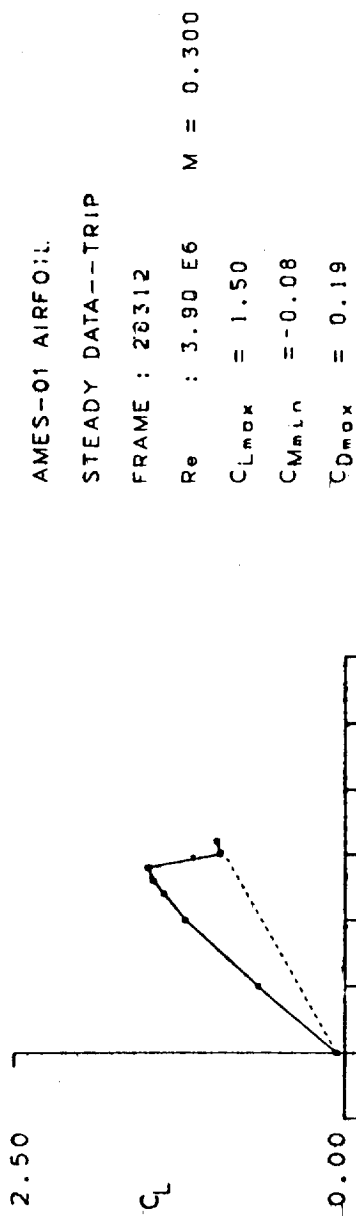


Figure 5.- Concluded.

WORTMANN FX 69-H-098 AIRFOIL

STEADY DATA--TRIP

FRAME : 17208

Re : 3.90 E6 M = 0.300

C_{Lmax} = 1.37

C_{Mmin} = -0.11

C_{Dmax} = 0.23

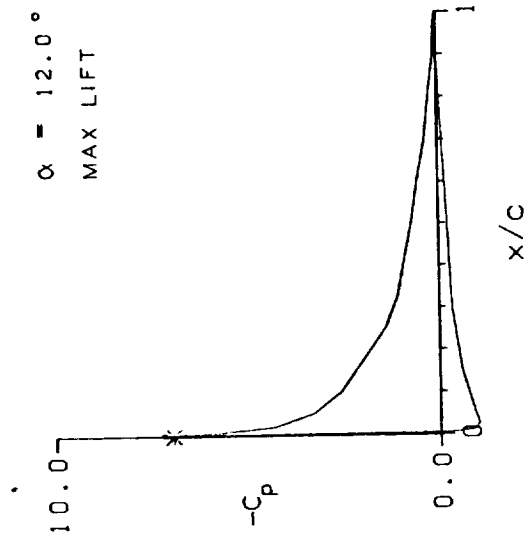
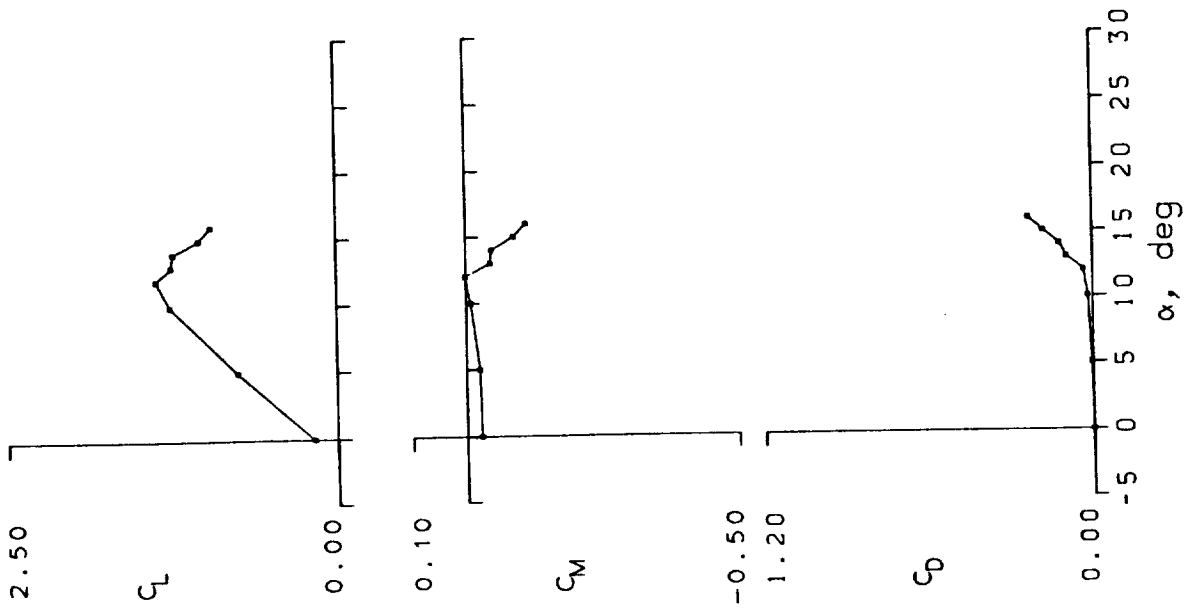


Figure 6.- Static data for Wortmann FX-098 airfoil.

WORTMANN FX 69-H-098 AIRFOIL

STEADY DATA--TRIP





FRAME : 18019

Re : 2.39 E6 M = 0.185

$C_{Lmax} = 1.36$

$C_{Mmin} = -0.09$

$C_{Dmax} = 0.31$

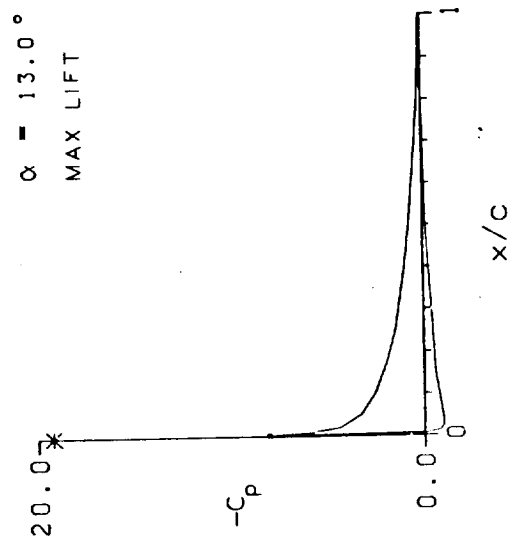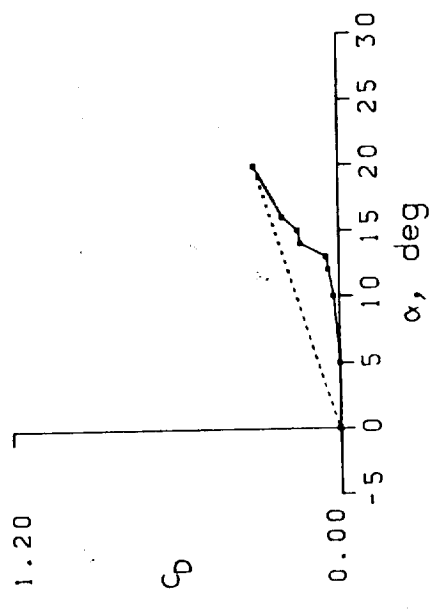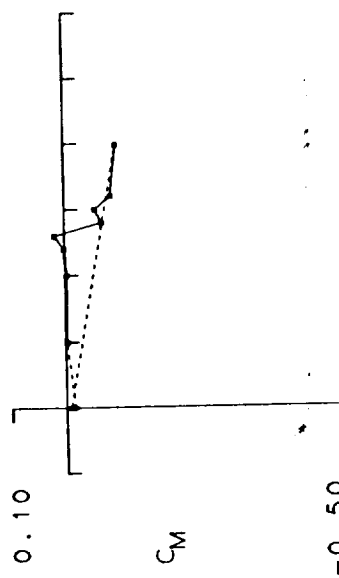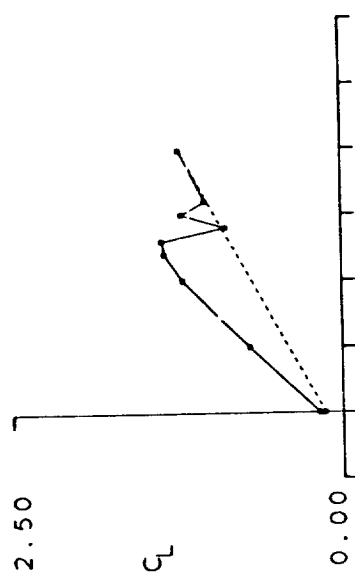

$\alpha = 13.0^\circ$
MAX LIFT

Figure 6.- Continued.

WORTMANN FX 69-H-098 AIRFOIL
 STEADY DATA
 FRAME : 18215
 Re : 1.49 E6 M = 0.109
 C_{Lmax} = 1.44
 C_{Mmin} = -0.13
 C_{Dmax} = 0.51

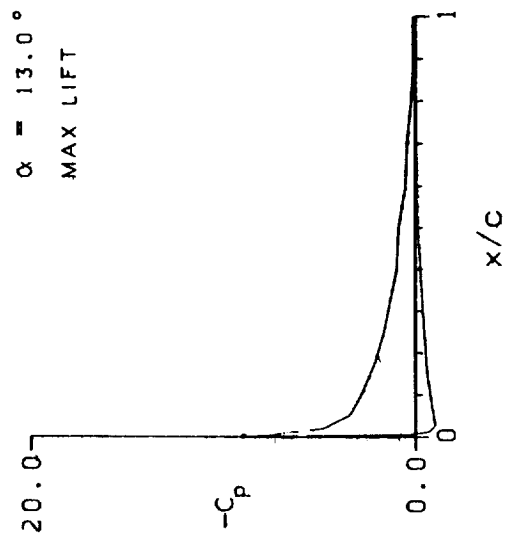
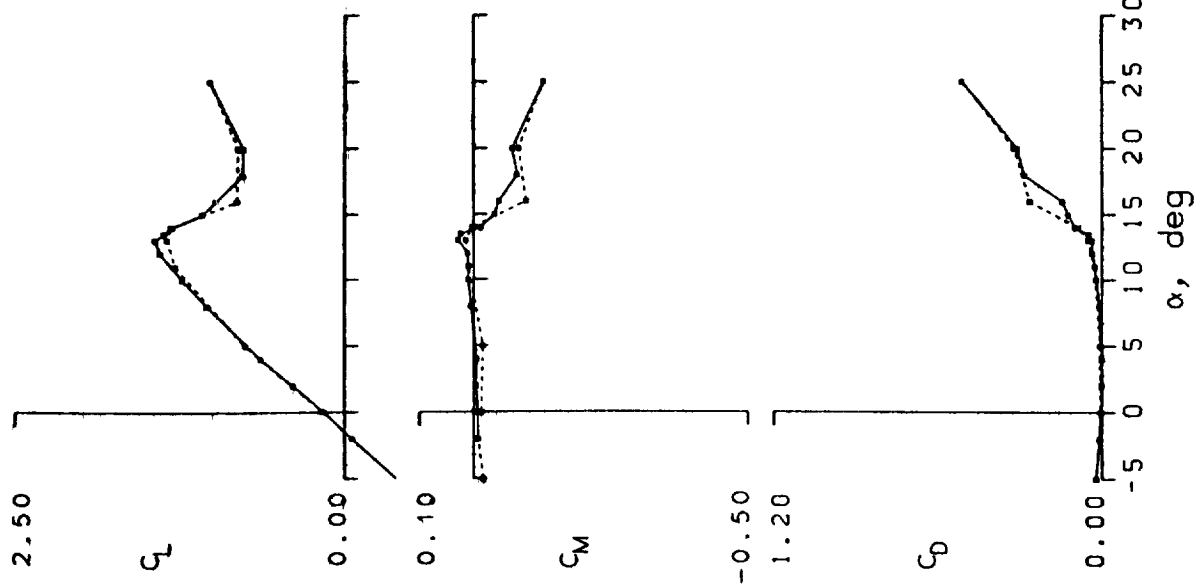


Figure 6.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

STEADY DATA

FRAME : 19020

Re : 2.40 E6 M \pm 0.185

CLmax = 1.51

CMmin = -0.14

CDmax = 0.49

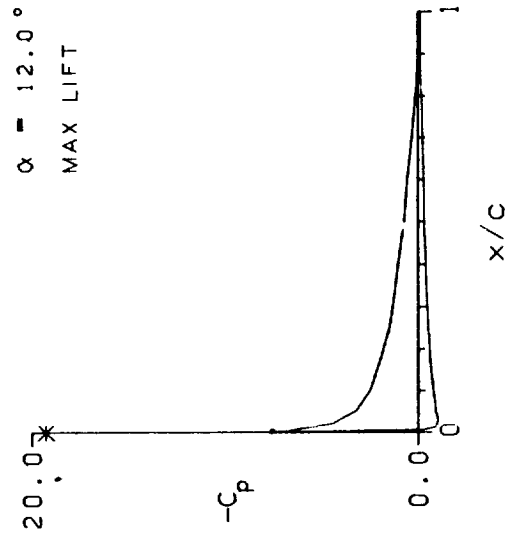
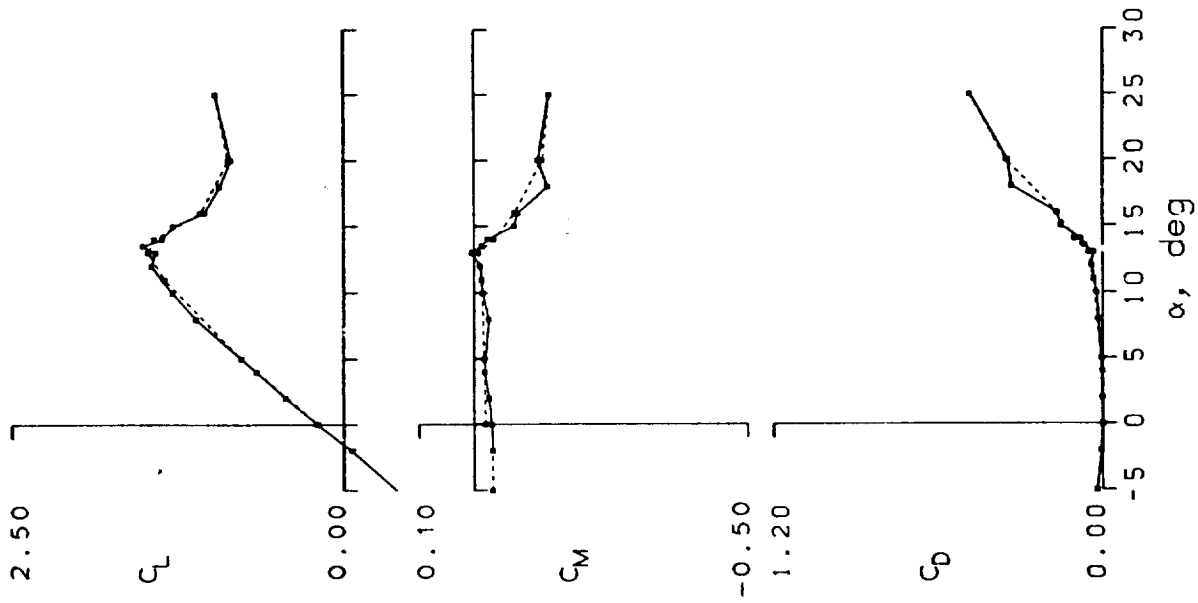


Figure 6.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

STEADY DATA

FRAME : 19314

R_e : 3.24 E6 $M = 0.251$

$C_{Lmax} = 1.50$

$C_{Mmin} = -0.11$

$C_{Dmax} = 0.44$

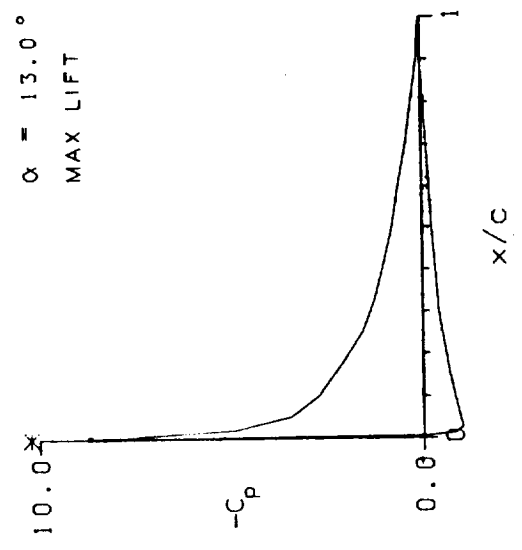
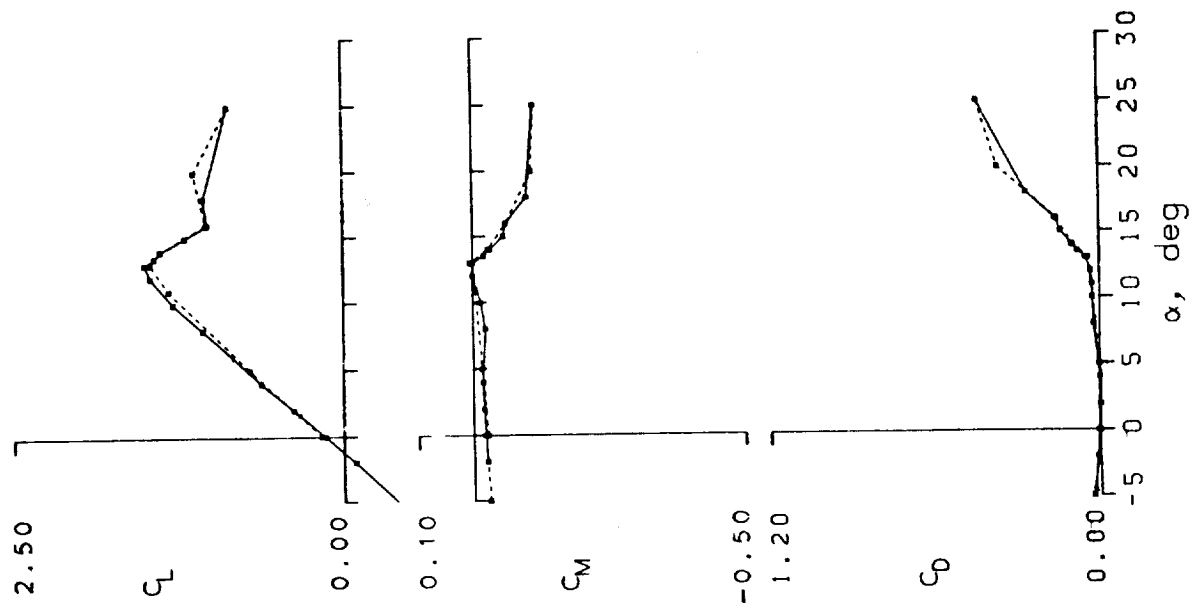


Figure 6.- Continued.

WORTMANN FX 59-M-098 AIRFOIL

STEADY DATA

FRAME : 20118

Re : 3.76 E6 M = 0.301

C_{Lmax} = 1.49

C_{Mmin} = -0.12

C_{Dmax} = 0.43

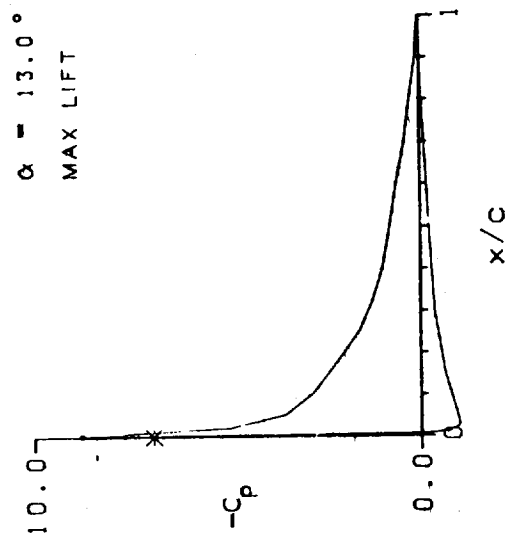
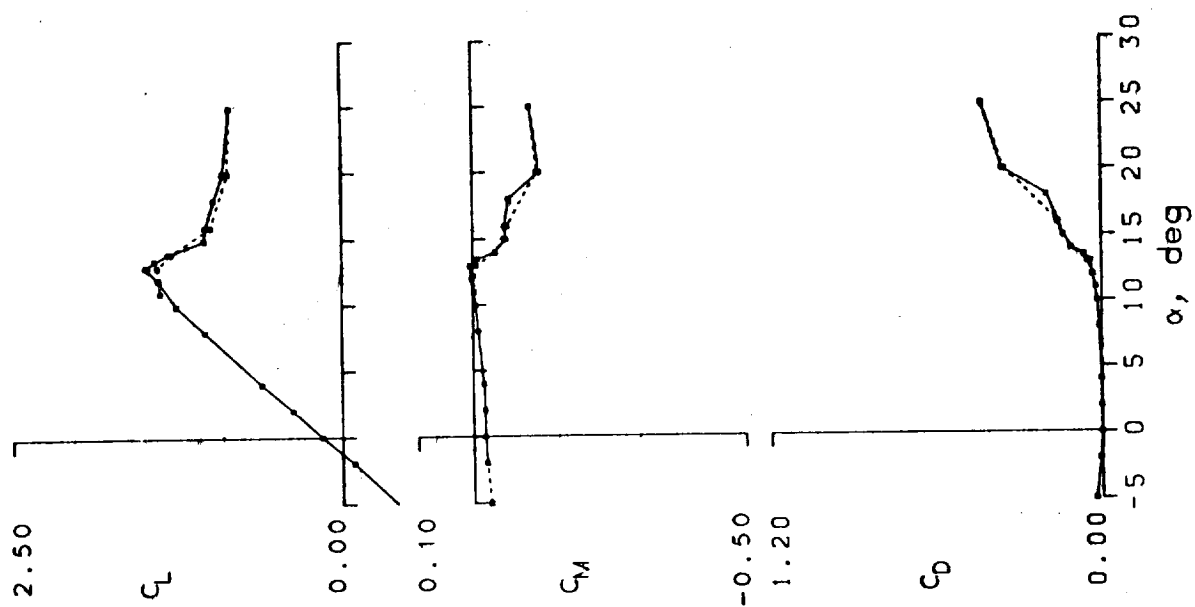


Figure 6.- Concluded.

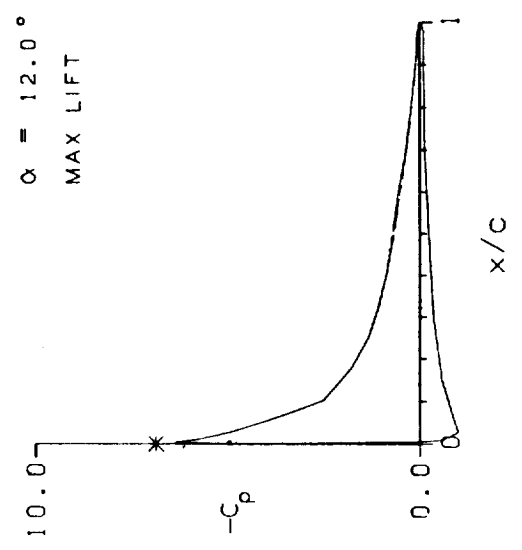
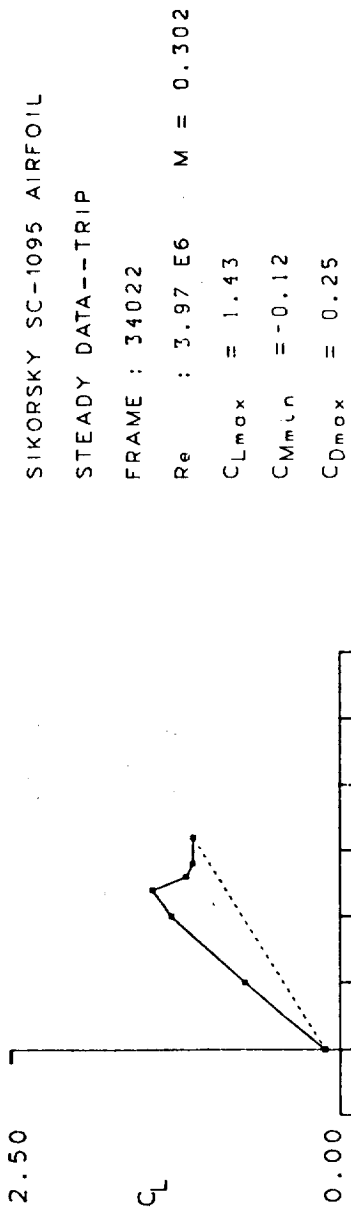


Figure 7.- Static data for Sikorsky SC-1095 airfoil.

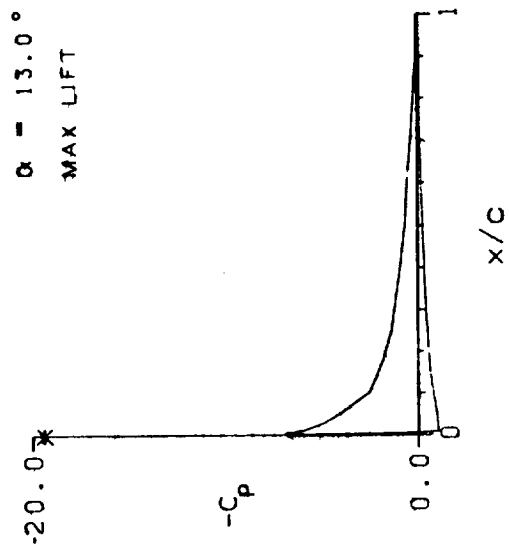
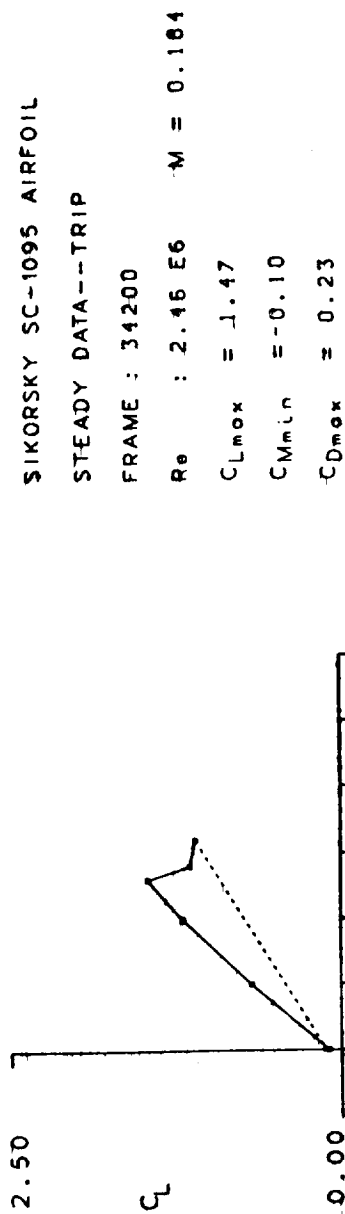


Figure 7.- Continued.

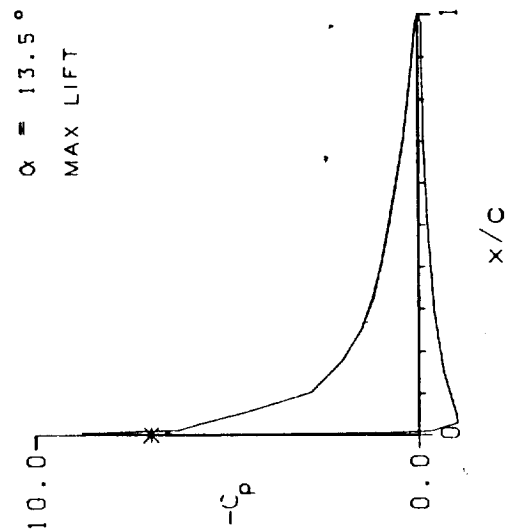
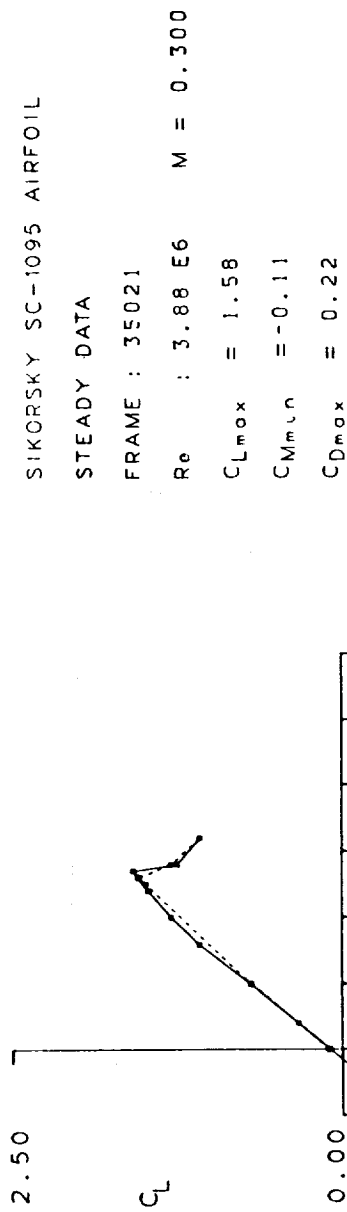


Figure 7.- Continued.

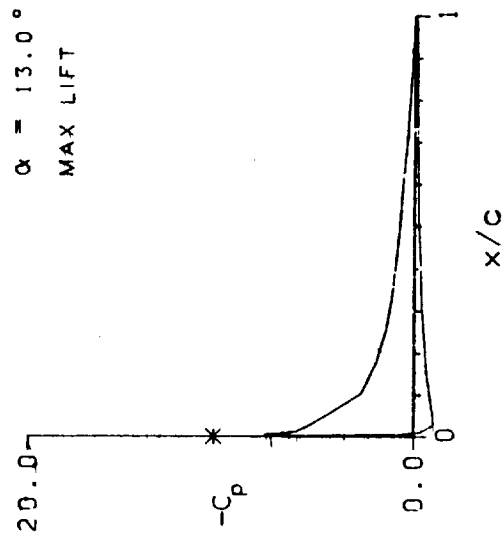
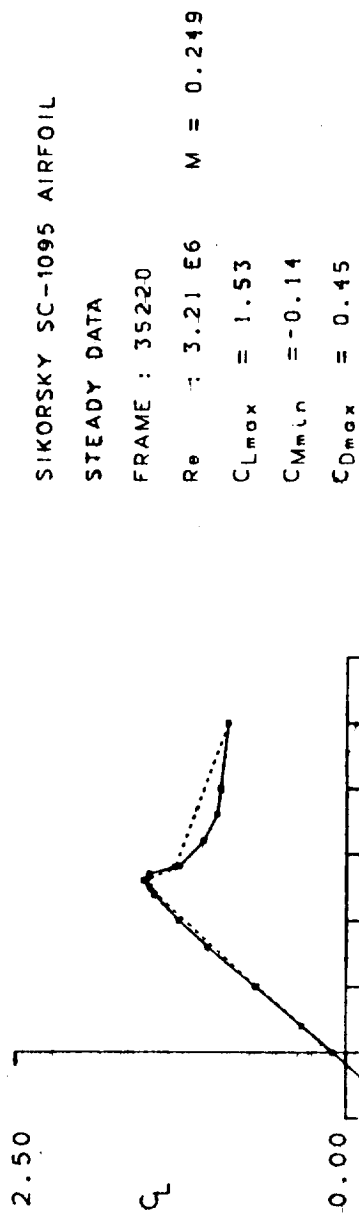


Figure 7.- Continued.

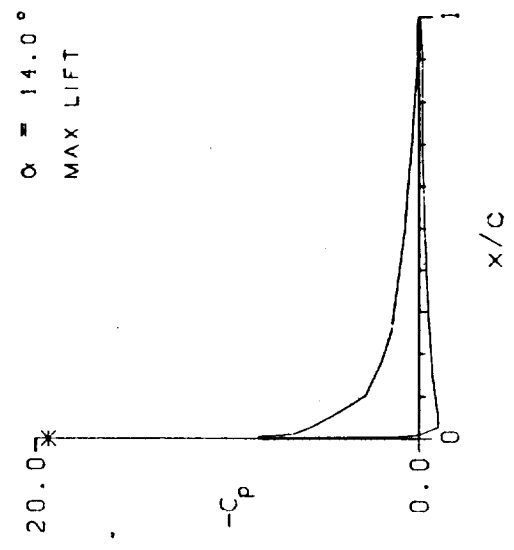


Figure 7.- Continued.

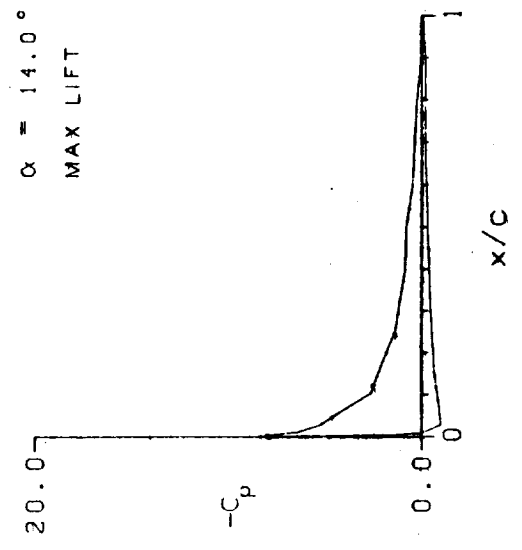
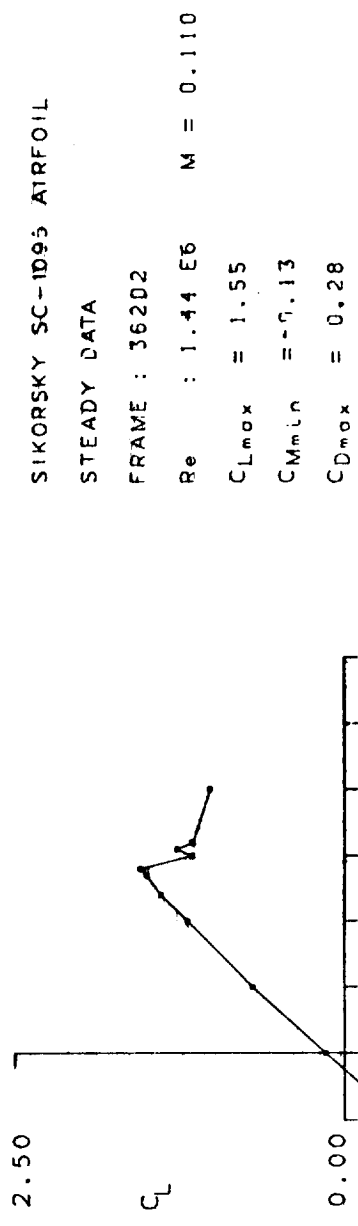


Figure 7.- Concluded.

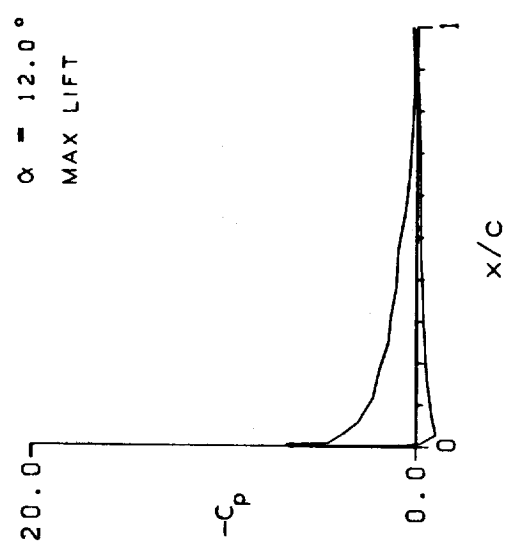
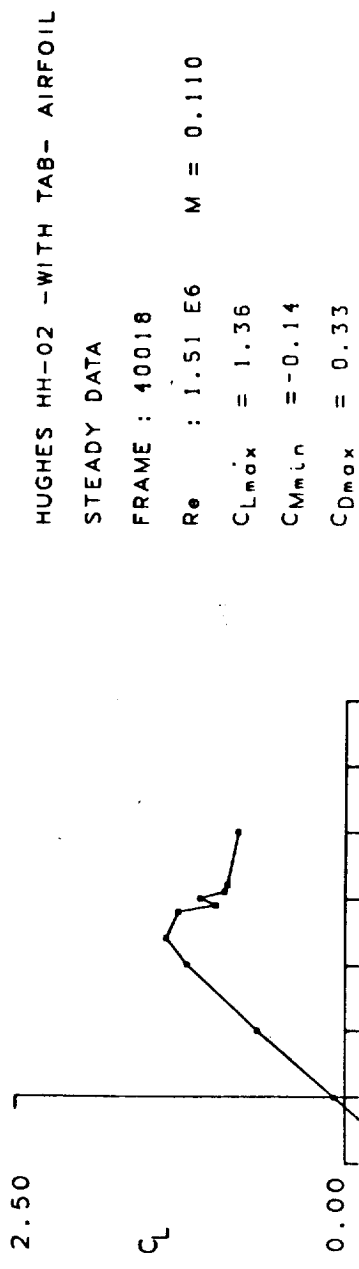


Figure 8.- Static data for Hughes HH-02 airfoil.

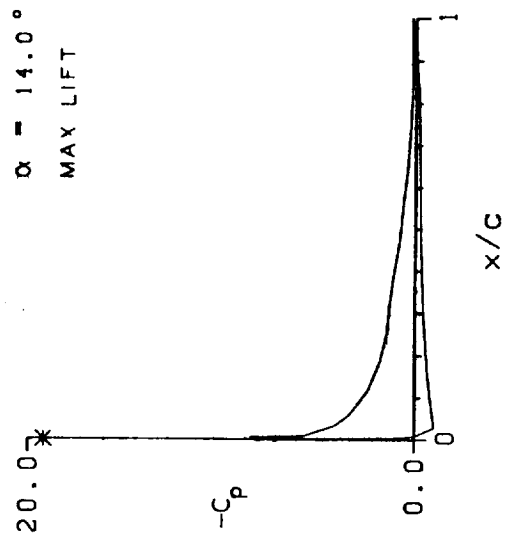
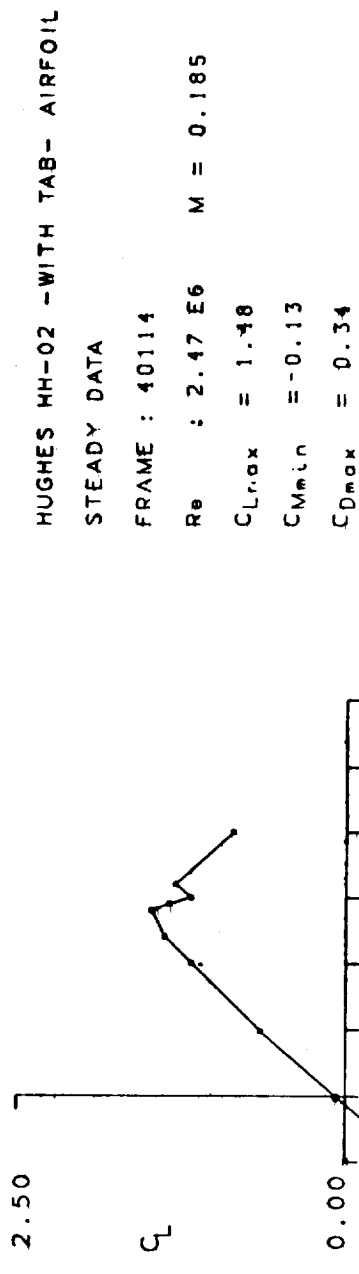


Figure 8.- Continued.

HUGHES HH-02 - WITH TAB- AIRFOIL

STEADY DATA

FRAME : 41019

Re : 4.10 E6 M = 0.300

C_{Lmax} = 1.47

C_{Mmin} = -0.12

C_{Dmax} = 0.32

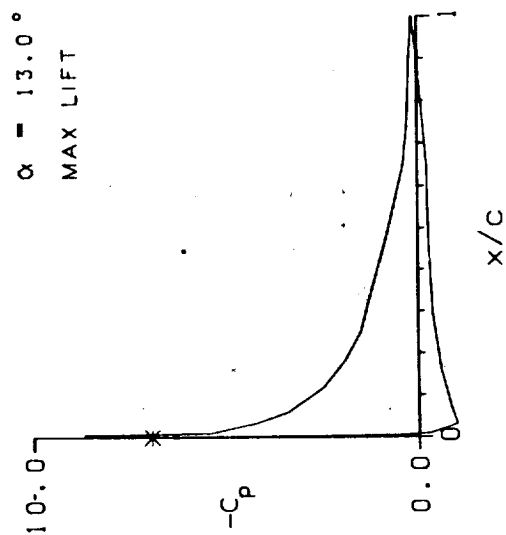
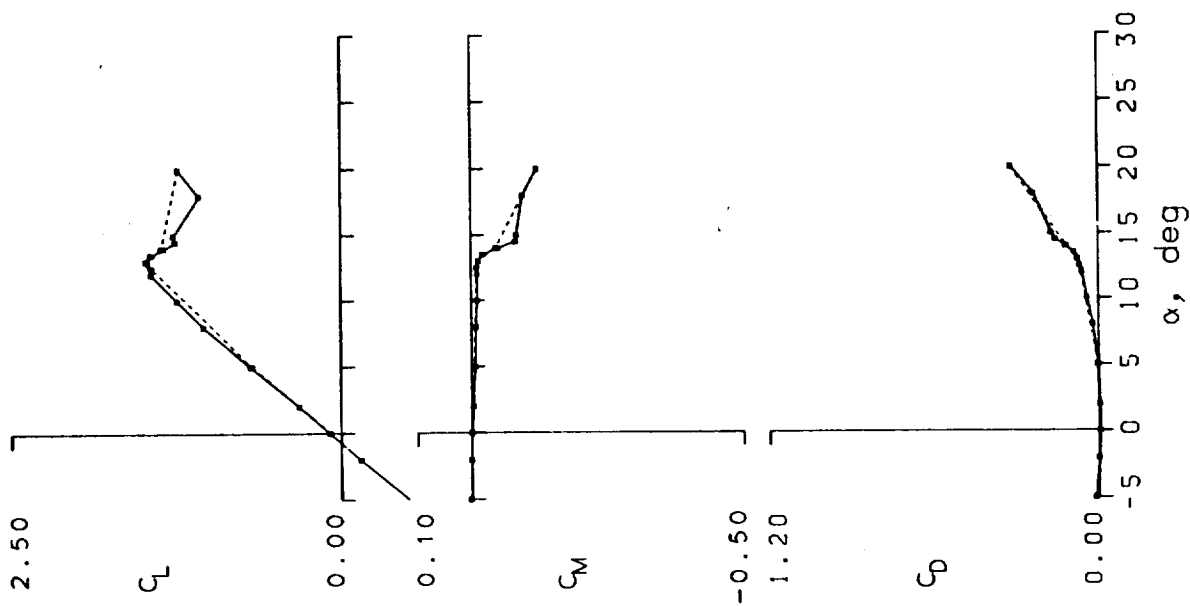


Figure 8.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL
 STEADY DATA
 FRAME : 41110
 $Re : 3.37 \times 10^6$ $M = 0.248$
 $C_{Lmax} = 1.54$
 $C_{Mmin} = -0.110$
 $C_{Dmax} = 0.28$

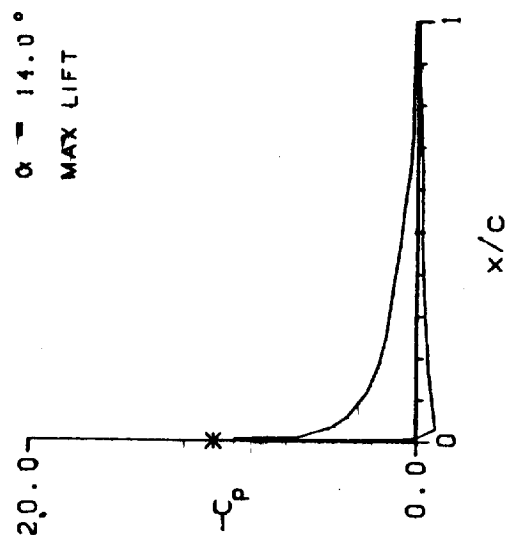
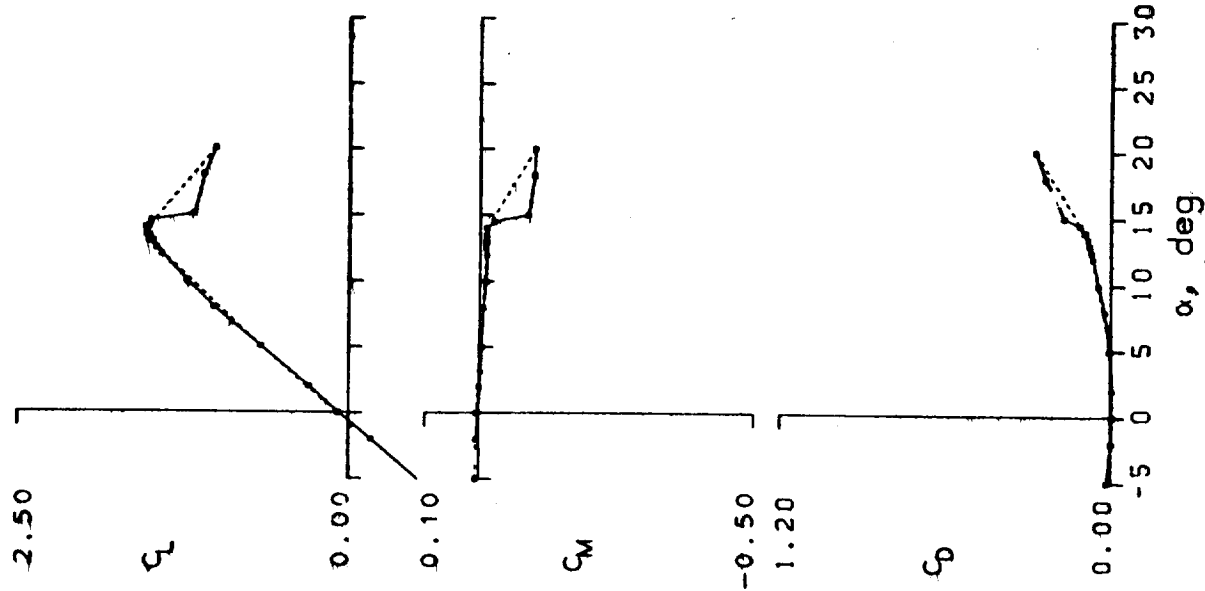


Figure 8.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL
 STEADY DATA--TRIP
 FRAME : 41221
 Re : 4.01 E6 M = 0.299
 $C_{L_{max}} = 1.42$
 $C_{M_{min}} = -0.11$
 $C_{D_{max}} = 0.23$

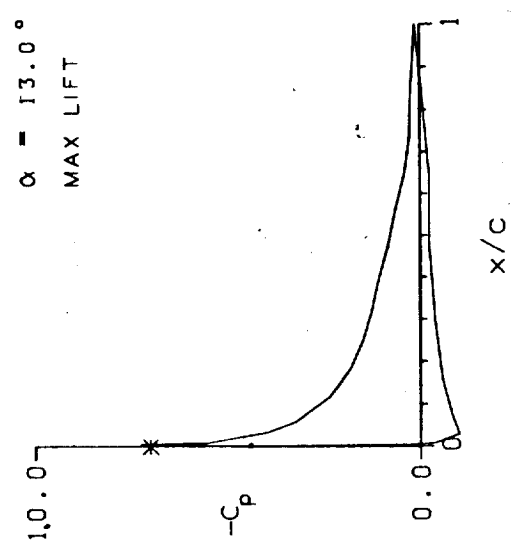
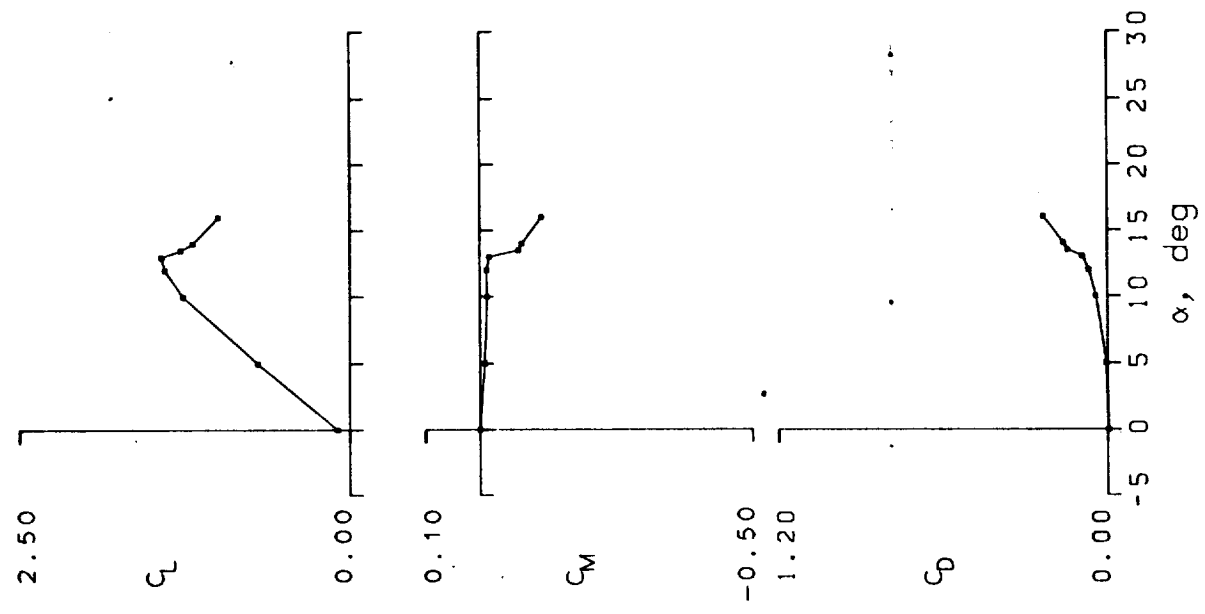


Figure 8.- Continued.

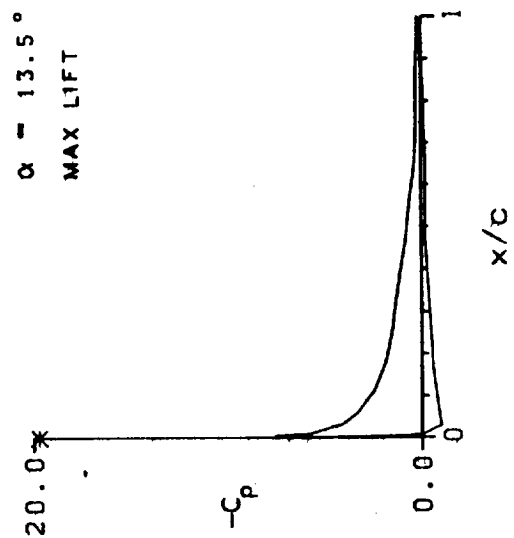
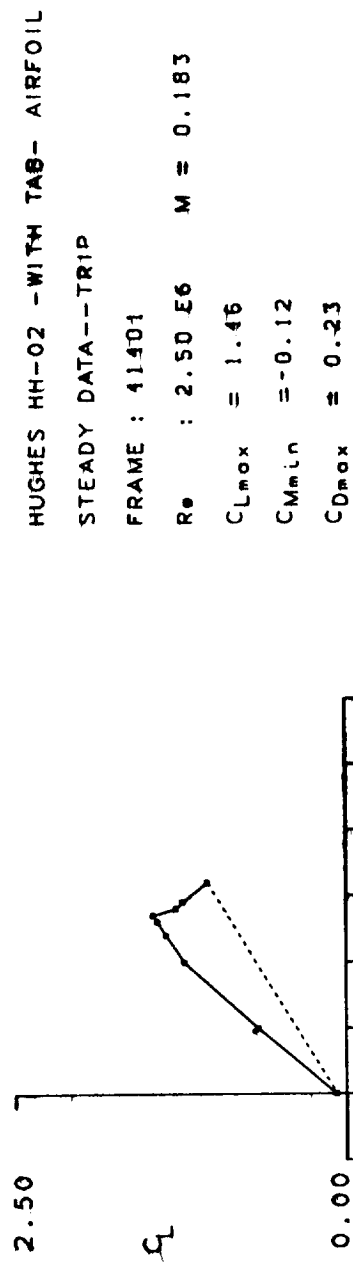


Figure 8.- Concluded.

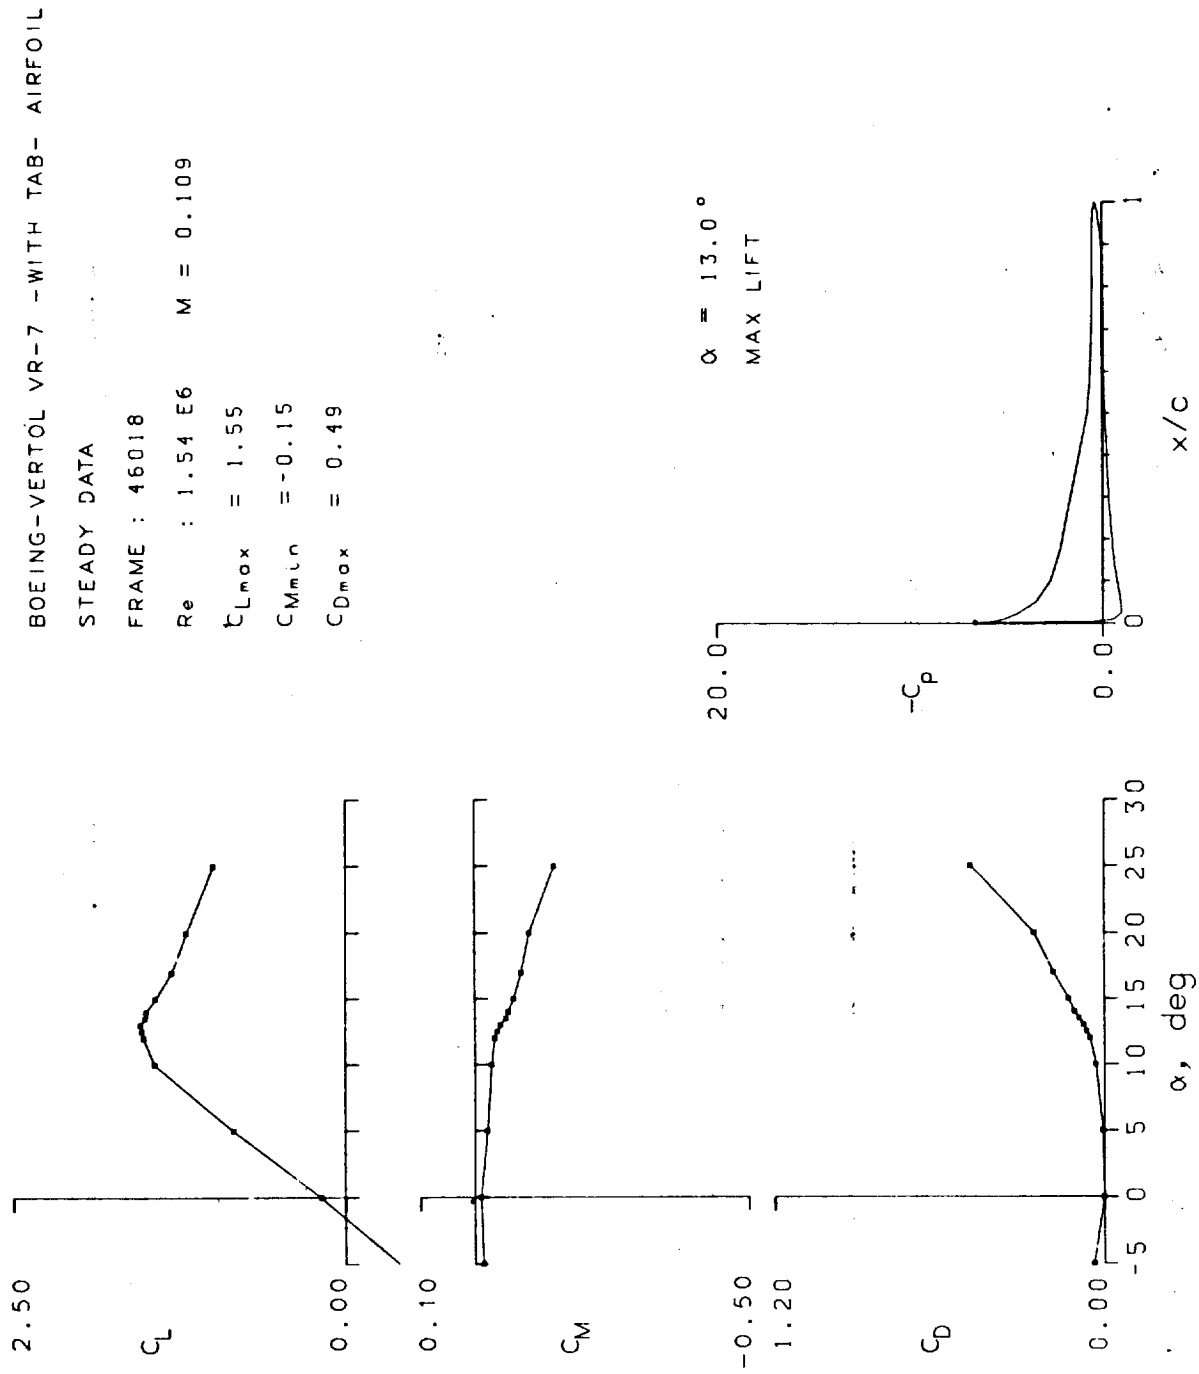


Figure 9.- Static data for Vertol VR-7 airfoil.

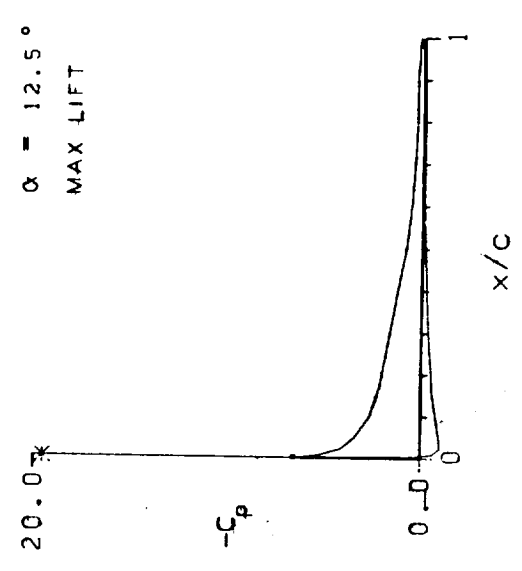
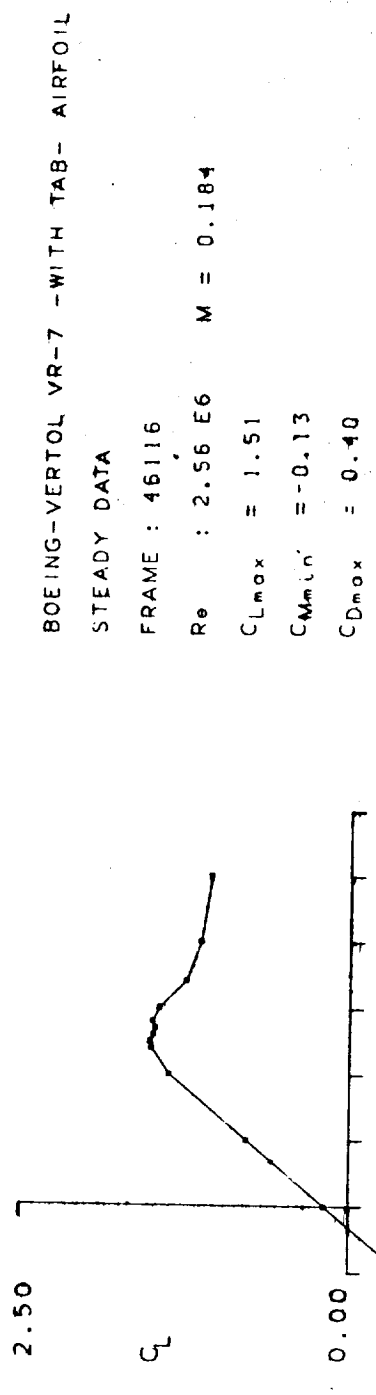


Figure 9.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

STEADY DATA

FRAME : 46307

Re : 3.44 E6 M = 0.248

$C_{L_{max}} = 1.57$

$C_{M_{min}} = -0.14$

$C_{D_{max}} = 0.40$

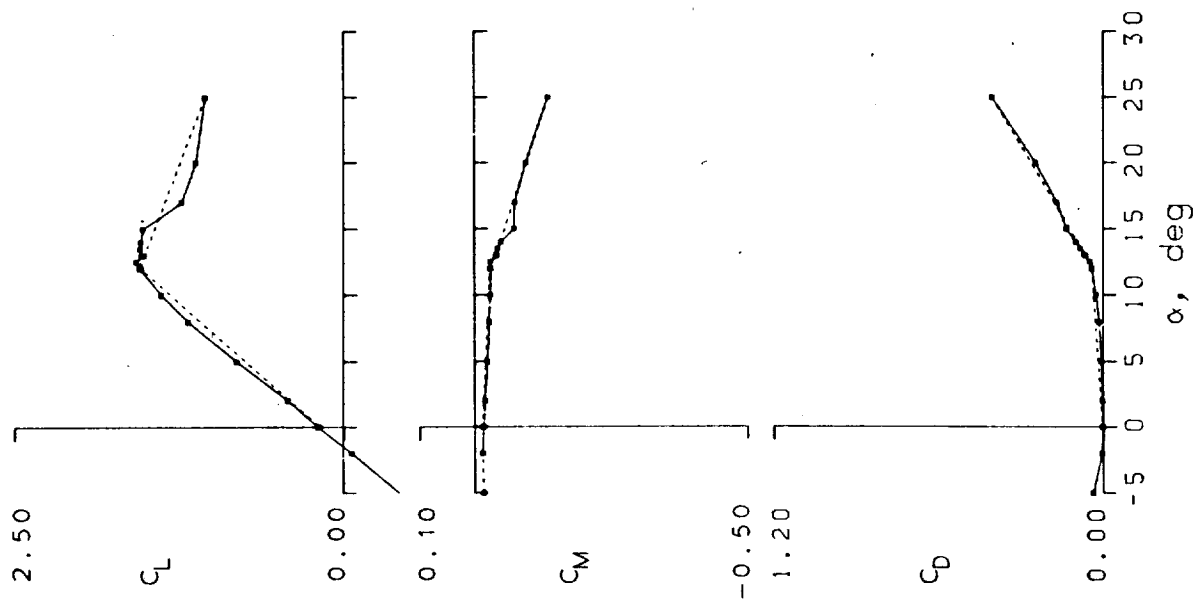


Figure 9.- Continued.

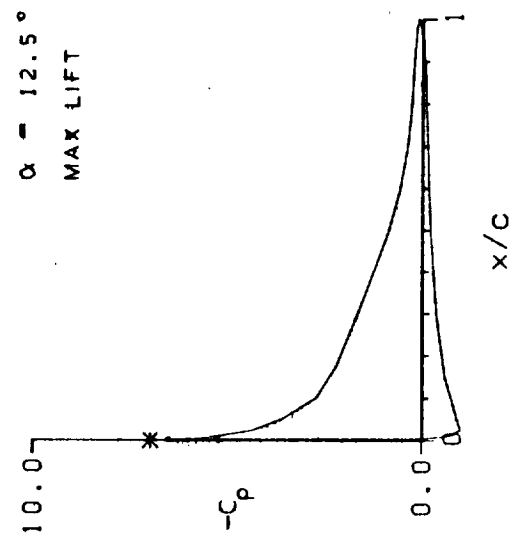
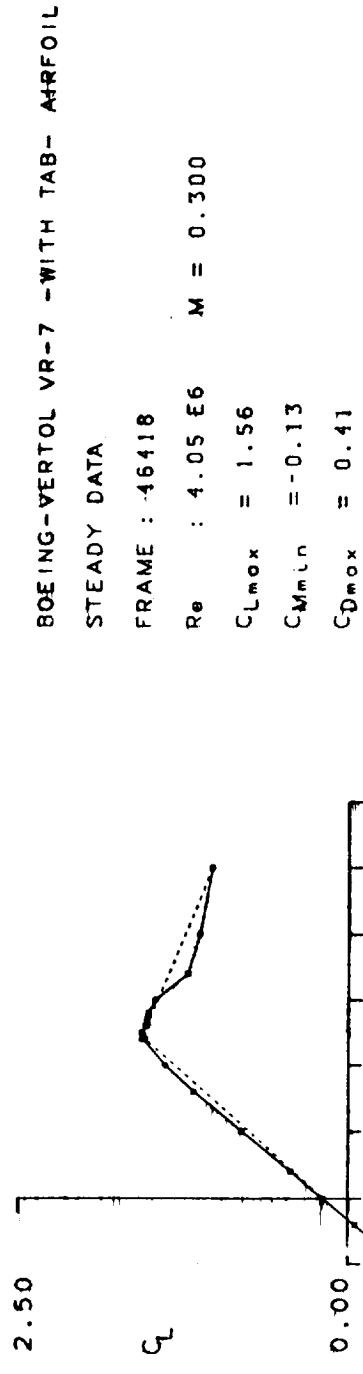


Figure 9.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

STEADY DATA--TRIP

FRAME : 46621

Re : 2.51 E6 M = 0.183

$C_{Lmax} = 1.38$

$C_{Mmin} = -0.10$

$C_{Dmax} = 0.28$

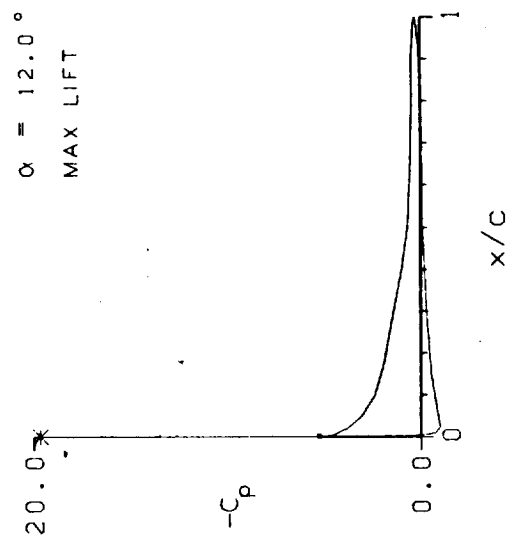
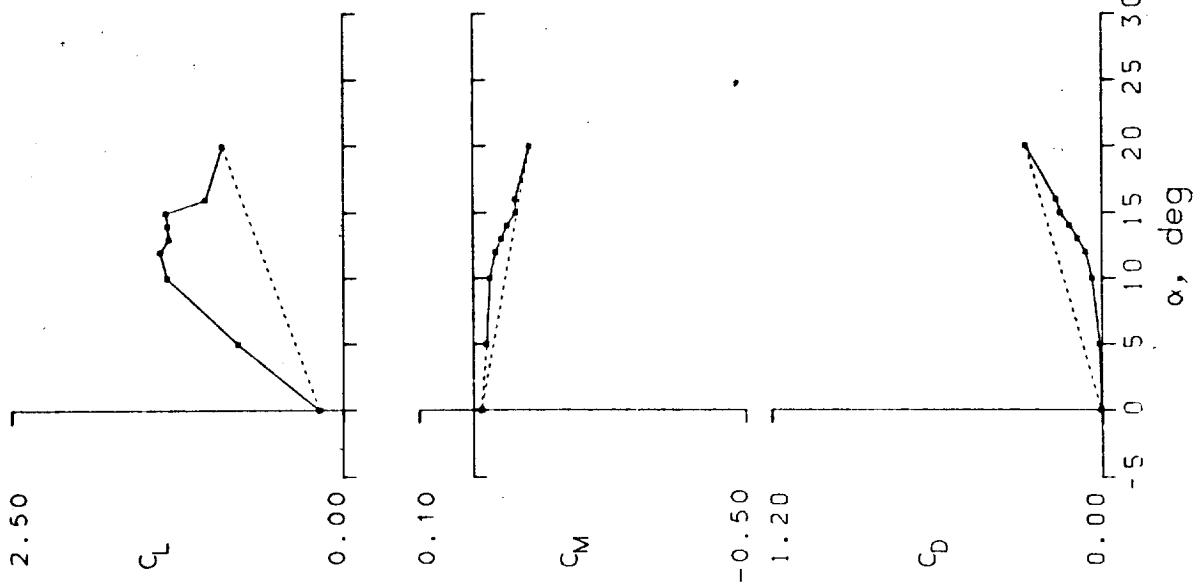


Figure 9.- Continued.

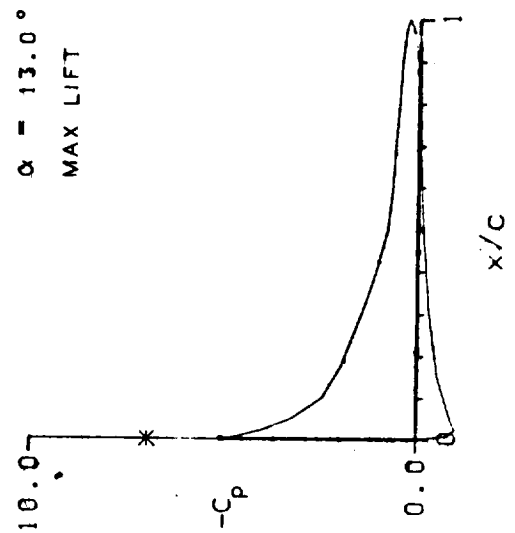
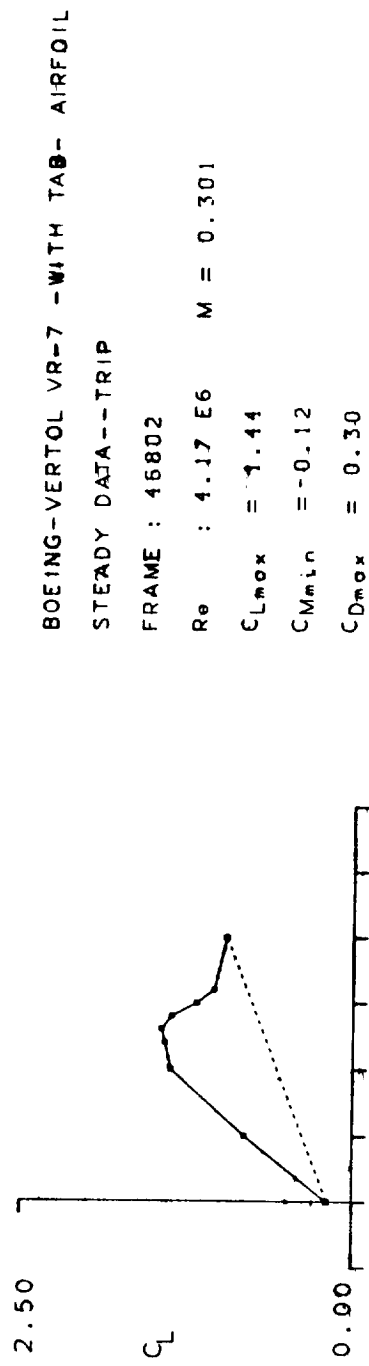


Figure 9.- Concluded.

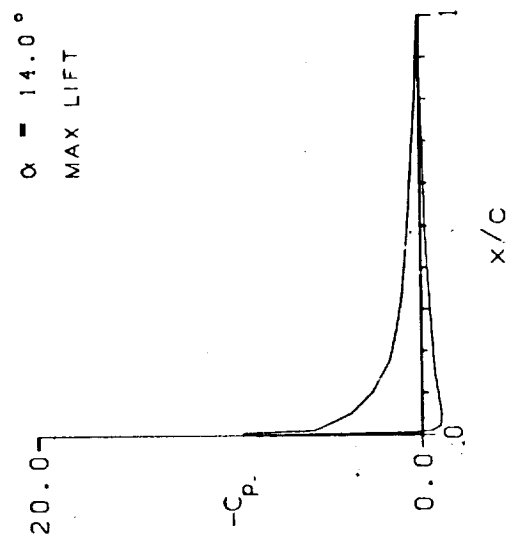
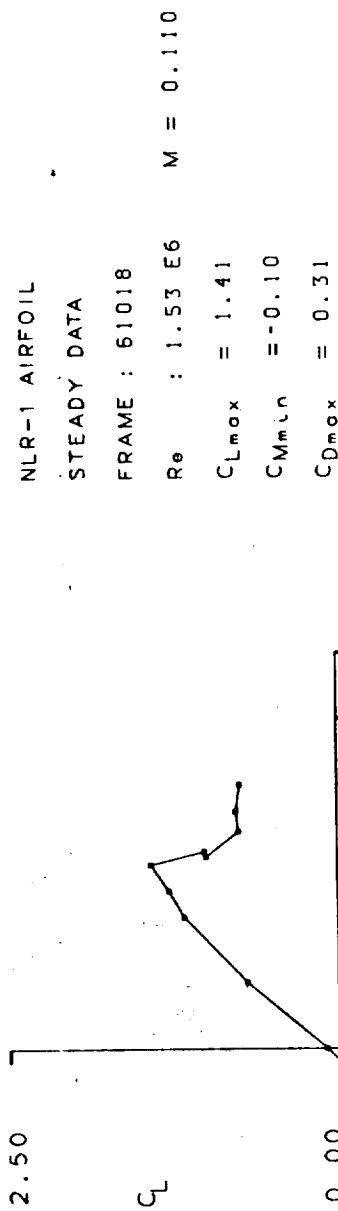


Figure 10.- Static data for NLR-1 airfoil.

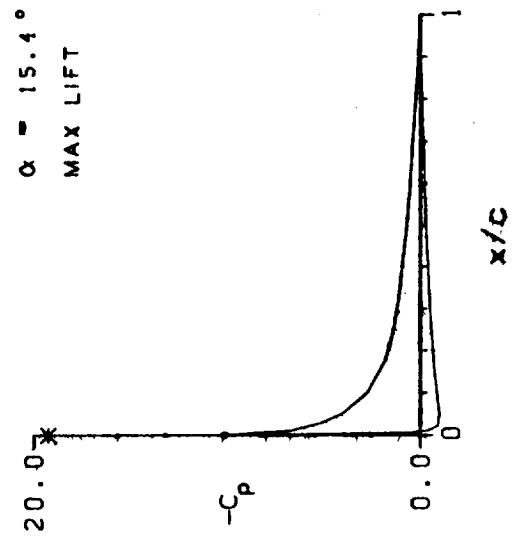
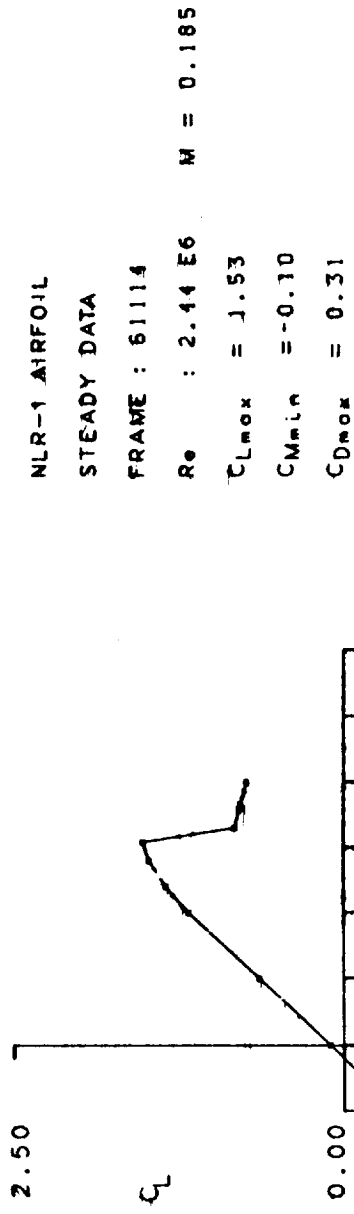


Figure 10.- Continued.

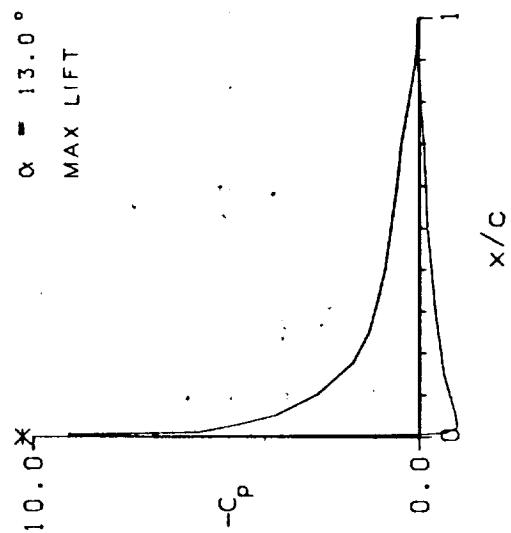
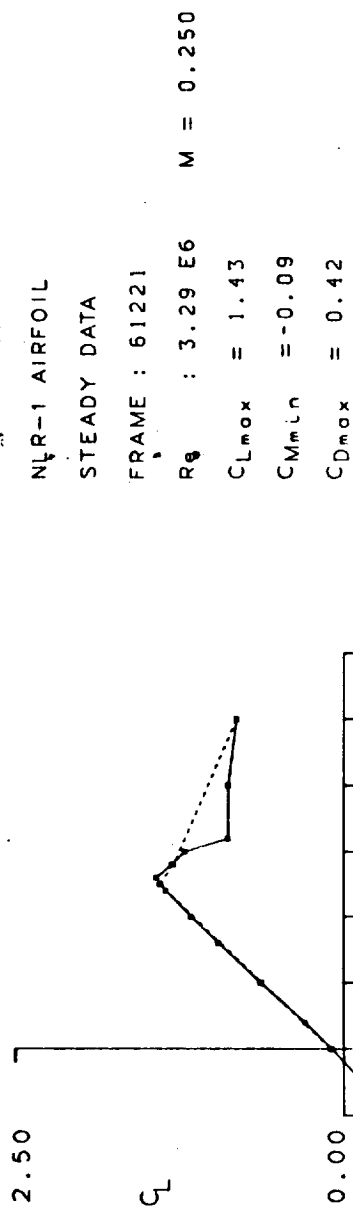


Figure 10.- Continued.

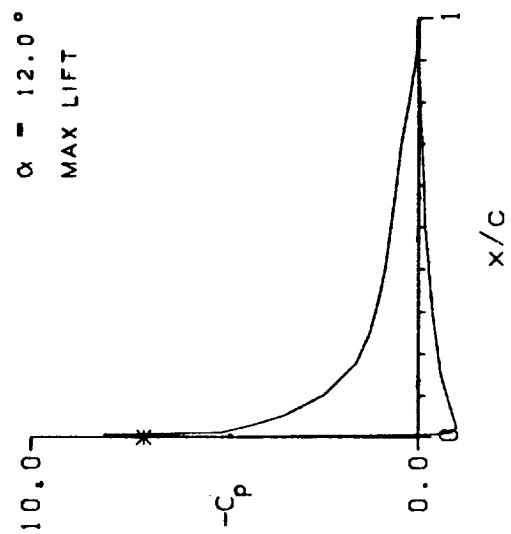
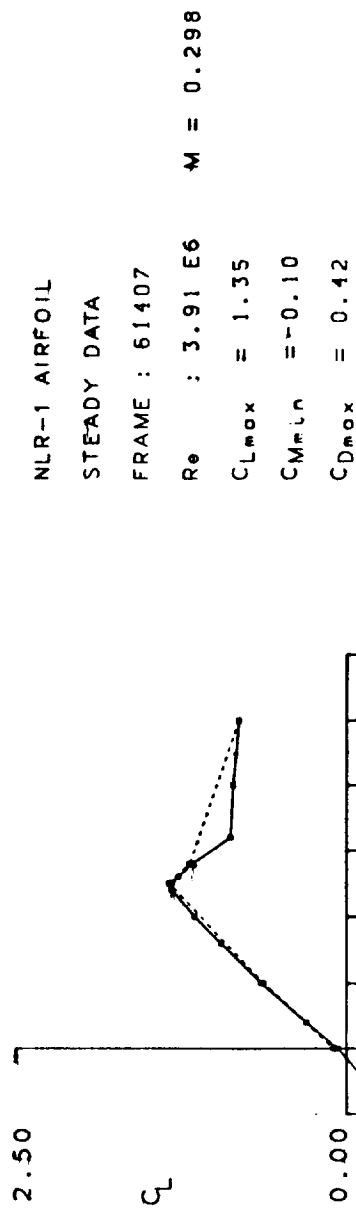


Figure 10.- Continued.

NLR-1 AIRFOIL
 STEADY DATA--TRIP
 FRAME : 64221
 Re : 2.35 E6 M = 0.185
 C_{Lmax} = 1.31
 C_{Mmin} = -0.08
 C_{Dmax} = 0.22

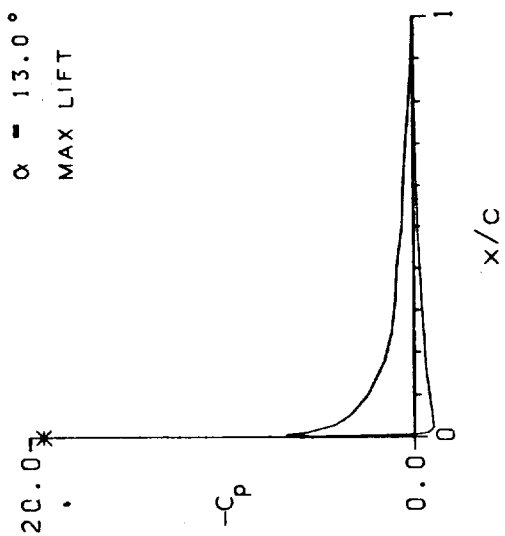
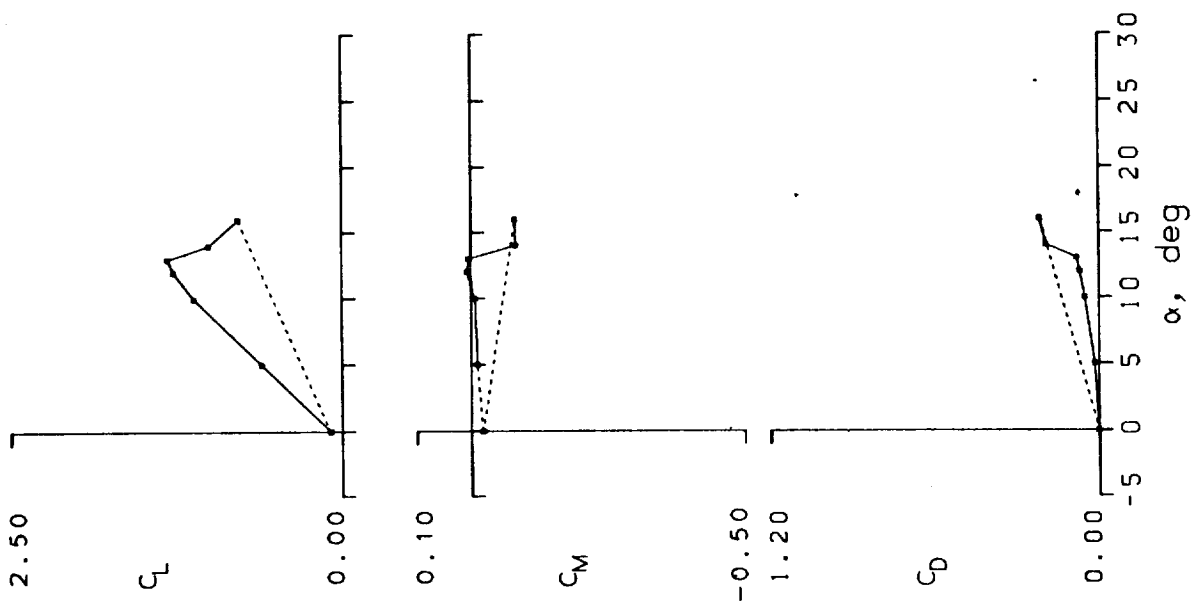


Figure 10.- Continued.

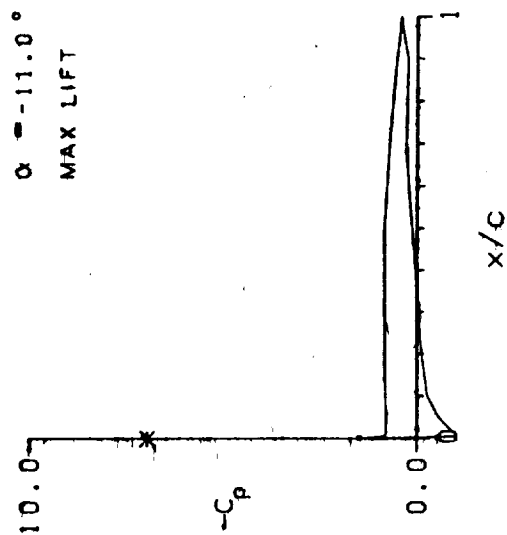
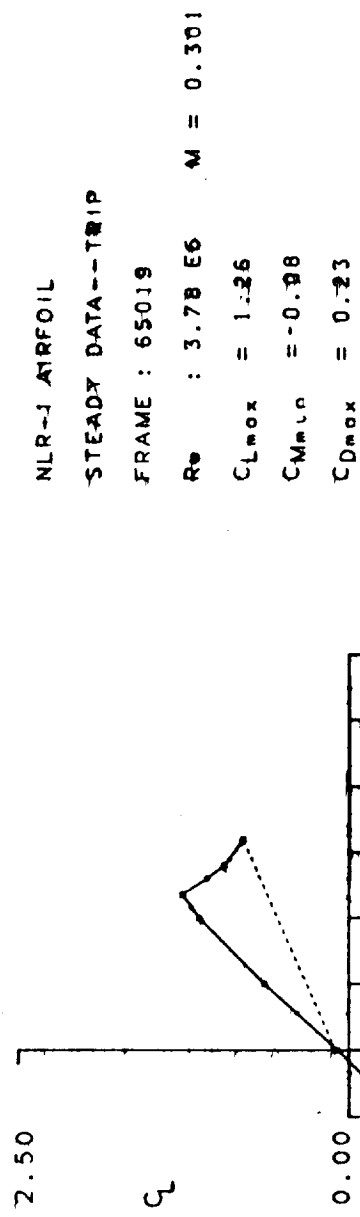


Figure 10.- Concluded.

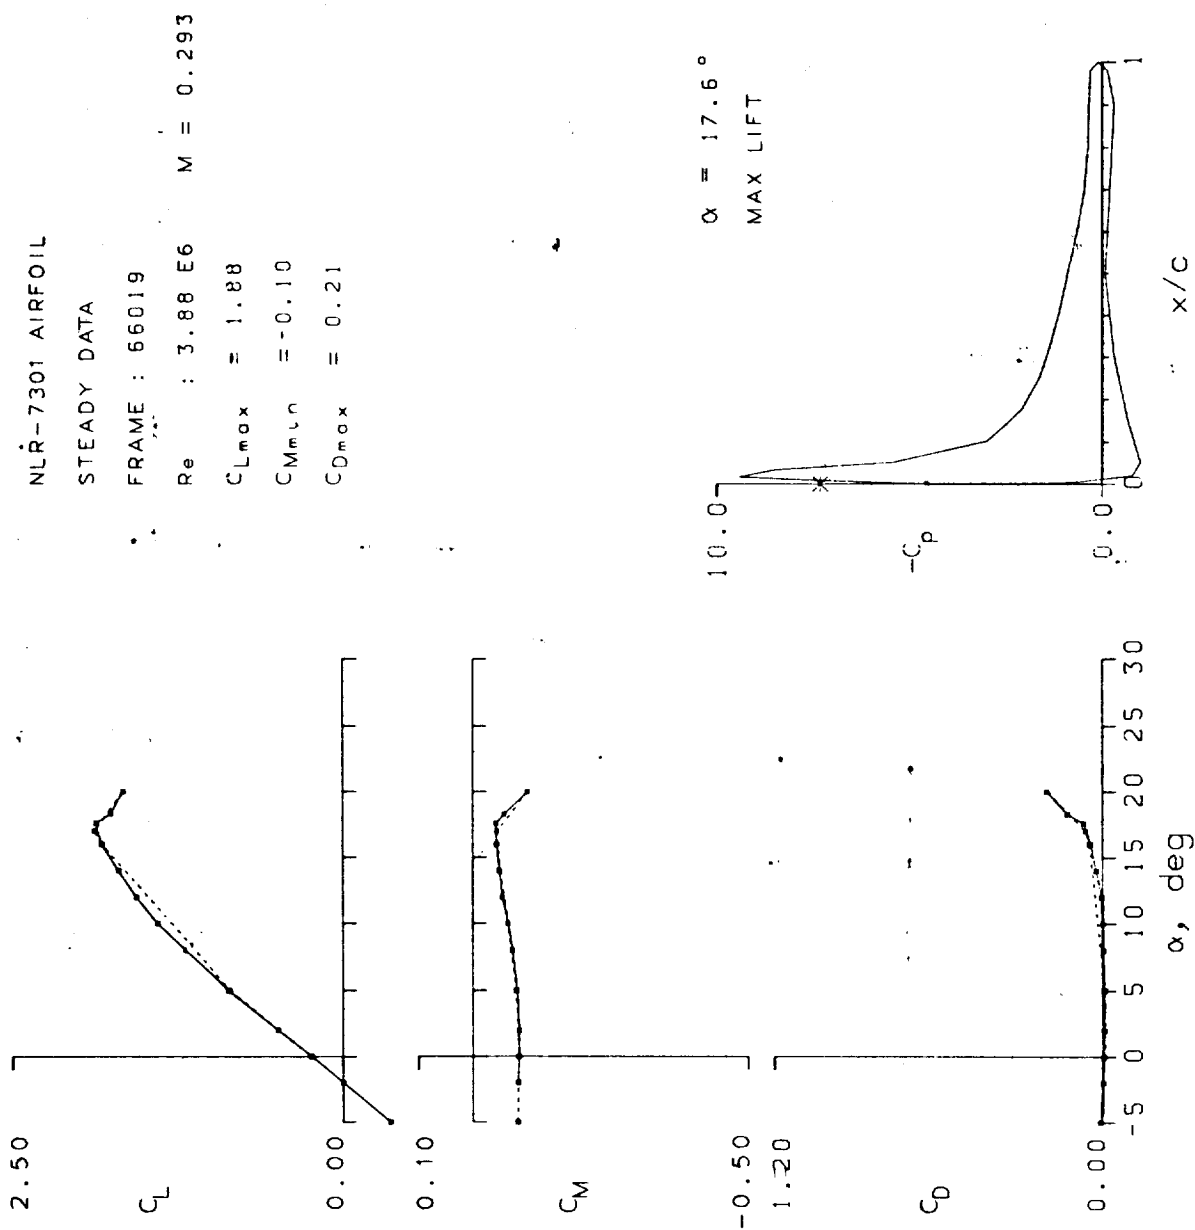


Figure 11.- Static data for NLR-7301 airfoil.

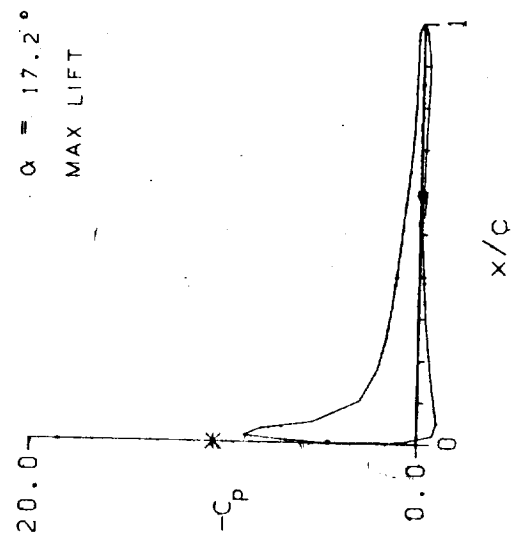
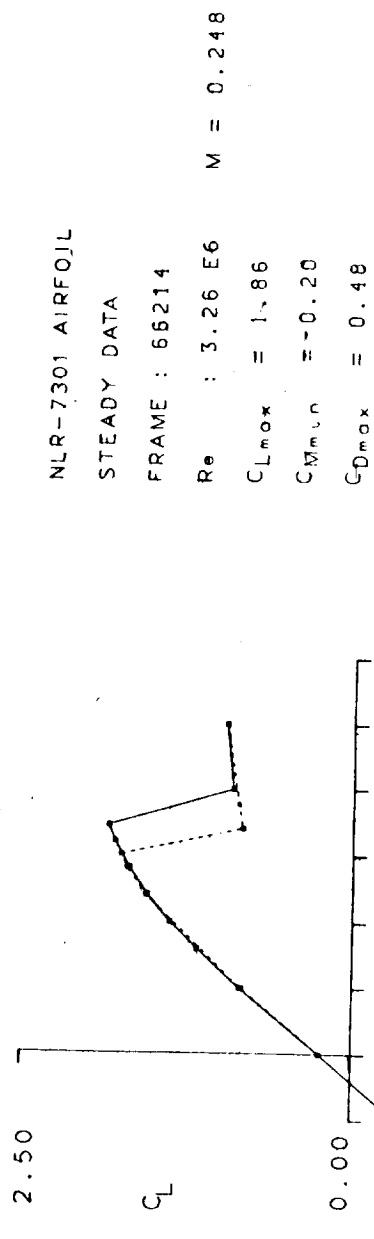


Figure 11.- Continued.

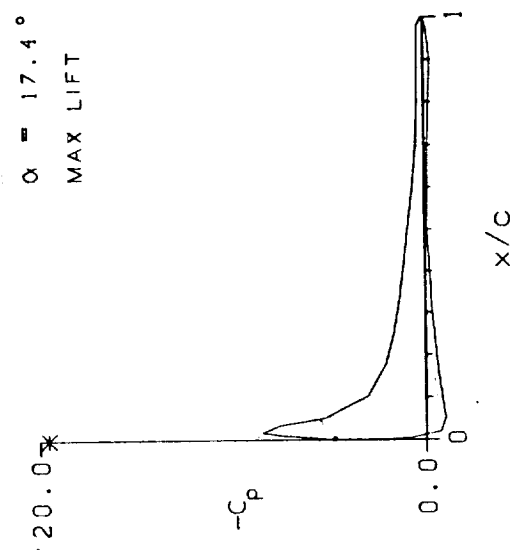
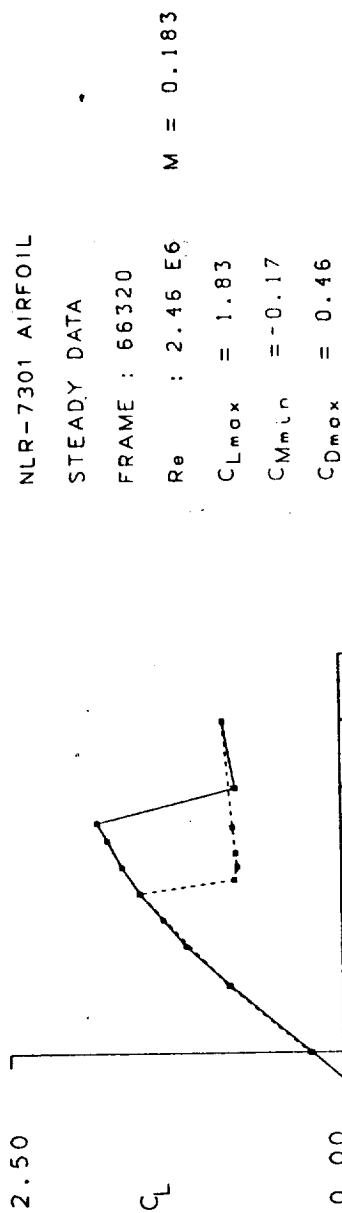


Figure 11.- Continued.

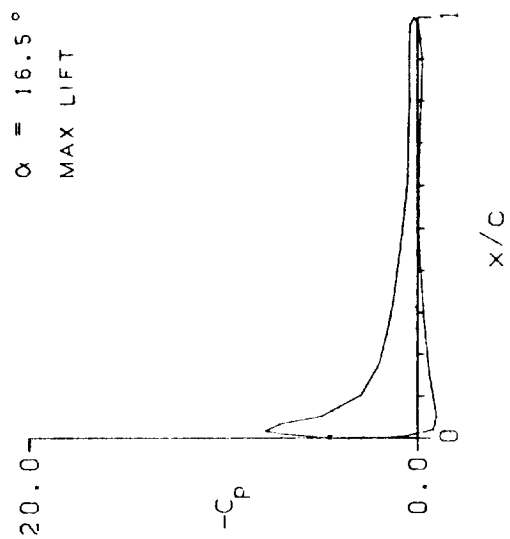
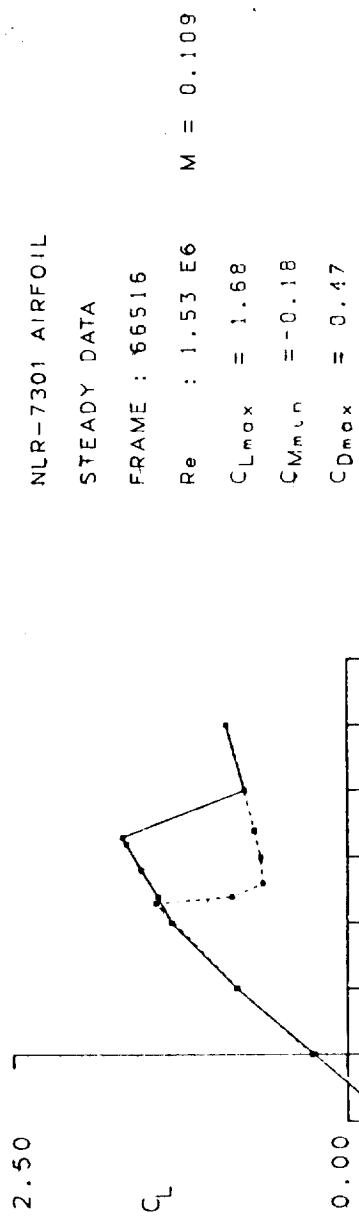


Figure 11.- Continued.

NLR-7301 AIRFOIL
 STEADY DATA--TRIP
 FRAME : 66623
 Re : 2.46 E6 M = 0.183
 C_{Lmax} = 1.67
 C_{Mmin} = -0.21
 C_{Dmax} = 0.54



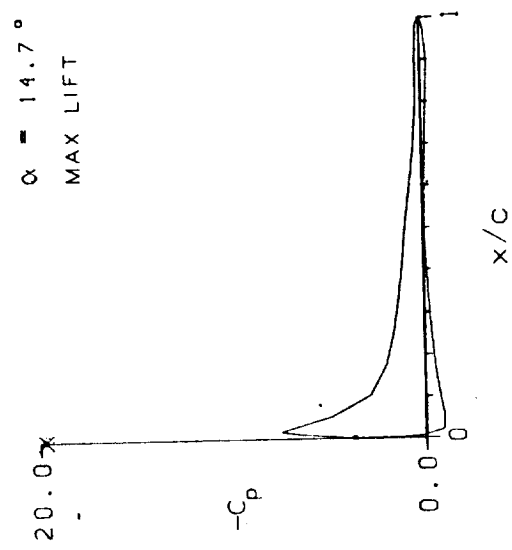


Figure 11.- Continued.

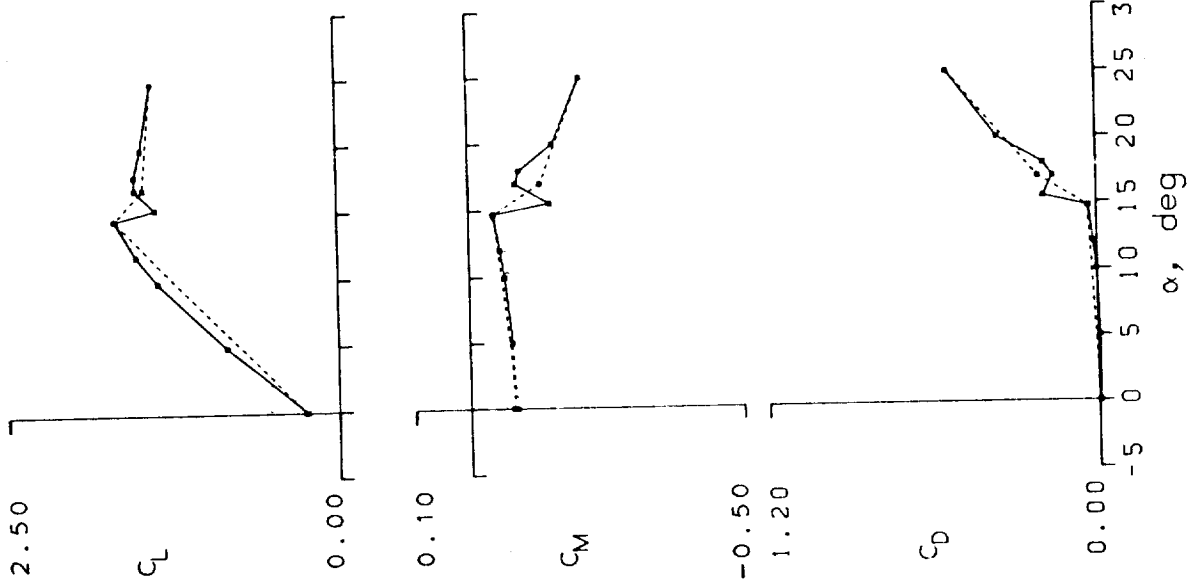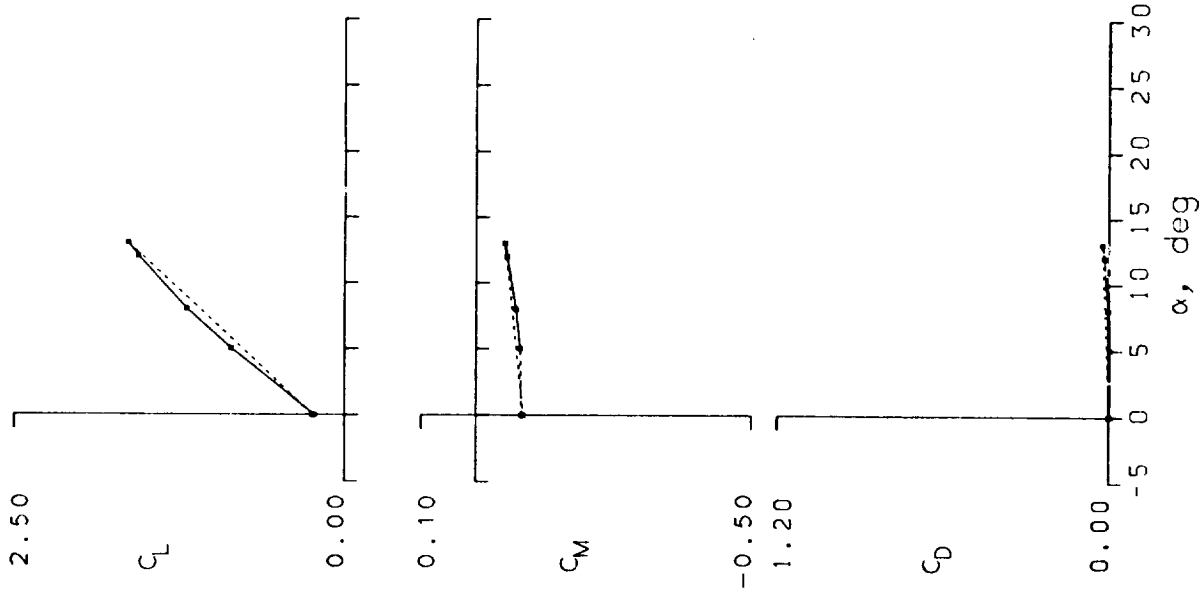

NLR-7301 AIRFOIL
 STEADY DATA--TRIP
 FRAME : 66810
 Re : 3.91 E6 M = 0.297
 $C_{Lmax} = 1.64$
 $C_{Mmin} = -0.09$
 $C_{Dmax} = 0.02$

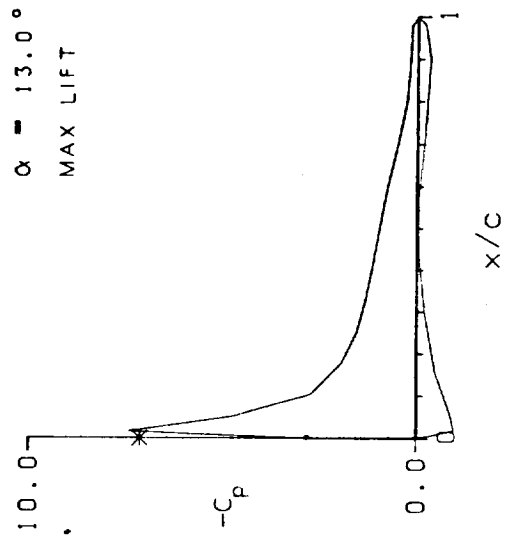


Figure 11.- Concluded.

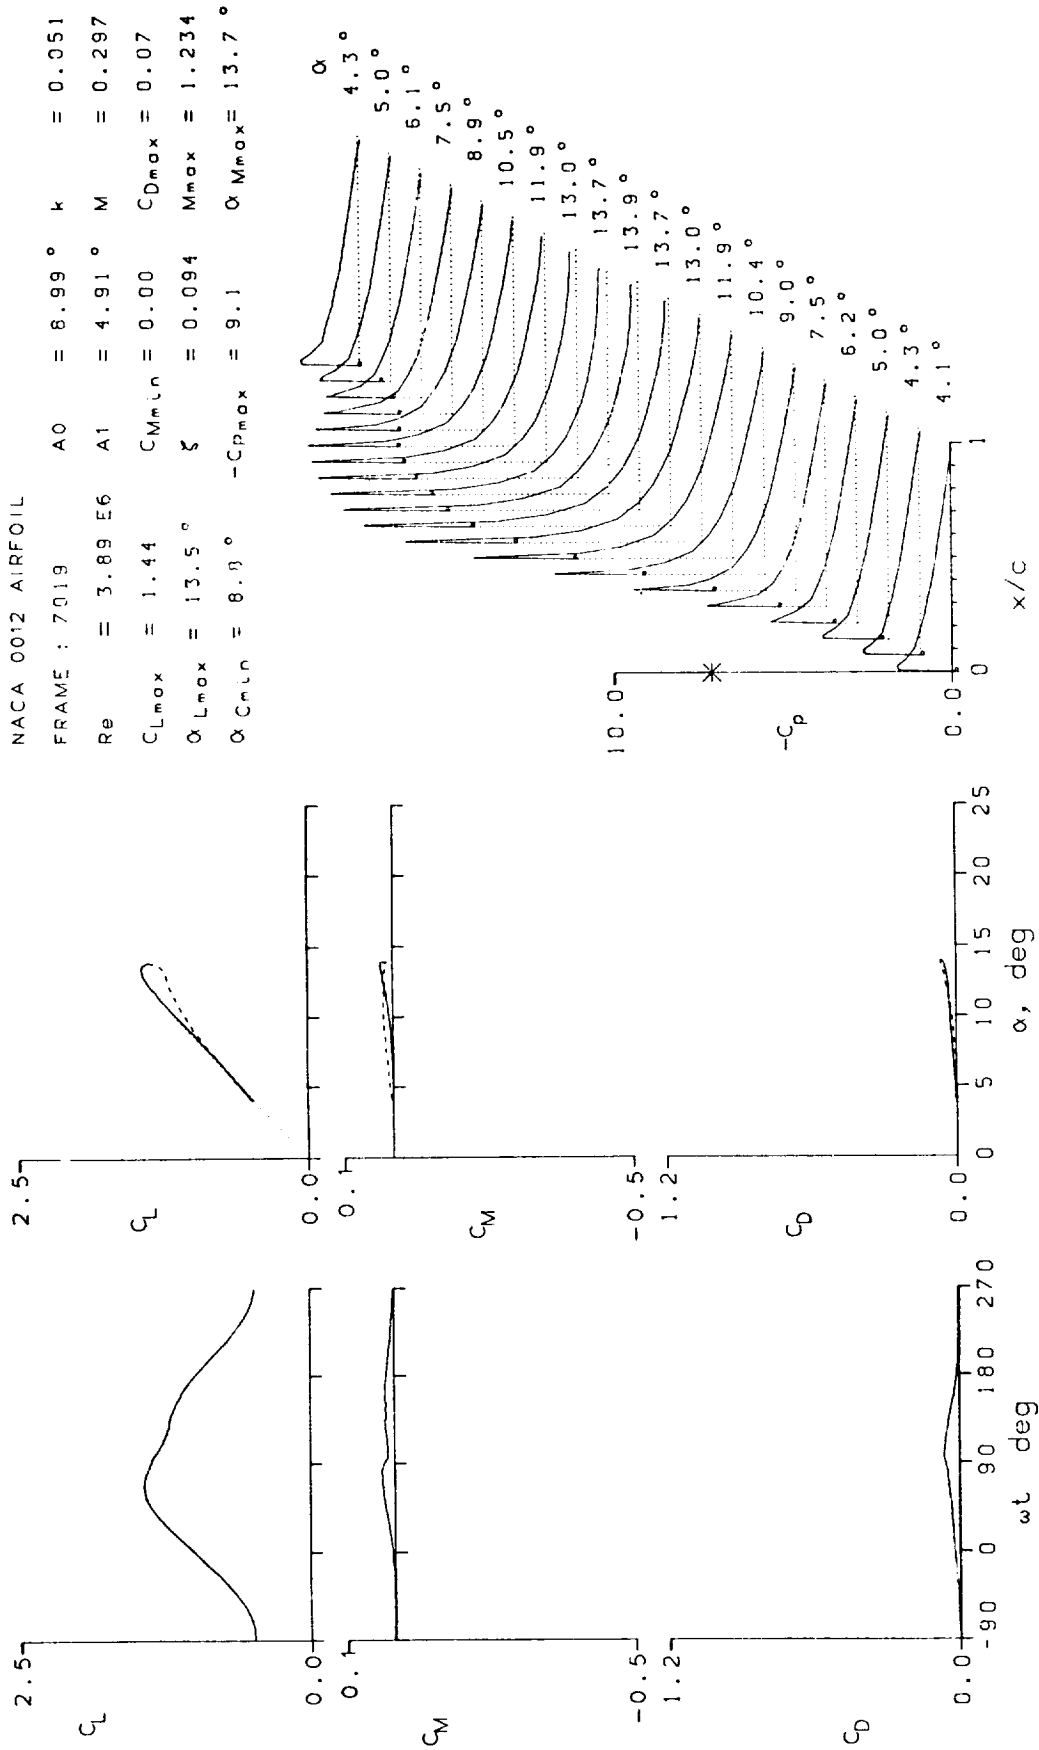


Figure 12.- dynamic data for NACA 0012 airfoil.

NACA 0012 AIRFOIL

FRAME : 7021	A0 = 8.99 °	k = 0.100
Re = 3.96 E6	A1 = 4.91 °	M = 0.299
$C_{Lmax} = 1.48$	$C_{Mmin} = -0.09$	$C_{Dmax} = 0.16$
$\alpha_{Lmax} = 13.8 °$	$\zeta = -0.193$	$M_{max} = 1.238$
$\alpha_{Cmin} = 8.8 °$	$-C_{Dmax} = 9.1$	$\alpha_{Mmax} = 13.7 °$

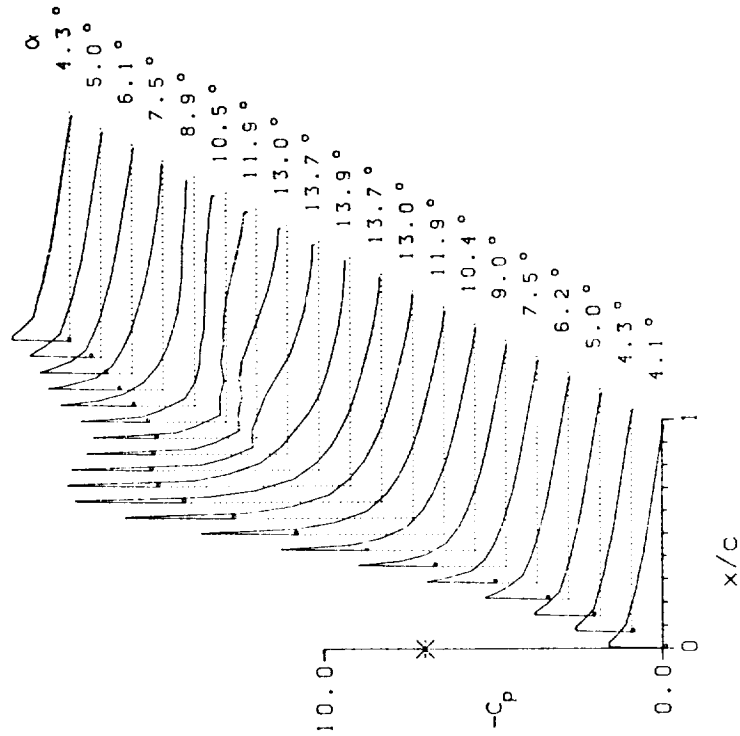
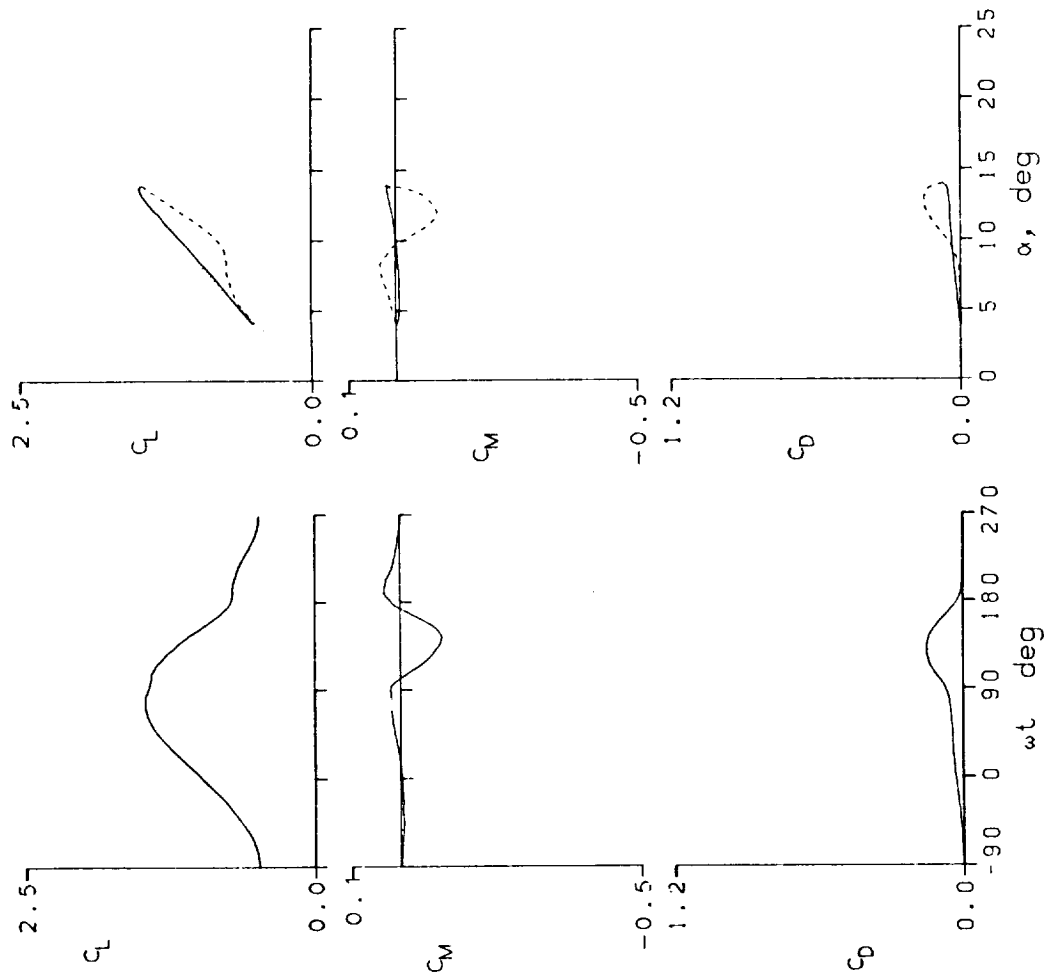


Figure 12.- Continued.

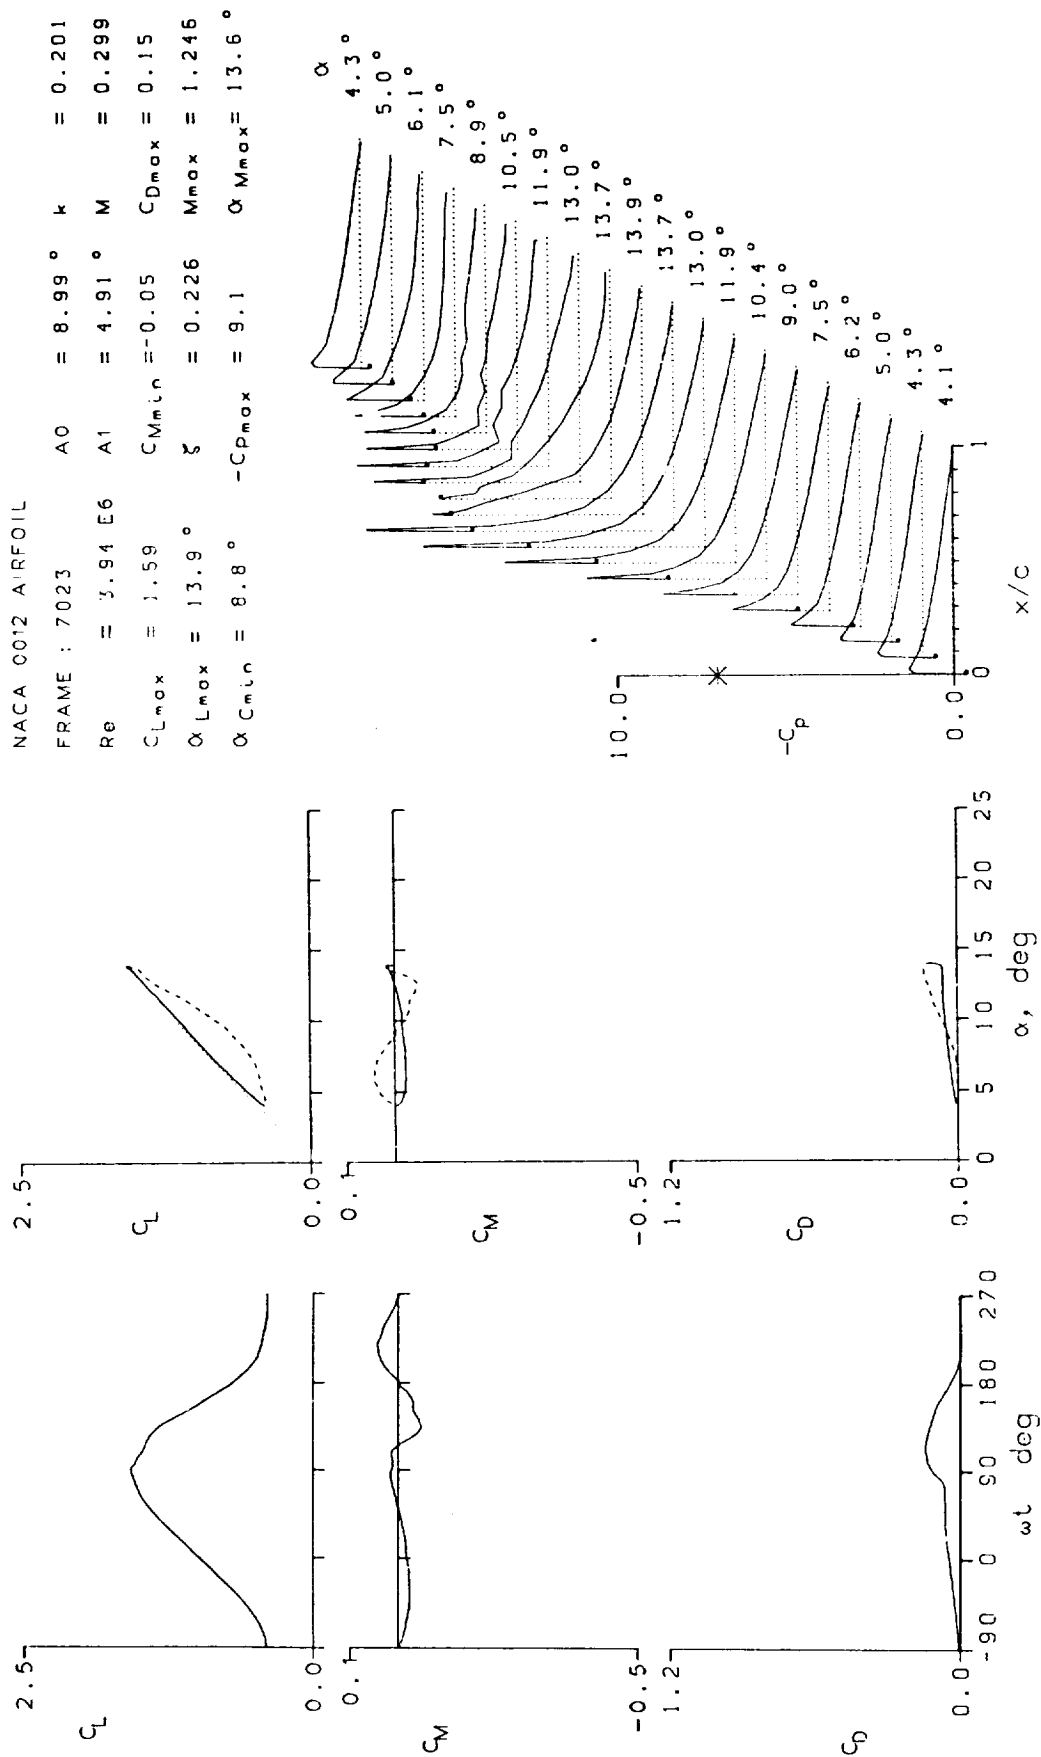


Figure 12.- Continued.

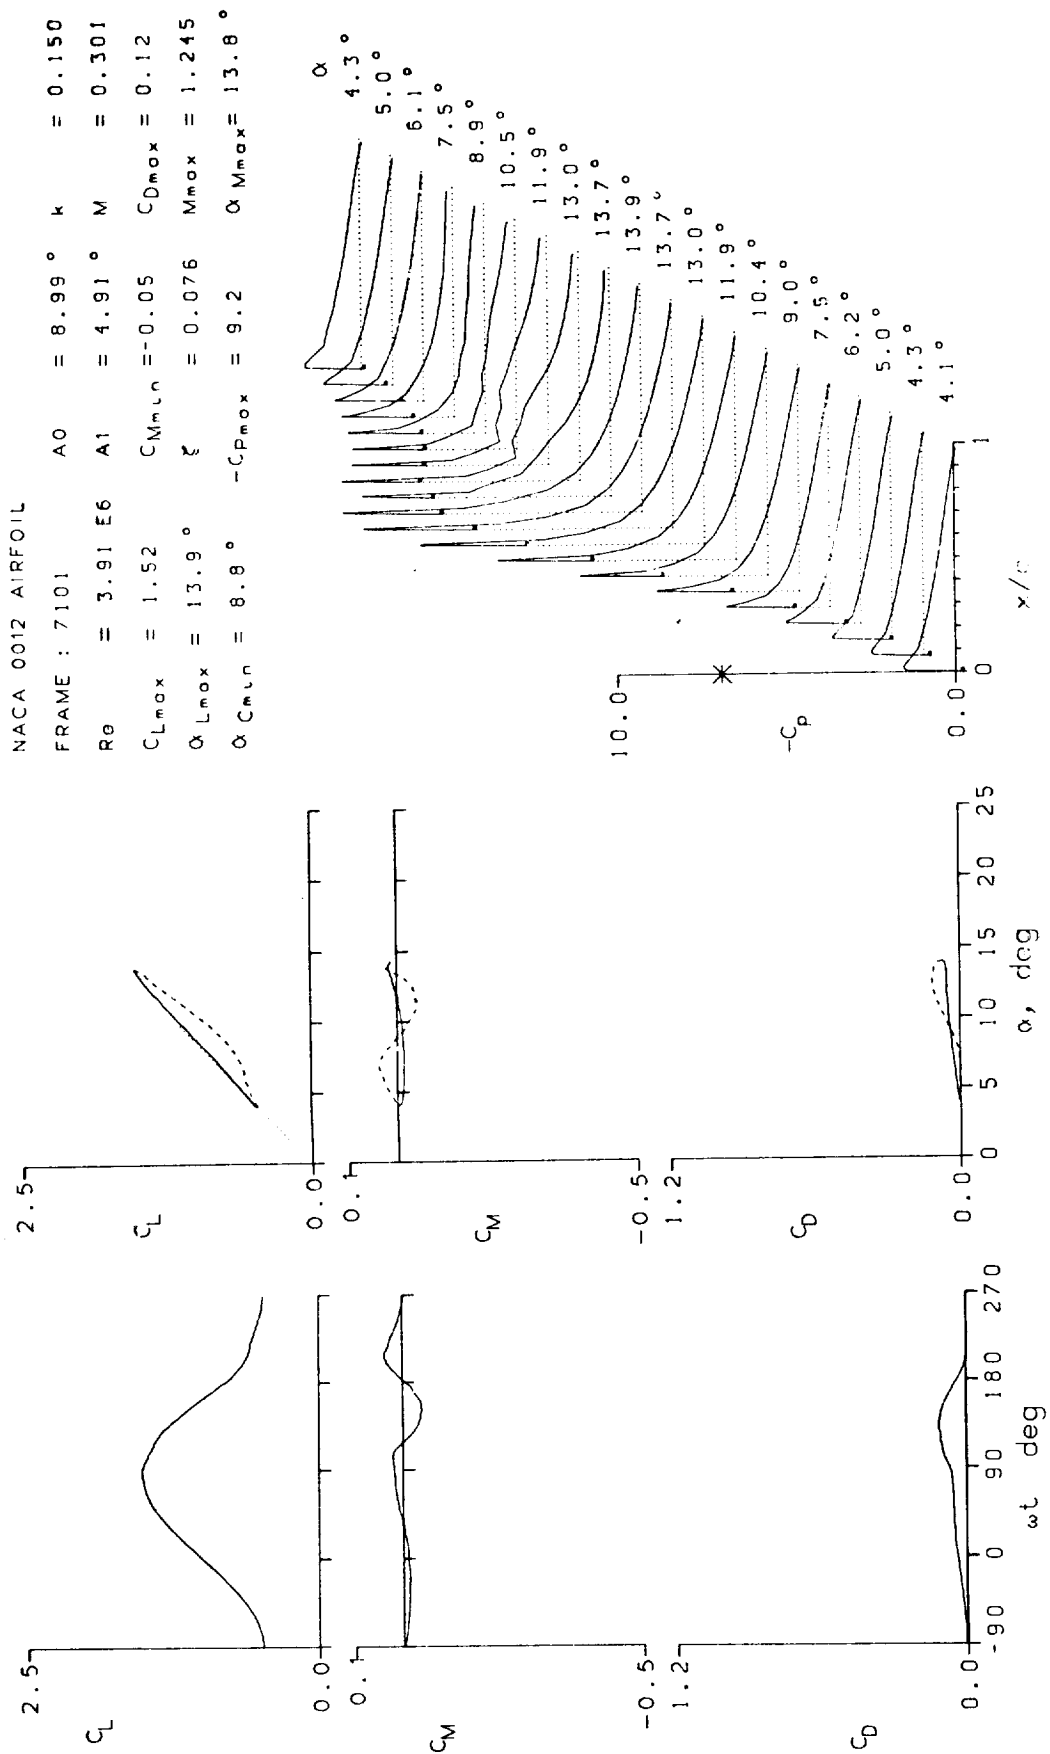


Figure 12.- Continued.

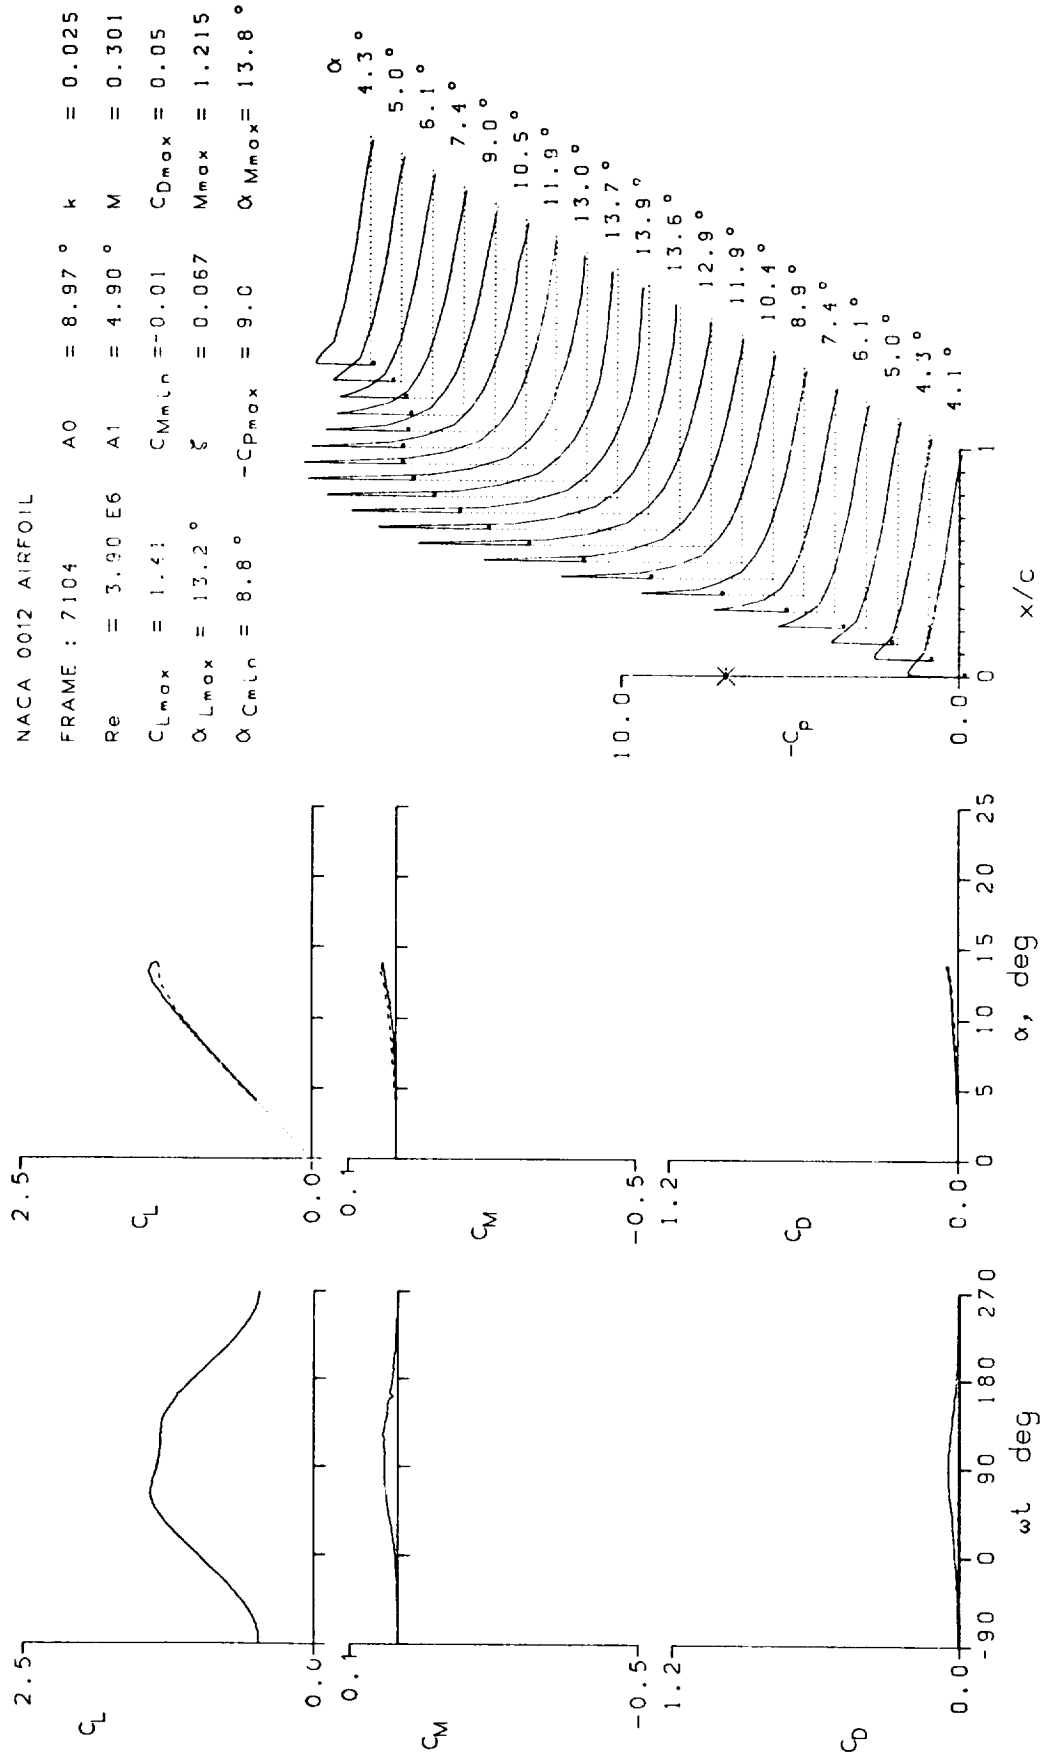


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7108	A0 = 7.97 °	k = 0.025
Re = 3.92 E6	A1 = 4.90 °	M = 0.301
C _{Lmax} = 1.37	C _{Mmin} = 0.00	C _{Dmax} = 0.03
α _{Lmax} = 12.8 °	ξ = 0.073	M _{max} = 1.187
α _{Cmin} = 7.8 °	-C _{pmax} = 8.7	α _{Mmax} = 12.9 °

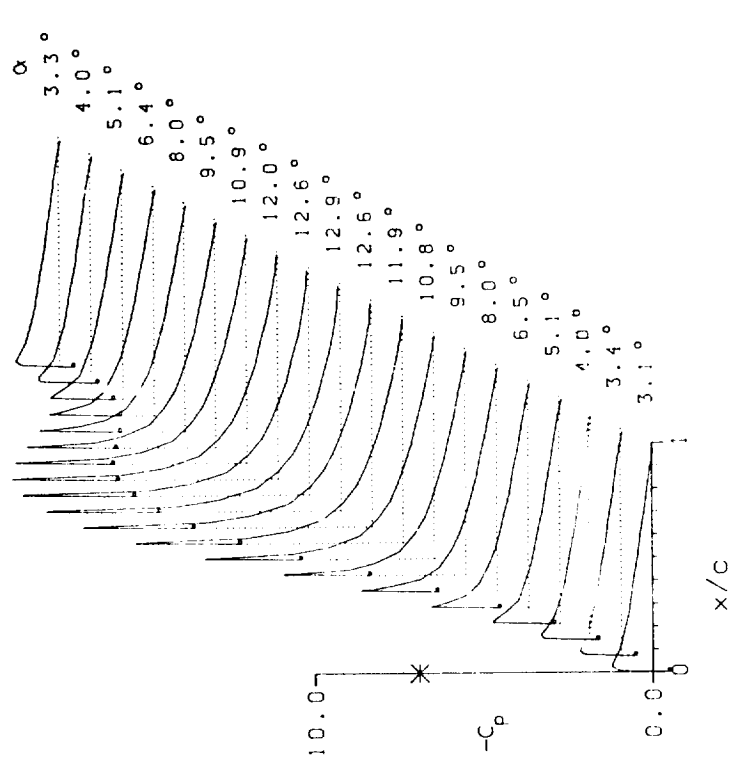
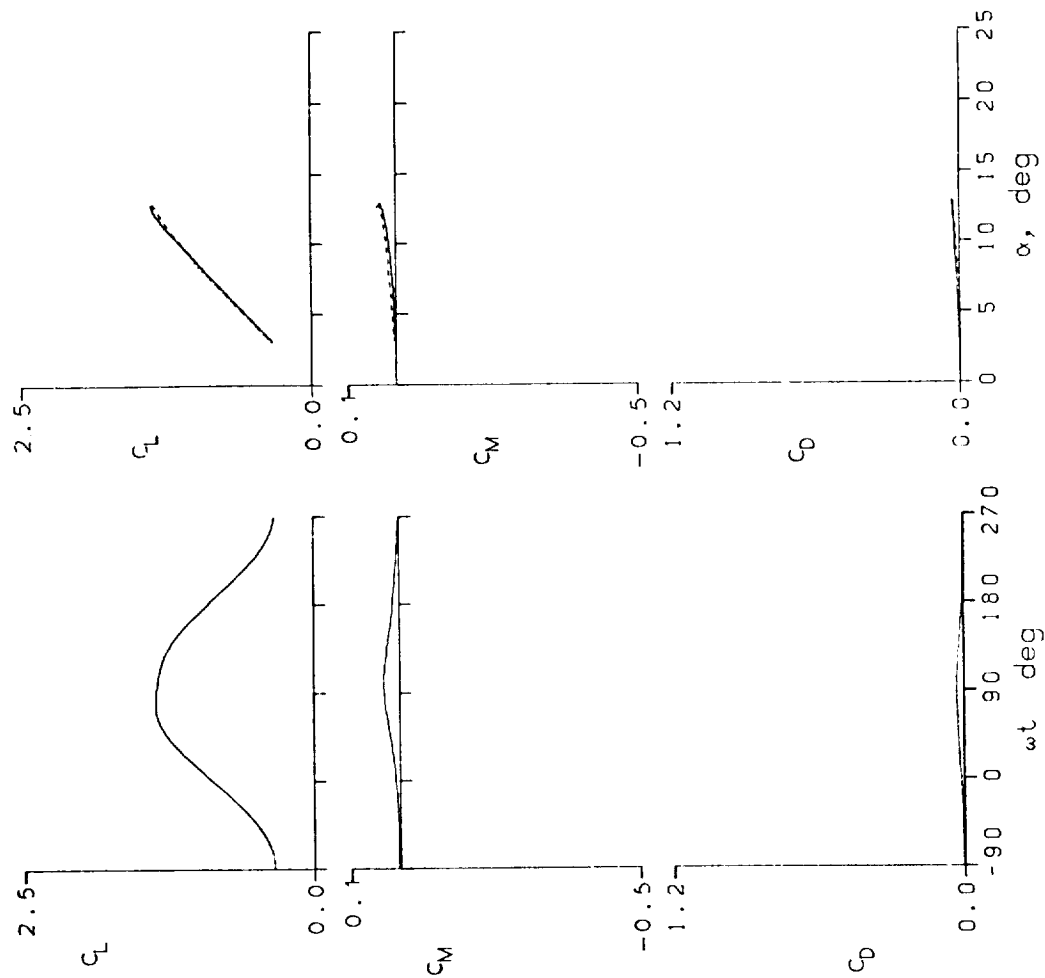


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7110 A0 = 7.96° k = 0.100
 Re = 3.90 E6 A1 = 4.90° M = 0.301
 $C_{Lmax} = 1.41$ $C_{Mmin} = -0.01$ $C_{Dmax} = 0.04$
 $\alpha_{Lmax} = 12.8^\circ$ $\xi = 0.306$ $M_{max} = 1.200$
 $\alpha_{Cmin} = 7.7^\circ$ $-C_{pmax} = 8.8$ $\alpha_{Mmax} = 12.9^\circ$



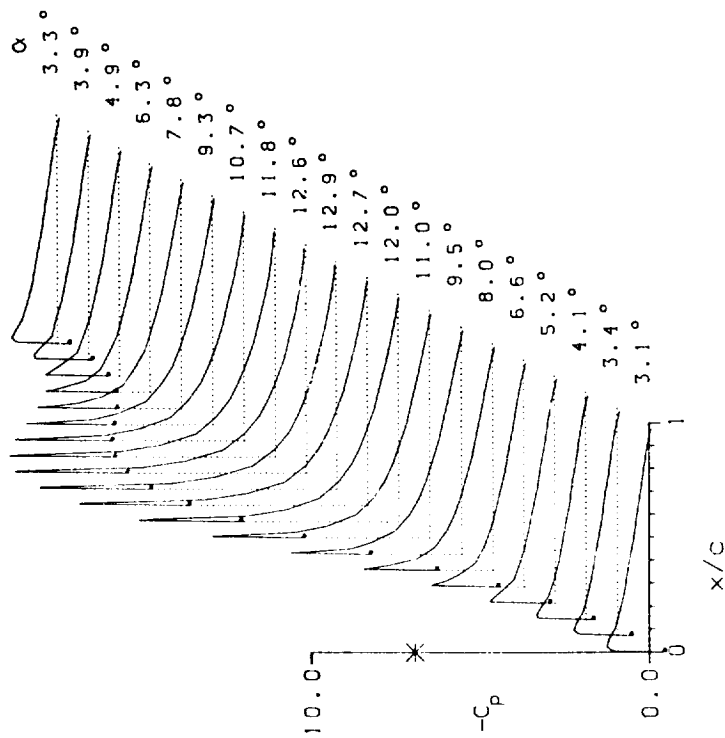


Figure 12.- Continued.

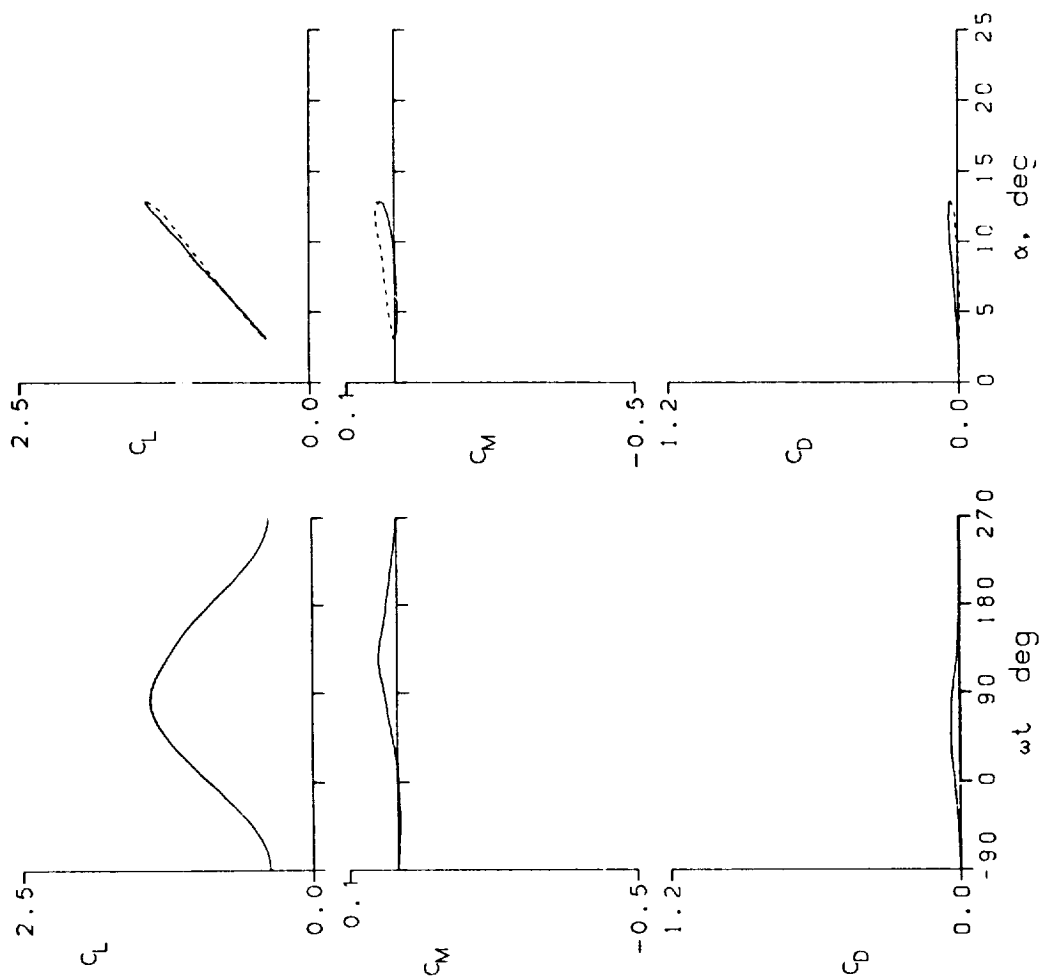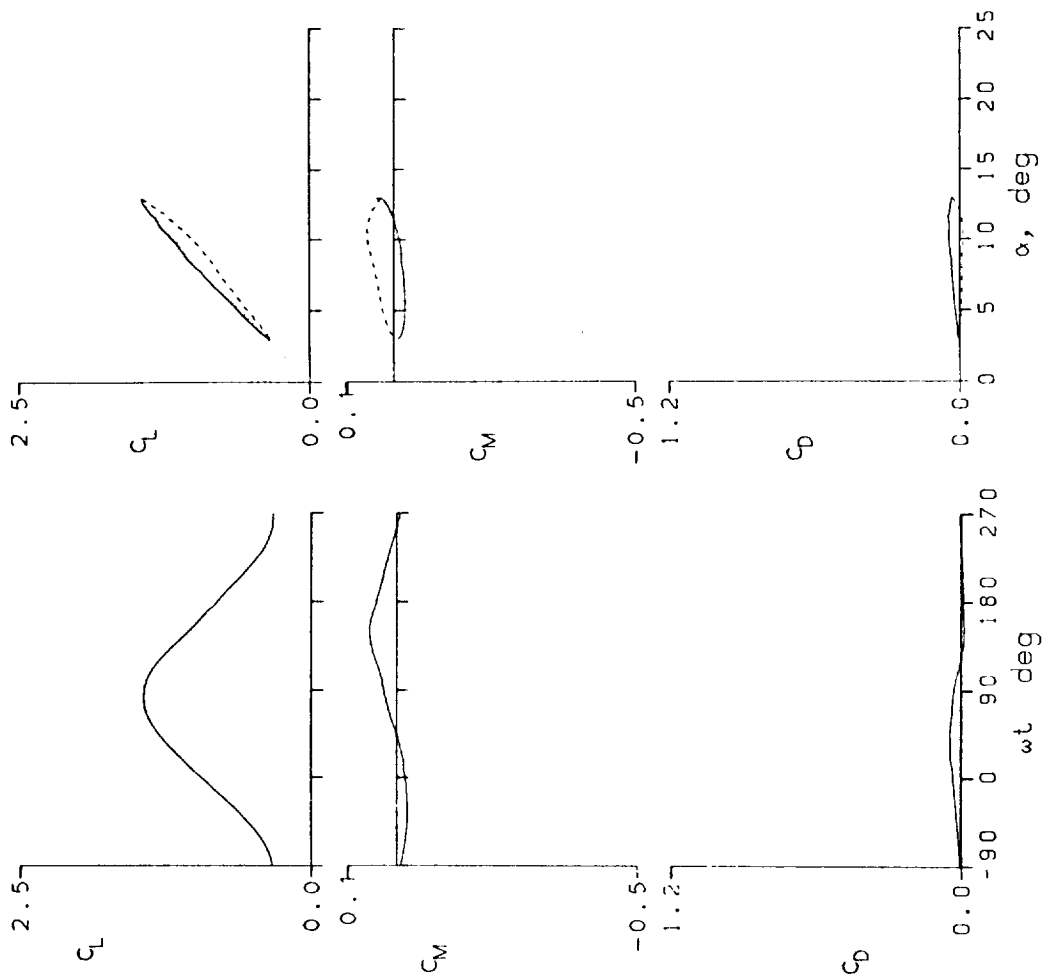

NACA 0012 AIRFOIL
 FRAME : 7111 A0 = 7.97 ° k = 0.199
 Re = 3.89 E6 A1 = 4.91 ° M = 0.301
 $C_{Lmax} = 1.45$ $C_{Mmin} = -0.03$ $C_{Dmax} = 0.05$
 $\alpha_{Lmax} = 12.9^\circ$ $\xi = 0.706$ $M_{max} = 1.232$
 $\alpha_{Cmin} = 7.7^\circ$ $-C_{Dmax} = 9.1$ $\alpha_{Mmax} = 12.9^\circ$

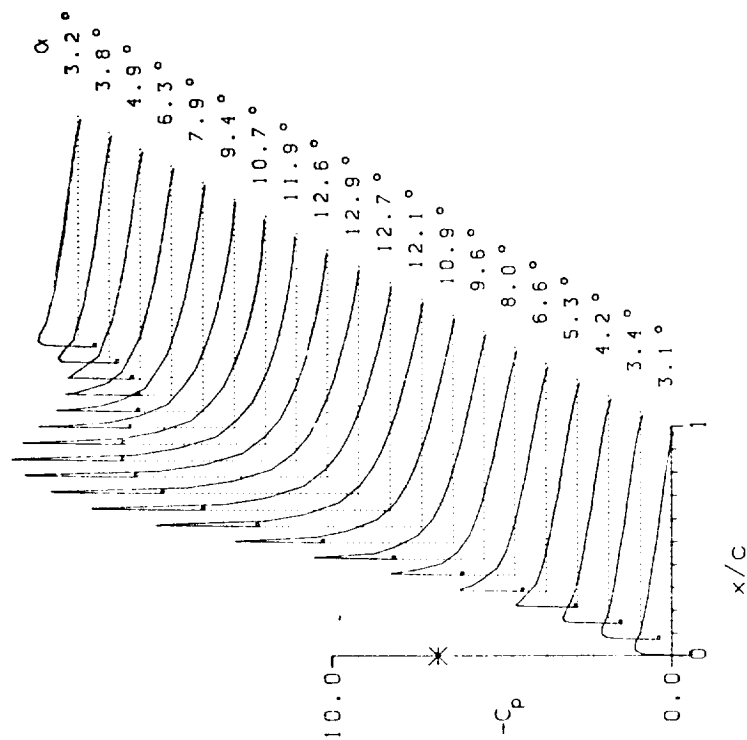


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7112	A0 = 9.97 °	k = 0.025
Re = 3.88 E6	A1 = 4.90 °	M = 0.301
$C_{Lmax} = 1.42$	$C_{Mmin} = -0.10$	$C_{Dmax} = 0.18$
$\alpha_{Lmax} = 13.5 °$	$\zeta = -0.110$	$M_{max} = 1.222$
$\alpha_{Cmin} = 9.8 °$	$-C_{Pmax} = 9.0$	$\alpha_{Mmax} = 13.8 °$

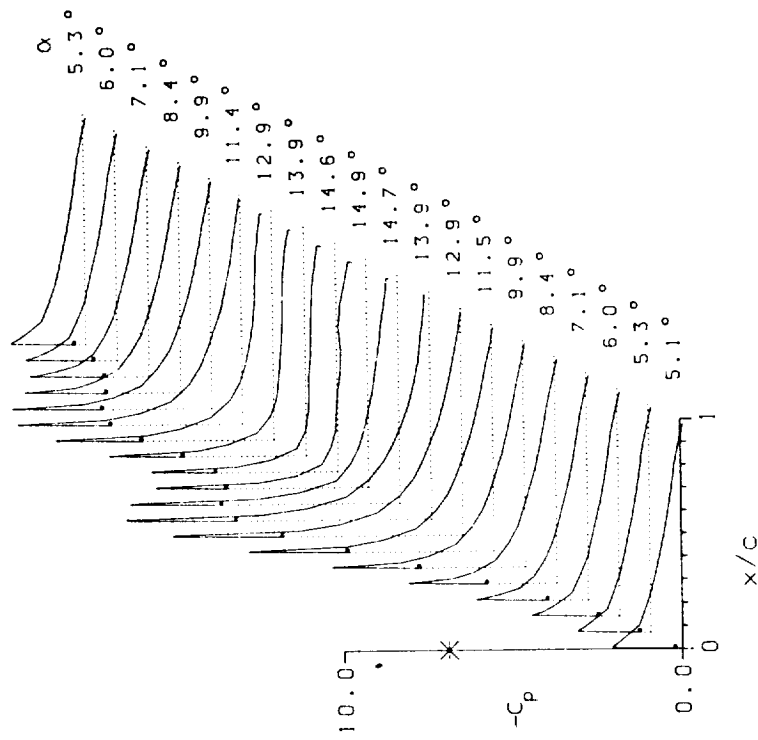
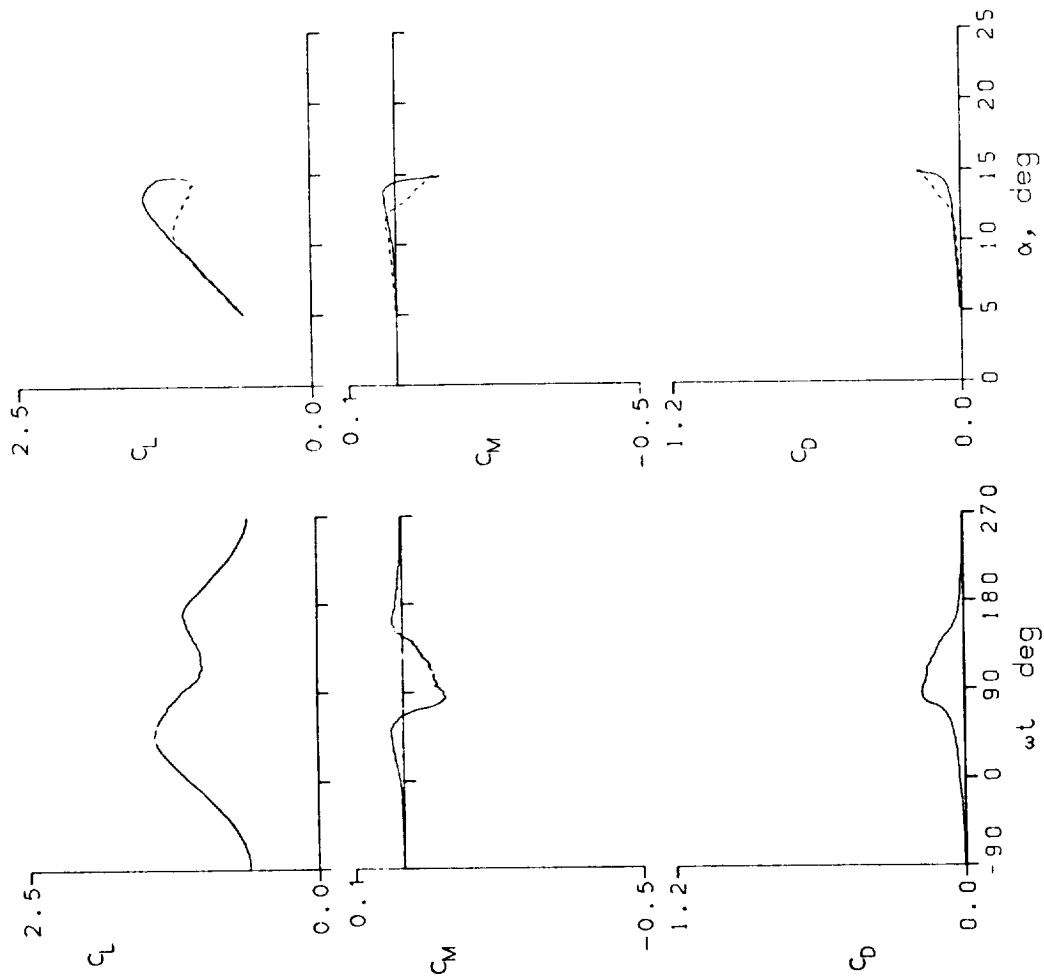


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7113	A0 = 9.95 °	k = 0.099
Re = 3.88 E6	A1 = 4.91 °	M = 0.301
CLmax = 1.54	CMmin = -0.09	CDmax = 0.24
αLmax = 14.3 °	ξ = -0.032	Mmax = 1.230
αCmin = 9.7 °	-CDmax = 9.1	αMmax = 13.8 °

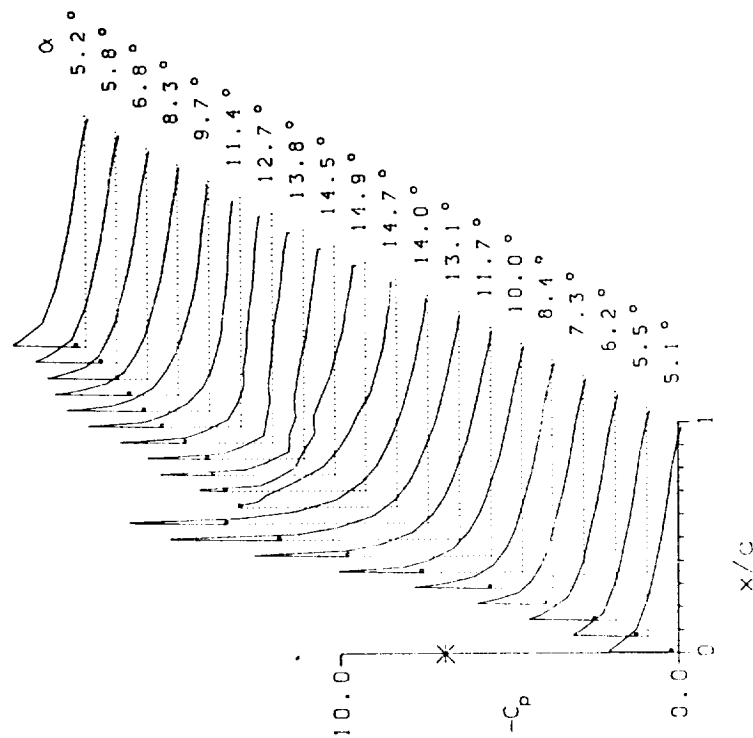
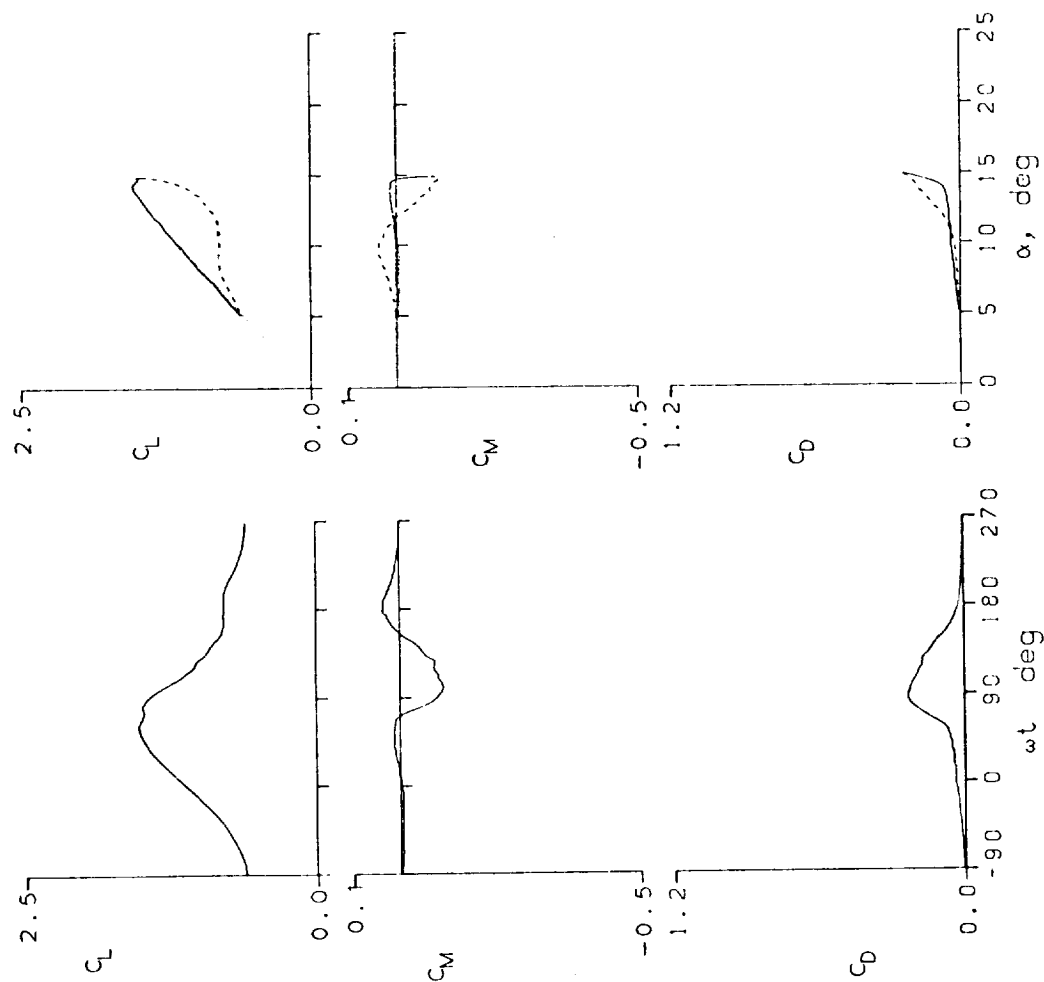


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7114	A0 = 9.91 °	k = 0.199
Re = 3.87 E6	A1 = 4.93 °	M = 0.101
$C_{Lmax} = 1.65$	$C_{Mmin} = -0.17$	$C_{Dmax} = 0.33$
$\alpha_{Lmax} = 14.4 °$	$\xi = 0.073$	$M_{max} = 1.227$
$\alpha_{Cmin} = 9.7 °$	$-C_{pmax} = 9.1$	$\alpha_{Mmax} = 13.8 °$

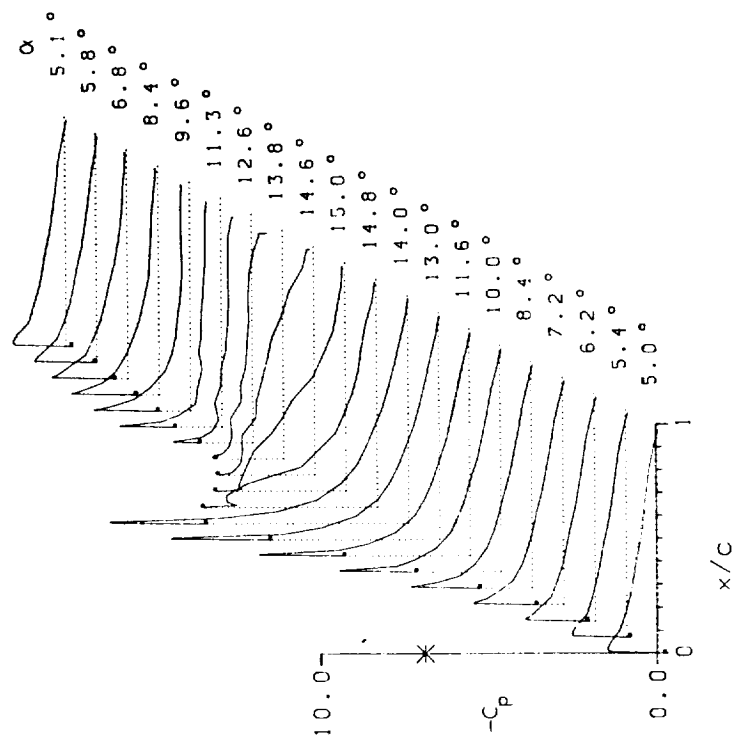
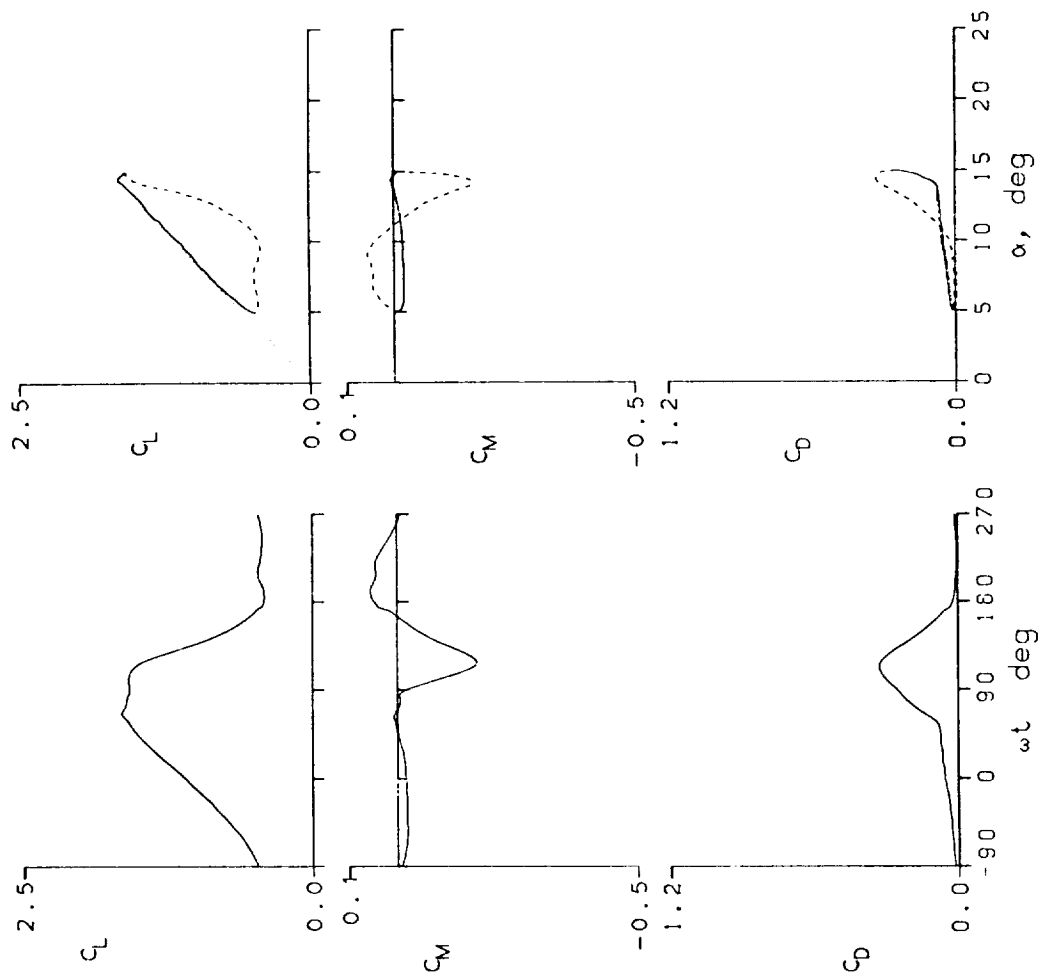


Figure 12.- Continued.


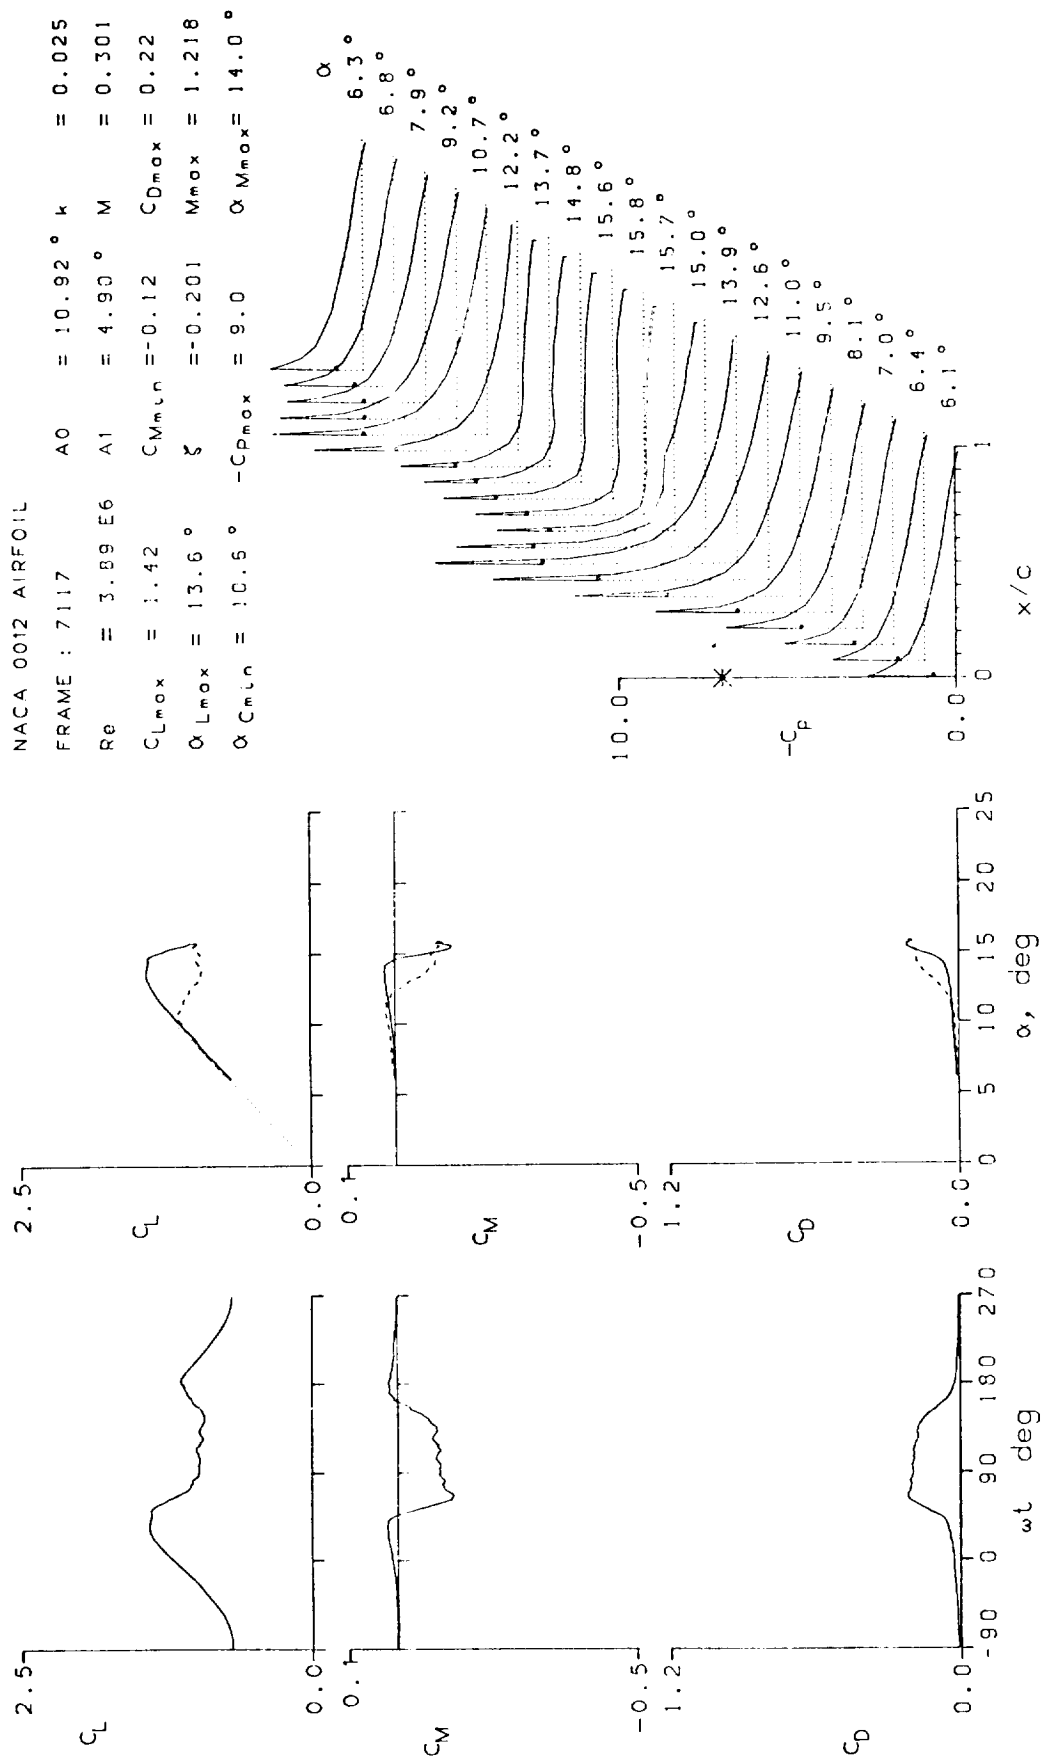


Figure 12.- Continued.

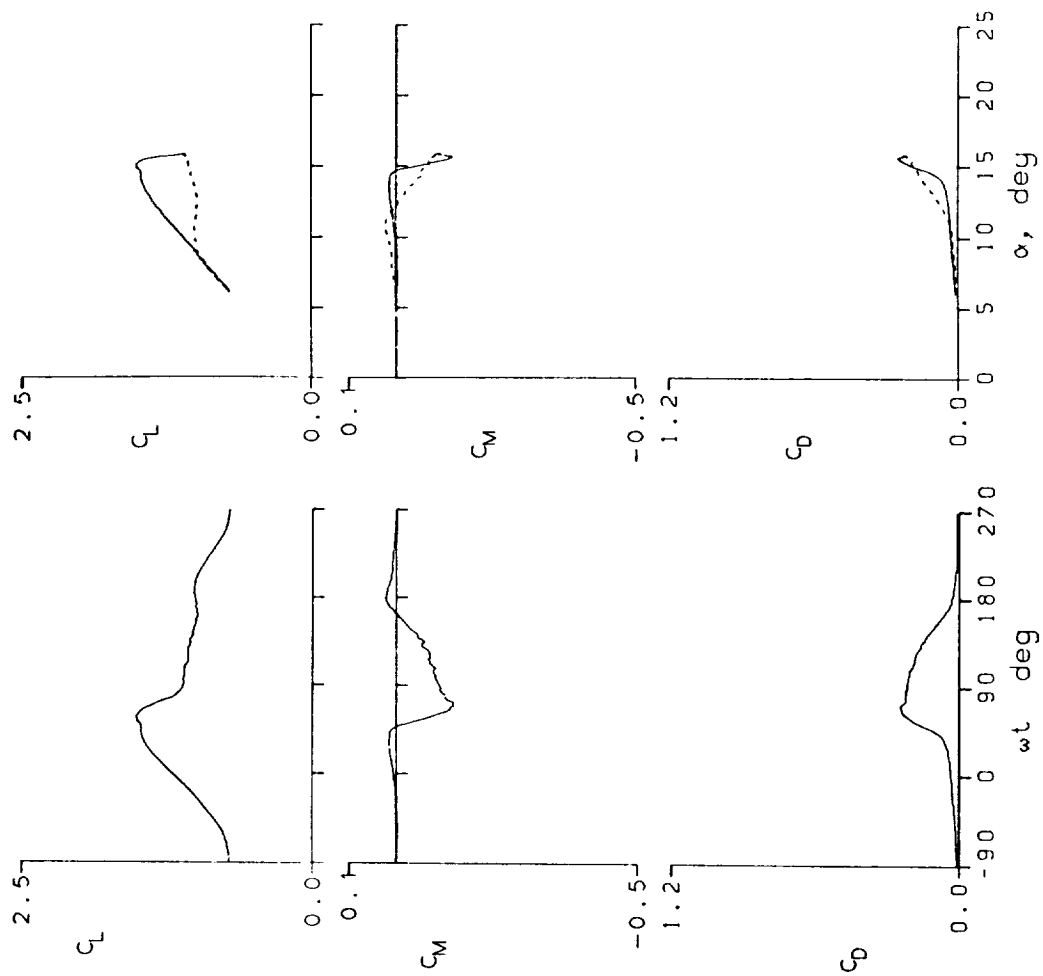

NACA 0012 AIRFOIL

FRAME : 7118 $A_0 = 10.92^\circ$ $k = 0.050$
 $Re = 3.88 \text{ E}6$ $A_1 = 4.90^\circ$ $M = 0.301$
 $C_{L_{max}} = 1.52$ $C_{M_{min}} = -0.12$ $C_{D_{max}} = 0.25$
 $\alpha_{L_{max}} = 15.0^\circ$ $\xi = -0.060$ $M_{max} = 1.222$
 $\alpha_{C_{min}} = 10.7^\circ$ $-C_{p_{max}} = 9.0$ $\alpha_{M_{max}} = 13.9^\circ$


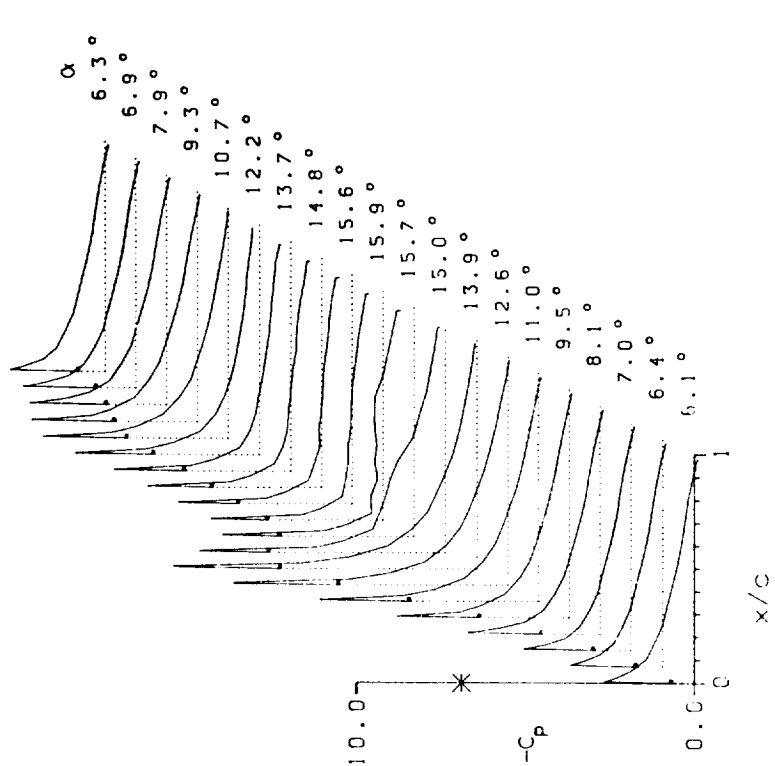


Figure 12.- Continued.

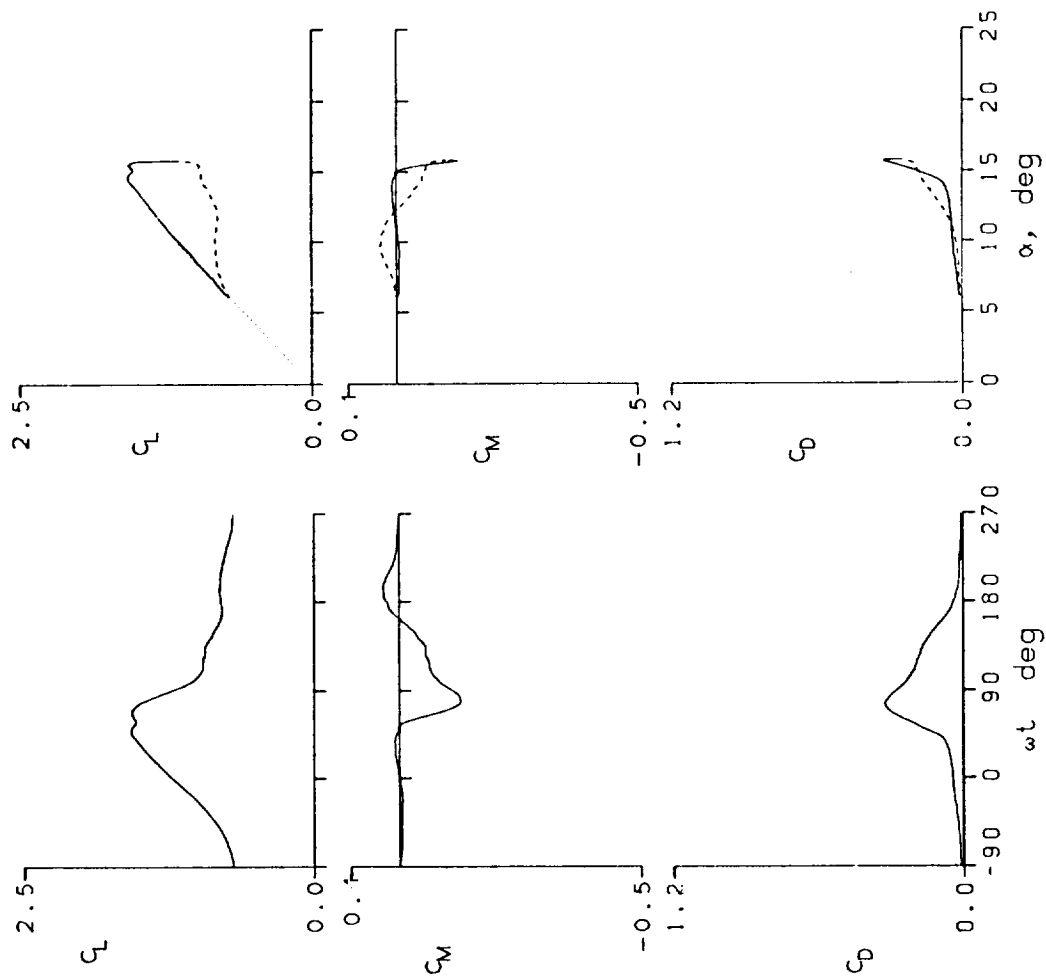

NACA 0012 AIRFOIL
 FRAME : 7119 $A_0 = 10.92^\circ$ $k = 0.099$
 $Re = 3.87 \text{ E} 6$ $A_1 = 4.89^\circ$ $M = 0.301$
 $C_{L_{max}} = 1.58$ $C_{M_{min}} = -0.13$ $C_{D_{max}} = 0.33$
 $\alpha_{L_{max}} = 14.6^\circ$ $\xi = 0.017$ $M_{max} = 1.225$
 $\alpha_{C_{min}} = 10.7^\circ$ $-C_{D_{max}} = 9.0$ $\alpha_{M_{max}} = 13.9^\circ$

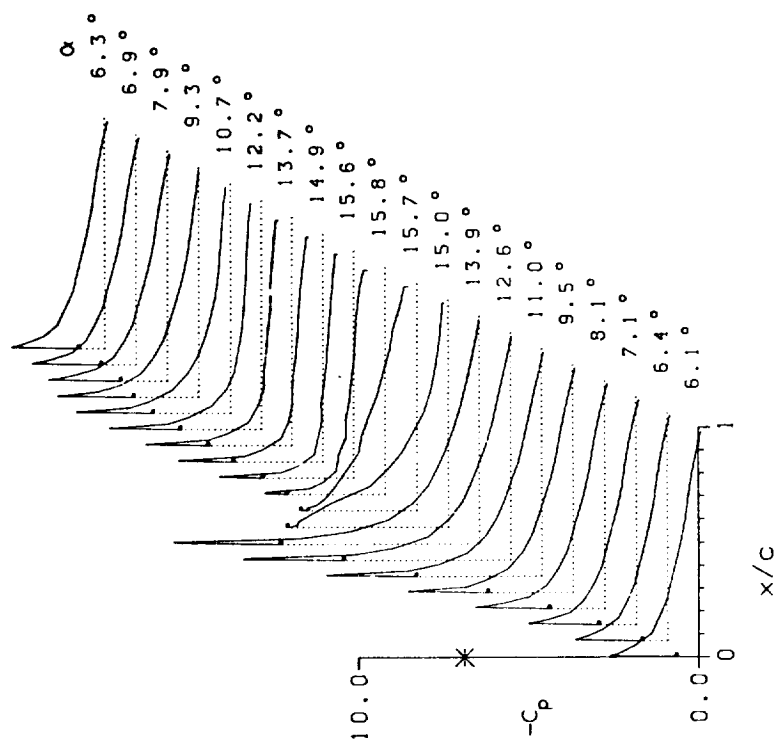


Figure 12.- Continued.

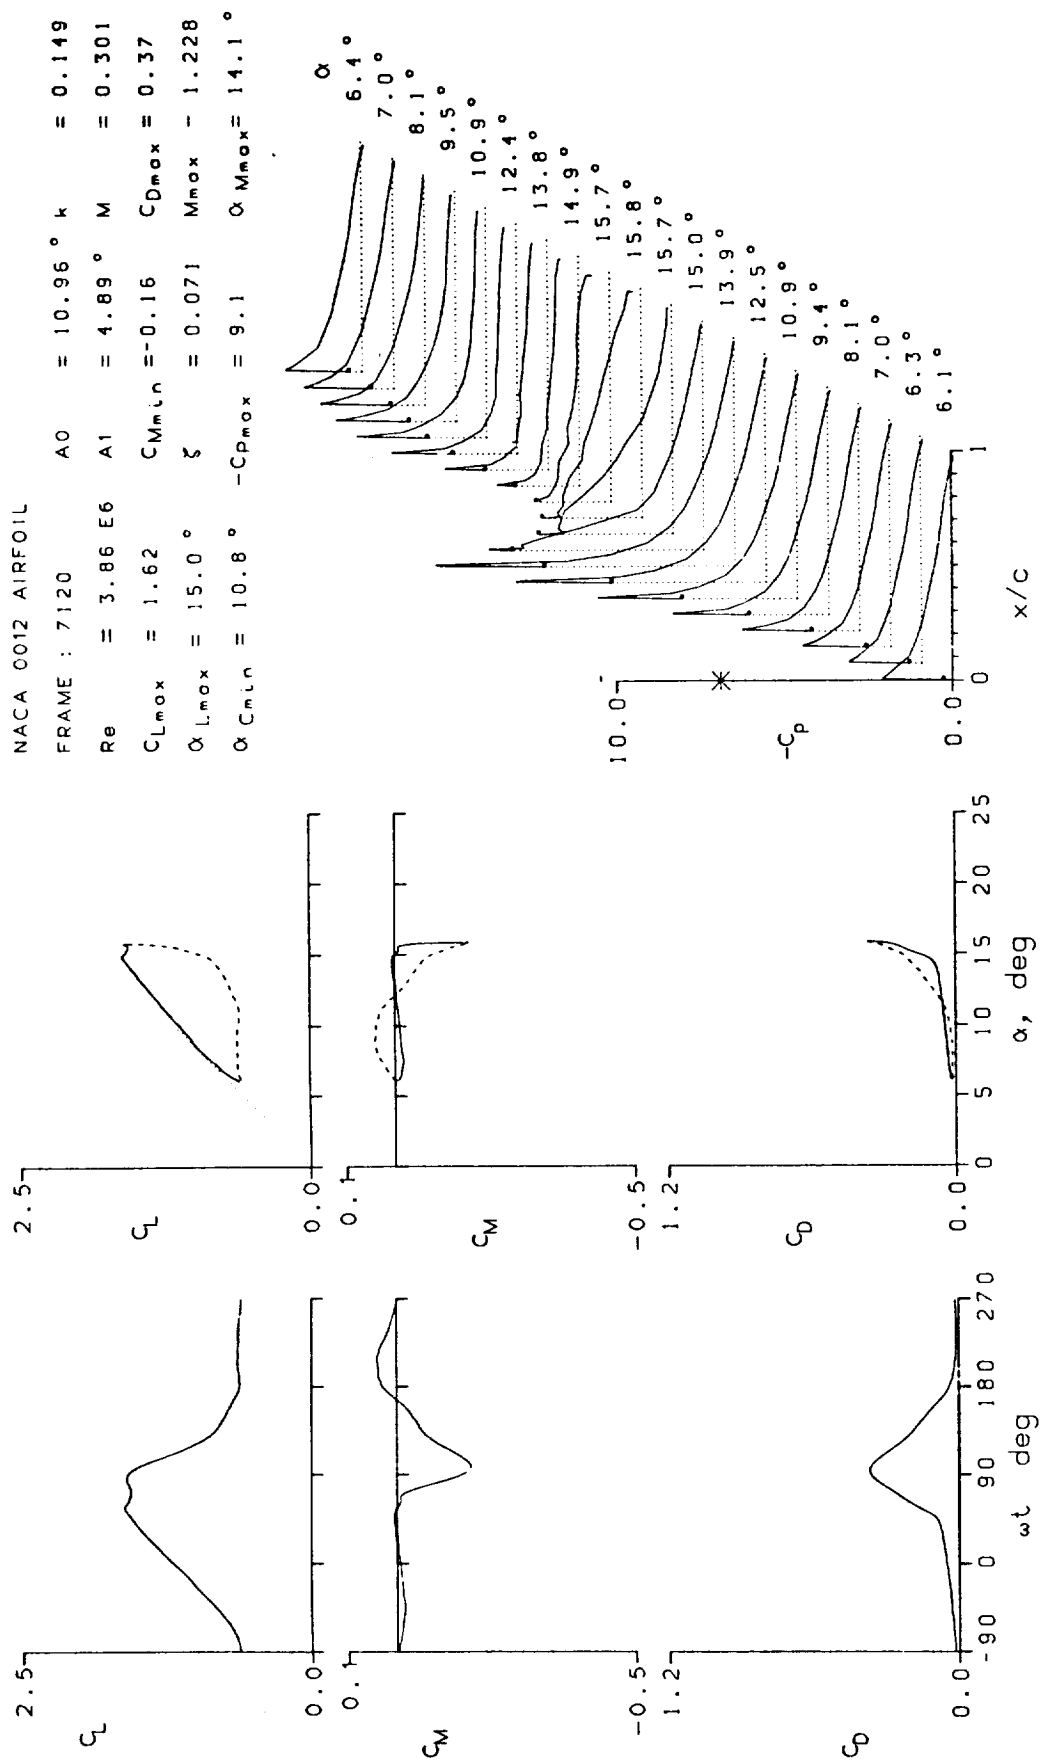


Figure 12.- Continued.

NACA 0012 AIRFOIL
 FRAME : 7121 $A_0 = 10.88^\circ$ $k = 0.198$
 $Re = 3.85 \text{ E}6$ $A_1 = 4.90^\circ$ $M = 0.301$
 $C_{Lmax} = 1.71$ $C_{Mmin} = -0.24$ $C_{Dmax} = 0.43$
 $\alpha_{Lmax} = 15.8^\circ$ $\zeta = 0.118$ $M_{max} = 1.219$
 $\alpha_{Cmin} = 10.5^\circ$ $-C_{Pmax} = 9.0$ $\alpha_{Mmax} = 14.1^\circ$

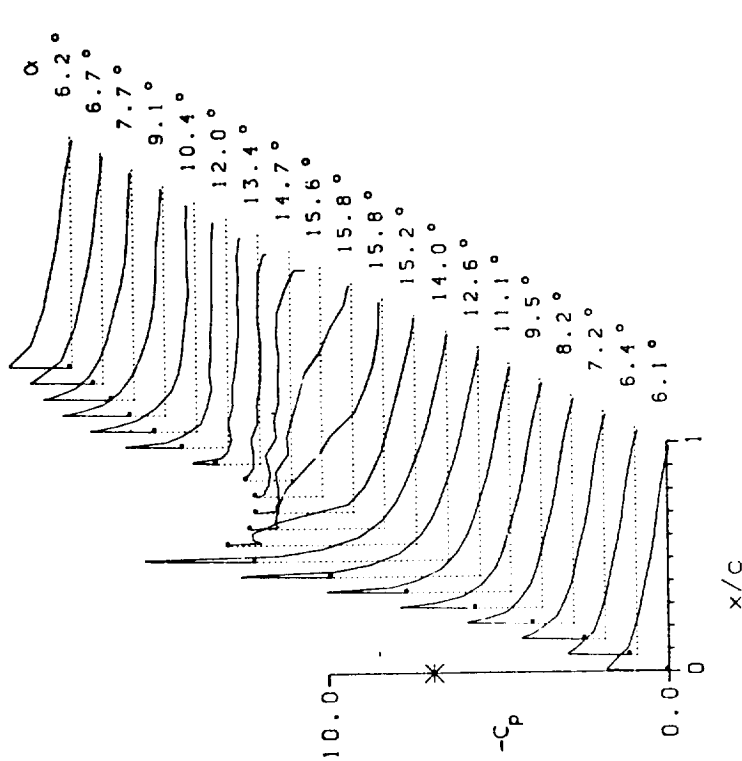
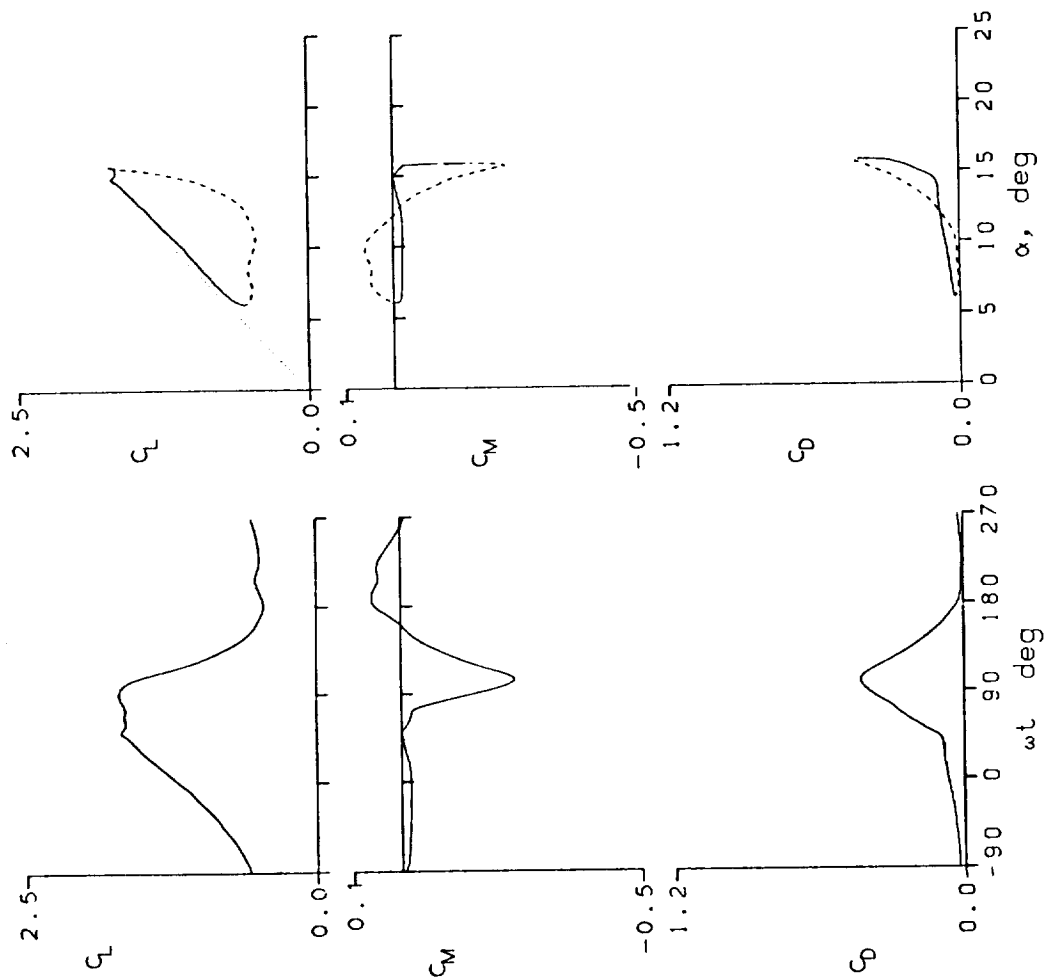


Figure 12.- Continued.

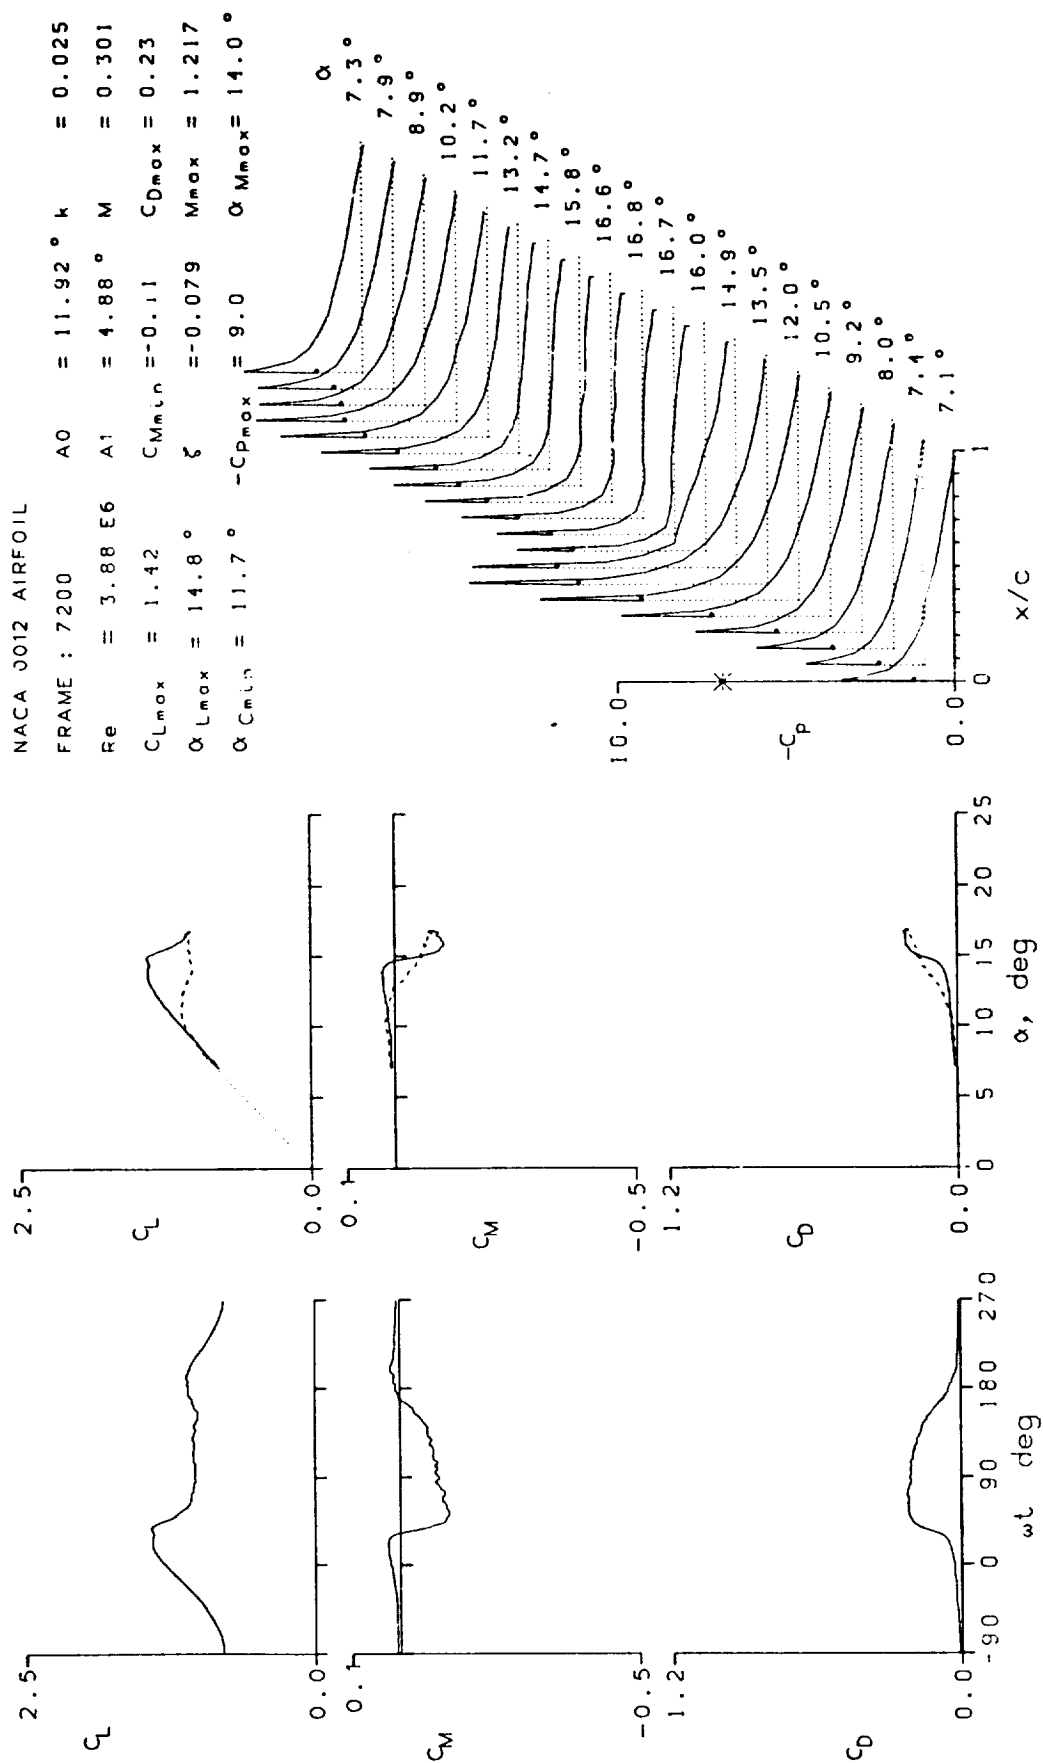


Figure 12.- Continued.


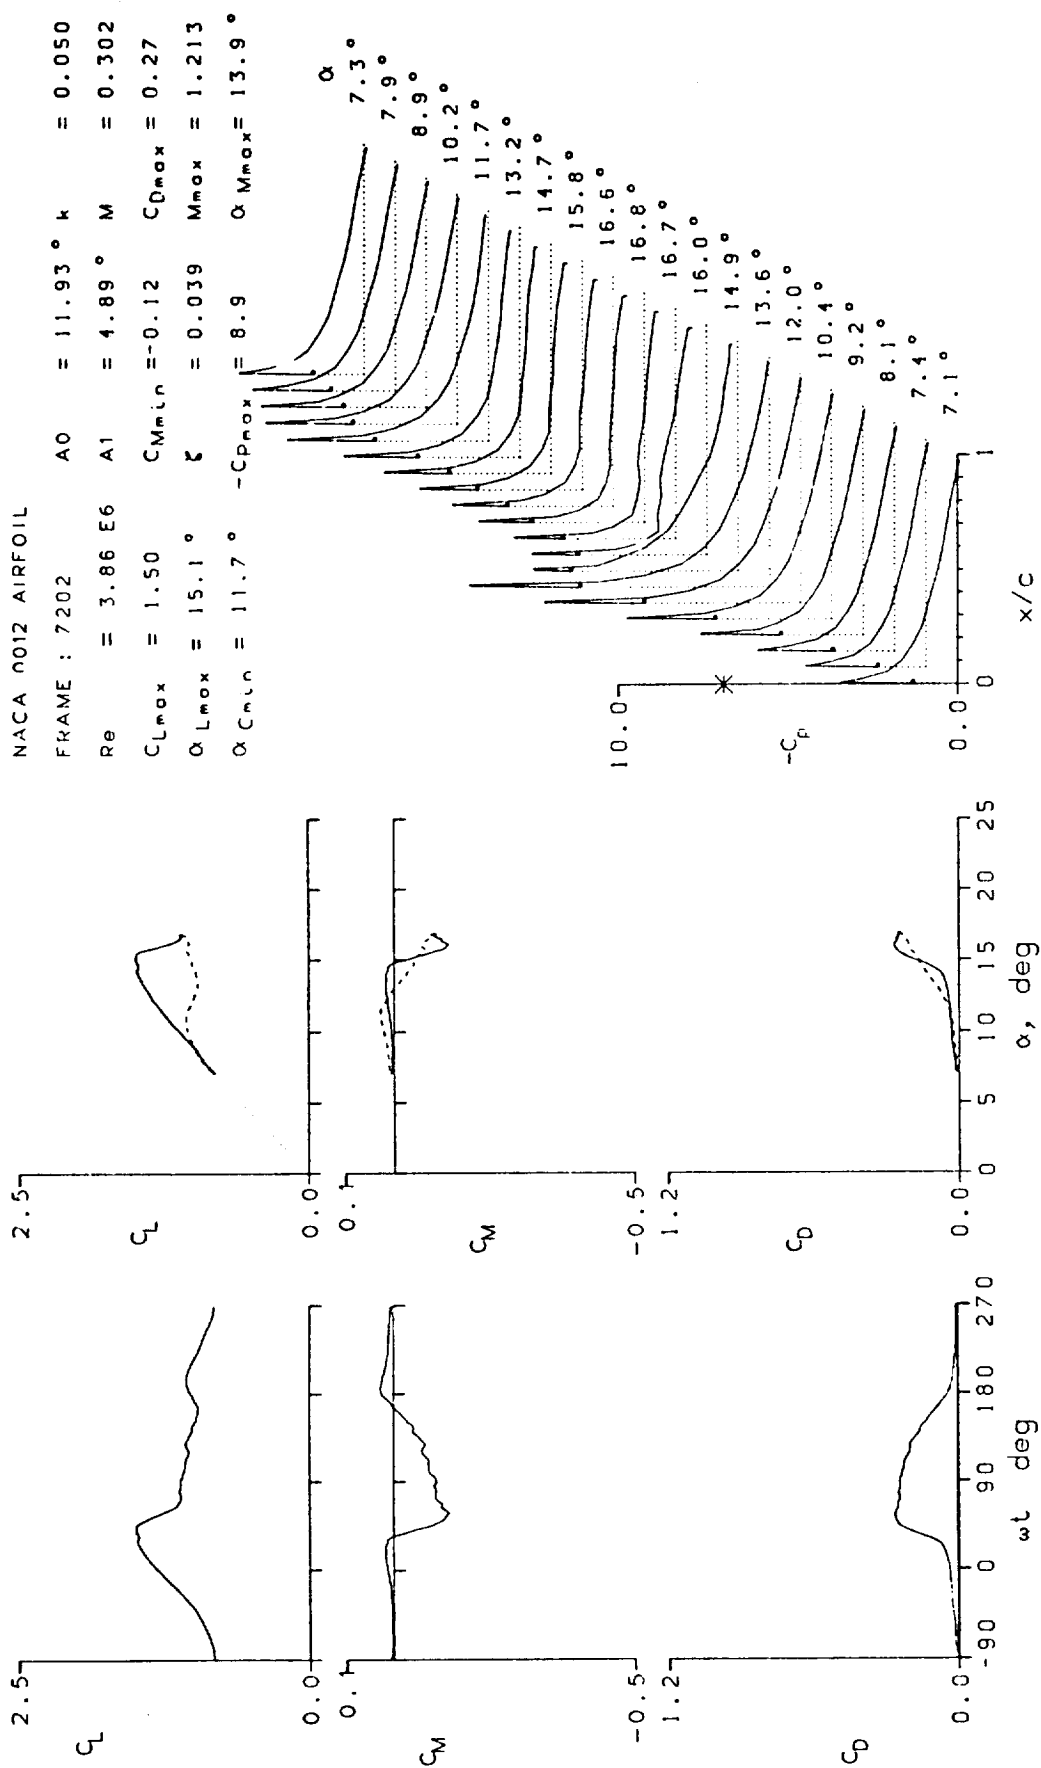


Figure 12.- Continued.

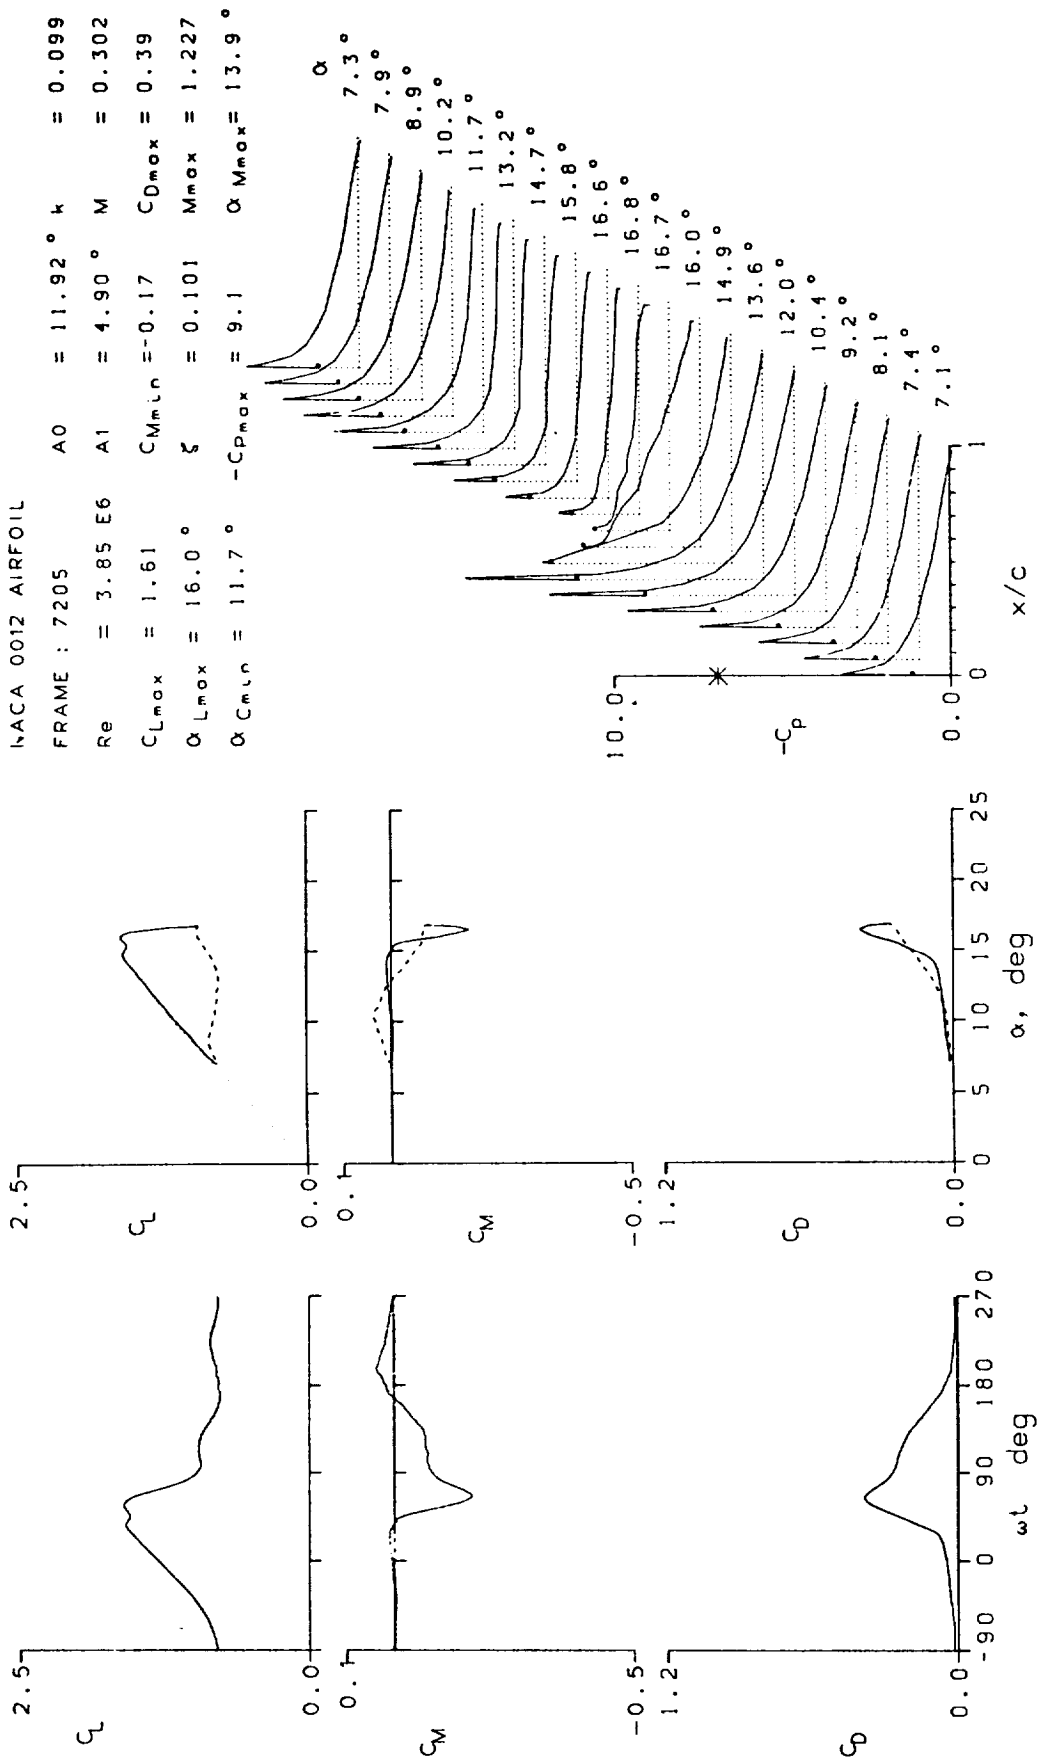

NACA 0012 AIRFOIL
 FRAME : 7207 $A_0 = 11.88^\circ$ $k = 0.198$
 $Re = 3.85 E6$ $A_1 = 4.90^\circ$ $M = 0.302$
 $C_{Lmax} = 1.81$ $C_{Mmin} = -0.28$ $C_{Dmax} = 0.50$
 $\alpha_{Lmax} = 16.8^\circ$ $\zeta = 0.208$ $M_{max} = 1.221$
 $\alpha_{Cmin} = 11.5^\circ$ $-C_{Pmax} = 9.0$ $\alpha_{Mmax} = 14.4^\circ$

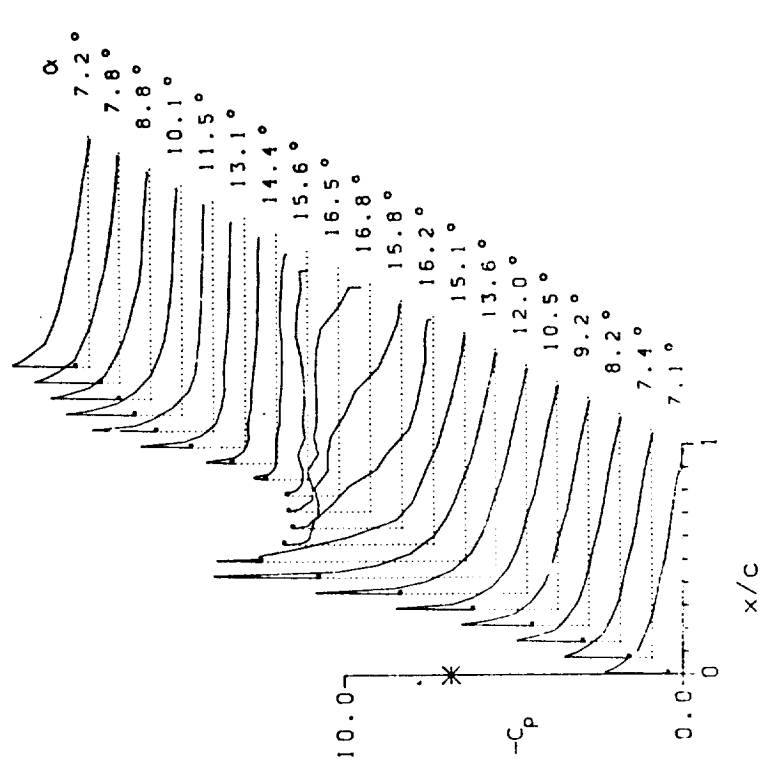
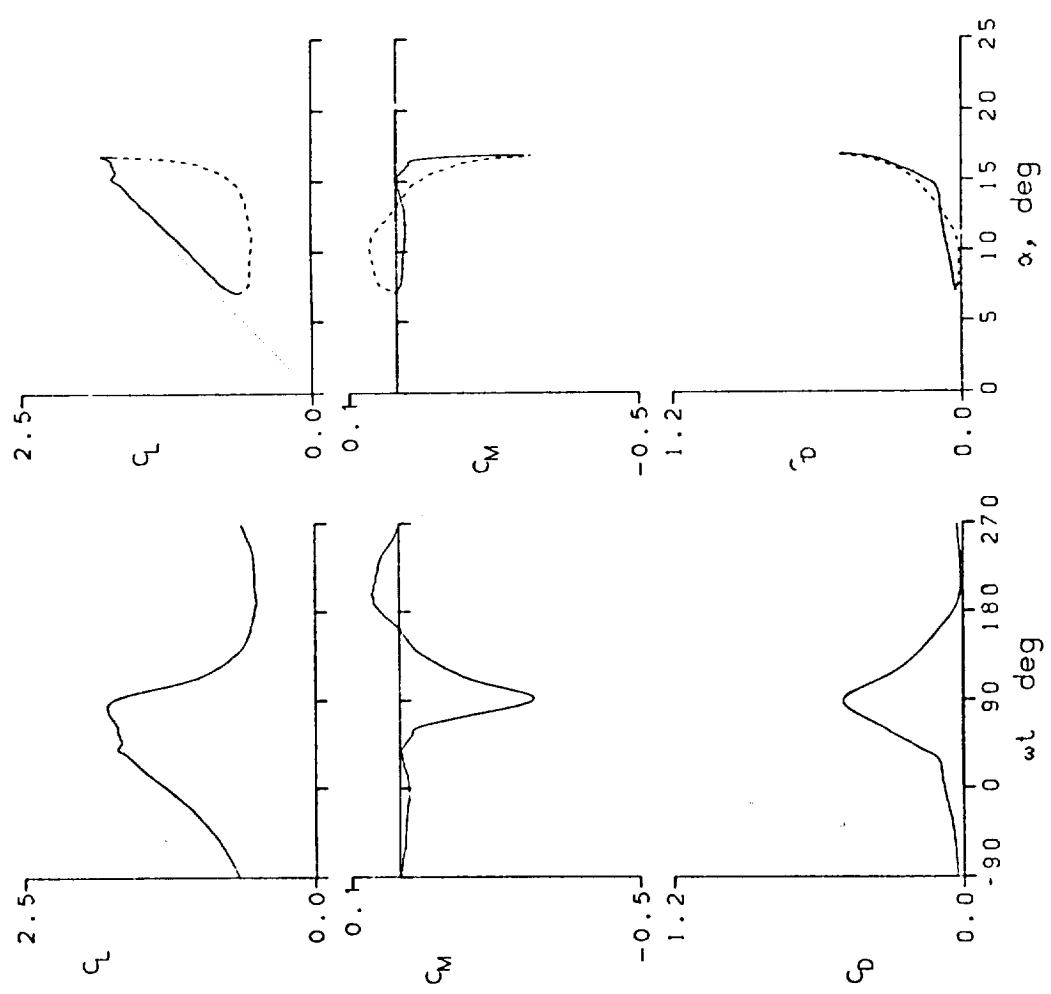


Figure 12.- Continued.

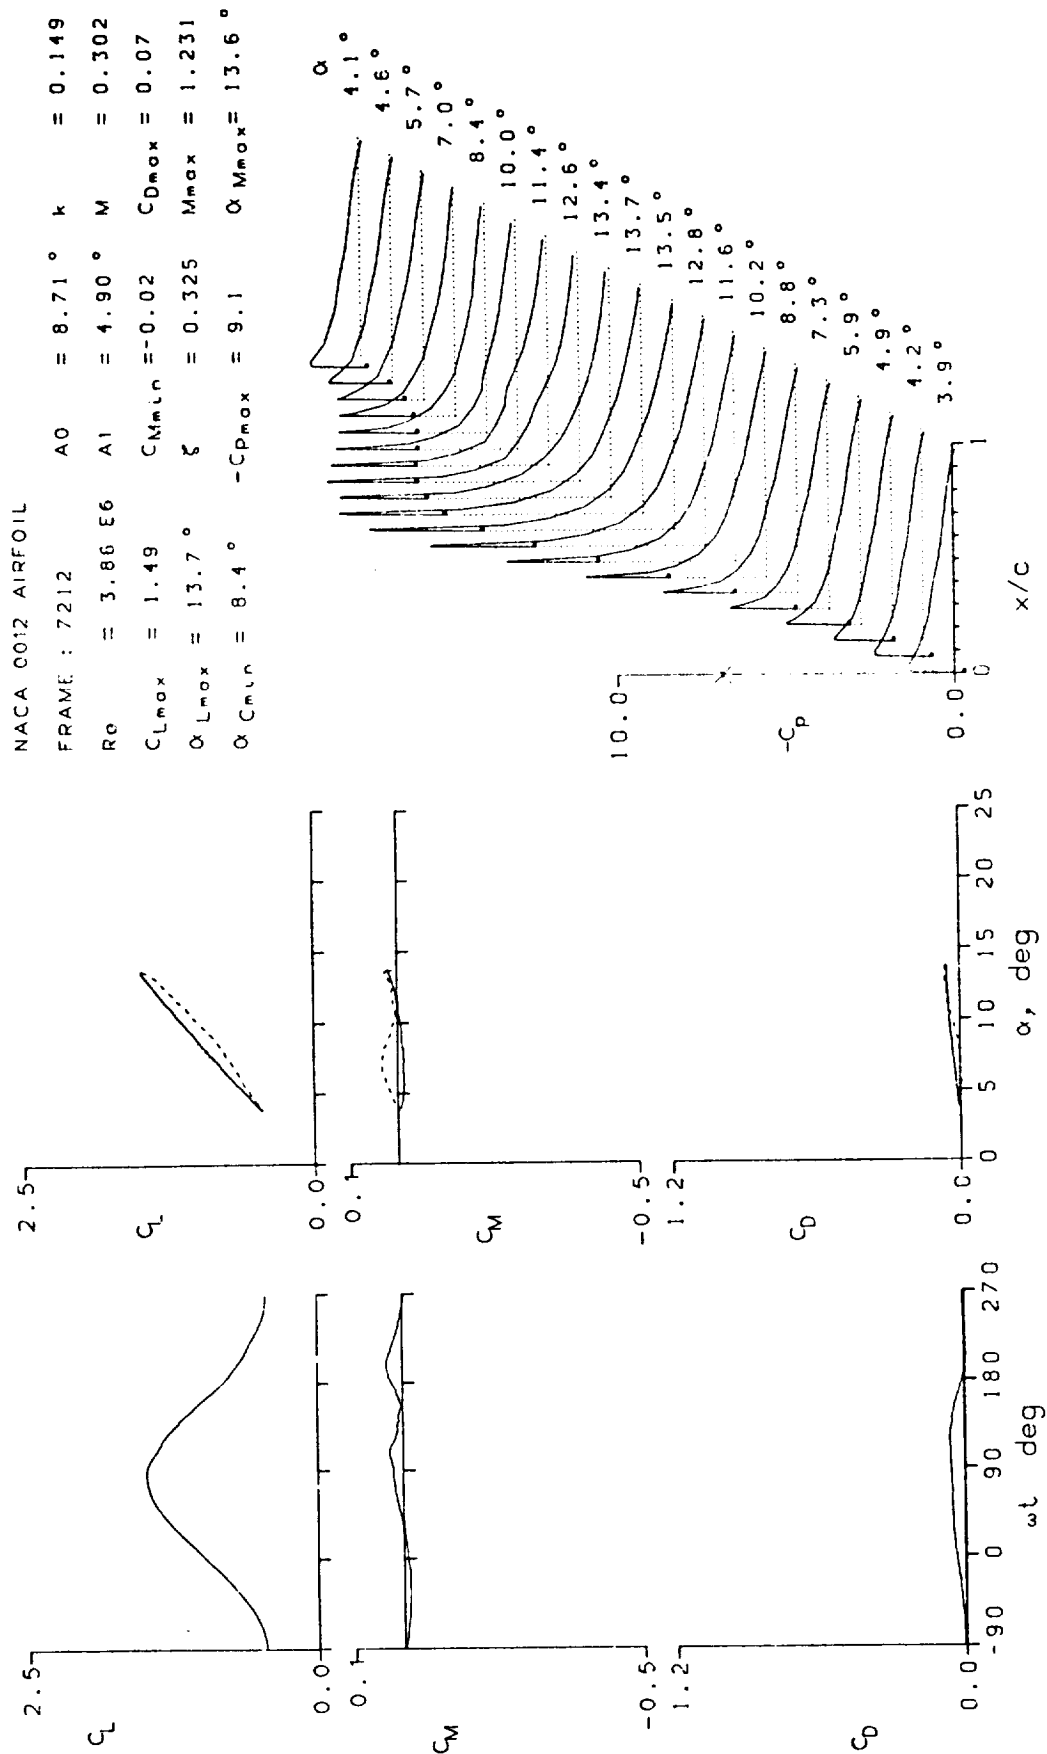


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7214	A0 = 8.71 °	k = 0.099
Re = 3.86 E6	A1 = 4.90 °	M = 0.302
$C_{Lmax} = 1.45$	$C_{Mmin} = -0.01$	$C_{Dmax} = 0.06$
$\alpha_{Lmax} = 13.6 °$	$\zeta = 0.231$	$M_{max} = 1.224$
$\alpha_{Cmin} = 8.4 °$	$-C_{Pmax} = 9.0$	$\alpha_{Mmax} = 13.7 °$

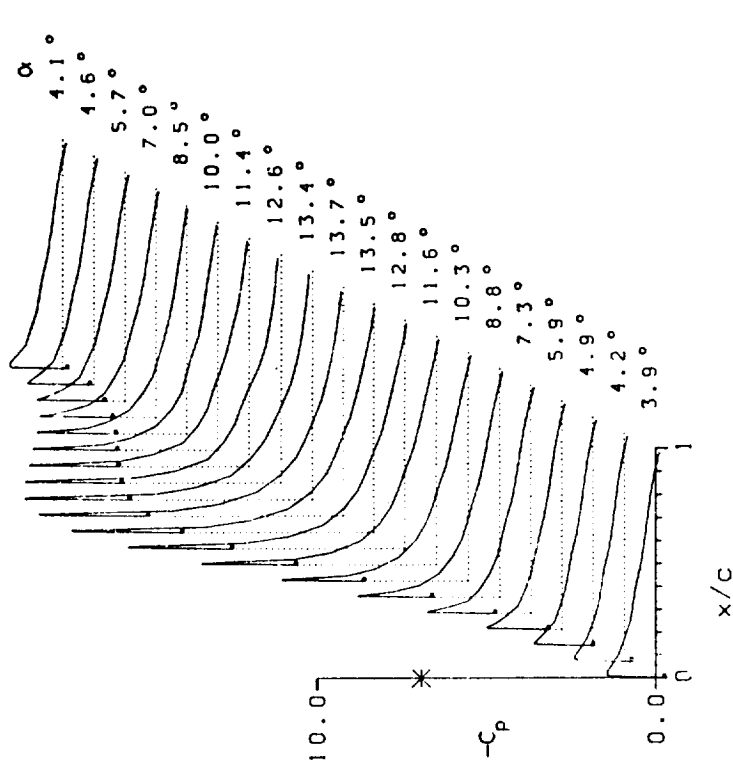
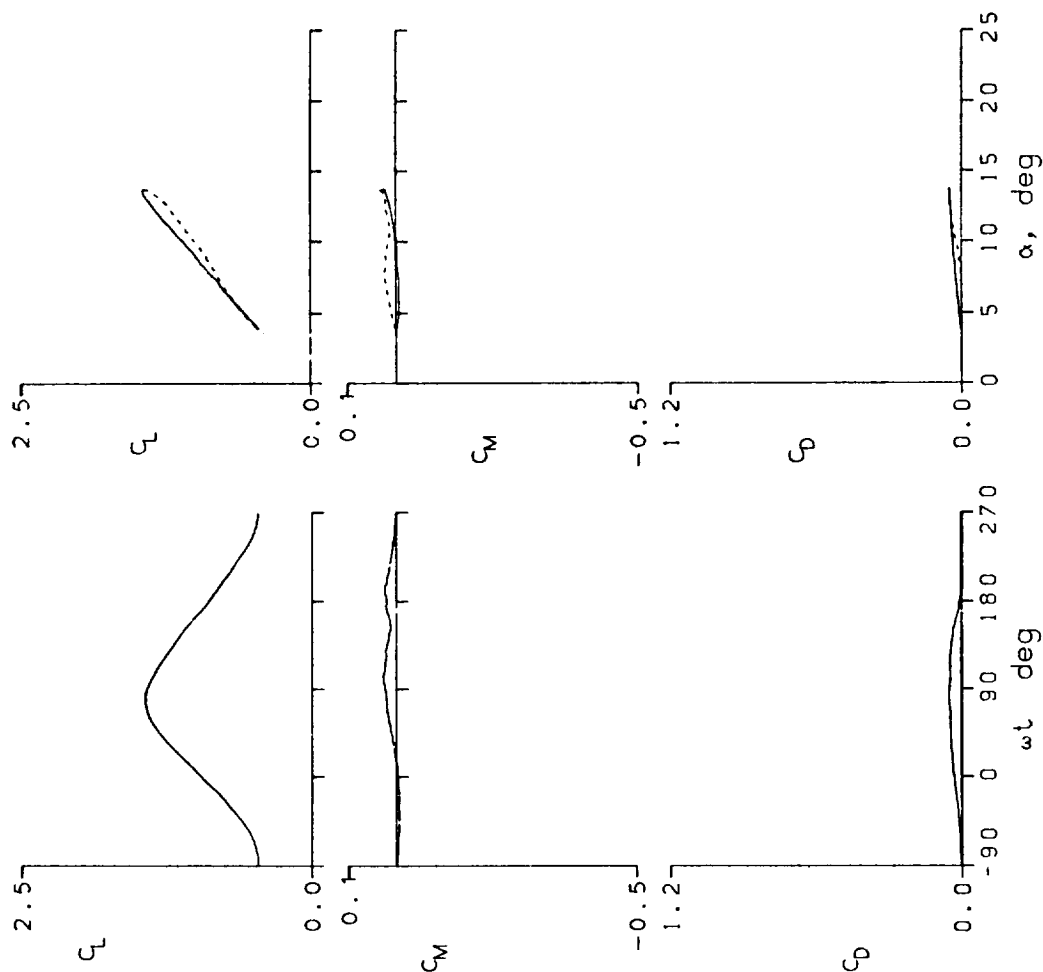


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7216	A0 = 8.71 °	k = 0.050
Re = 3.86 E6	A1 = 4.89 °	M = 0.302
C _{Lmax} = 1.42	C _{Mmin} = -0.01	C _{Dmax} = 0.05
α _{Lmax} = 13.4 °	ζ = 0.165	M _{max} = 1.212
α _{Cmin} = 8.5 °	-C _{pmax} = 8.9	α _{Mmax} = 13.6 °

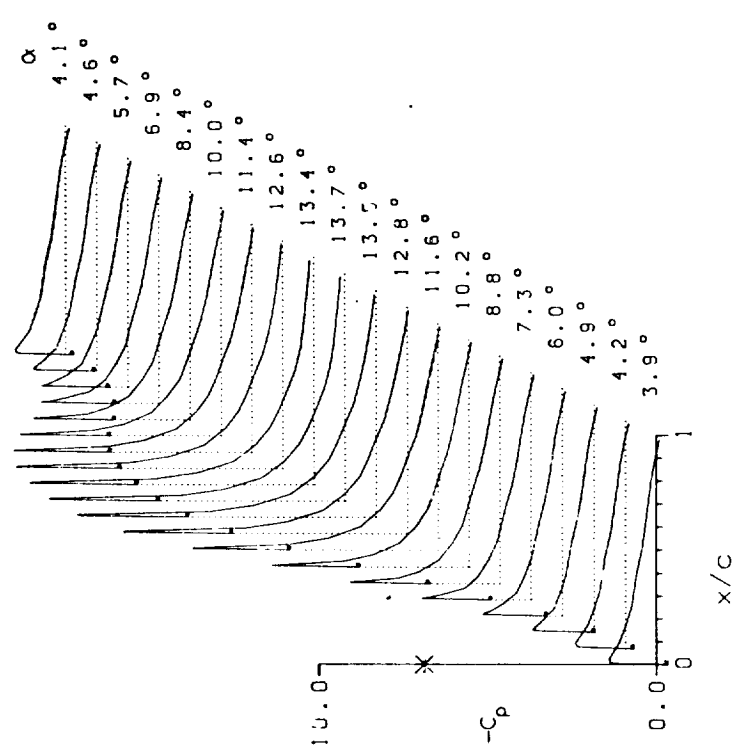
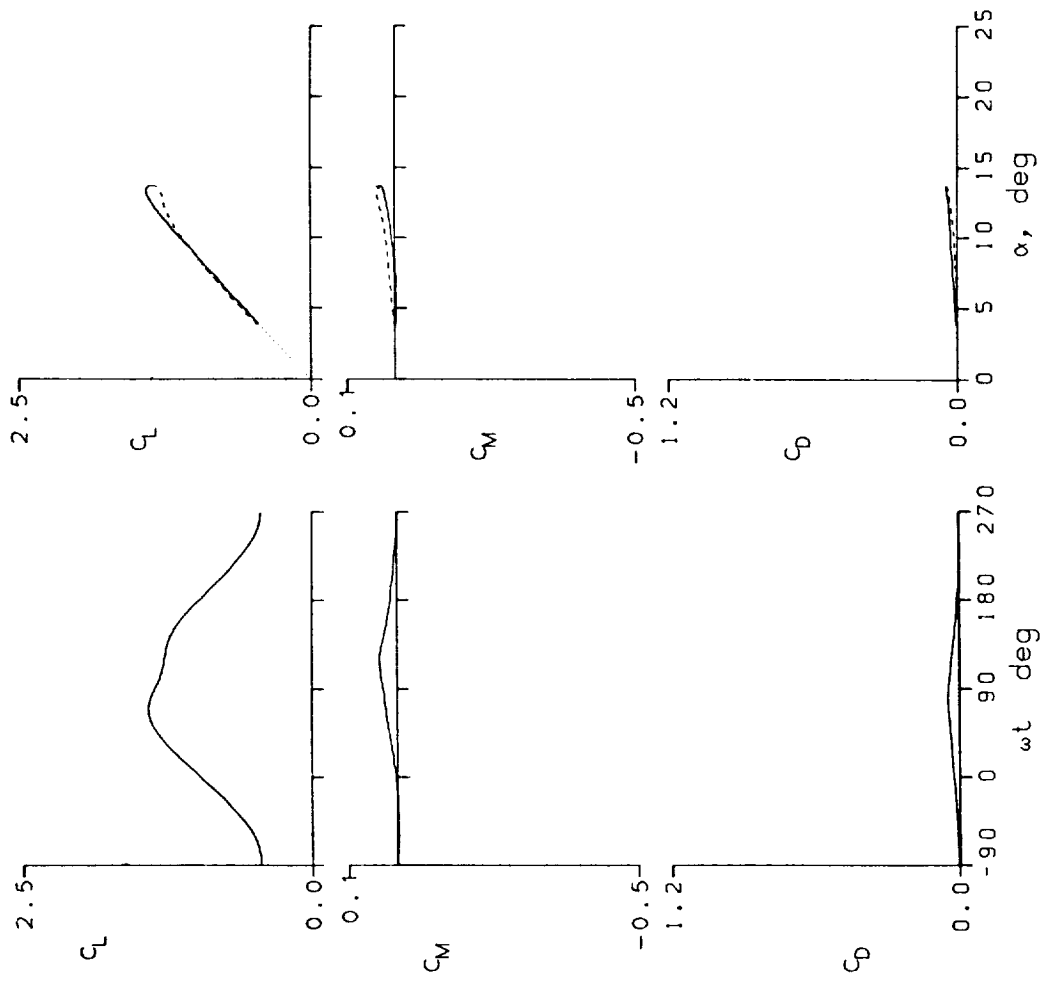


Figure 12.- Continued.

NACA 0012 AIRFOIL
 FRAME : 7222 $A_0 = 9.76^\circ$ $k = 0.051$
 $Re = 3.98 \text{ E} 6$ $A_1 = 4.95^\circ$ $M = 0.298$
 $C_{L_{max}} = 1.47$ $C_{M_{min}} = -0.09$ $C_{D_{max}} = 0.20$
 $\alpha_{L_{max}} = 13.9^\circ$ $\xi = -0.292$ $M_{max} = 1.247$
 $\alpha_{C_{min}} = 9.4^\circ$ $-C_{D_{max}} = 9.4$ $\alpha_{M_{max}} = 14.1^\circ$

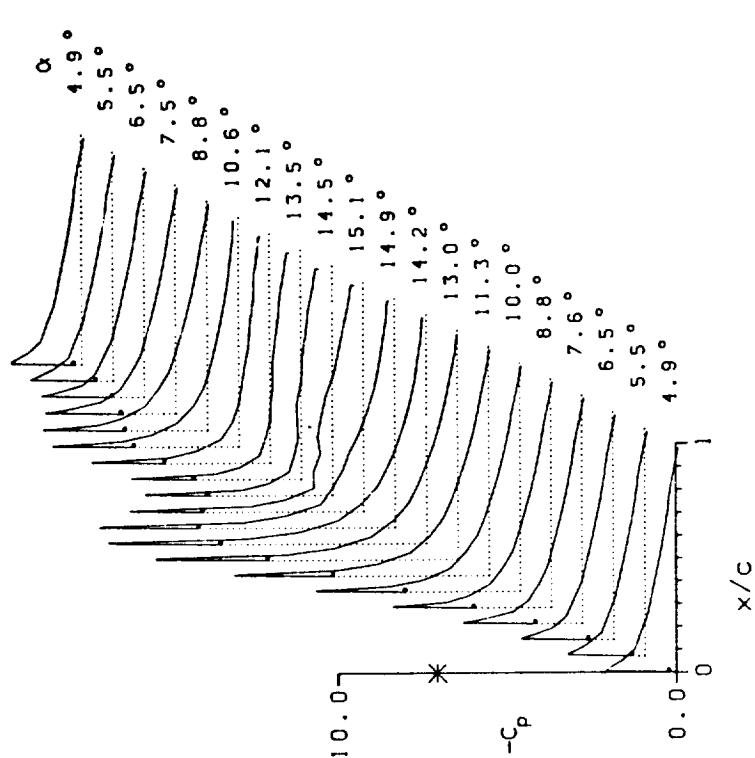
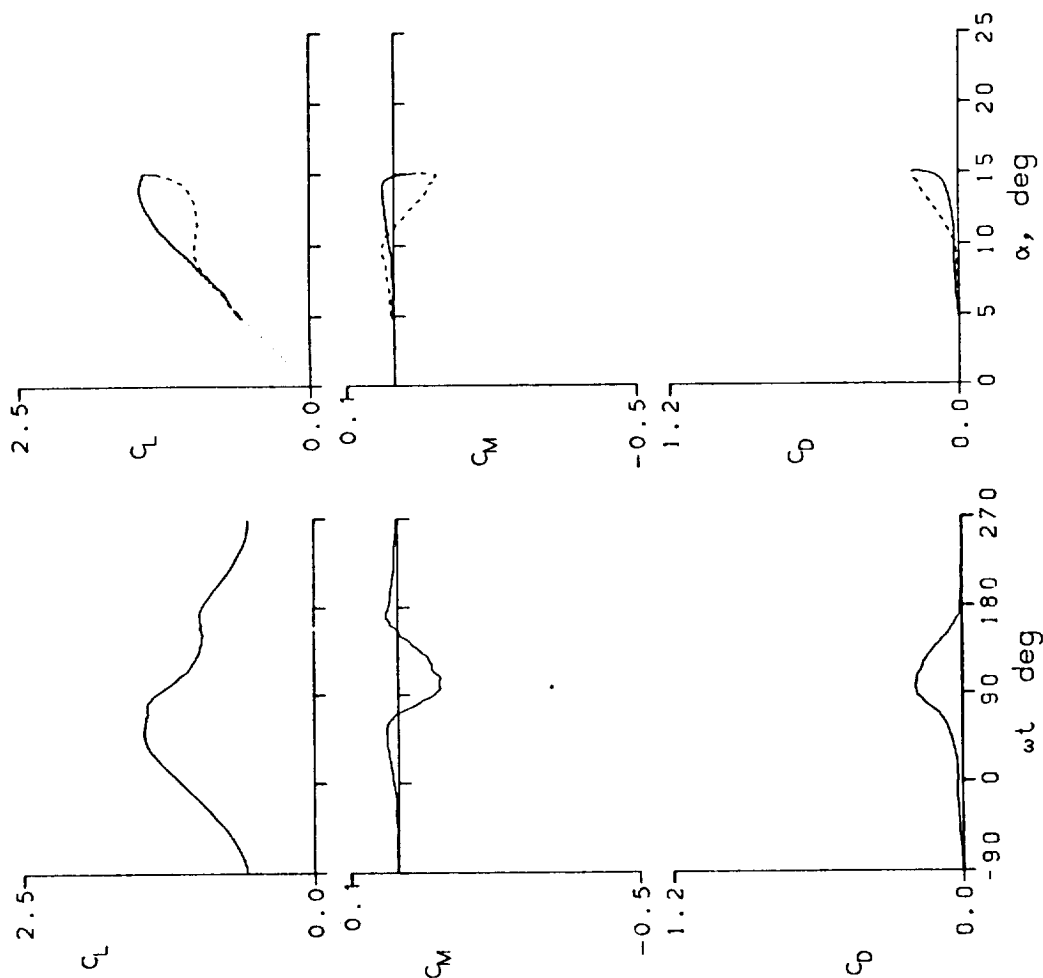


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7300	A0 = 9.93°	k = 0.151
Re = 3.99 E6	A1 = 4.90°	M = 0.300
CLmax = 1.59	CMmin = -0.08	CDmax = 0.26
αLmax = 14.6°	ξ = -0.017	Mmax = 1.251
αCMmin = 9.7°	-CPmax = 9.4	αMmax = 14.2°

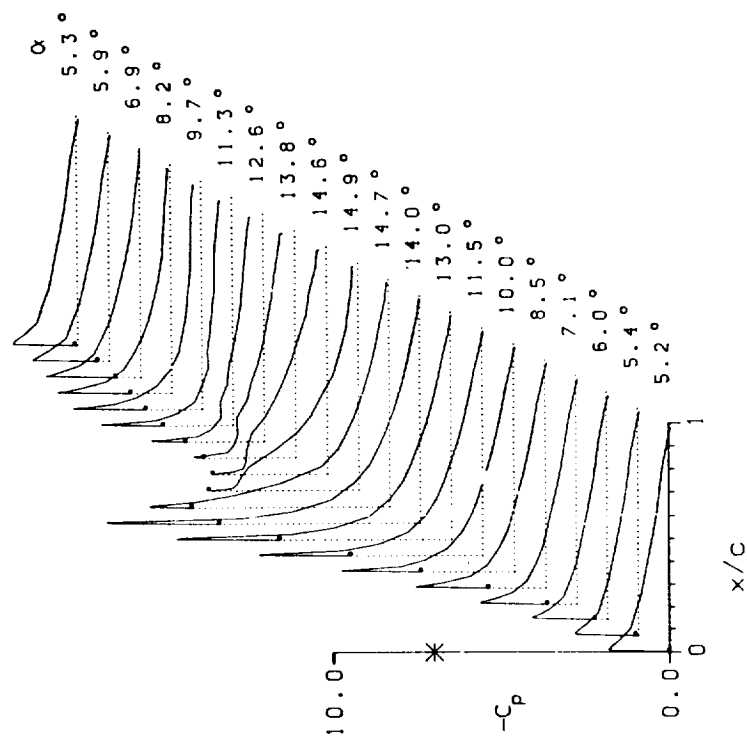
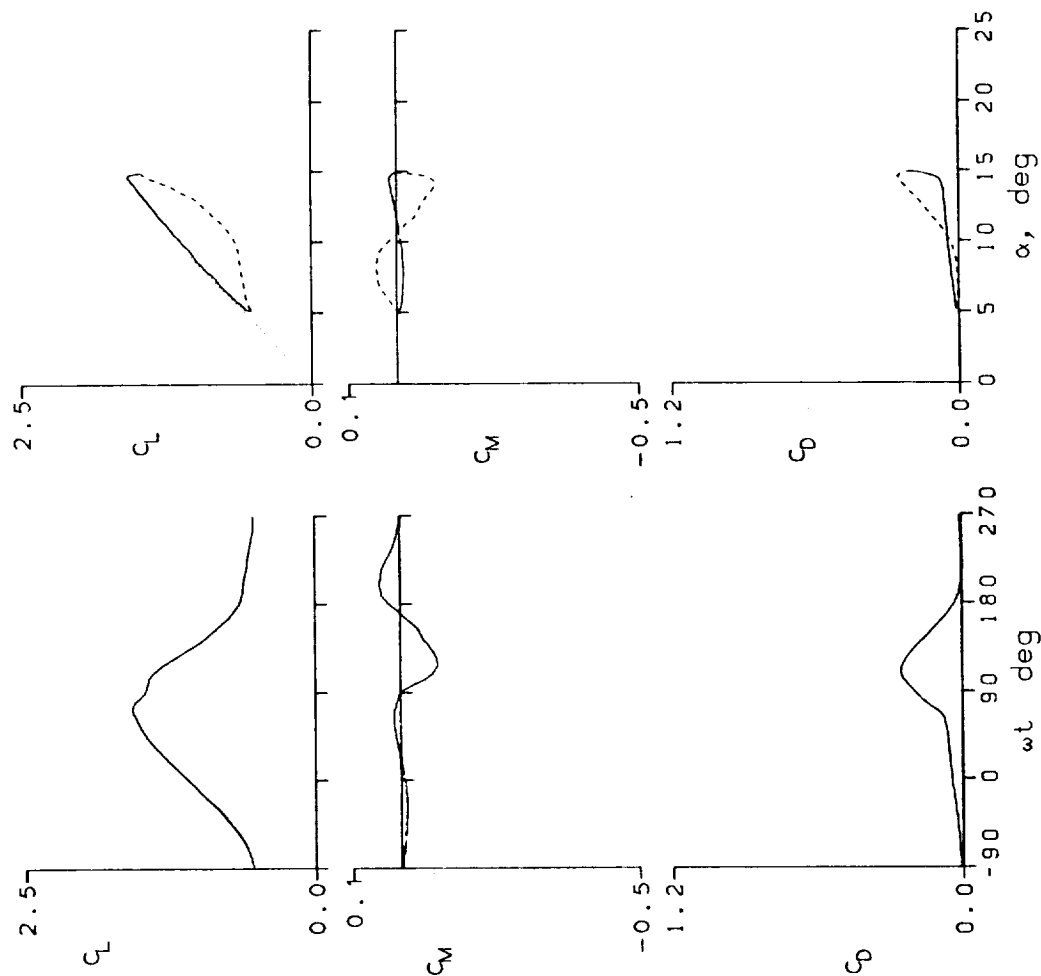


Figure 12.- Continued.

NACA 0012 AIRFOIL
 FRAME : 7302 A0 = 9.93° k = 0.074
 Re = 3.96 E6 A1 = 4.90° M = 0.300
 $C_{Lmax} = 1.52$ $C_{Mmin} = -0.10$ $C_{Dmax} = 0.21$
 $\alpha_{Lmax} = 14.1^\circ$ $\zeta = -0.127$ $M_{max} = 1.244$
 $\alpha_{Cmin} = 9.7^\circ$ $-C_{Dmax} = 9.3$ $\alpha_{Mmax} = 14.0^\circ$

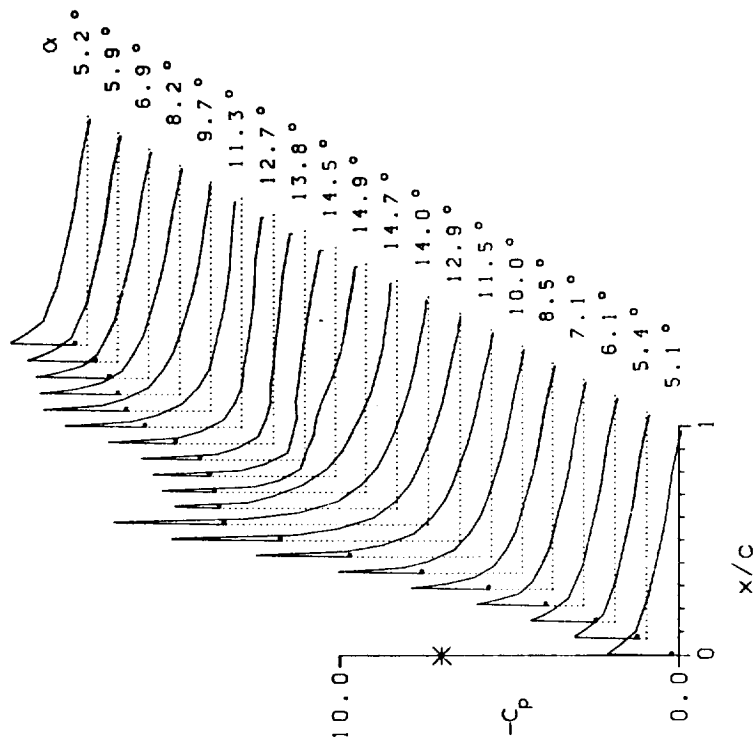
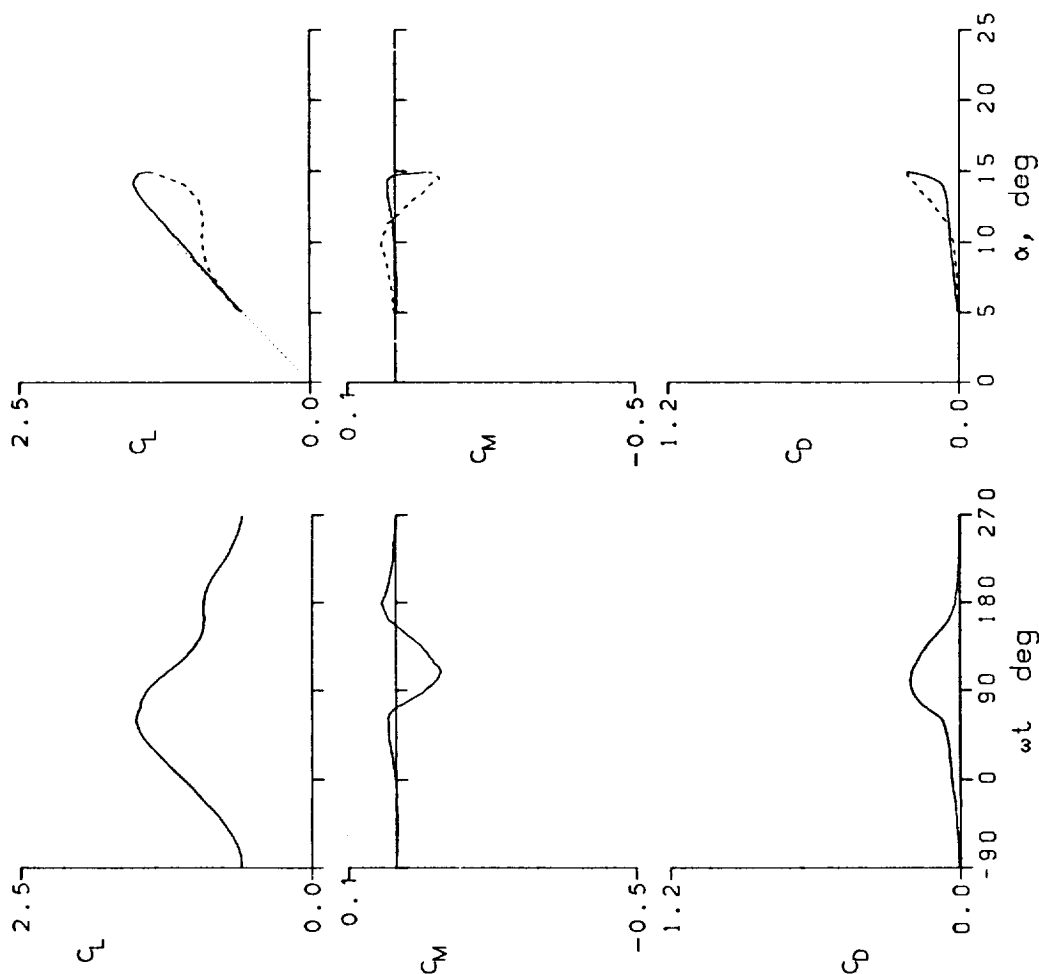


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 7305	A0 = 11.97 °	k = 0.151
Re = 3.97 E6	A1 = 4.90 °	M = 0.300
C _{Lmax} = 1.67	C _{Mmin} = -0.20	C _{Dmax} = 0.44
α _{Lmax} = 15.3 °	ξ = 0.072	M _{max} = 1.245
α _{Cmin} = 11.7 °	-C _{pmax} = 9.3	α _{Mmax} = 14.3 °

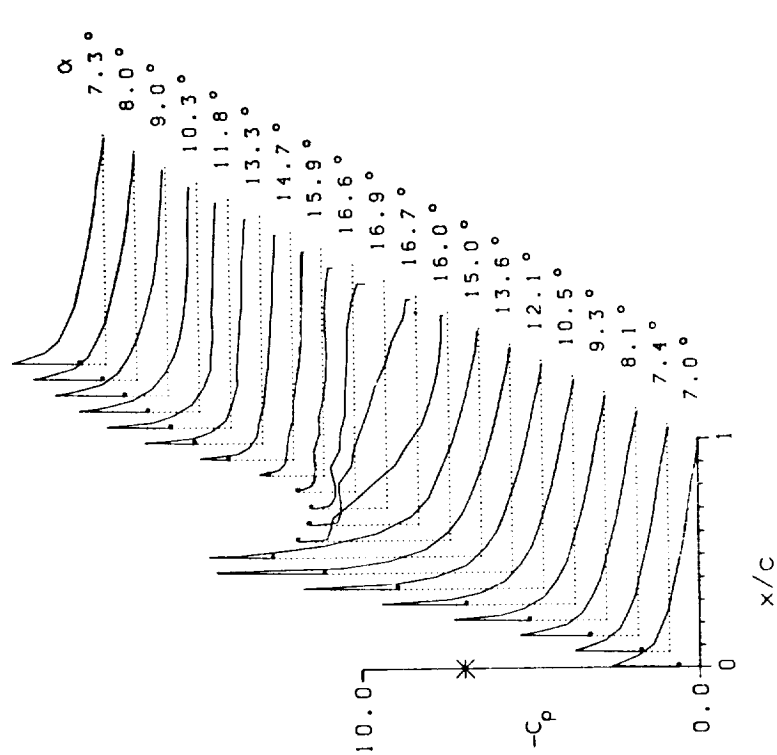
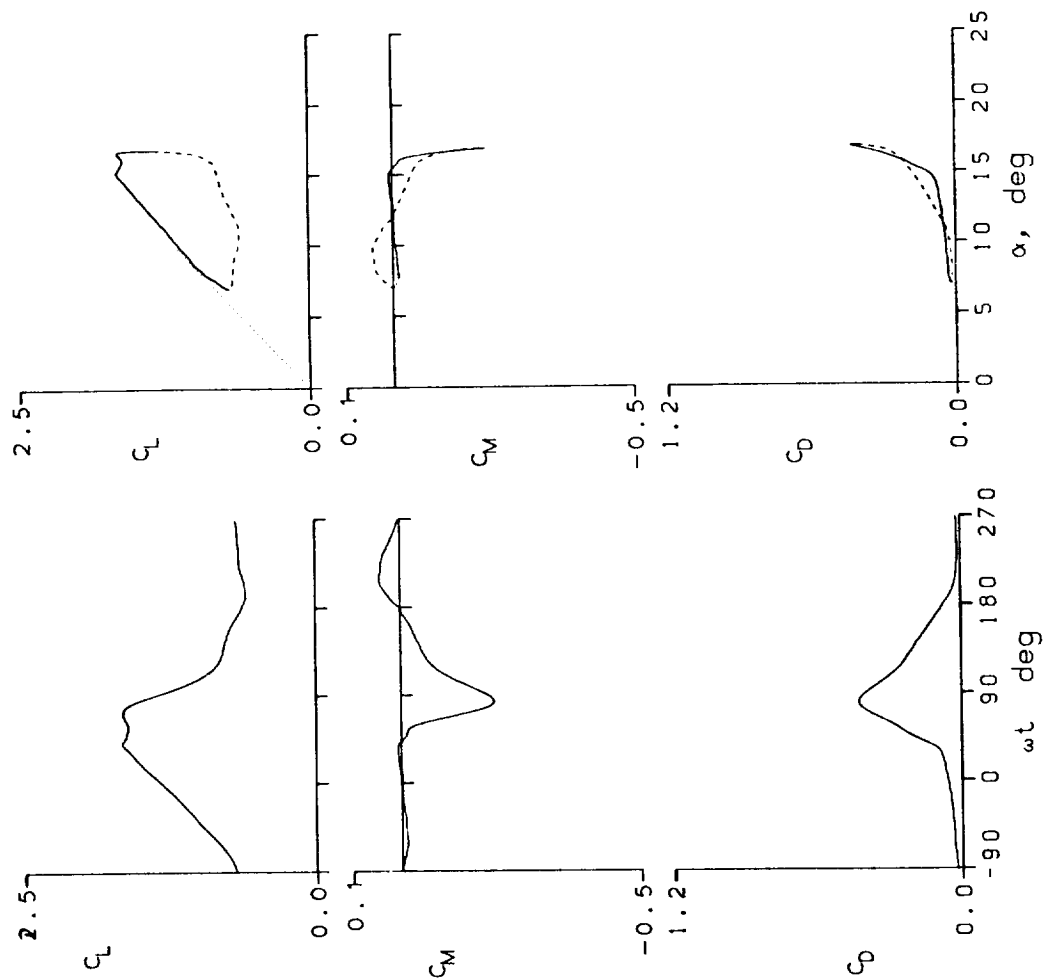


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 8019	A0 = 9.82 °	k = 0.104
Re = 0.49 E6	A1 = 9.90 °	M = 0.035
CLmax = 2.08	CMmin = -0.42	CDmax = 0.72
αLmax = 18.9 °	ξ = 0.125	Mmax = 0.104
αCmin = 9.3 °	-CPmax = 7.5	αMmax = 15.3 °

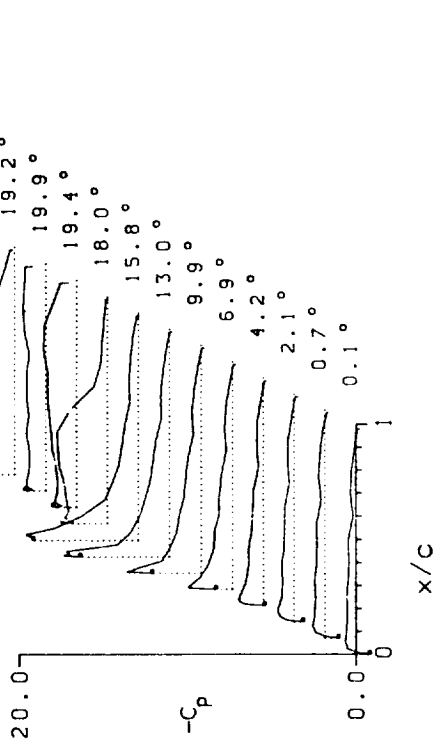
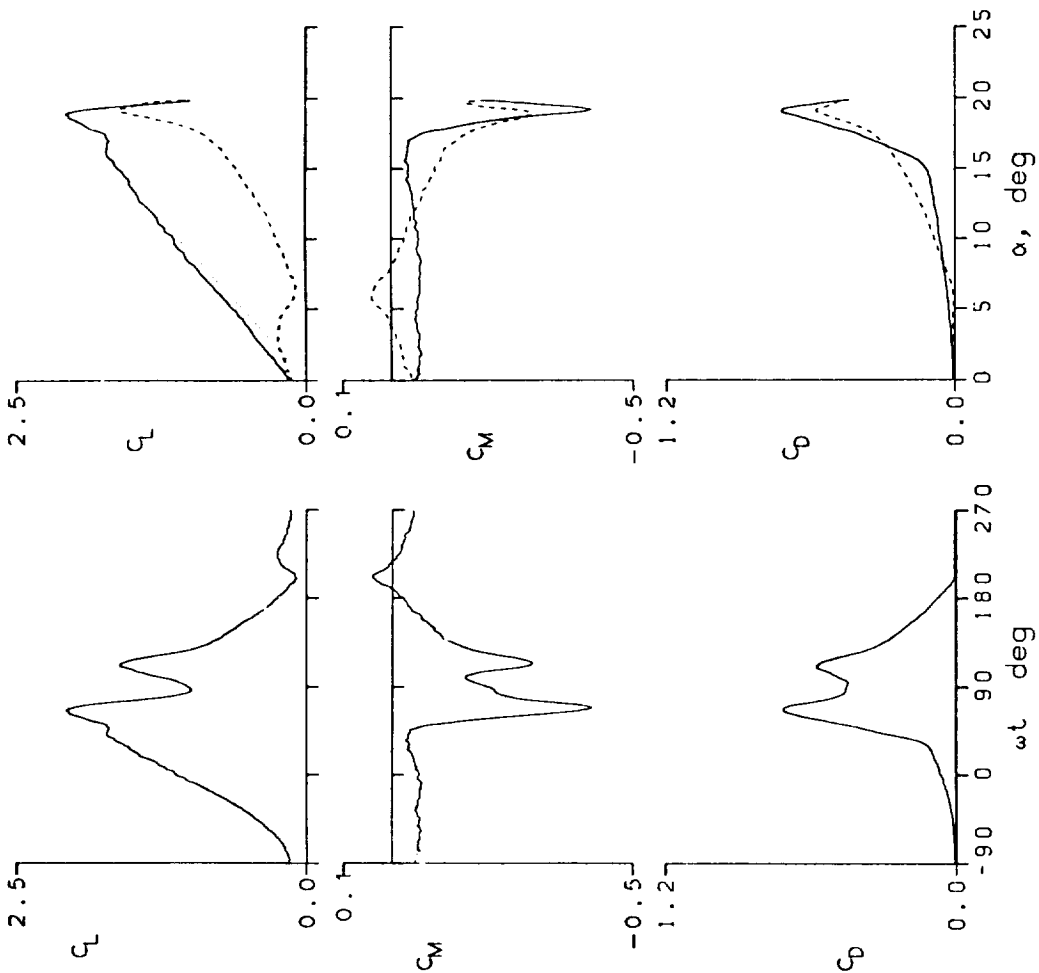


Figure 12.- Continued.

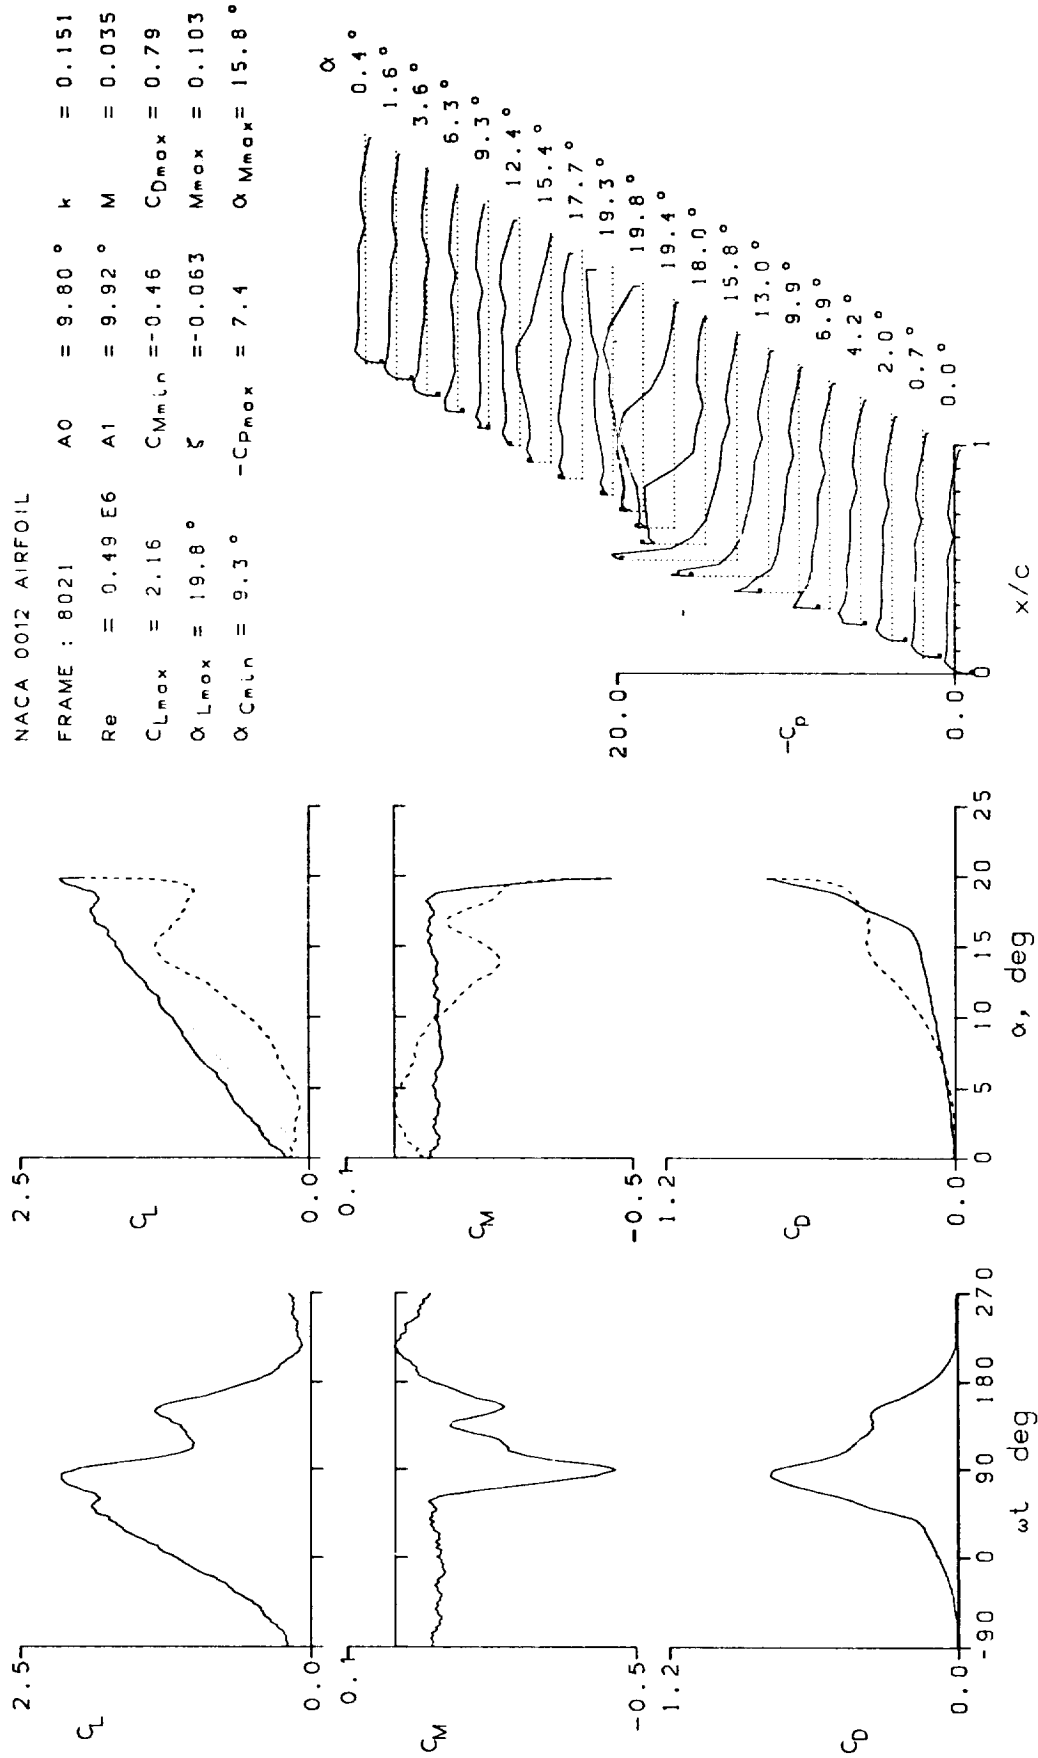


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 8023	A0 = 9.78 °	k = 0.253
Re = 0.49 E6	A1 = 9.93 °	M = 0.035
CLmax = 2.10	CMmin = -0.44	CDmax = 0.71
α Lmax = 19.8 °	ξ = -0.274	Mmax = 0.107
α CMmin = 9.3 °	-CPmax = 8.1	α Mmax = 17.2 °

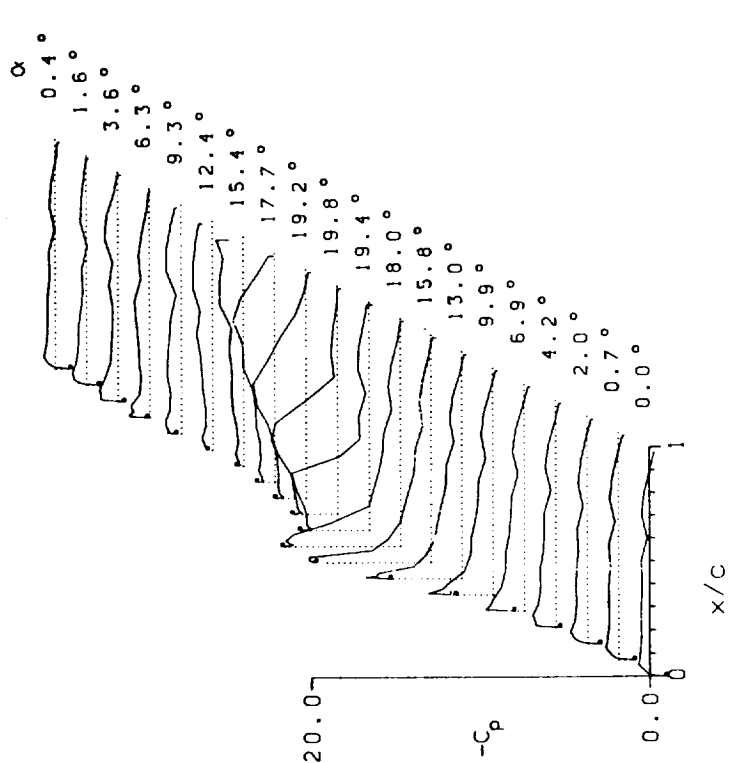
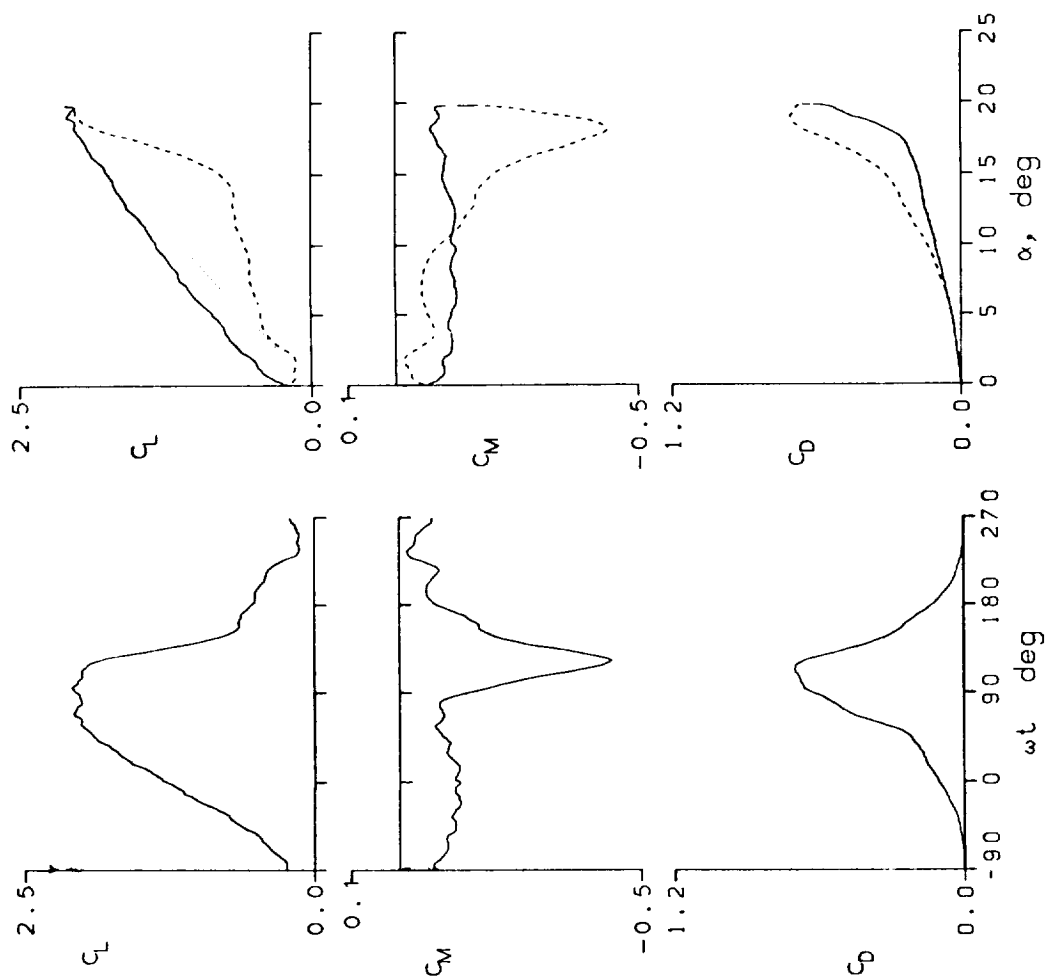


Figure 12.- Continued.

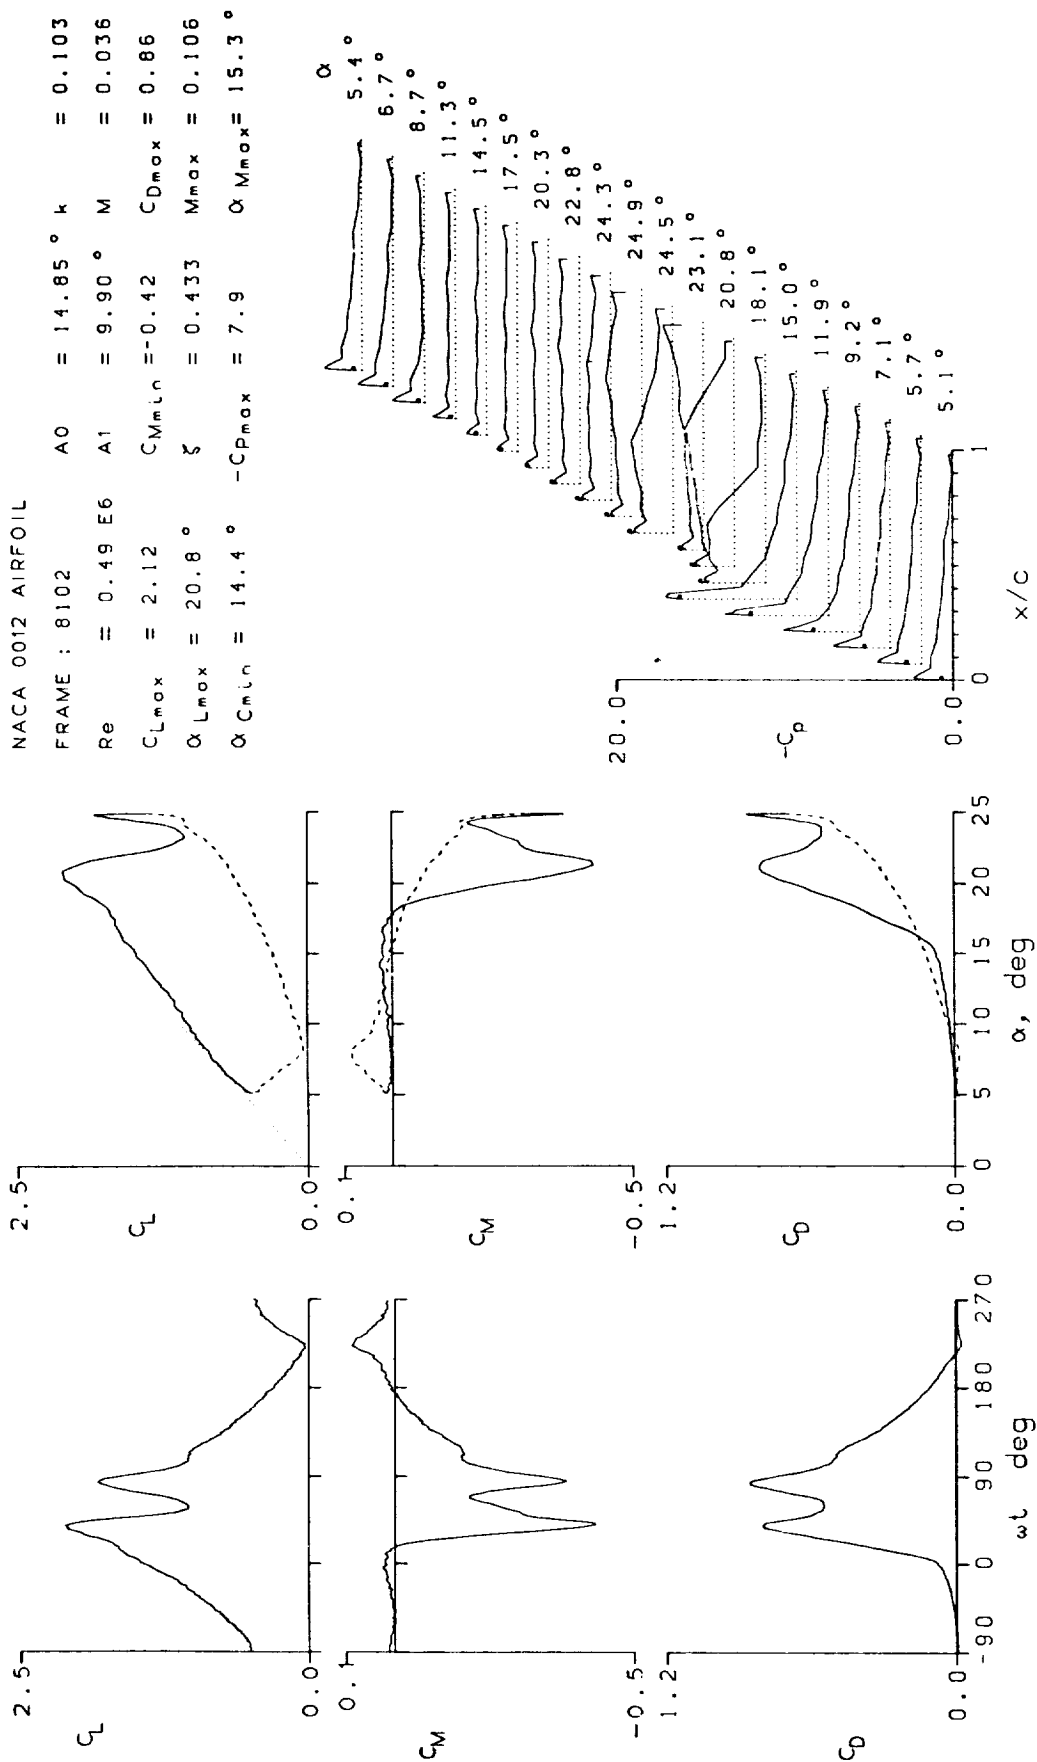


Figure 12.- Continued.

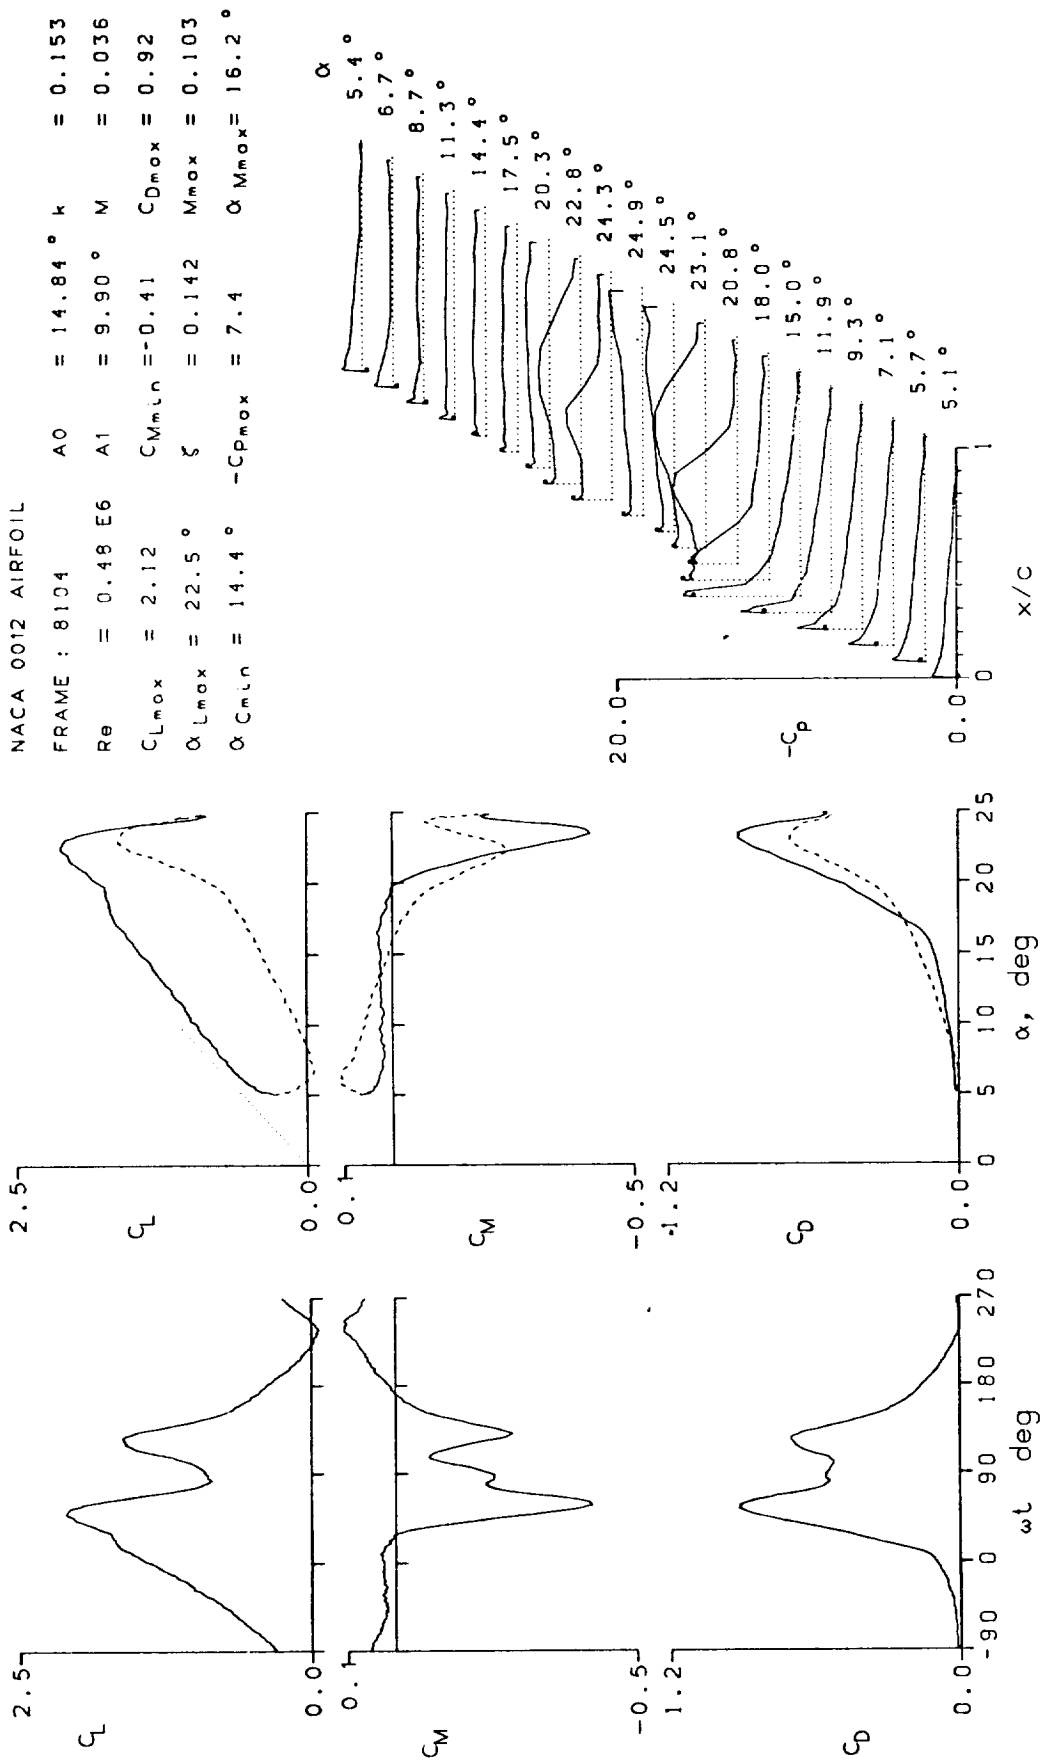


Figure 12.- Continued.

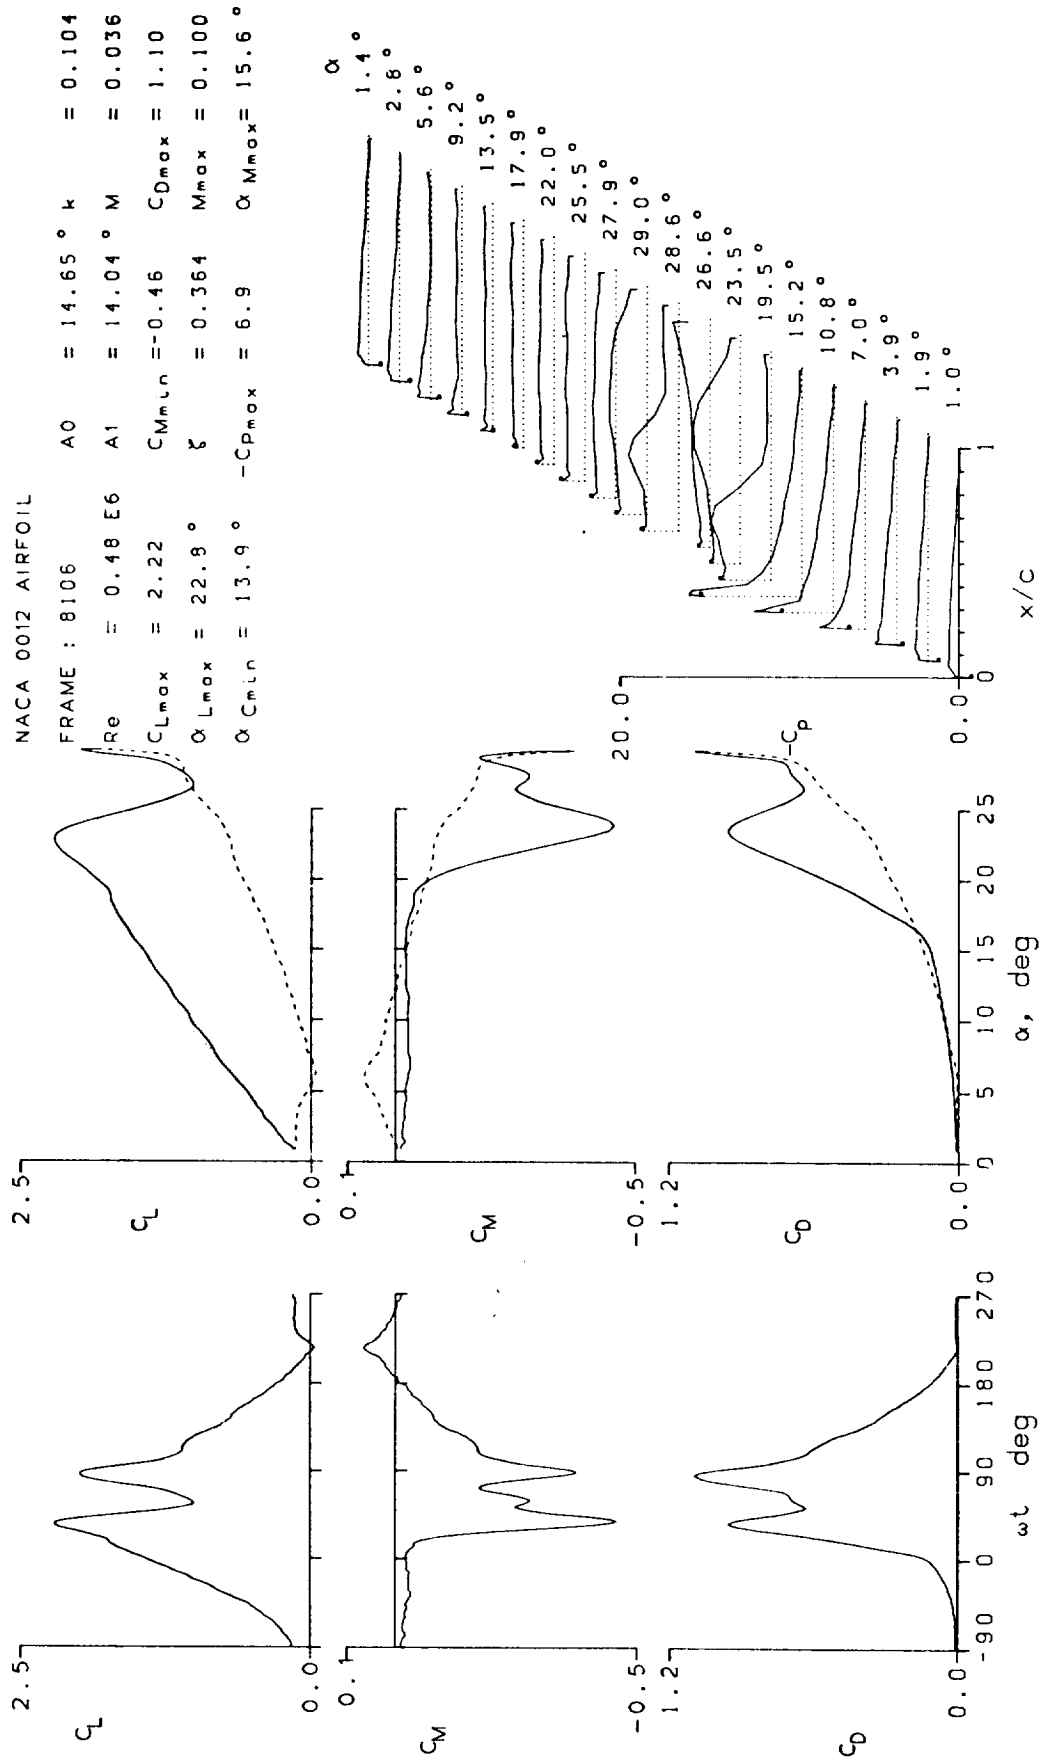


Figure 12.- Continued.

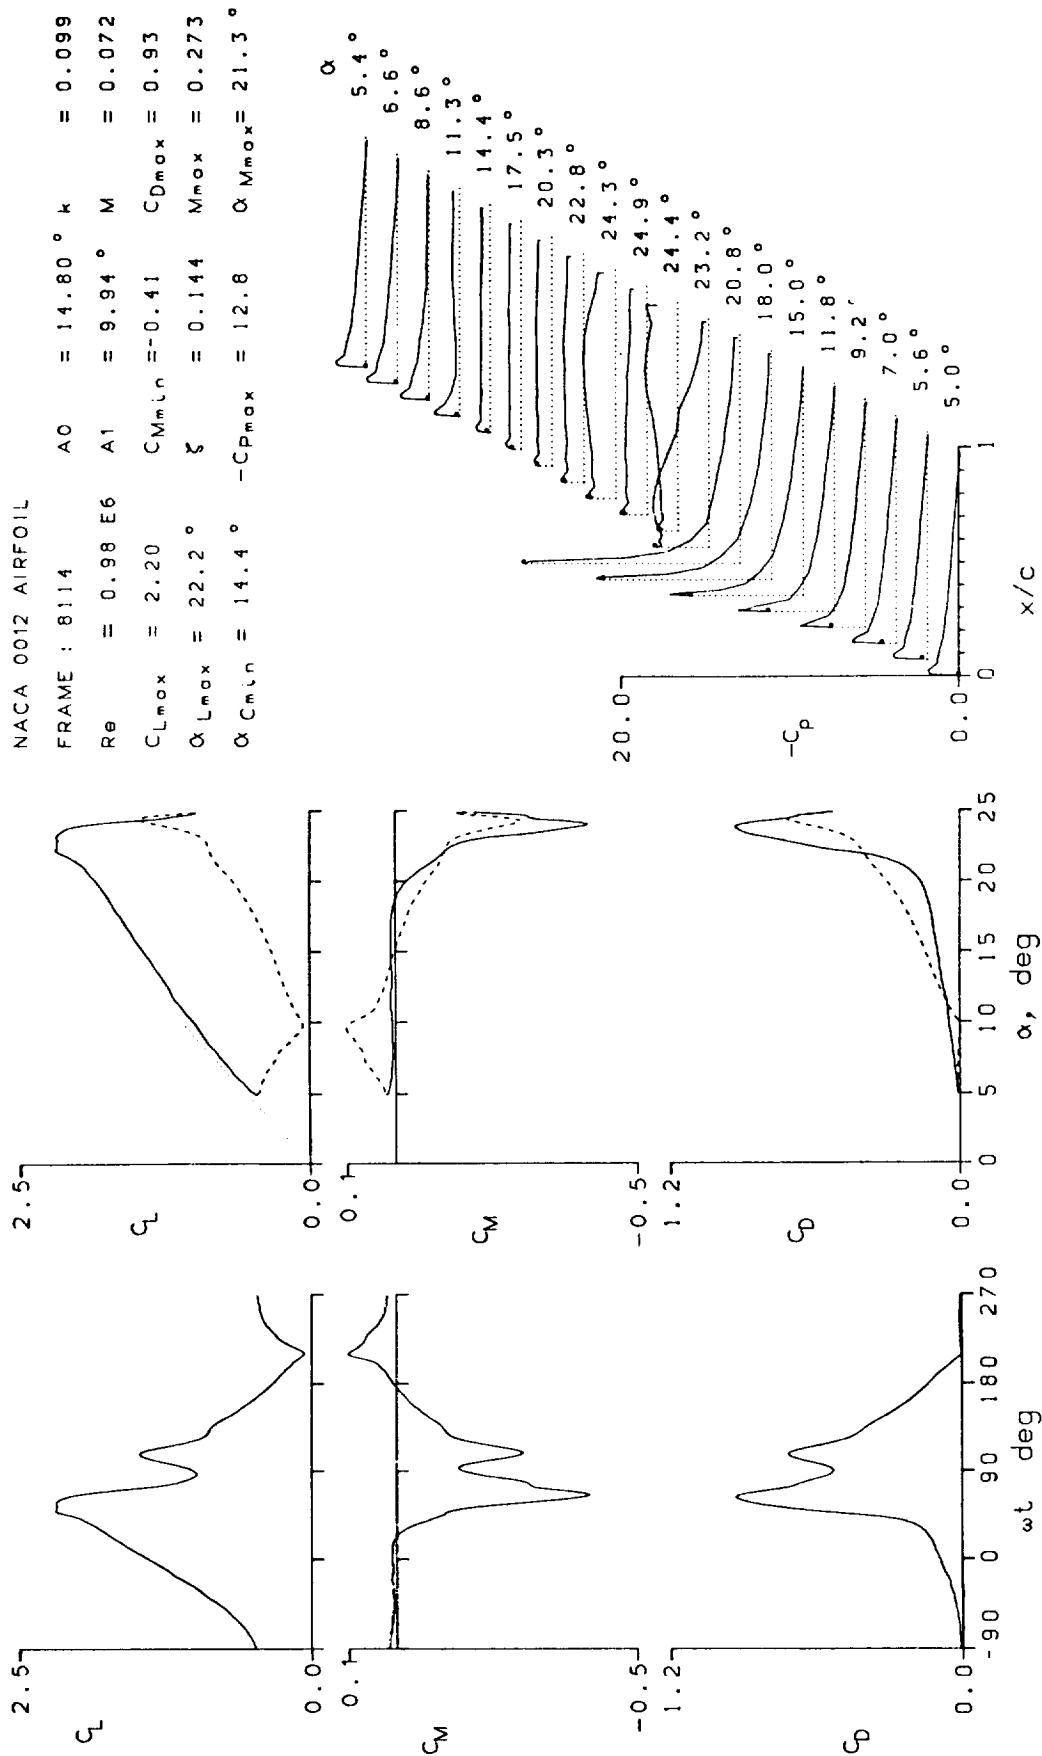


Figure 12.- Continued.

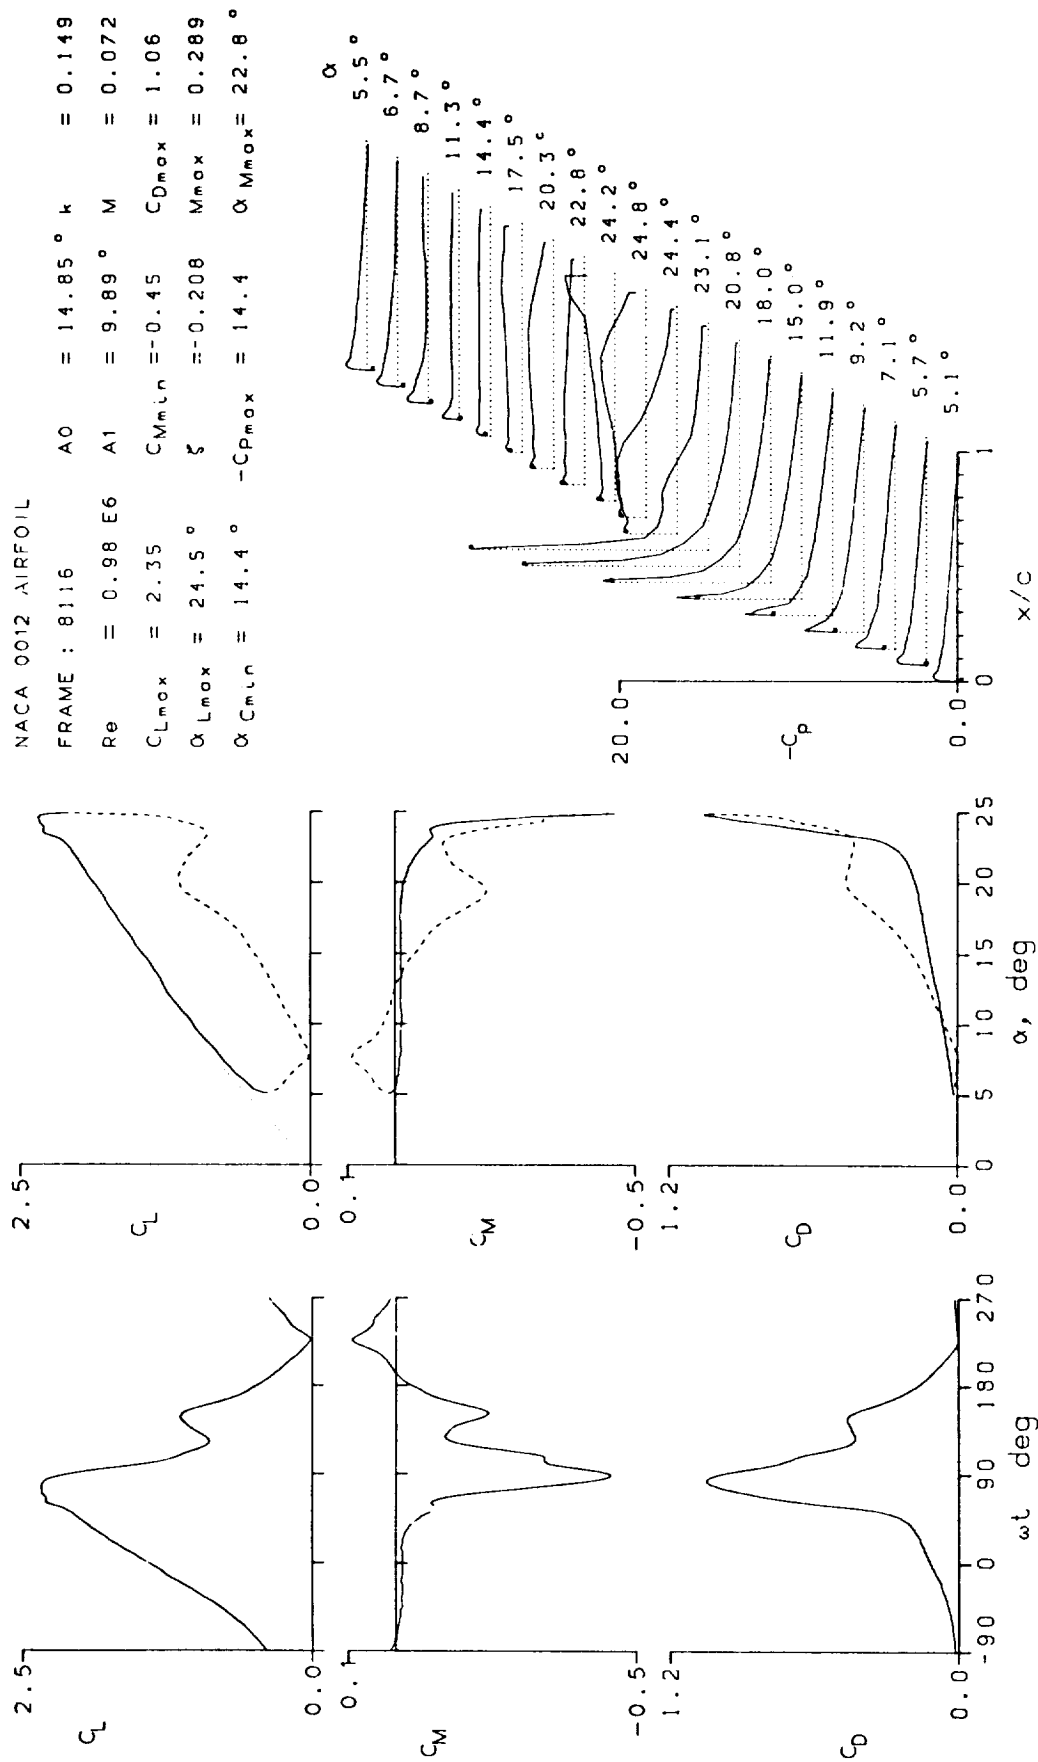


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 8118	A0 = 14.84 °	k = 0.248
Re = 0.98 E6	A1 = 9.89 °	M = 0.072
C _{Lmax} = 2.43	C _{Mmin} = -0.43	C _{Dmax} = 0.98
α _{Lmax} = 24.8 °	ξ = -0.607	M _{max} = 0.308
α _{Cmin} = 14.4 °	-C _{pmax} = 16.3	α _{Mmax} = 24.3 °

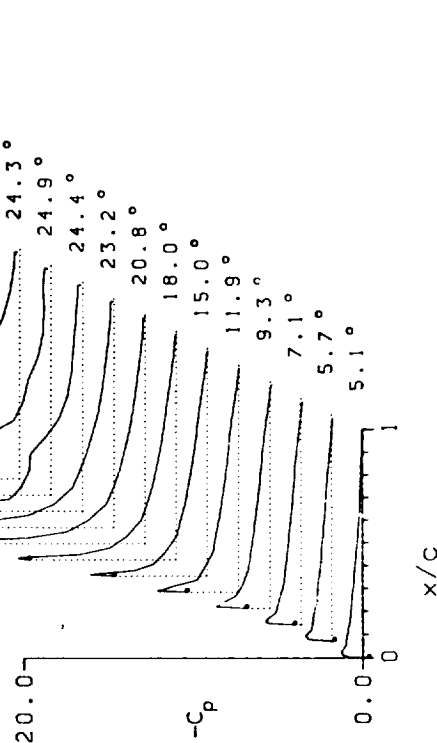
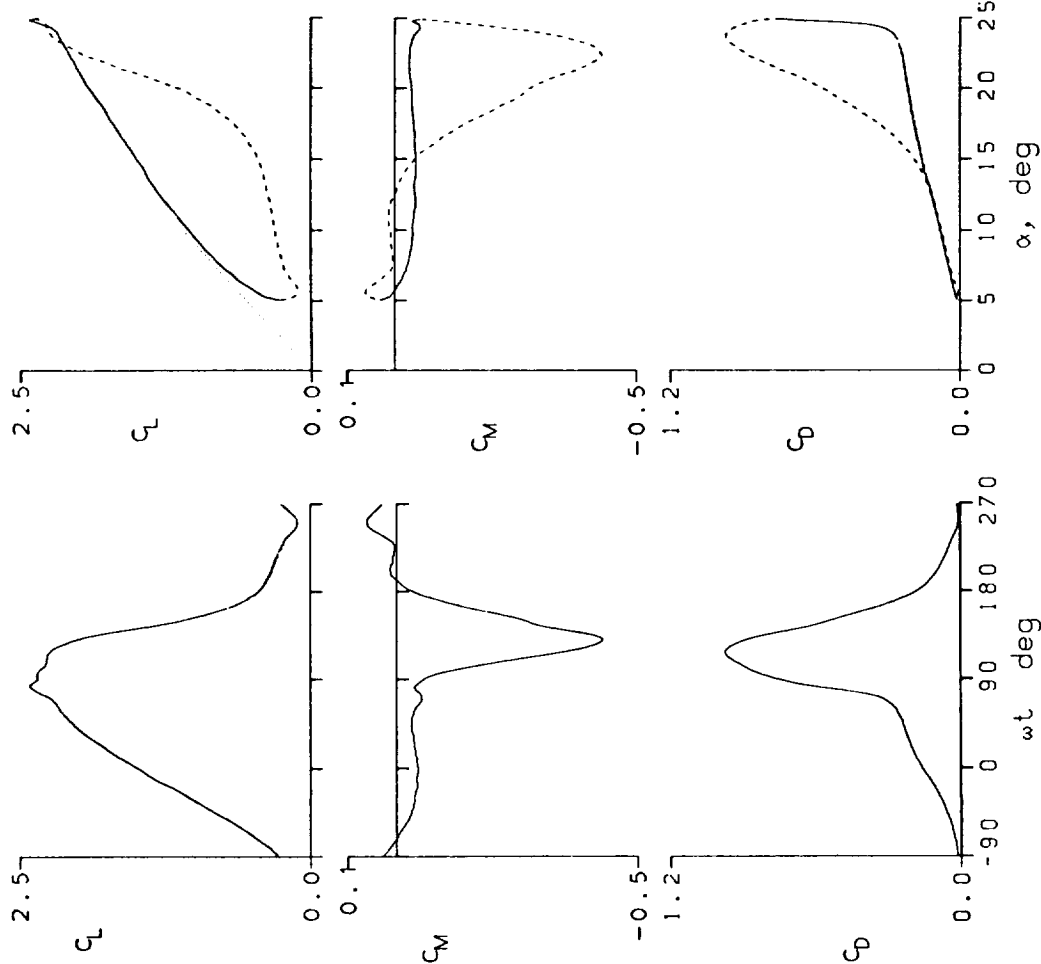


Figure 12.- Continued.

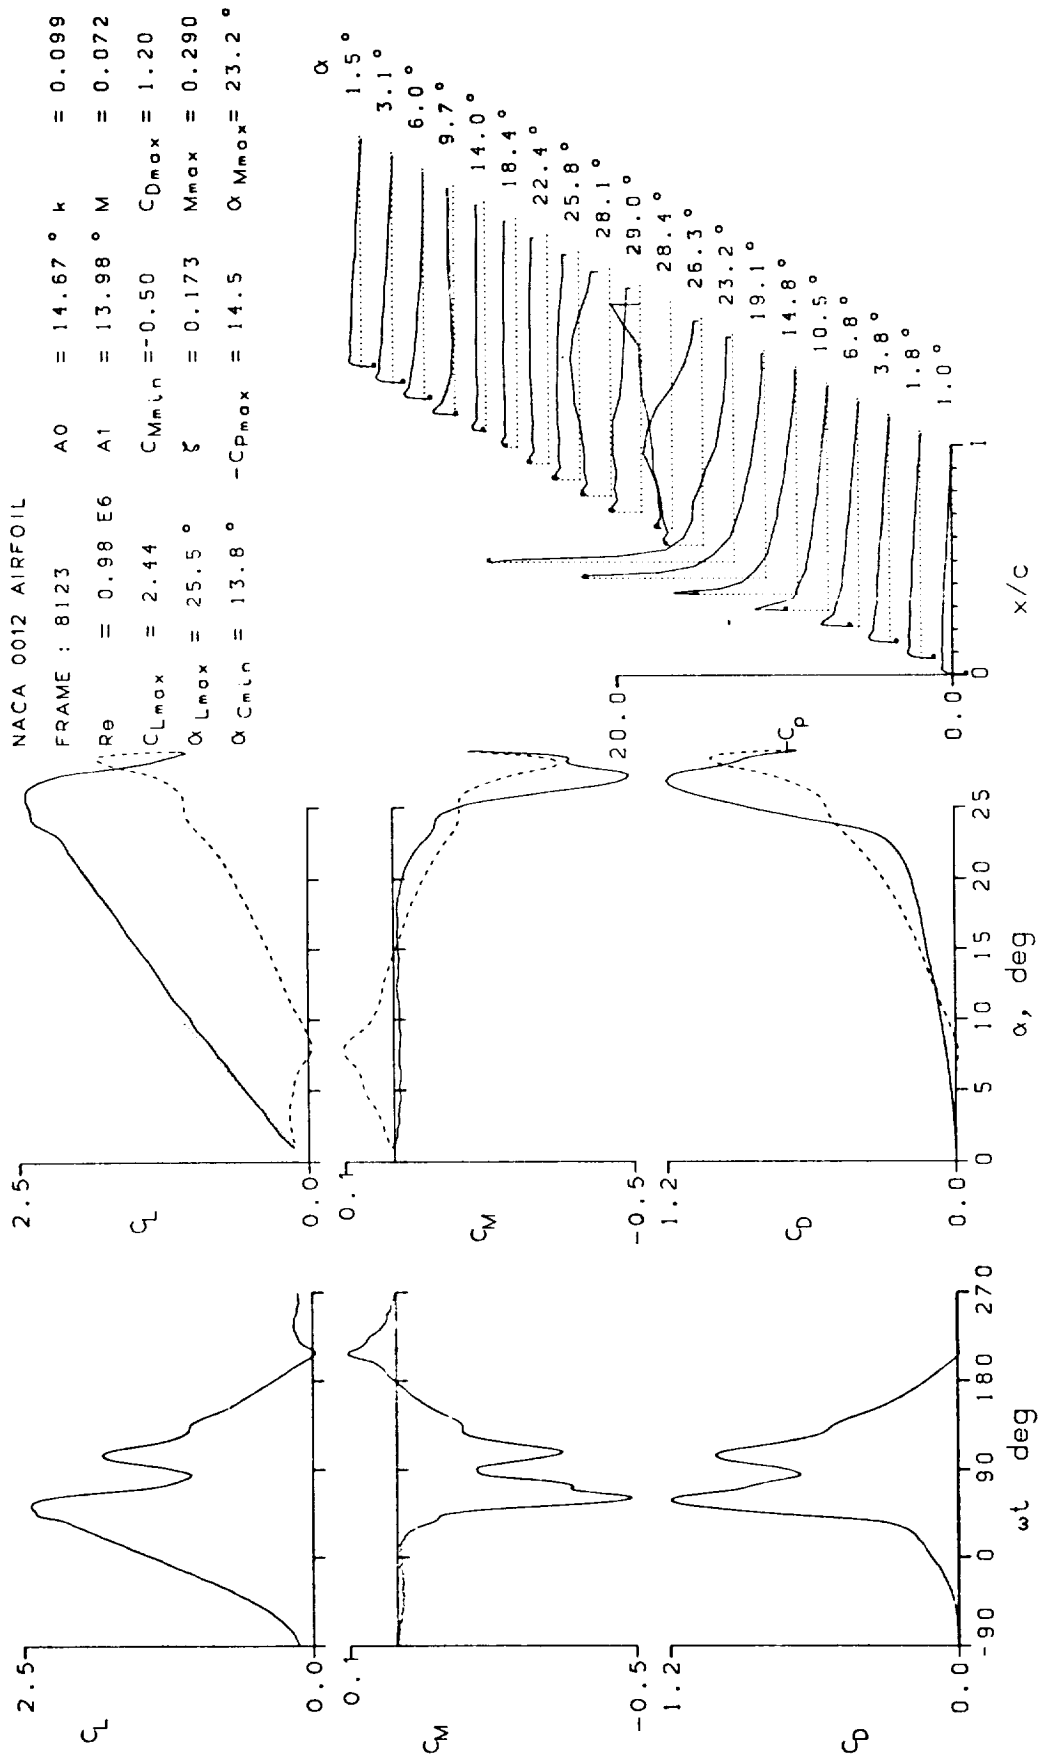


Figure 12.- Continued.

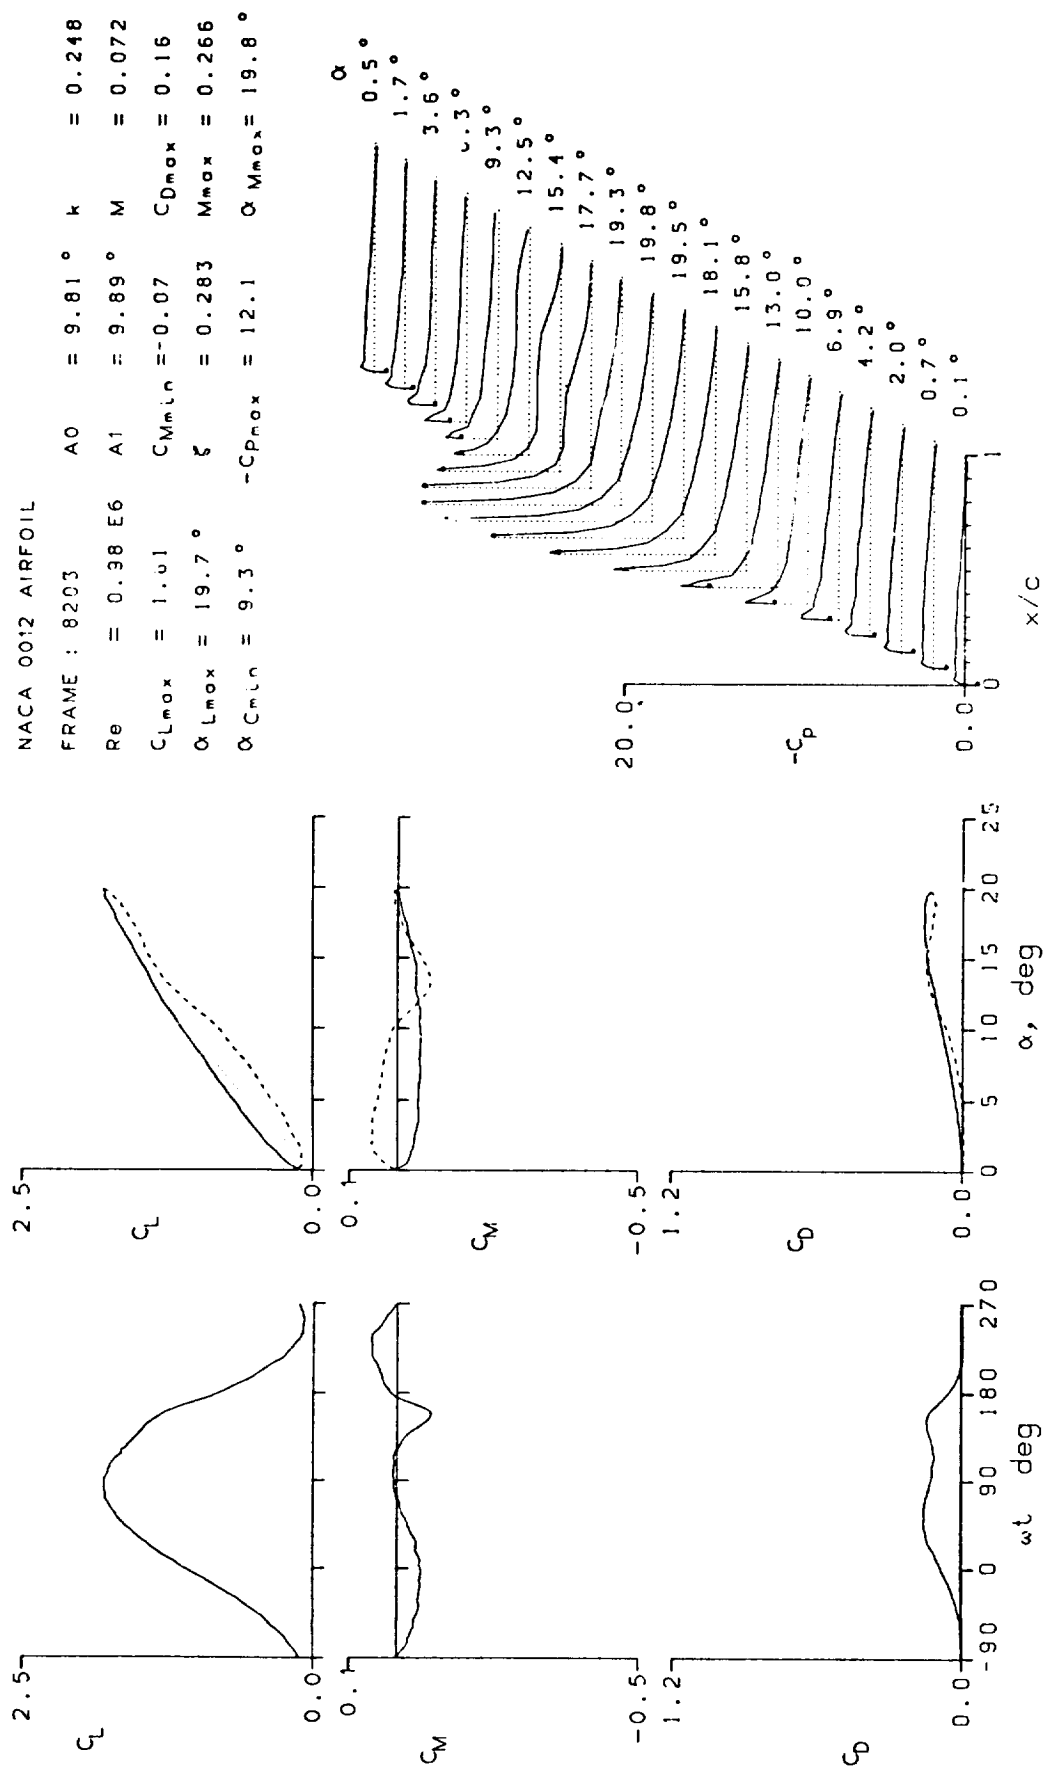


Figure 12.- Continued.


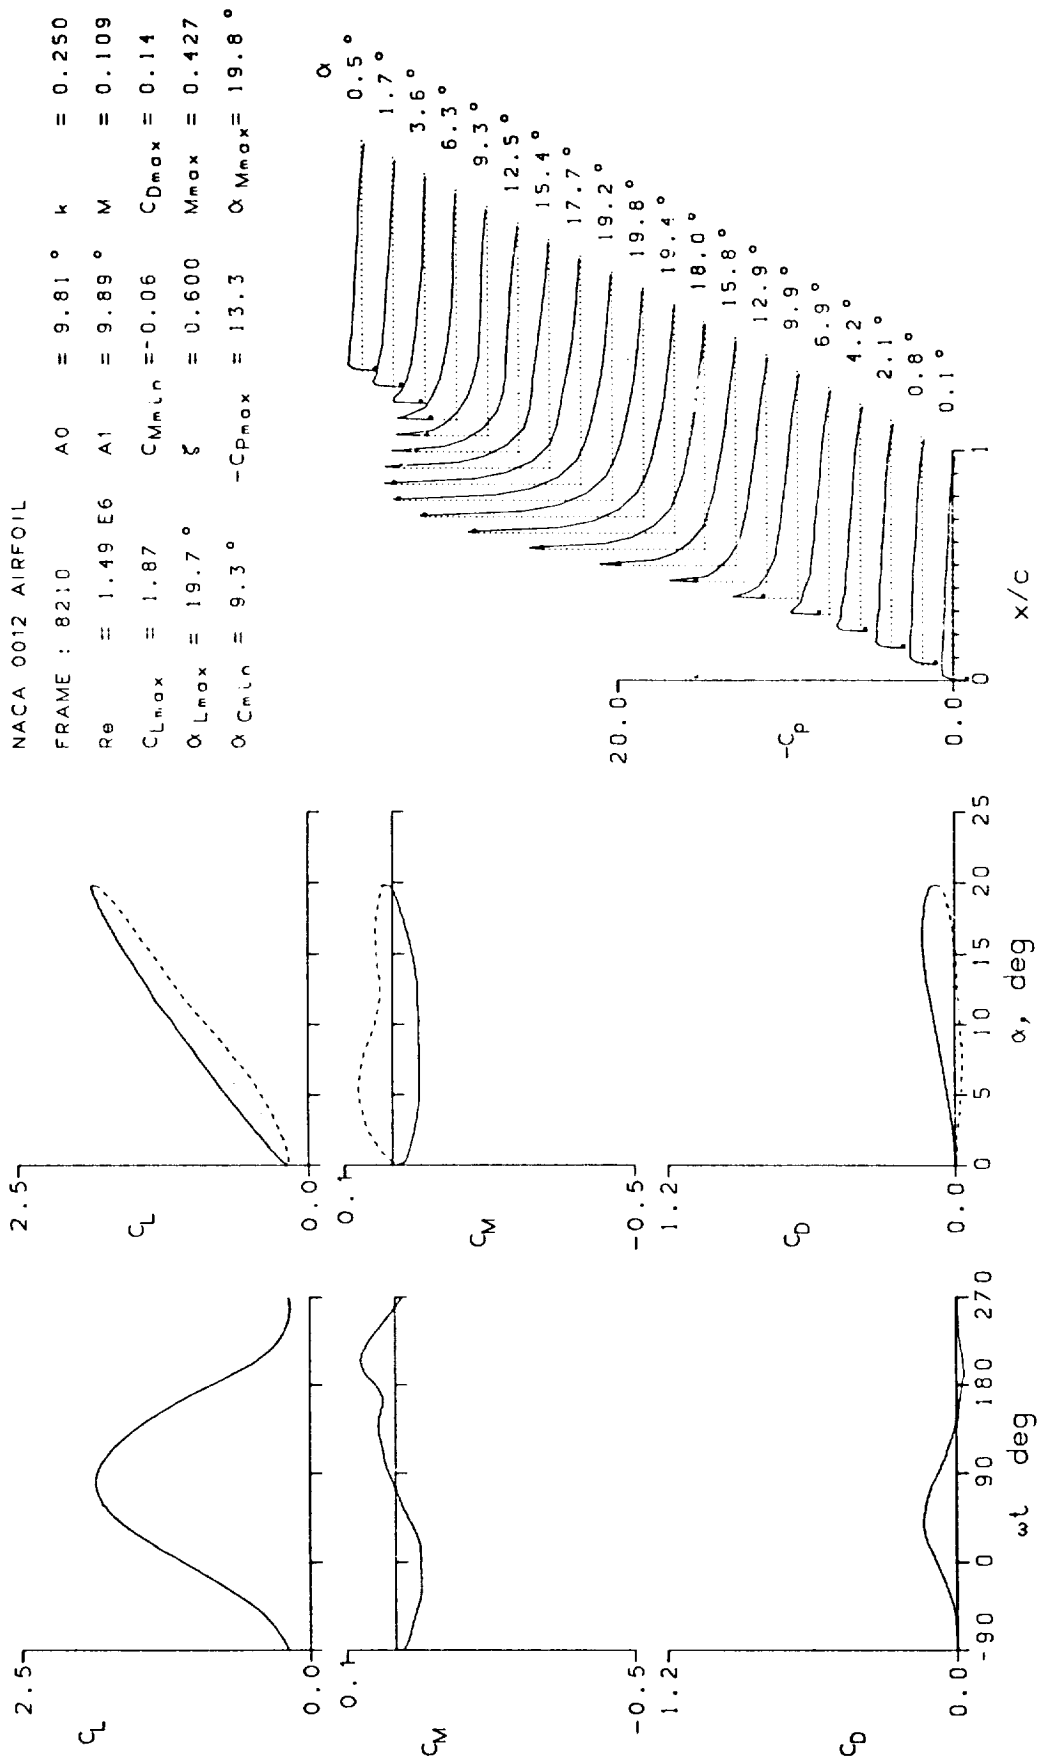


Figure 12.- Continued.

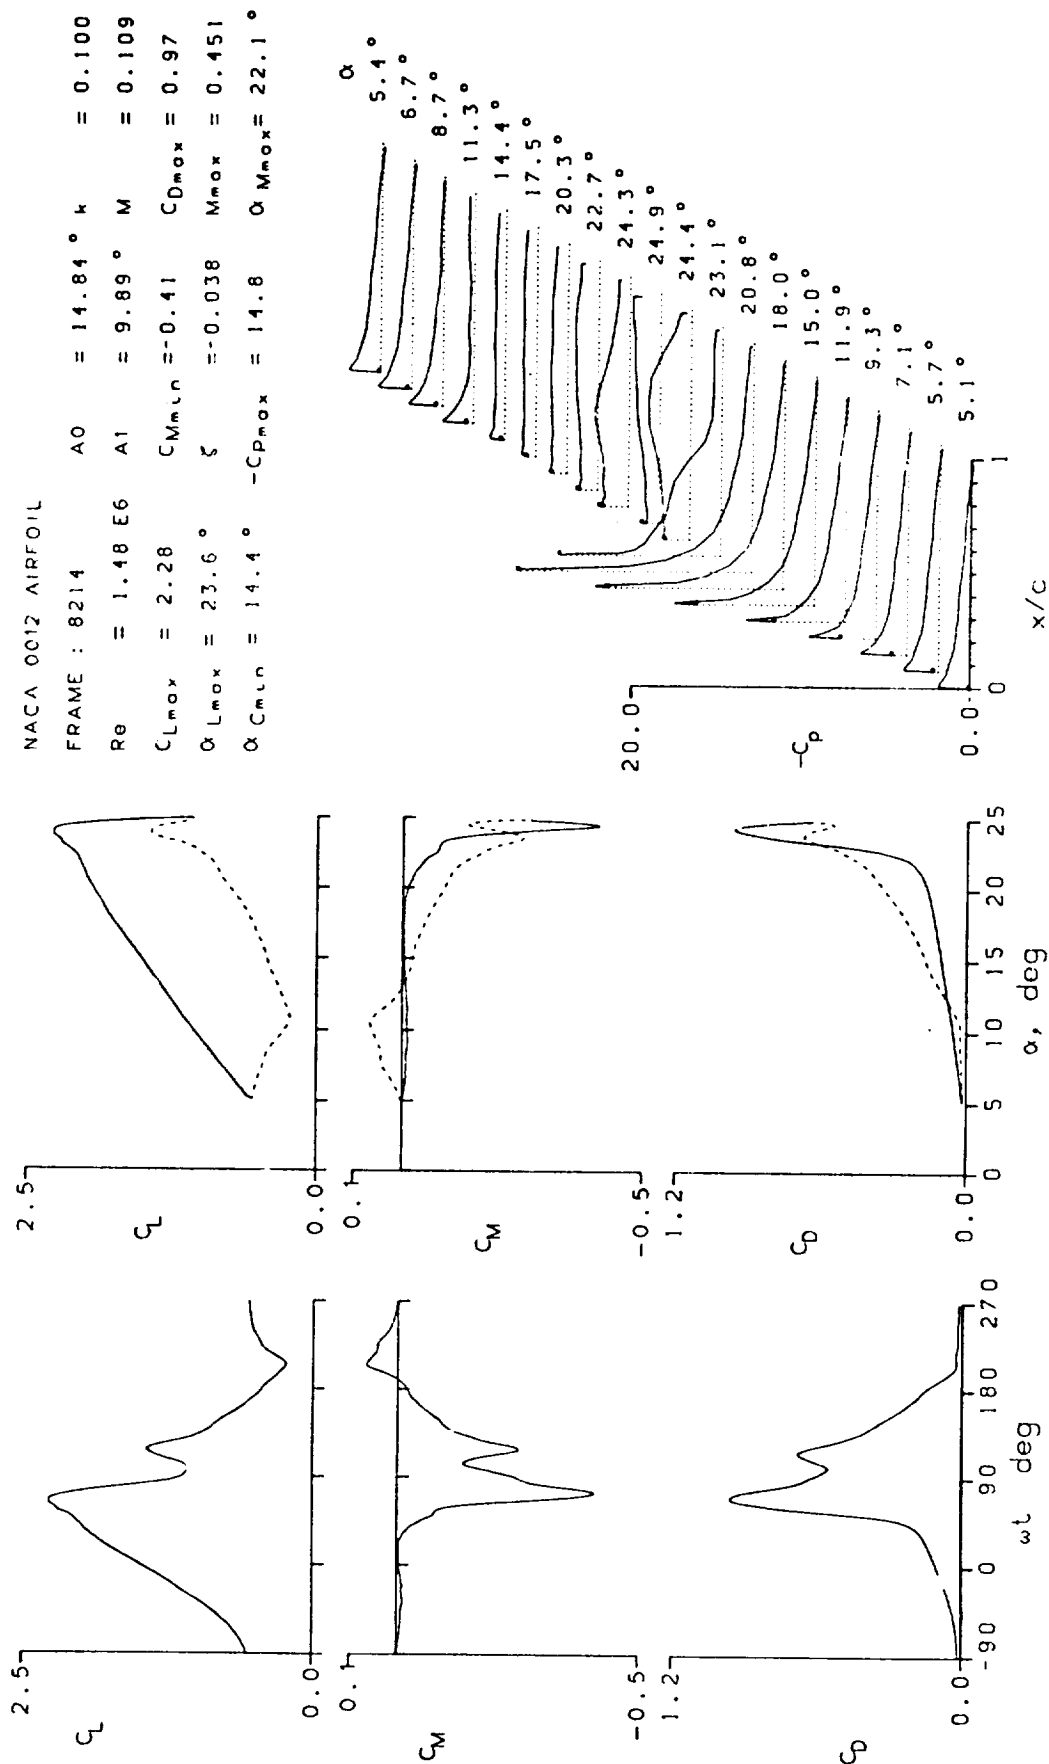

NACA 0012 AIRFOIL

FRAME : 8220	A0 = 14.85 °	k = 0.099
Re = 2.43 E6	A1 = 9.90 °	M = 0.184
CLmax = 2.26	CMmin = -0.41	CDmax = 0.99
αLmax = 24.2 °	ξ = -0.104	Mmax = 0.905
αCmin = 14.4 °	-CPmax = 16.9	αMmax = 22.3 °

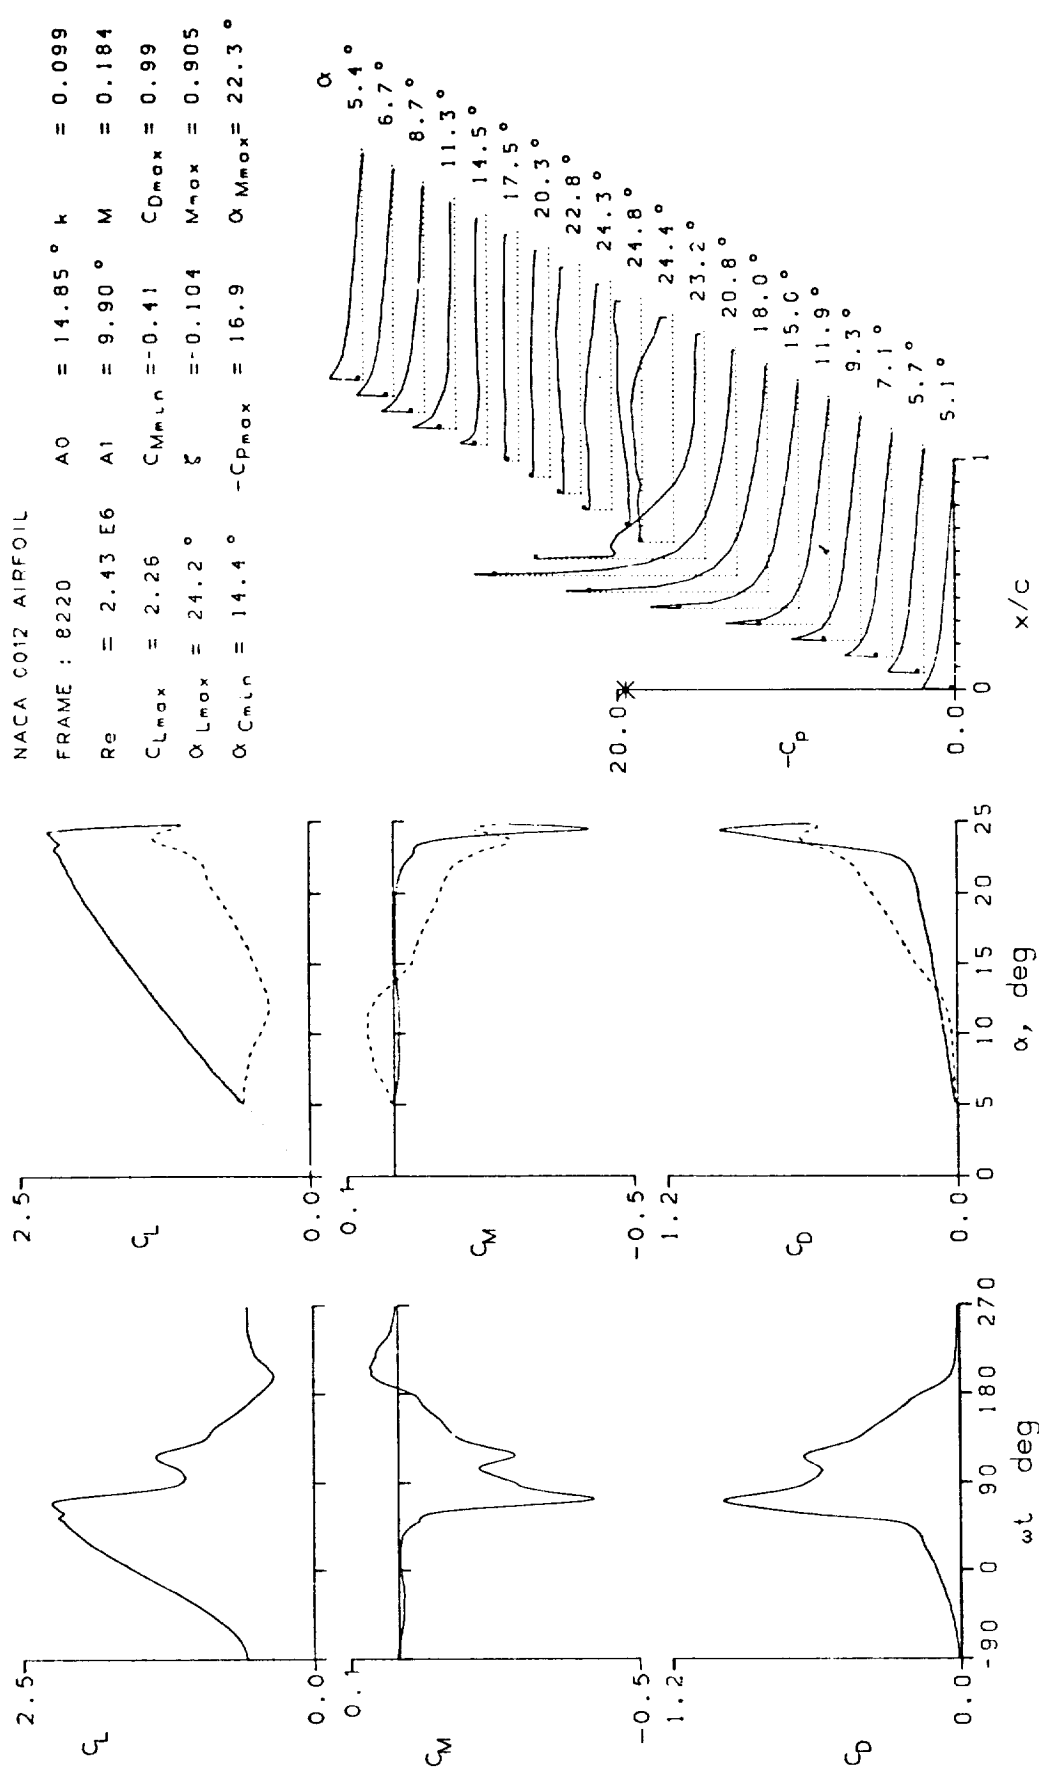


Figure 12.- Continued.

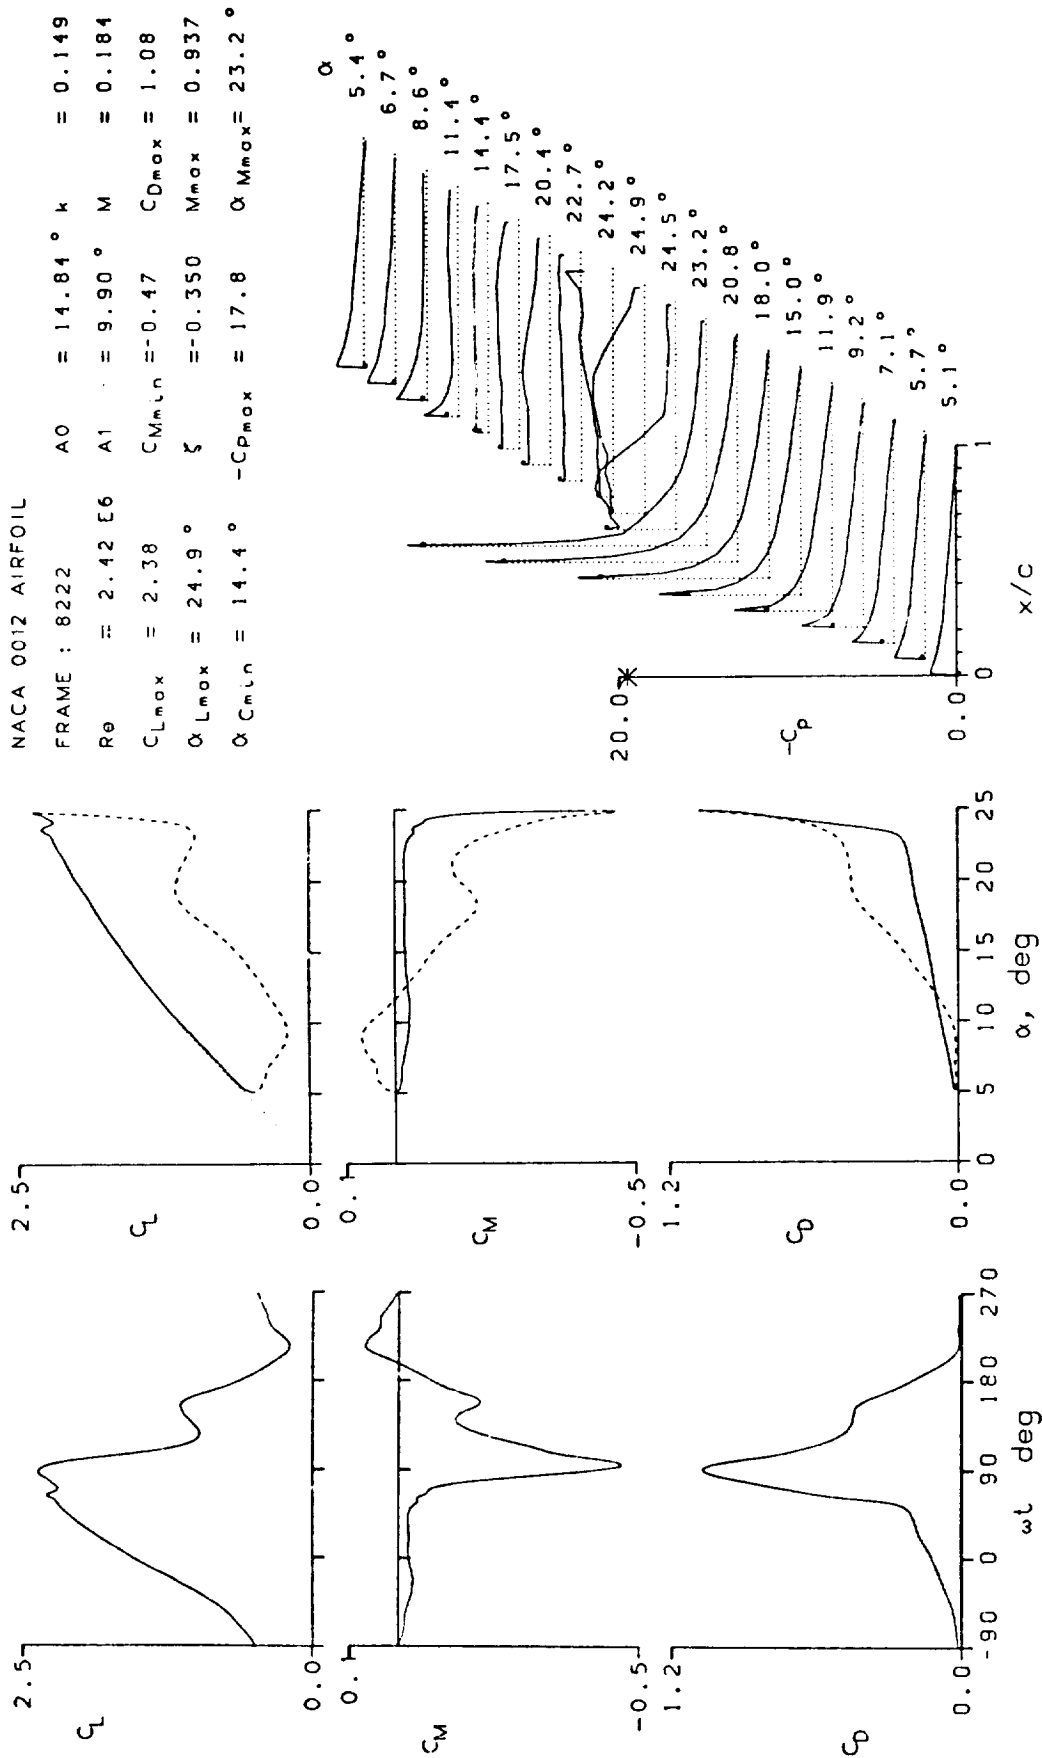


Figure 12.- Continued.

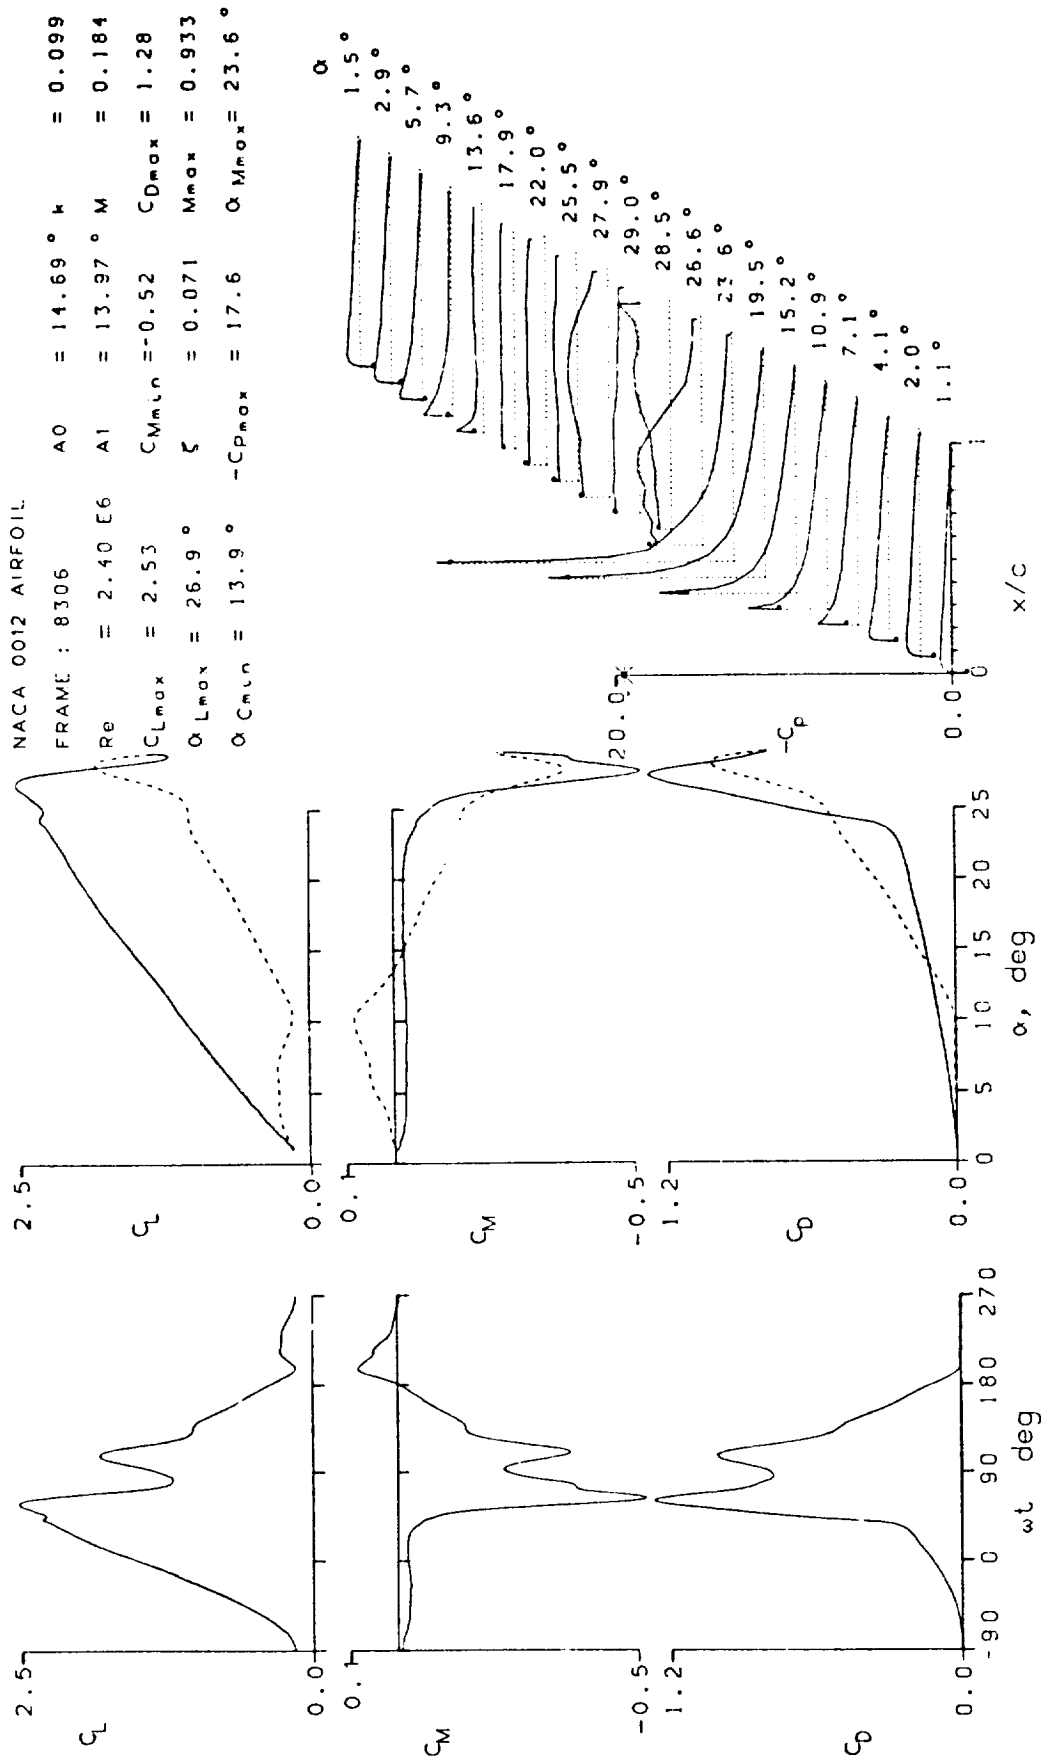


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 9022	A0 = 14.89 °	k = 0.235
Re = 2.36 E6	A1 = 6.00 °	M = 0.184
C _{Lmax} = 2.06	C _{Mmin} = -0.20	C _{Dmax} = 0.50
α _{Lmax} = 20.8 °	ξ = -1.068	M _{max} = 0.903
α _{Cmin} = 14.6 °	-C _{pmax} = 15.8	α _{Mmax} = 20.9 °

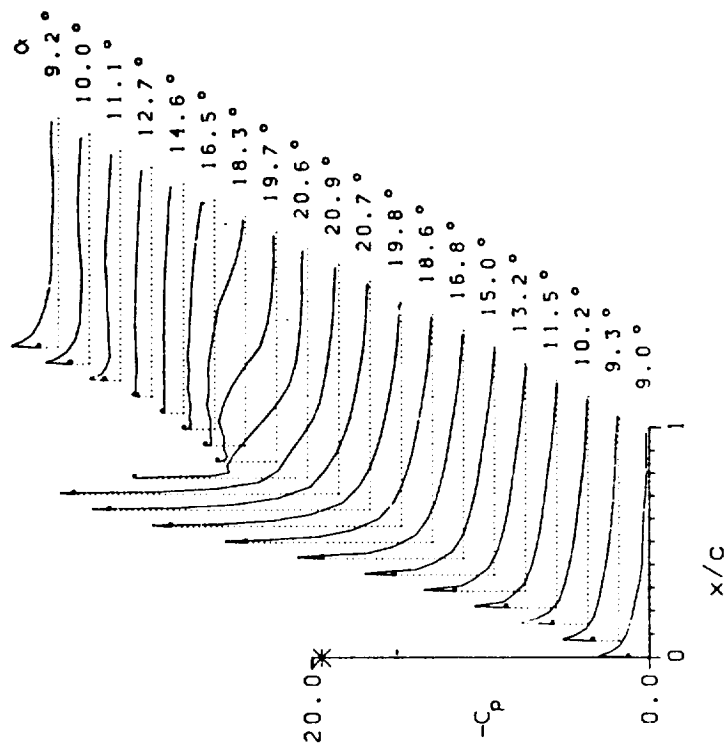
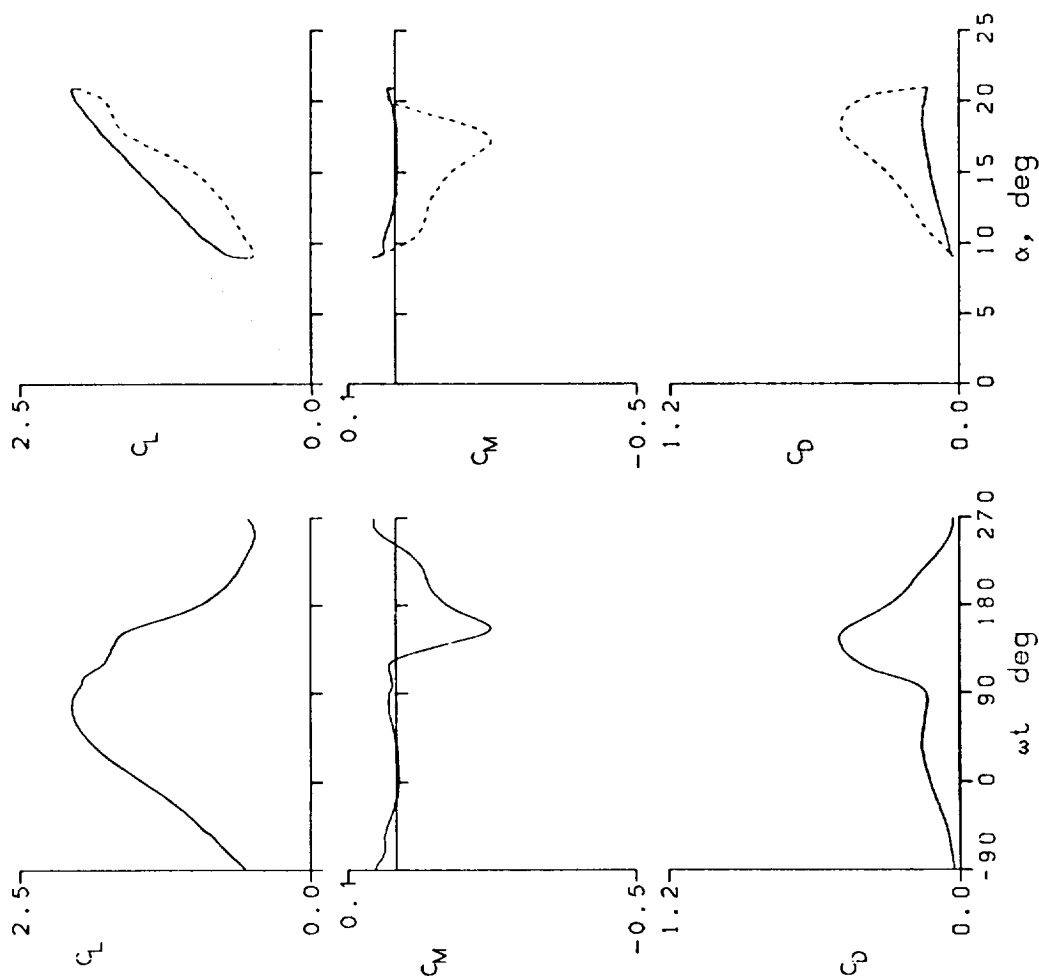


Figure 12.- Continued.

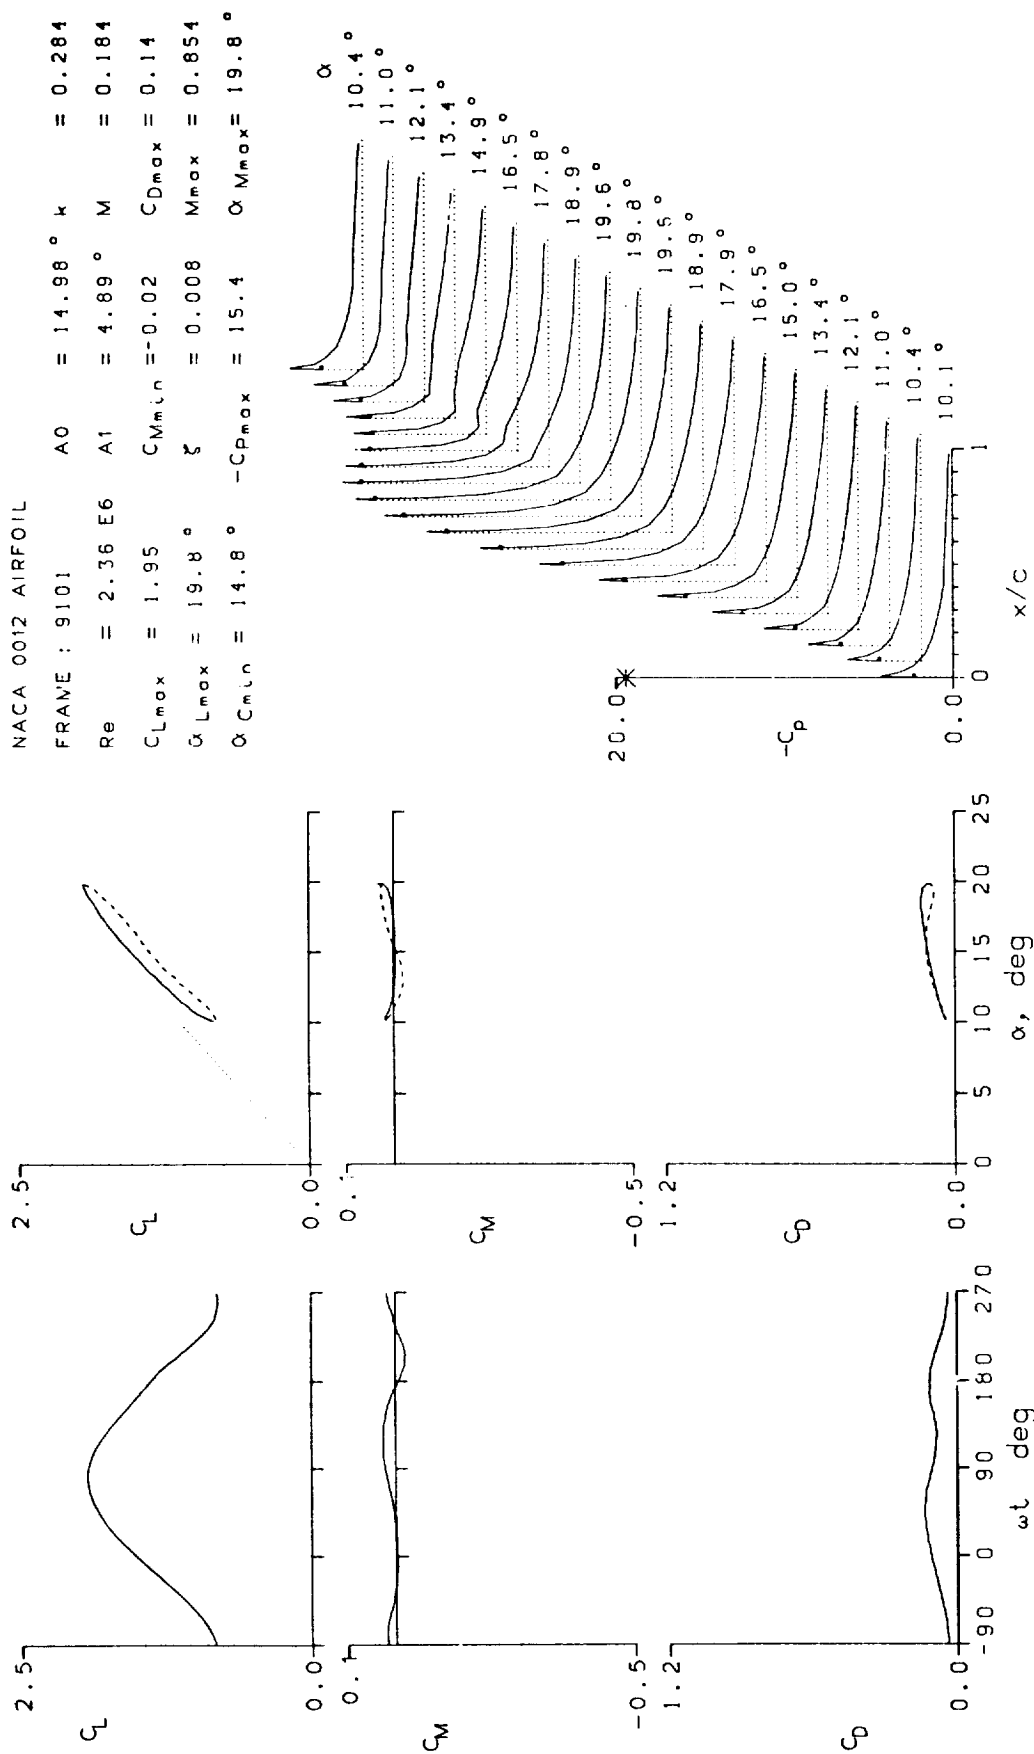


Figure 12.- Continued.

NACA 0012 AIRFOIL
 FRAME : 9106 $A_0 = 9.79^\circ$ $k = 0.245$
 $Re = 2.37 \text{ E} 6$ $A_1 = 9.87^\circ$ $M = 0.184$
 $C_{Lmax} = 2.02$ $C_{Mmin} = -0.05$ $C_{Dmax} = 0.16$
 $\alpha_{Lmax} = 19.7^\circ$ $\xi = 0.58$ $M_{max} = 0.883$
 $\alpha_{Cmin} = 9.4^\circ$ $-C_{Dmax} = 16.2$ $\alpha_{Mmax} = 19.5^\circ$

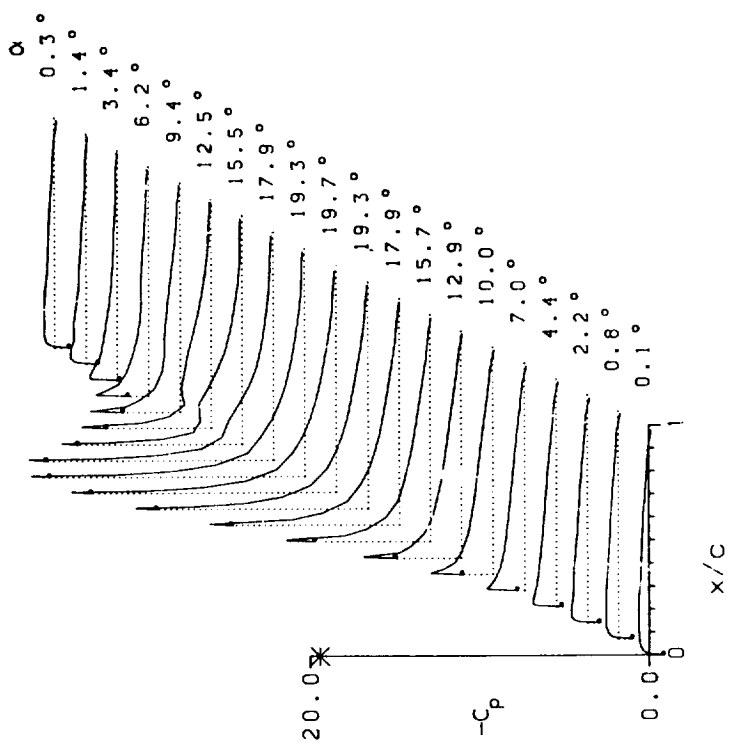
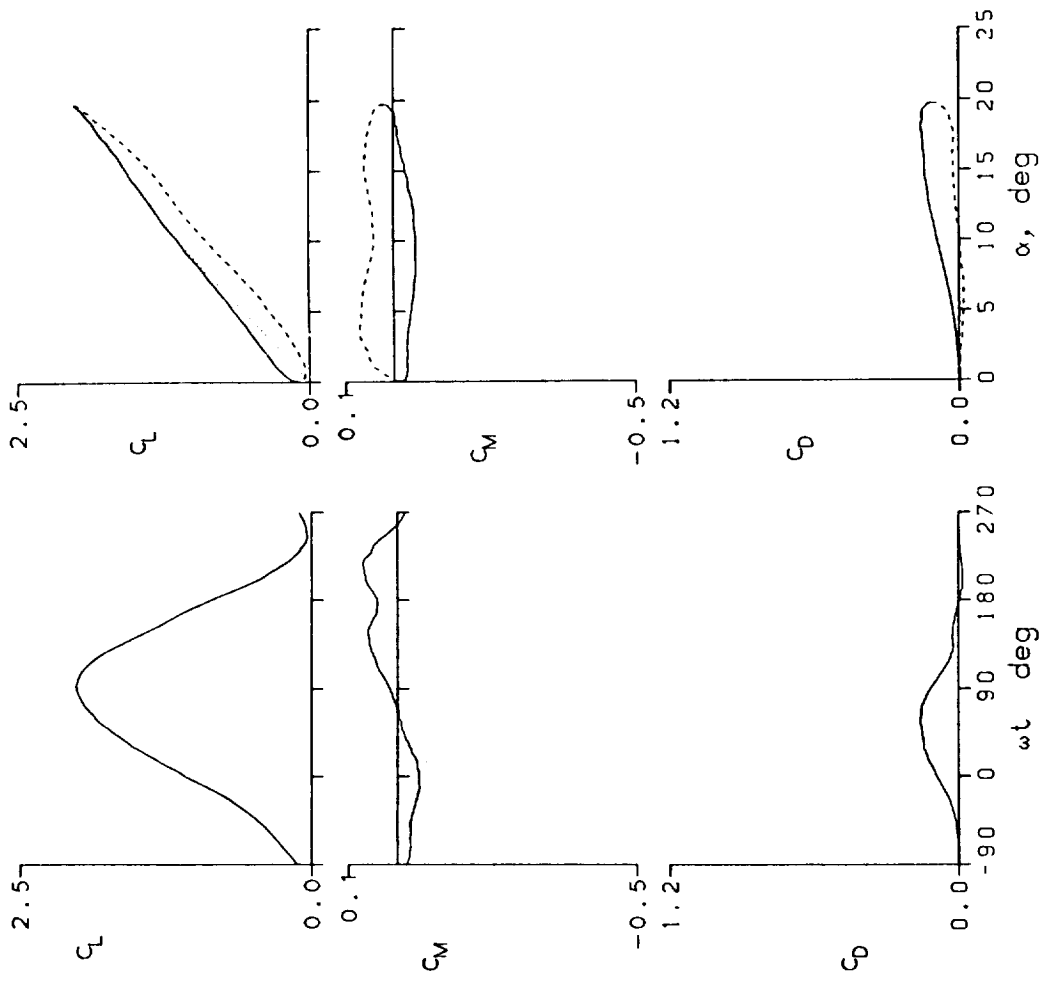


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 9110	A0 = 7.80 °	k = 0.010
Re = 2.48 E6	A1 = 9.95 °	M = 0.184
$C_{Lmax} = 1.70$	$C_{Mmin} = -0.18$	$C_{Dmax} = 0.36$
$\alpha_{Lmax} = 16.6 °$	$\xi = -0.130$	$M_{max} = 0.726$
$\alpha_{Cmin} = 7.3 °$	$-C_{pmax} = 11.8$	$\alpha_{Mmax} = 17.0 °$

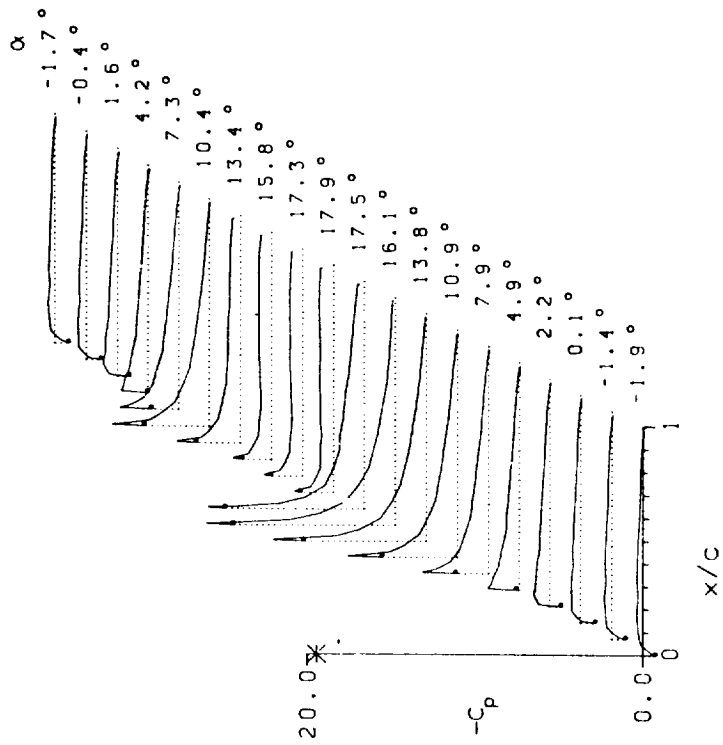
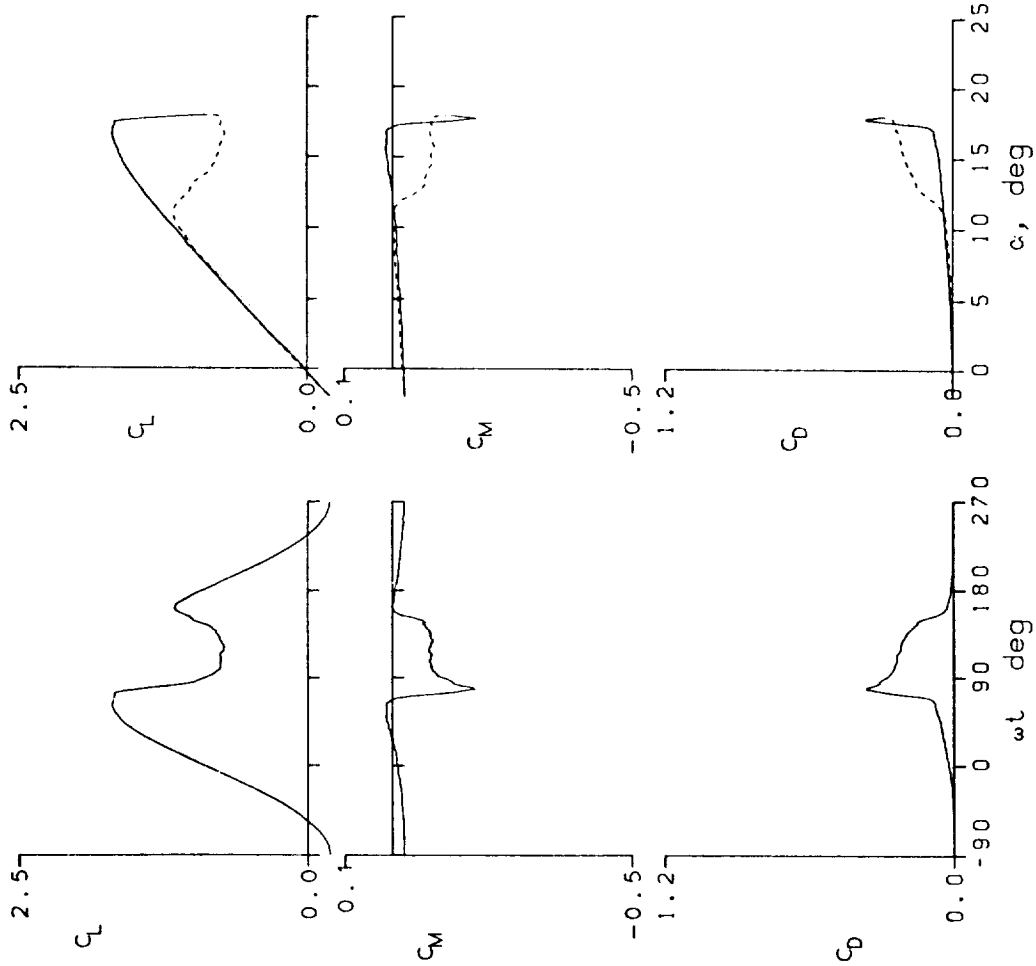


Figure 12.- Continued.

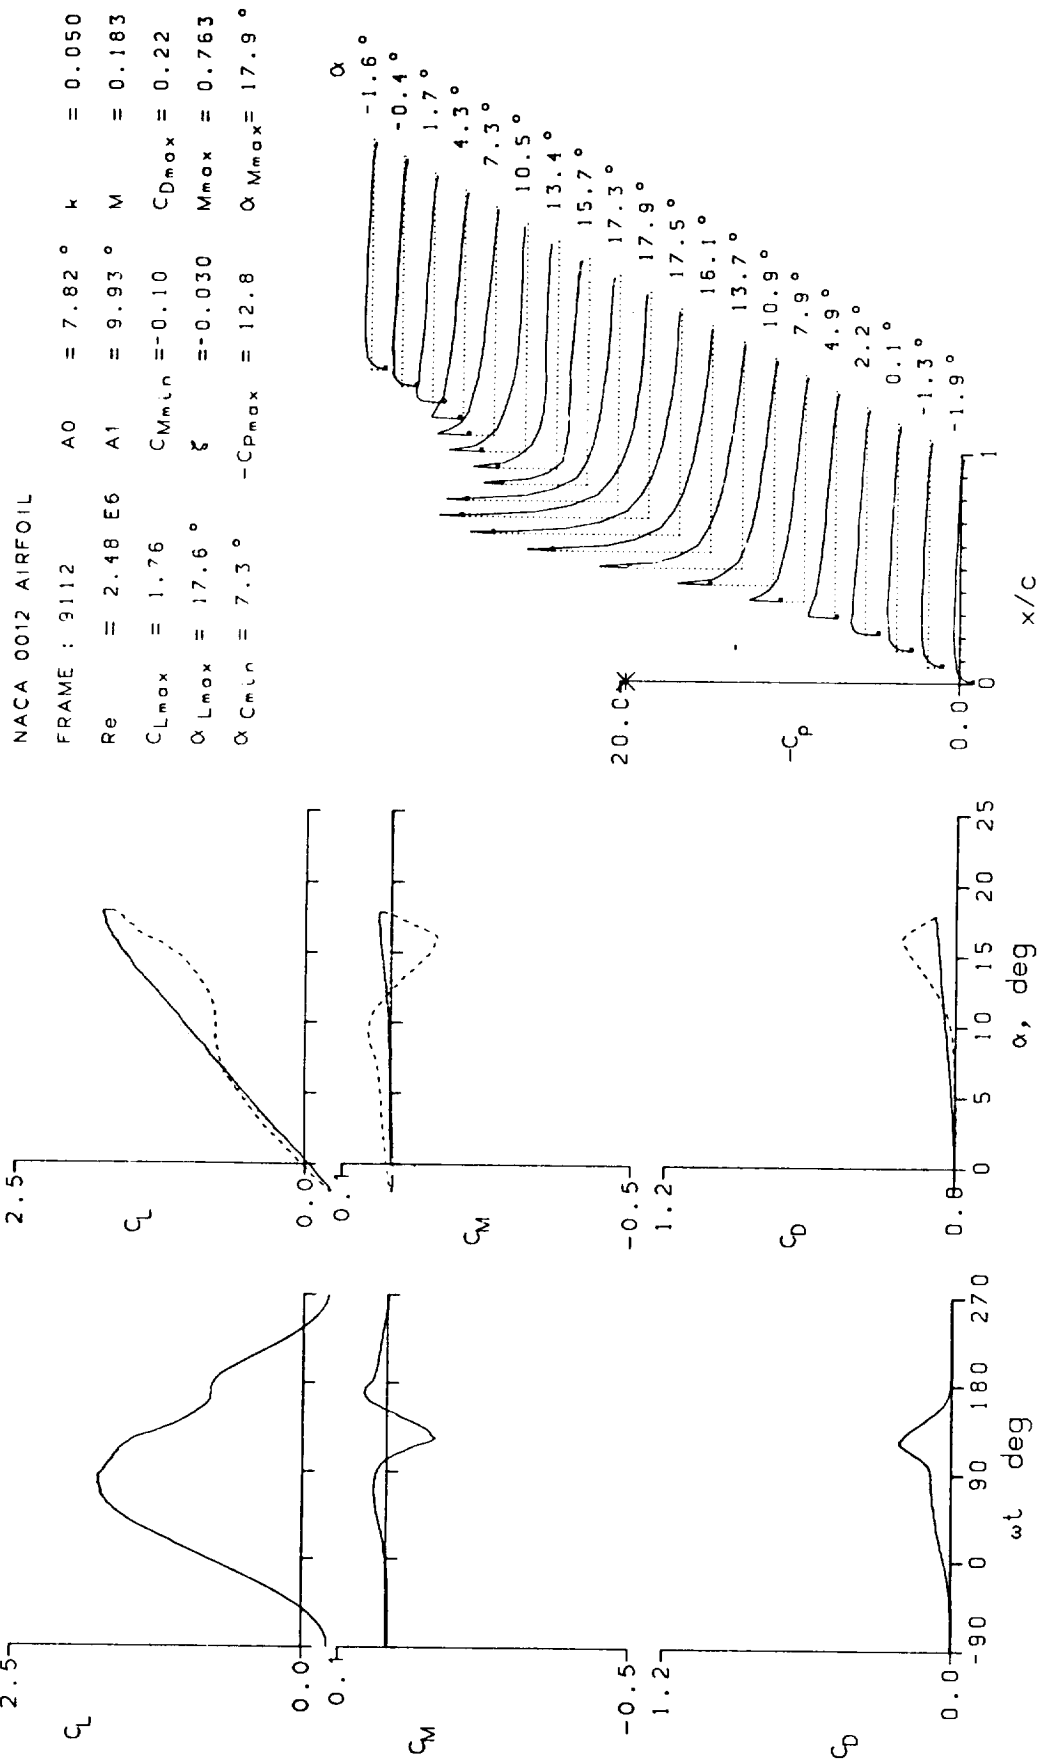


Figure 12.- Continued.

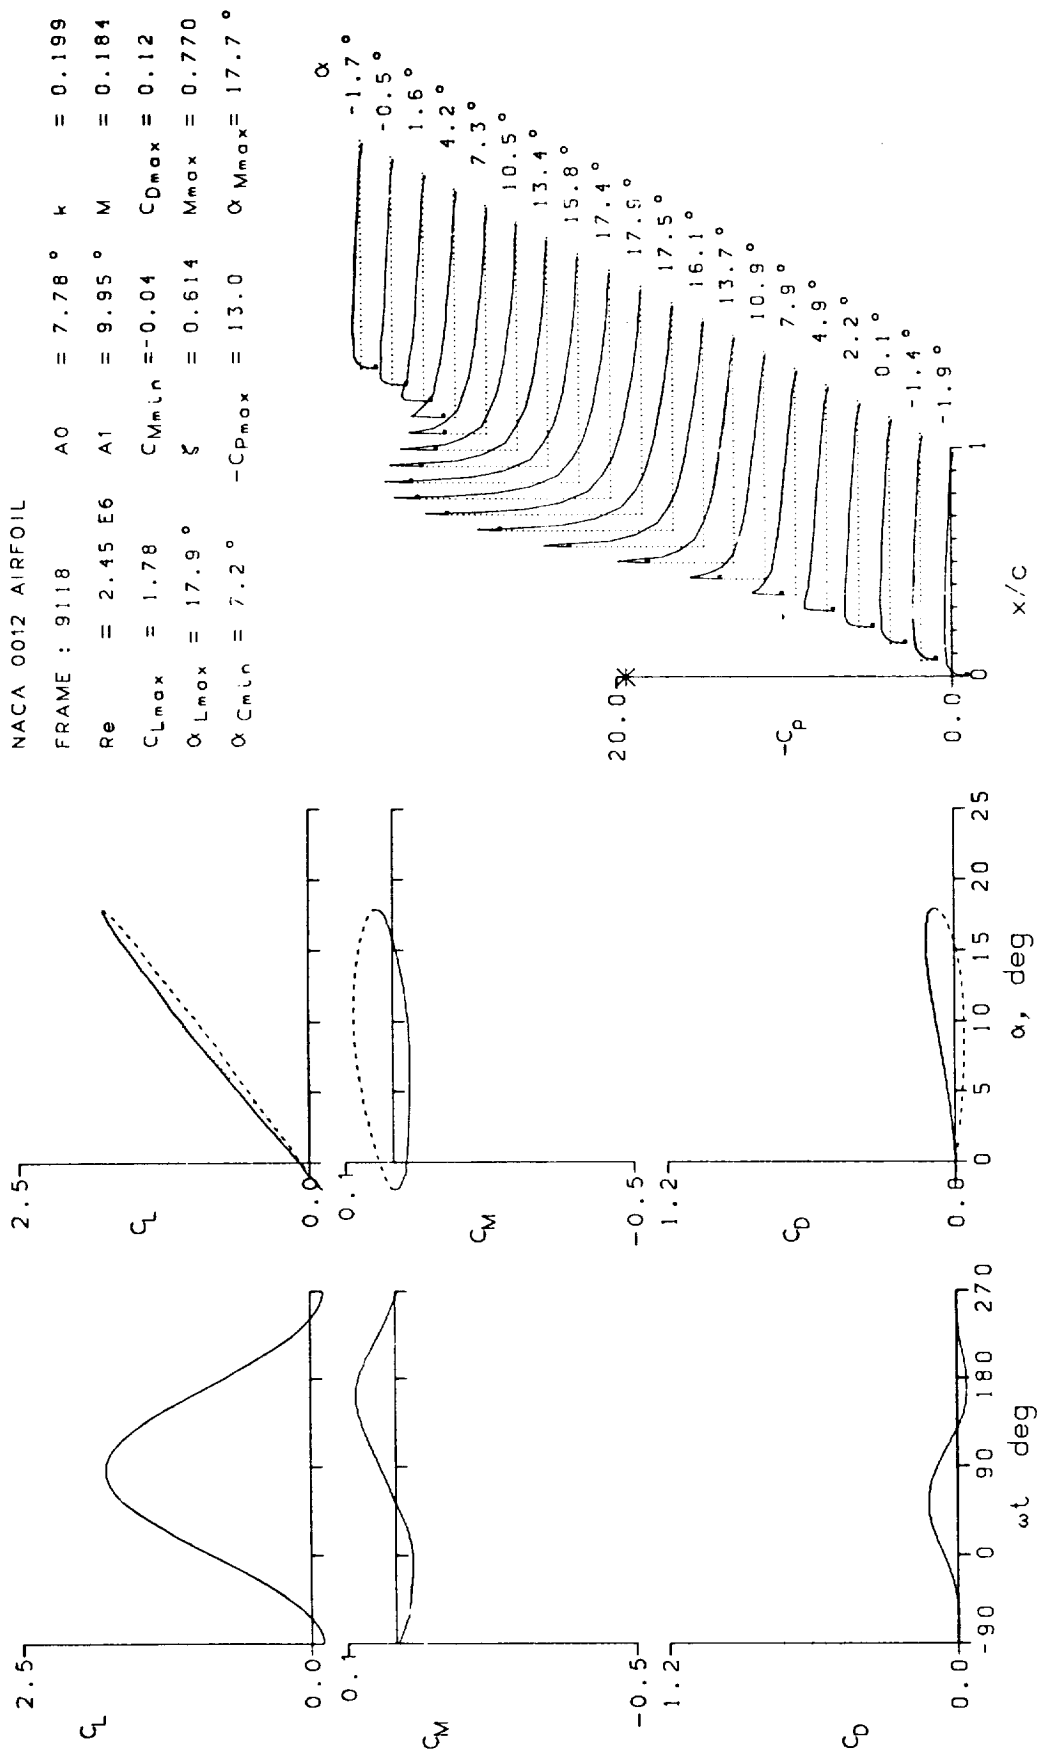


Figure 12.- Continued.

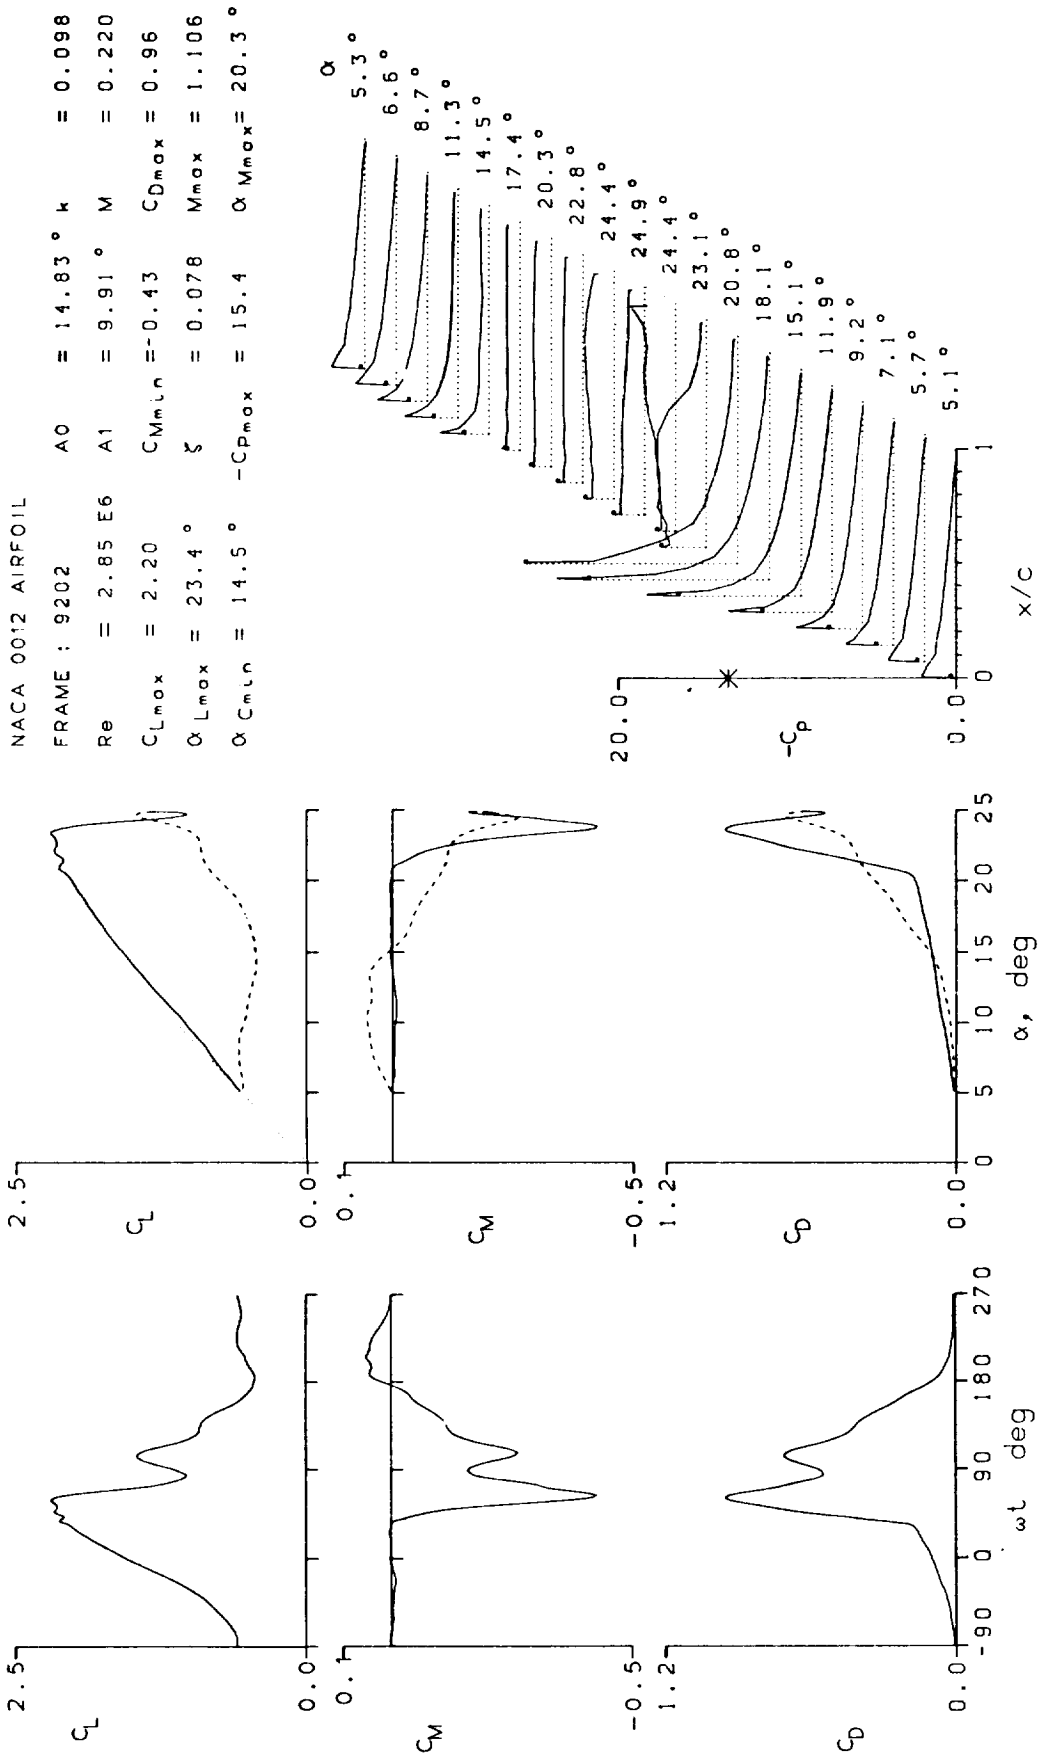


Figure 12.- Continued.

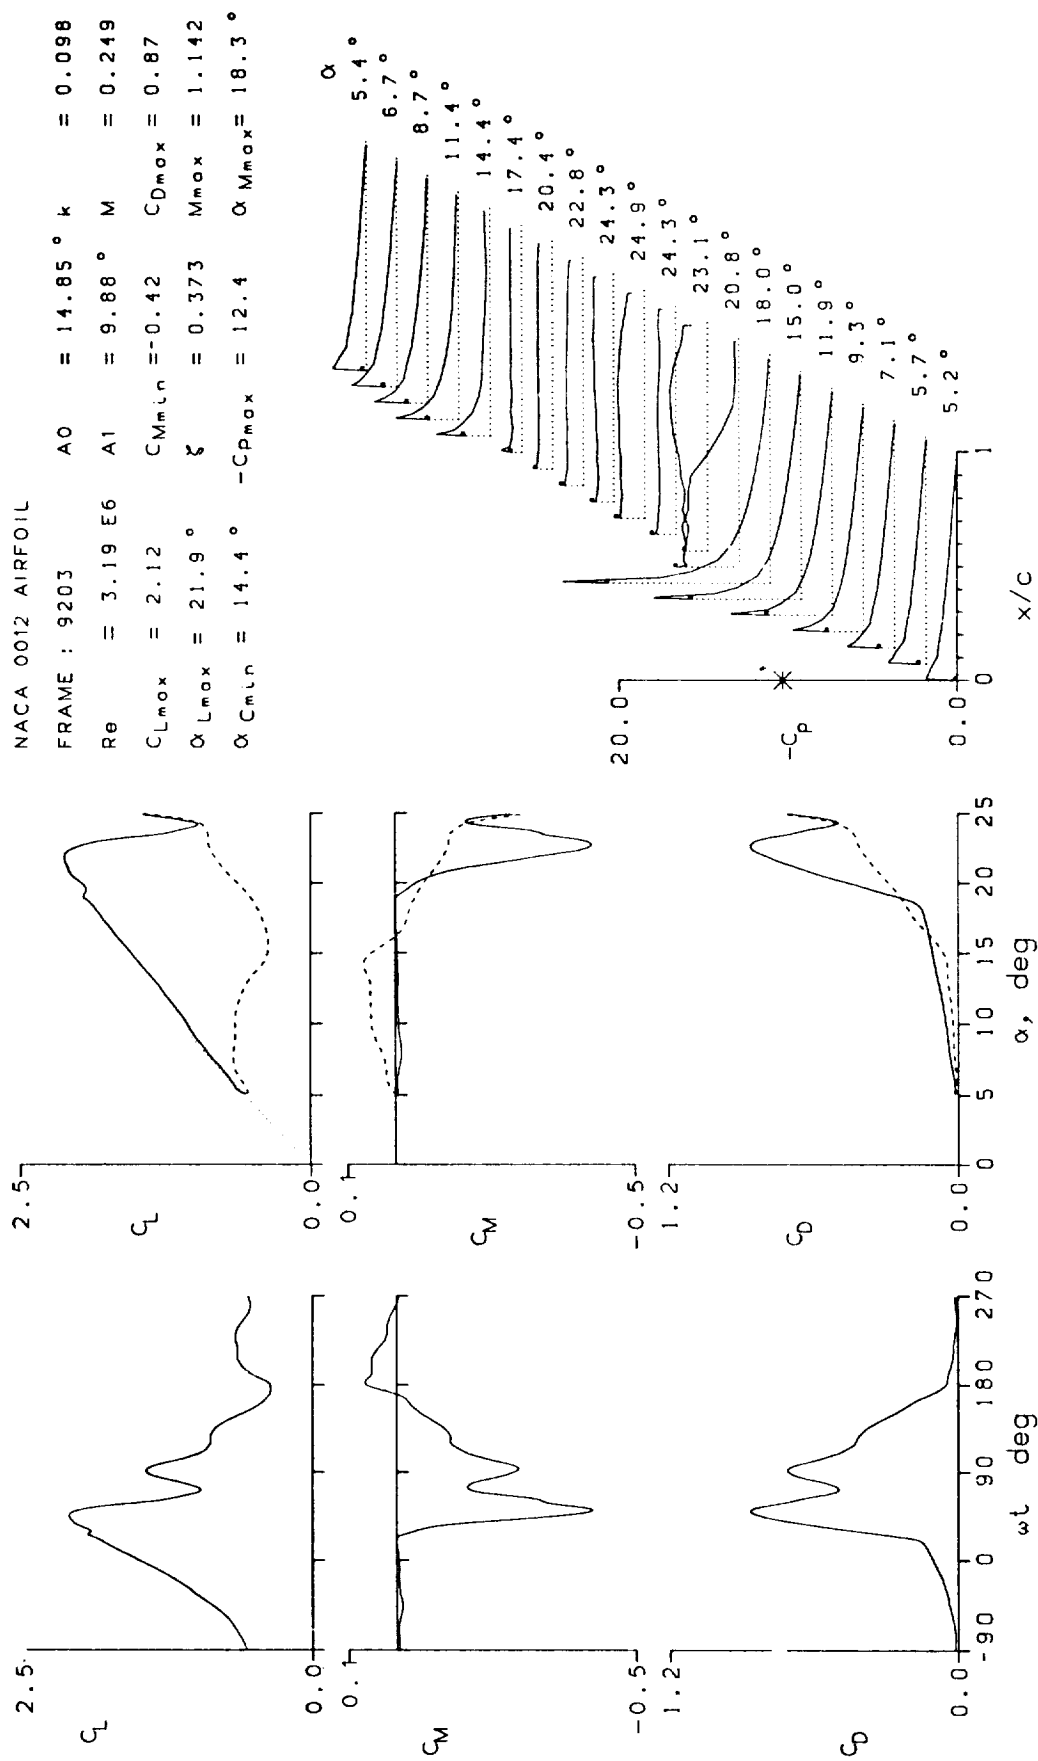


Figure 12.- Continued.

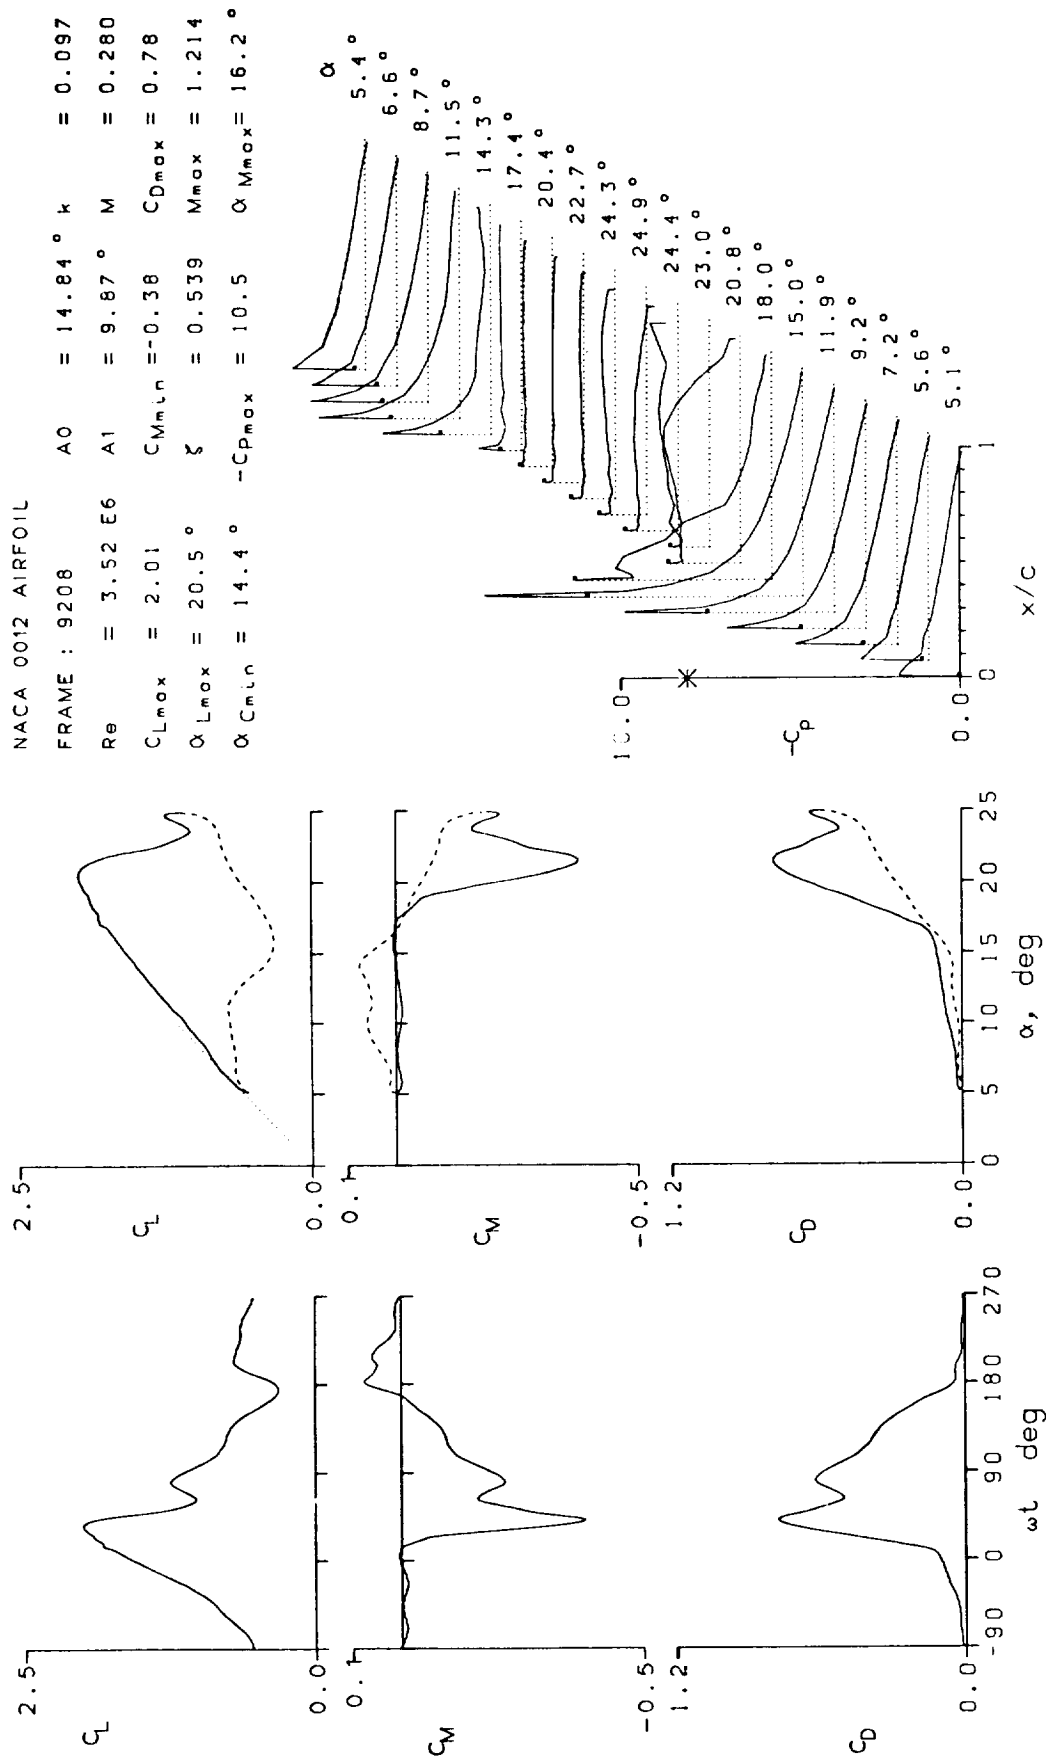


Figure 12.- Continued.

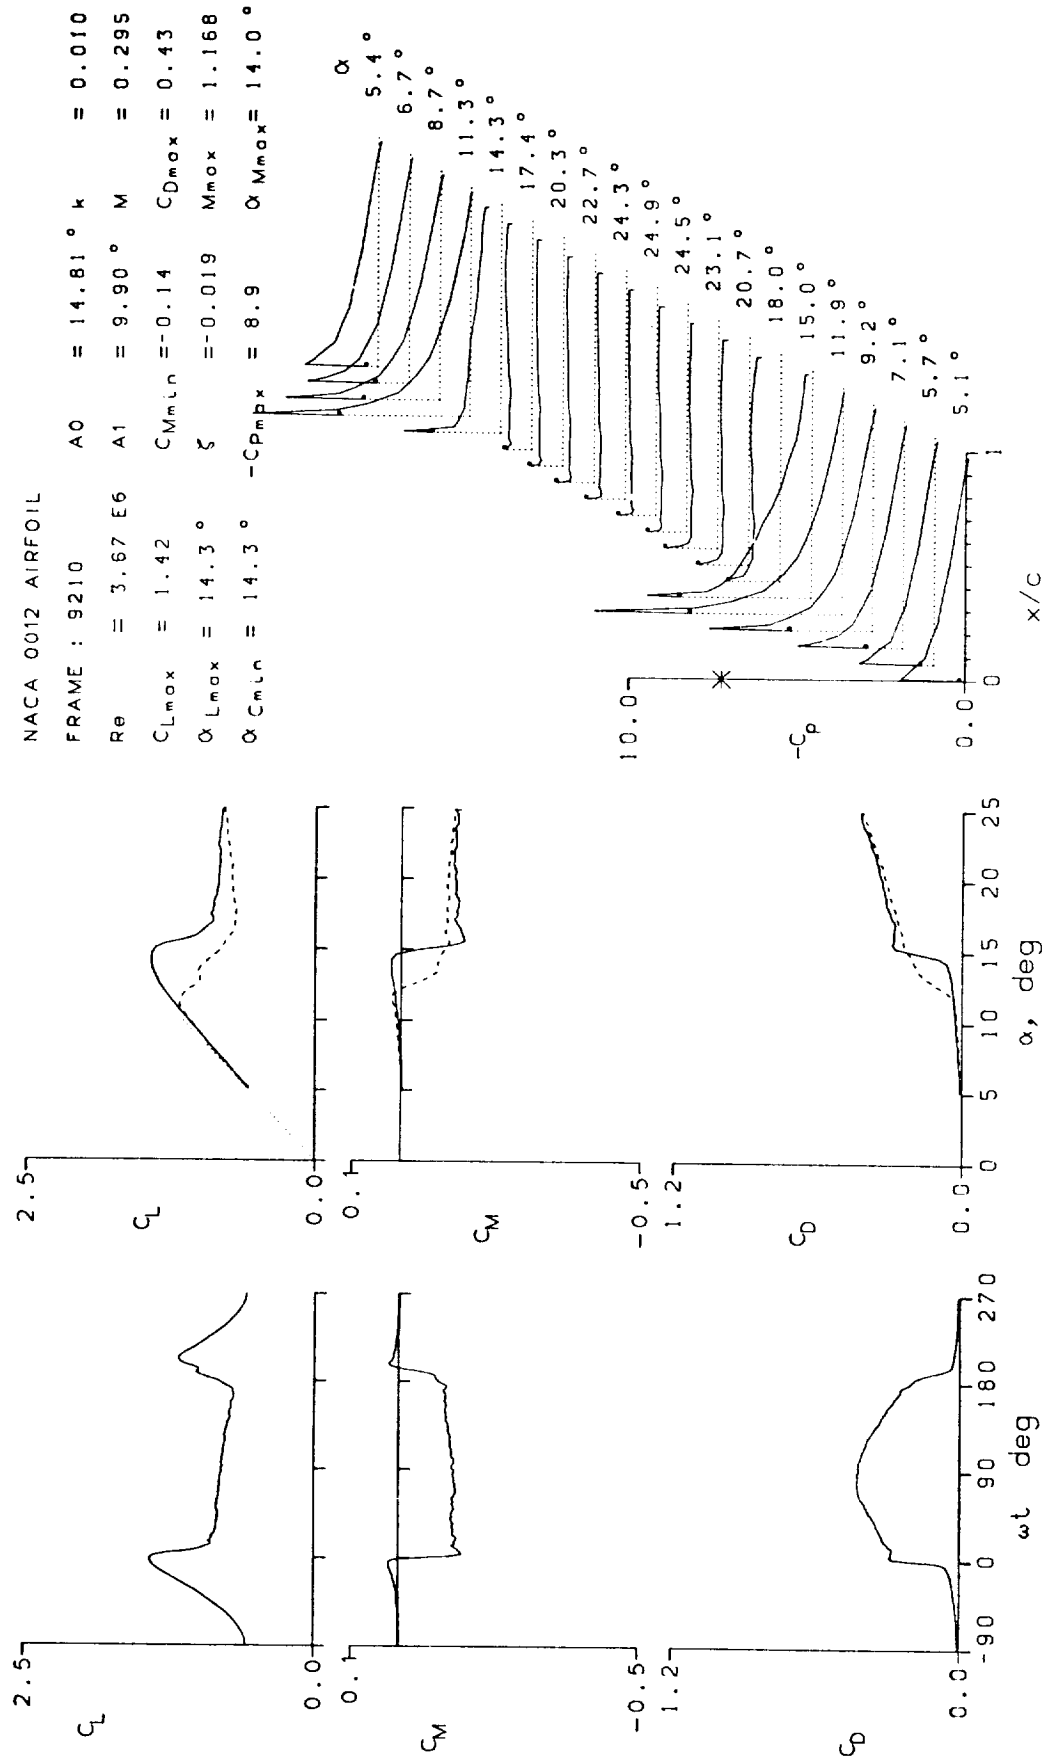


Figure 12.- Continued.

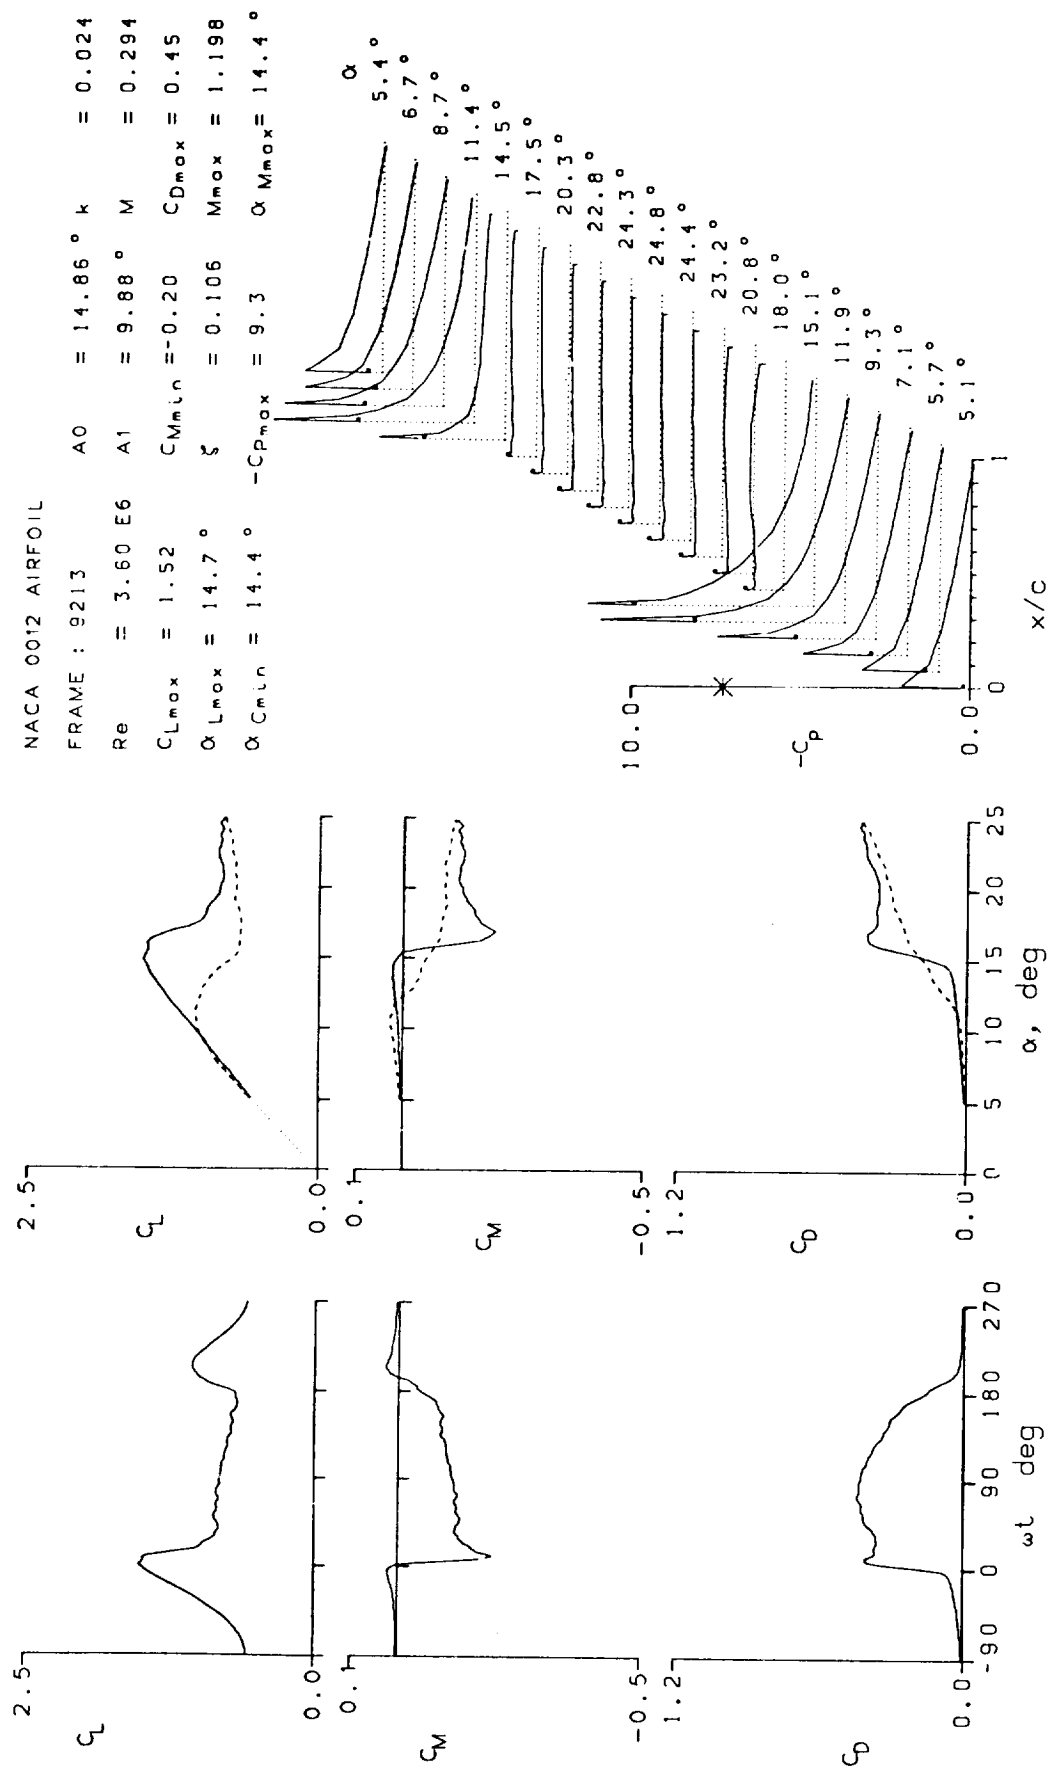


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 9214	A0 = 14.84°	k = 0.049
Re = 3.57 E6	A1 = 9.90°	M = 0.292
C _{Lmax} = 1.71	C _{Mmin} = -0.26	C _{Dmax} = 0.53
α _{Lmax} = 17.5°	ξ = 0.274	M _{max} = 1.215
α _{Cmin} = 14.4°	-C _{pmax} = 9.6	α _{Mmax} = 14.7°

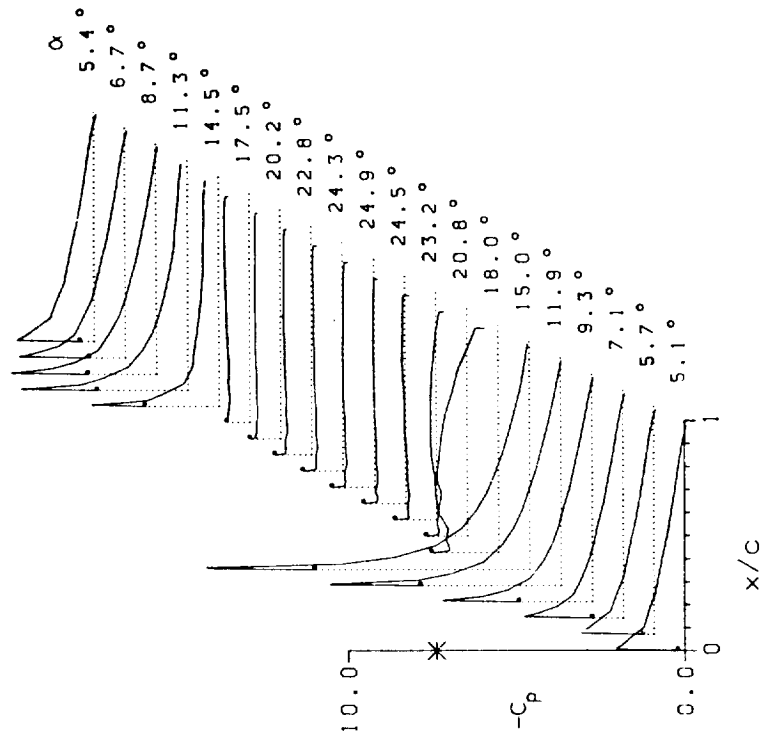
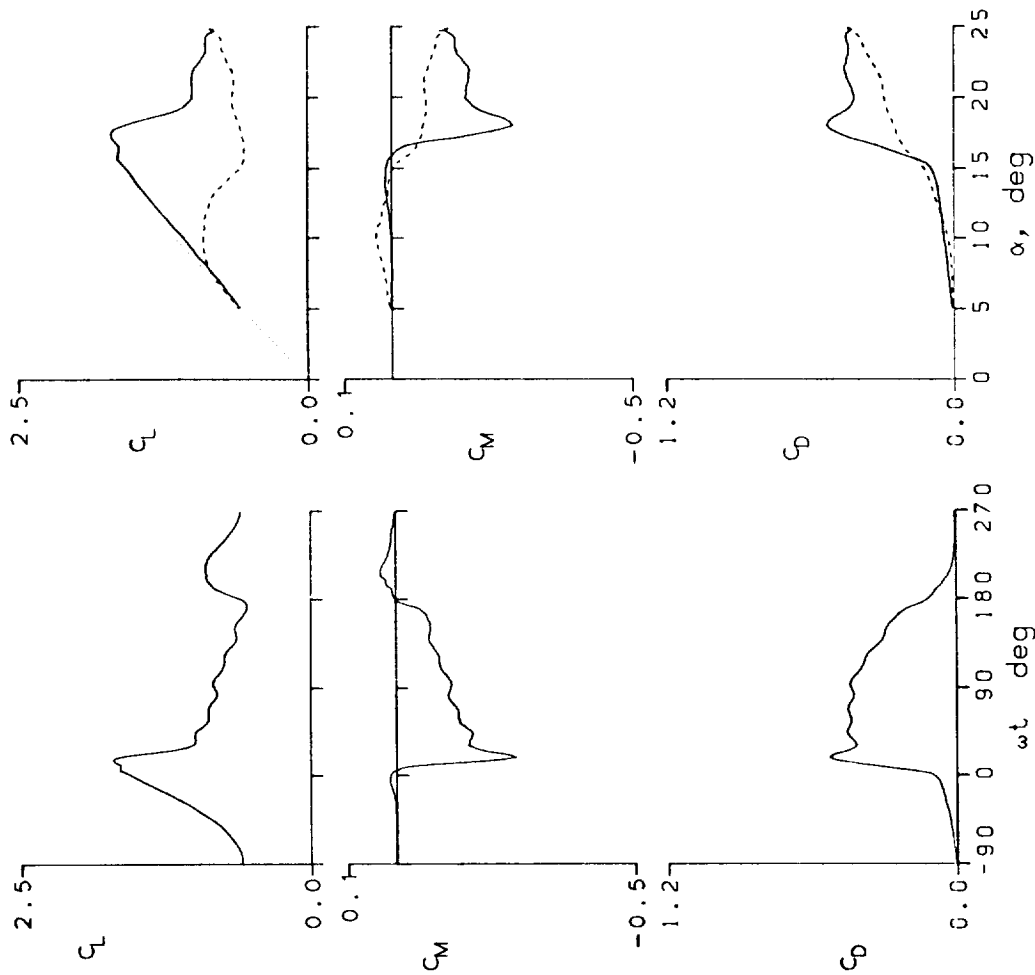


Figure 12.- Continued.

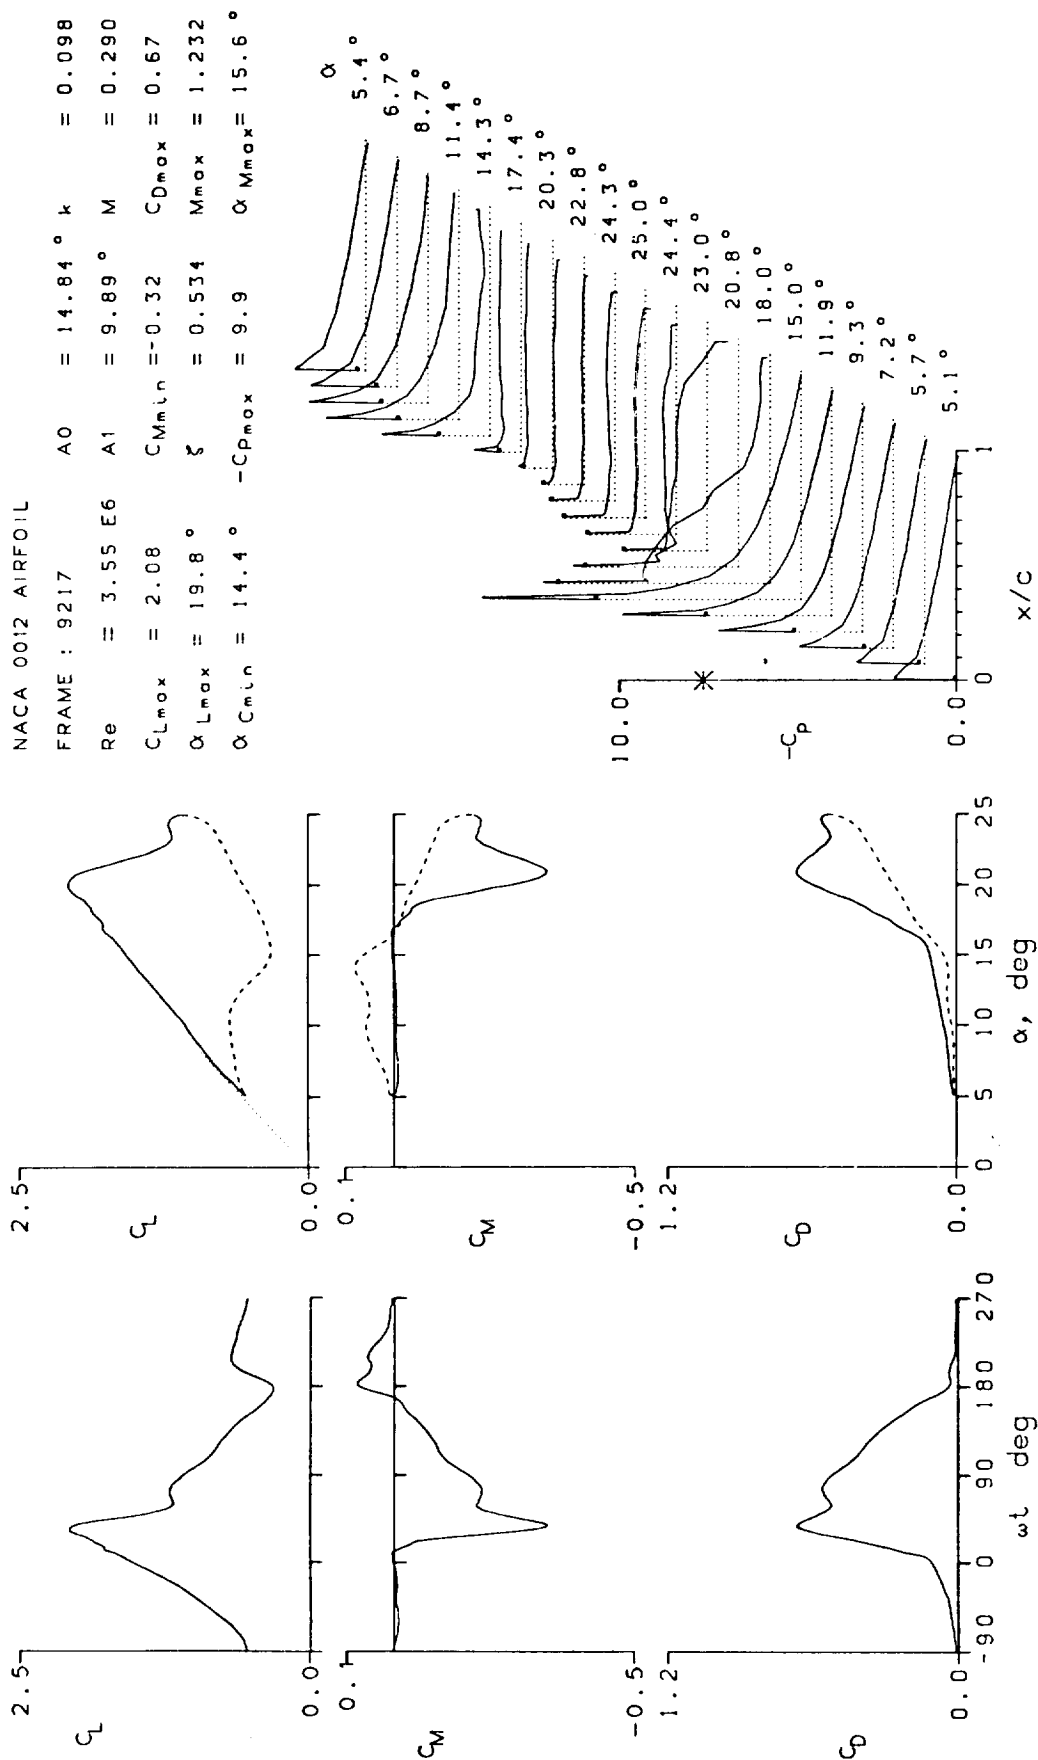


Figure 12.- Continued.

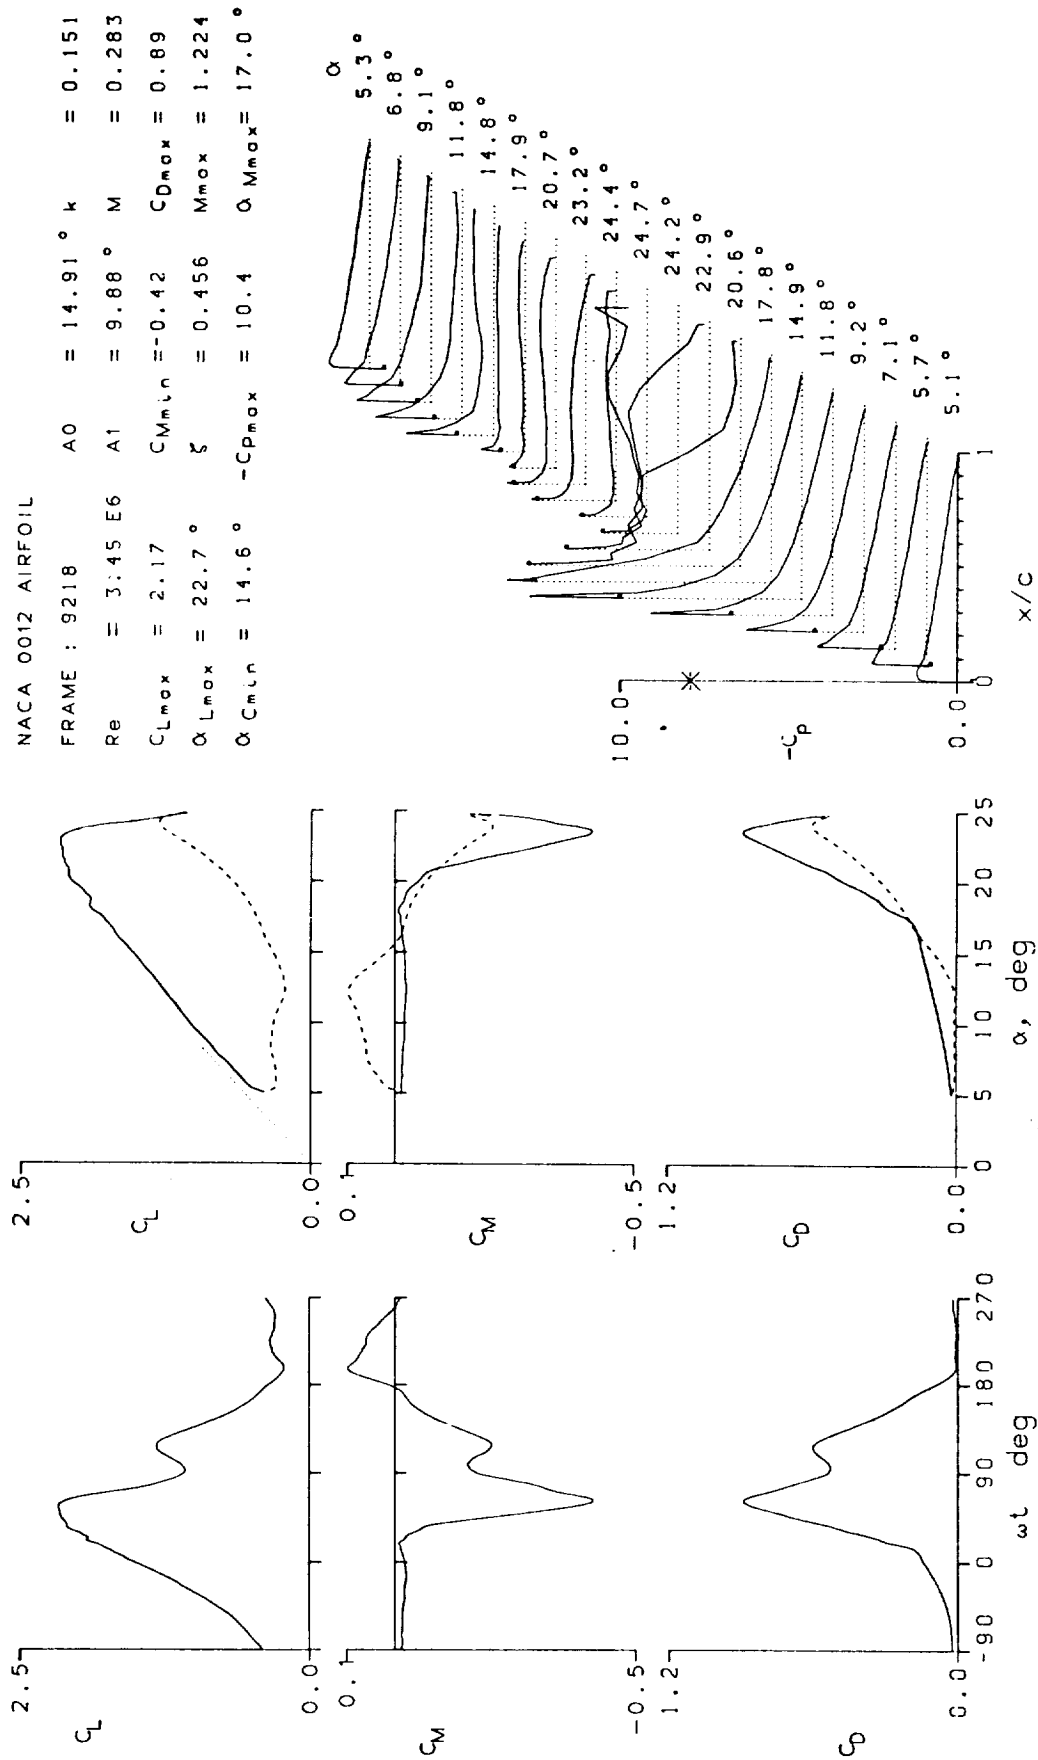


Figure 12.- Continued.

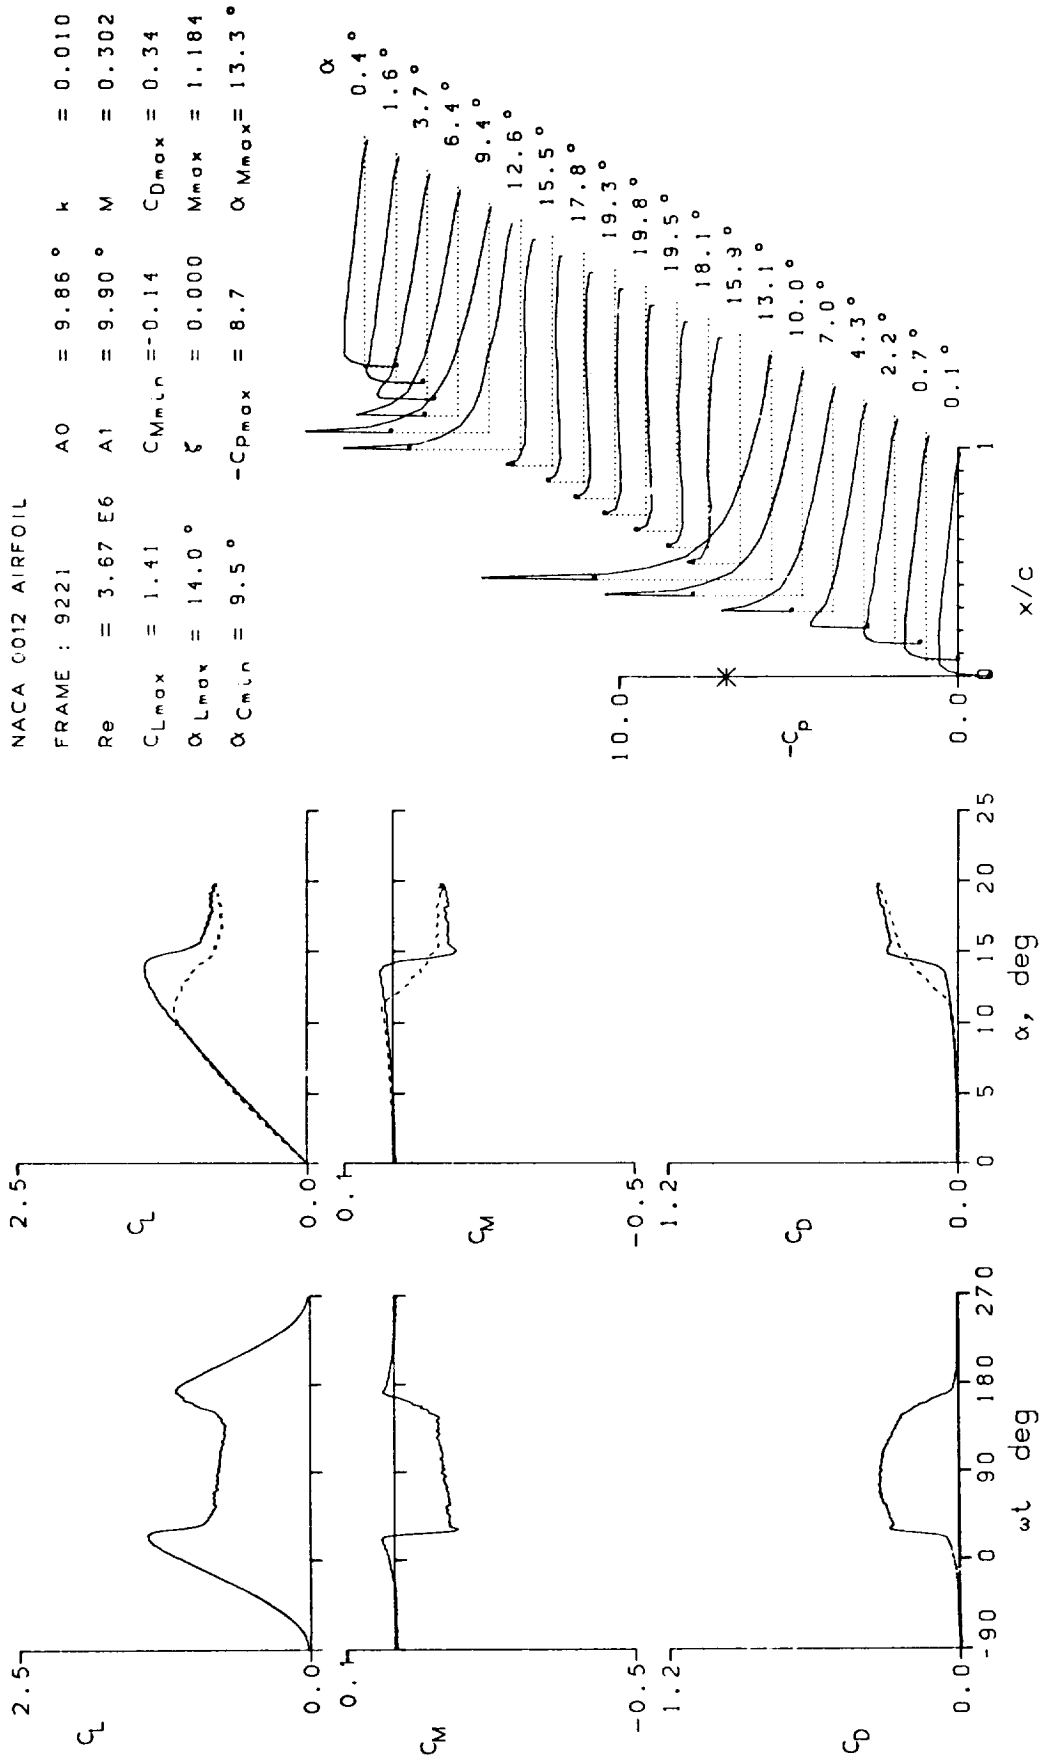


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 9222	A0 = 9.84 °	k = 0.024
Re = 3.66 E6	A1 = 9.88 °	M = 0.302
C _{Lmax} = 1.57	C _{Mmin} = -0.18	C _{Dmax} = 0.39
α _{Lmax} = 15.3 °	ξ = 0.042	M _{max} = 1.220
α _{C_{min}} = 9.4 °	-C _{pmax} = 9.0	α _{Mmax} = 13.9 °



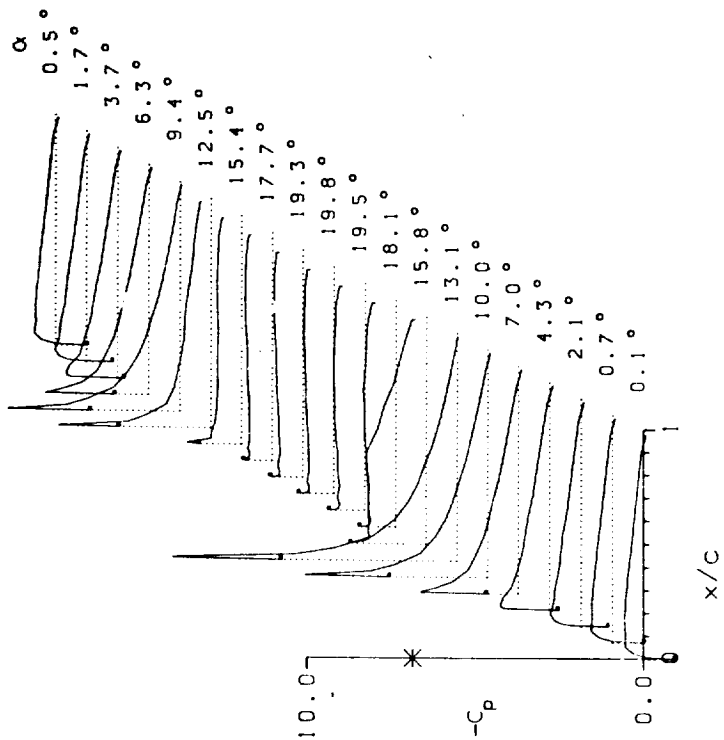


Figure 12.- Continued.

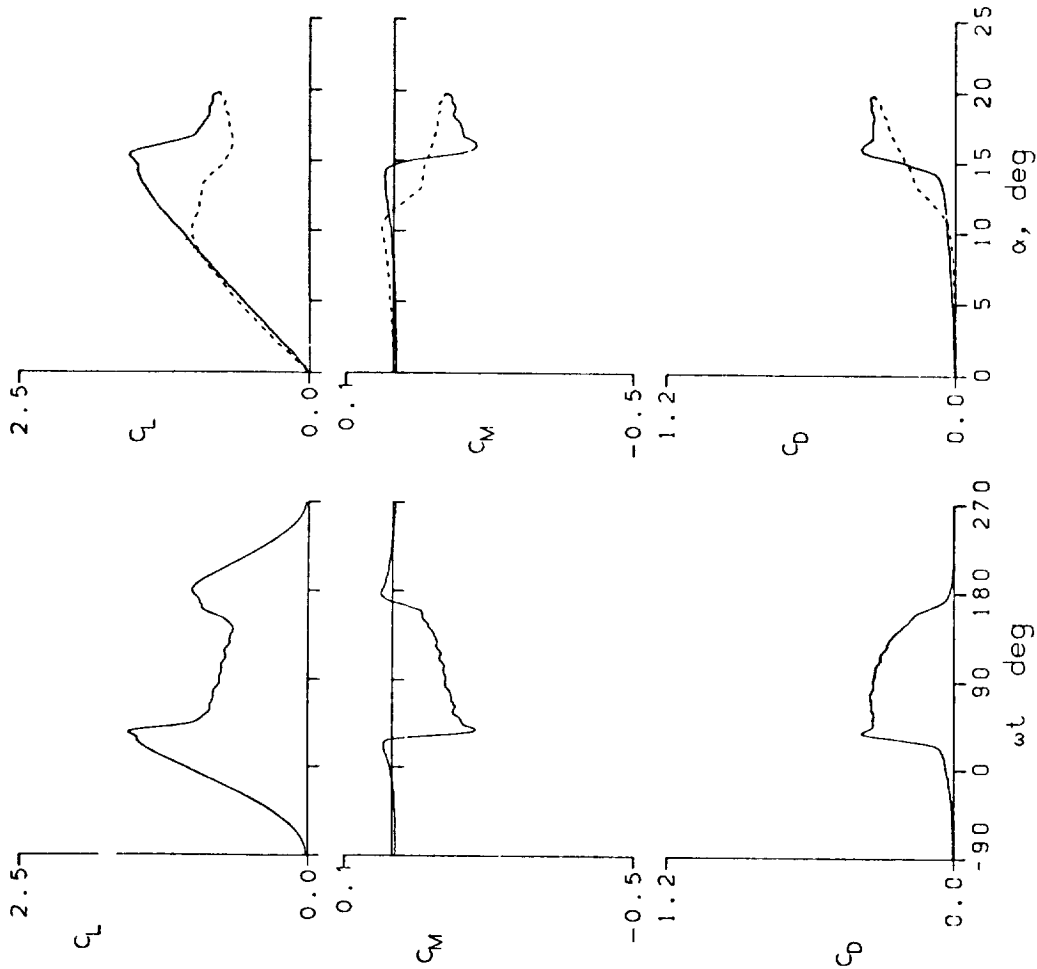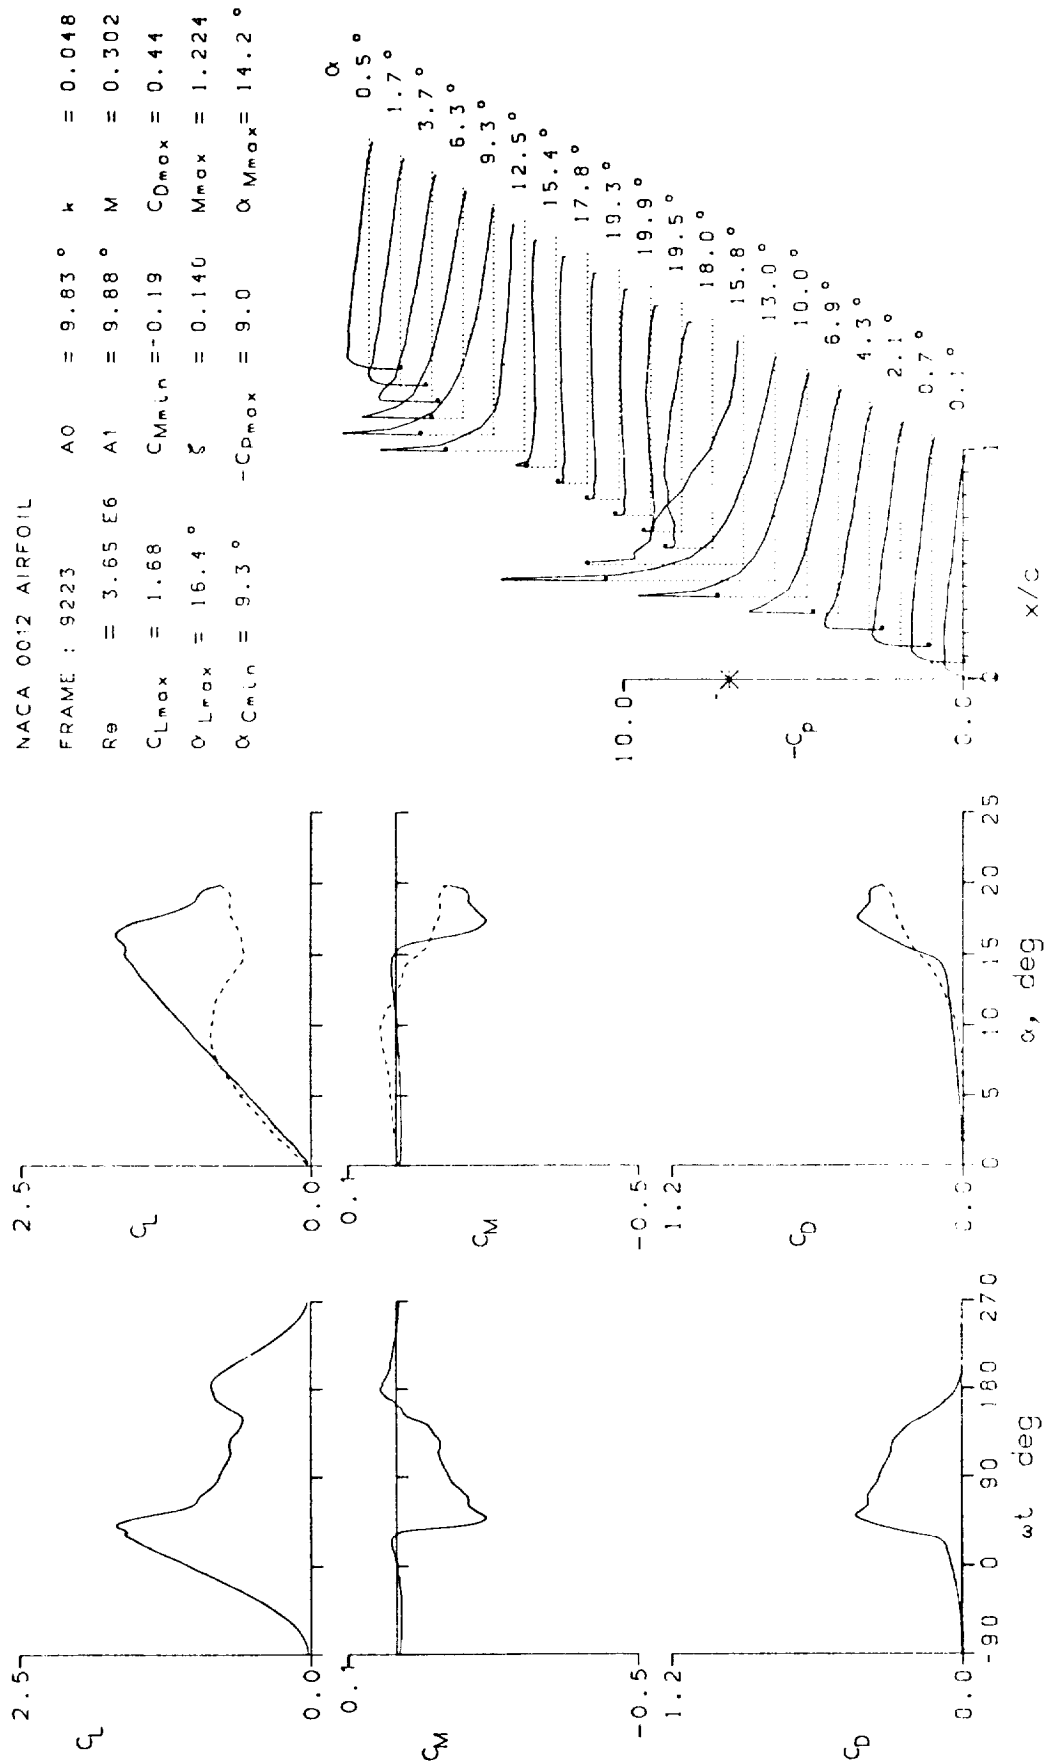

NACA 0012 AIRFOIL

FRAME : 9307	A0 = 9.97 °	k = 0.145
Re = 3.67 E6	A1 = 9.88 °	M = 0.302
CLmax = 1.86	CMmin = -0.30	CDmax = 0.61
α Lmax = 19.1 °	ξ = 0.277	Mmax = 1.238
α CMmin = 9.5 °	-CPmax = 9.1	α Mmax = 15.5 °

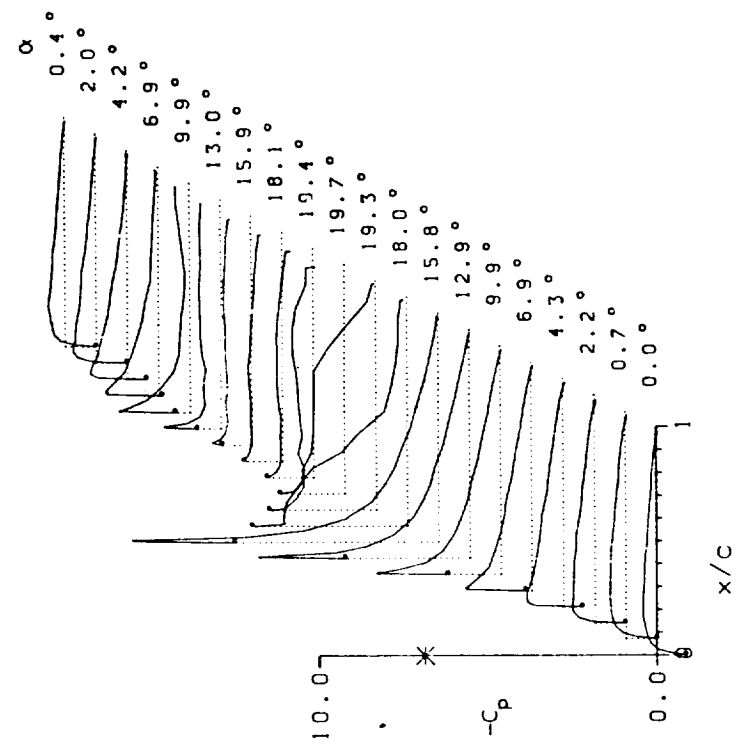
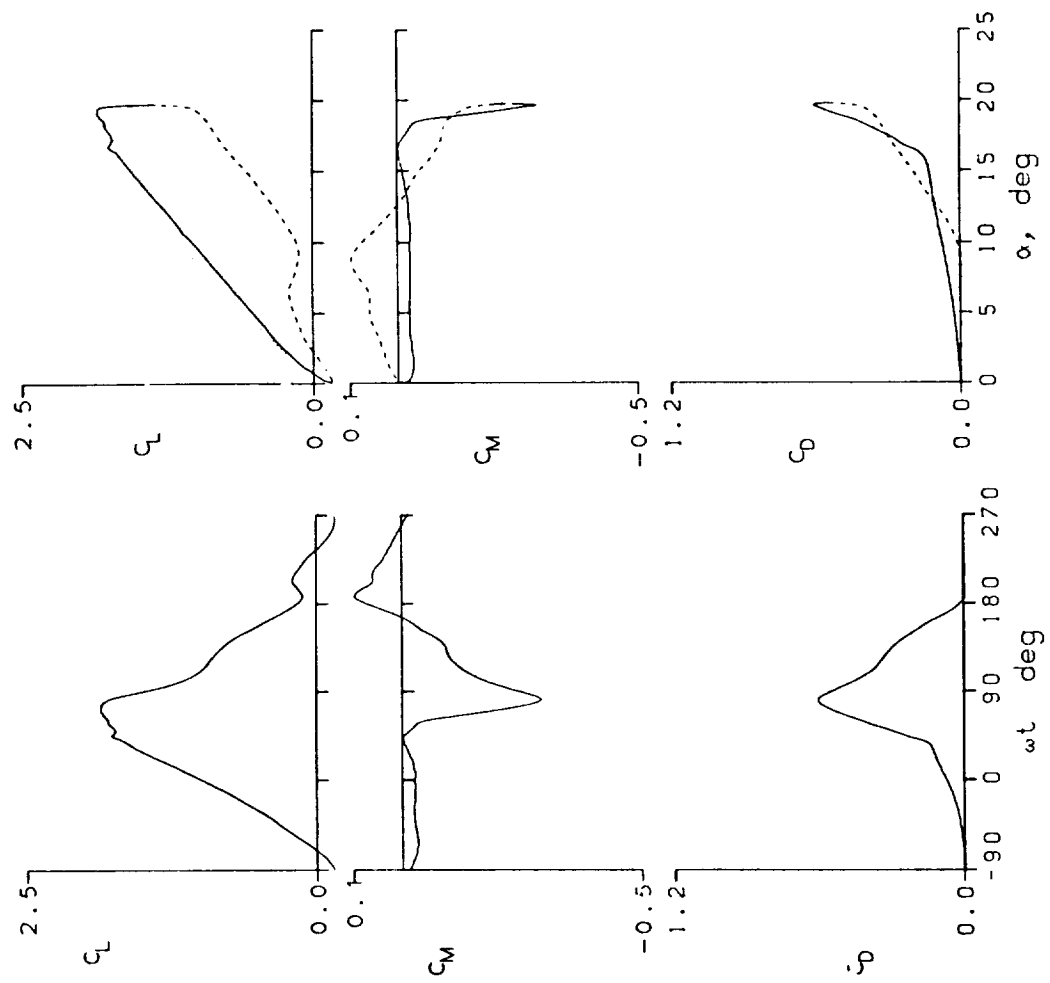


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10022	A0 = 11.84 °	k = 0.098
Re = 3.77 E6	A1 = 9.87 °	M = 0.301
$C_{Lmax} = 1.90$	$C_{Mmin} = -0.30$	$C_{Dmax} = 0.63$
$\alpha_{Lmax} = 19.2 °$	$\xi = 0.326$	$M_{max} = 1.226$
$\alpha_{Cmin} = 11.4 °$	$-C_{Pmax} = 9.1$	$\alpha_{Mmax} = 15.0 °$

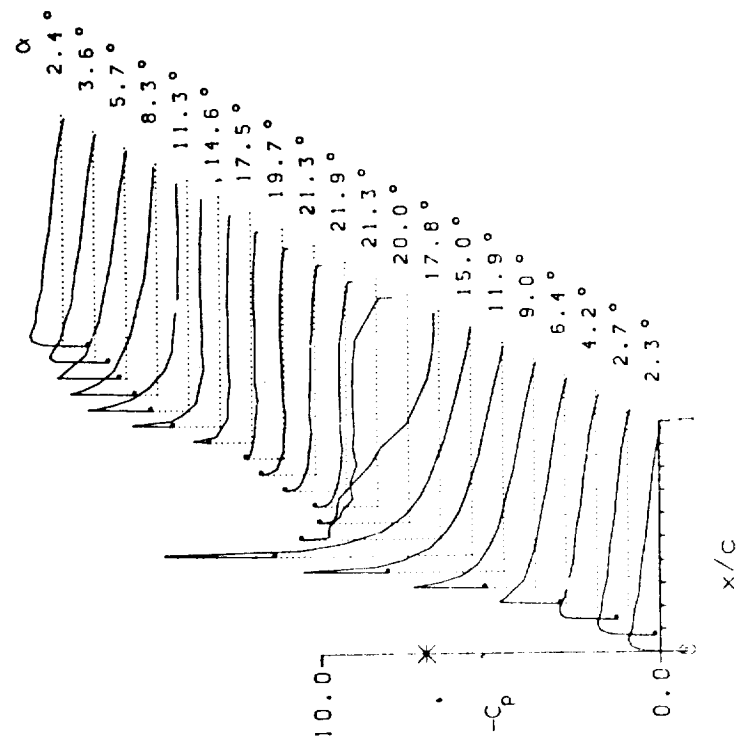
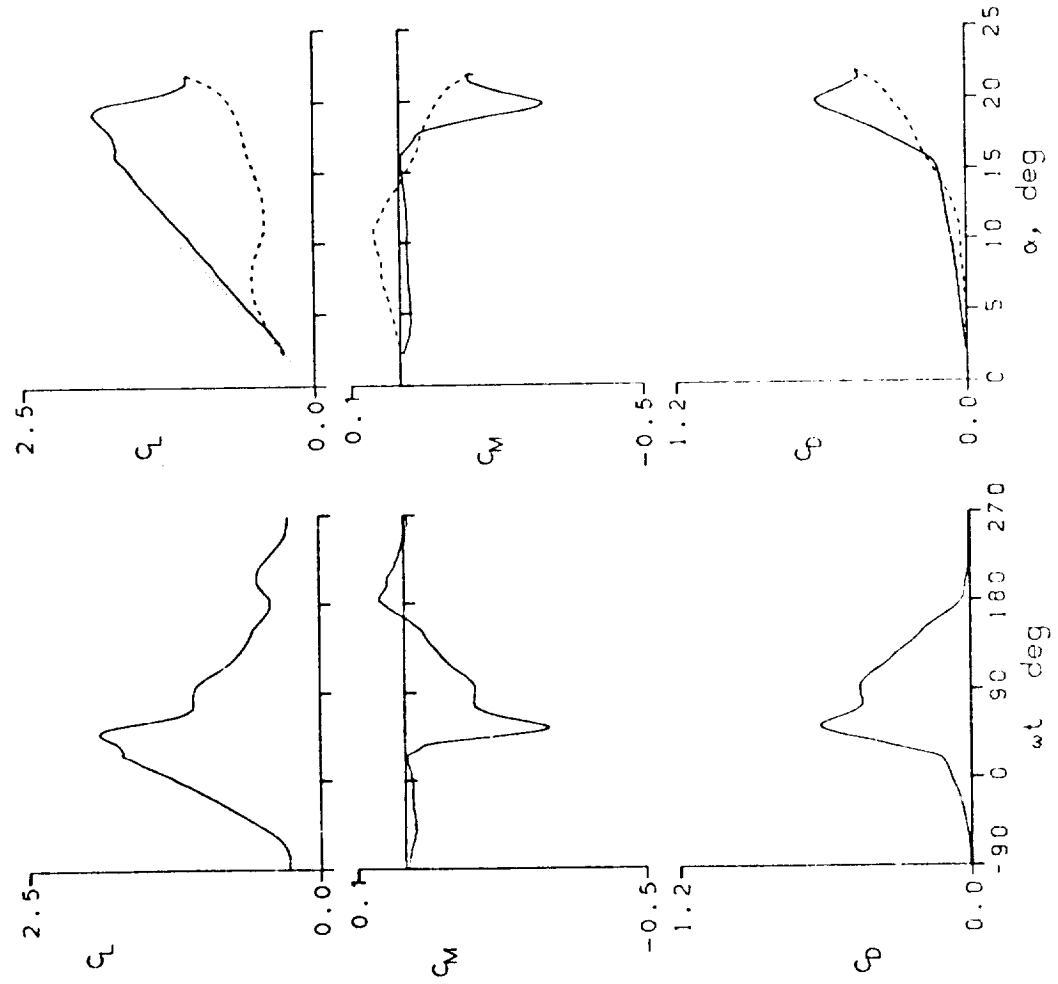


Figure 12.- Continued.

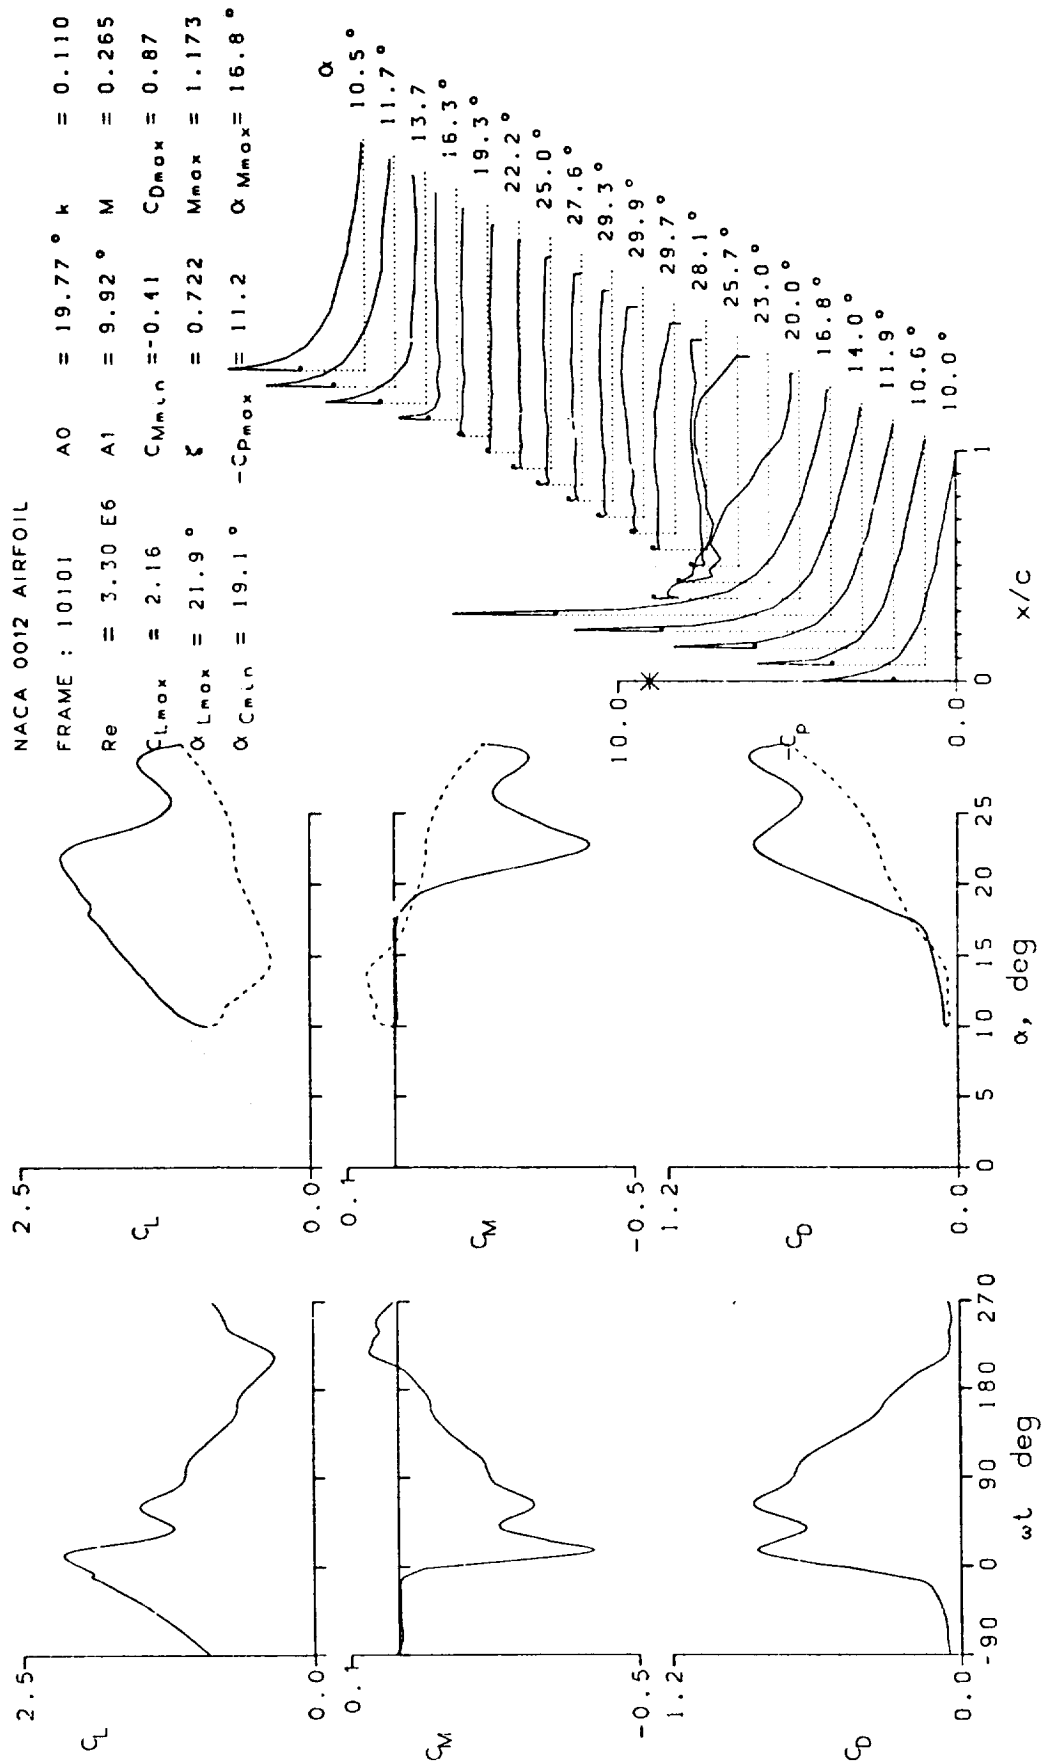


Figure 12.- Continued.

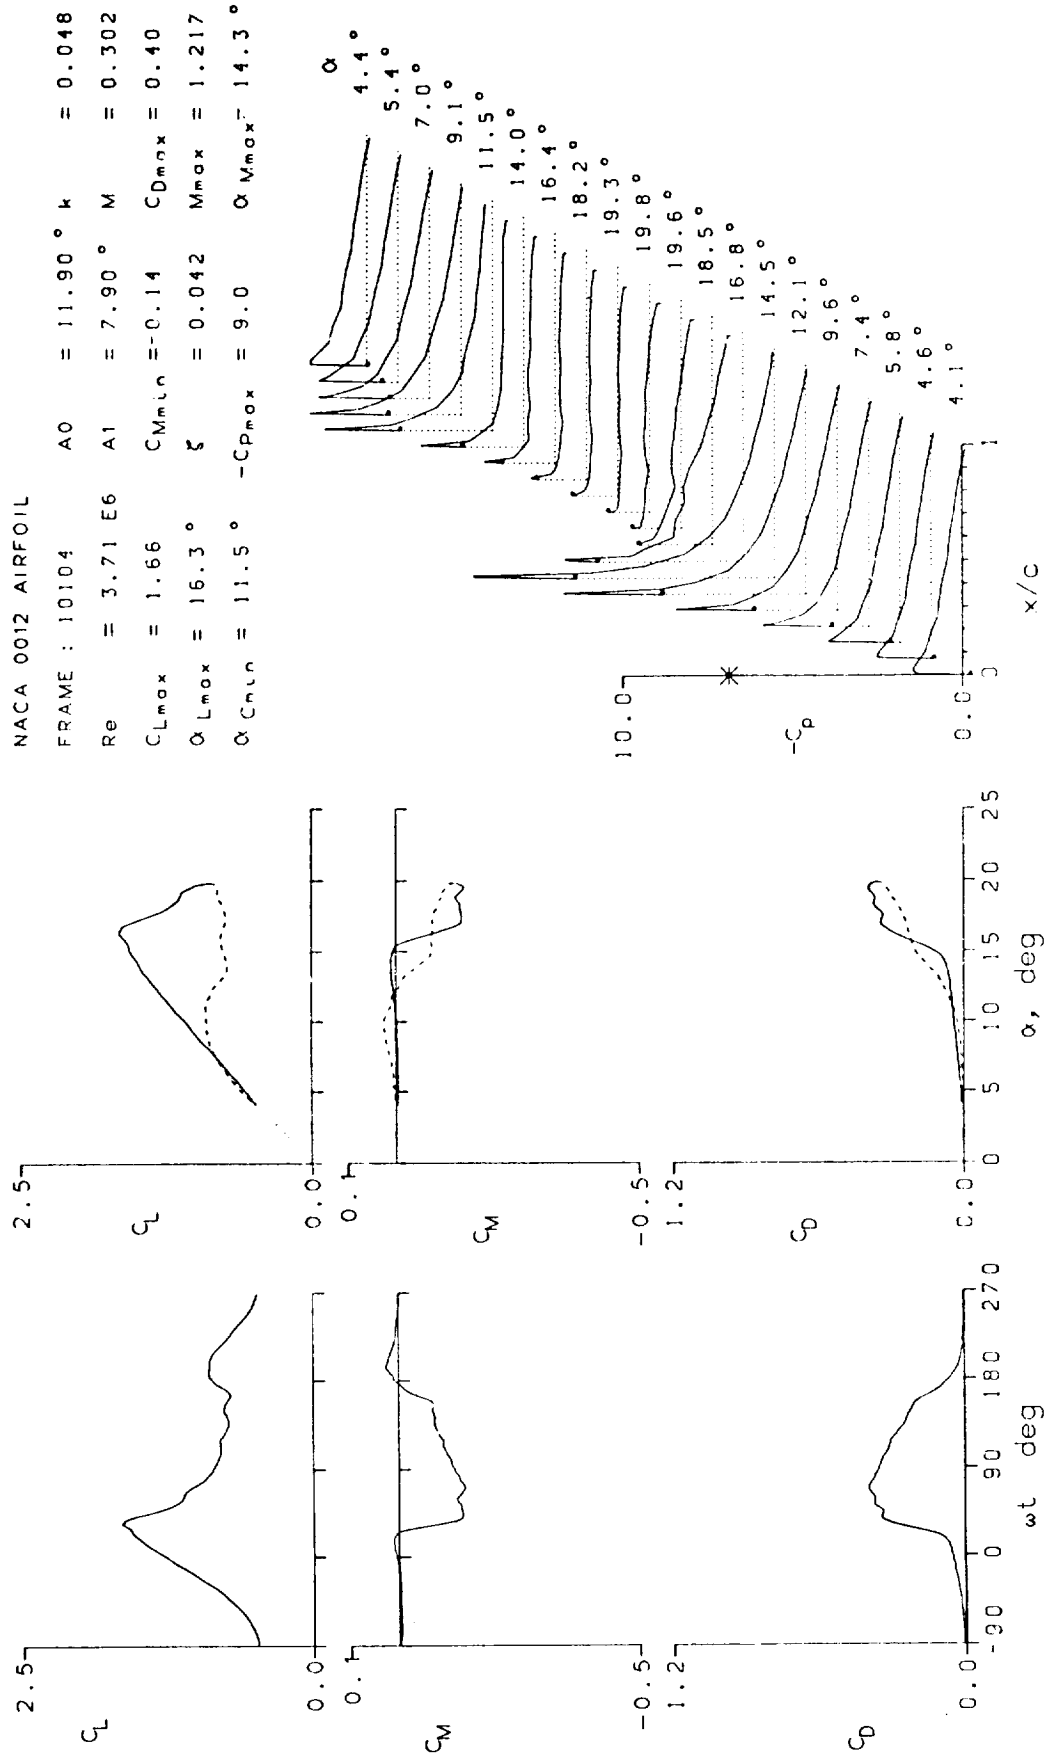


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10105	A0 = 11.90 °	k = 0.097
Re = 3.69 E6	A1 = 7.89 °	M = 0.302
$C_{Lmax} = 1.76$	$C_{Mmin} = -0.24$	$C_{Dmax} = 0.53$
$\alpha_{Lmax} = 18.0 °$	$\xi = 0.234$	$M_{max} = 1.217$
$\alpha_{Cmin} = 11.5 °$	$-C_{pmax} = 9.0$	$\alpha_{Mmax} = 14.8 °$

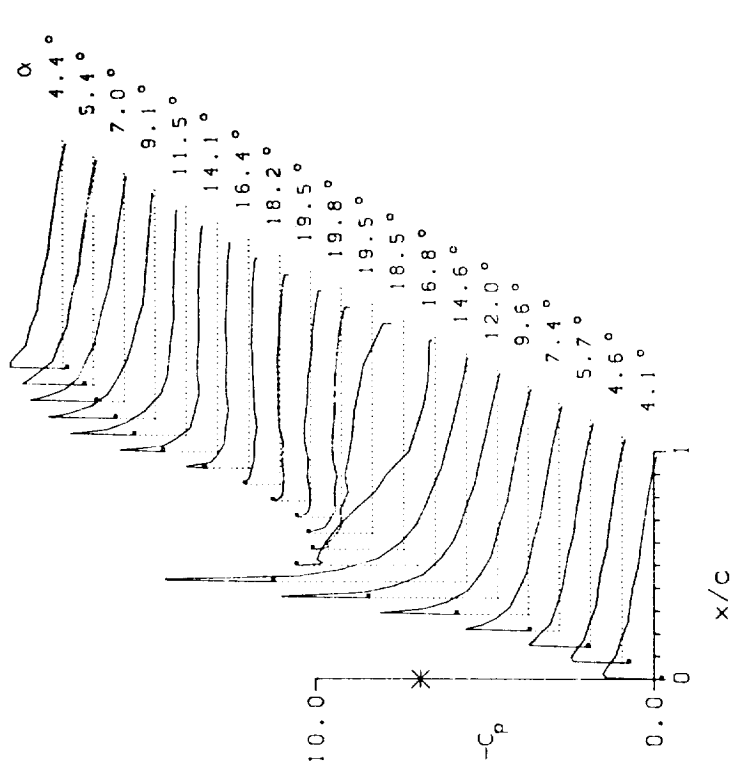
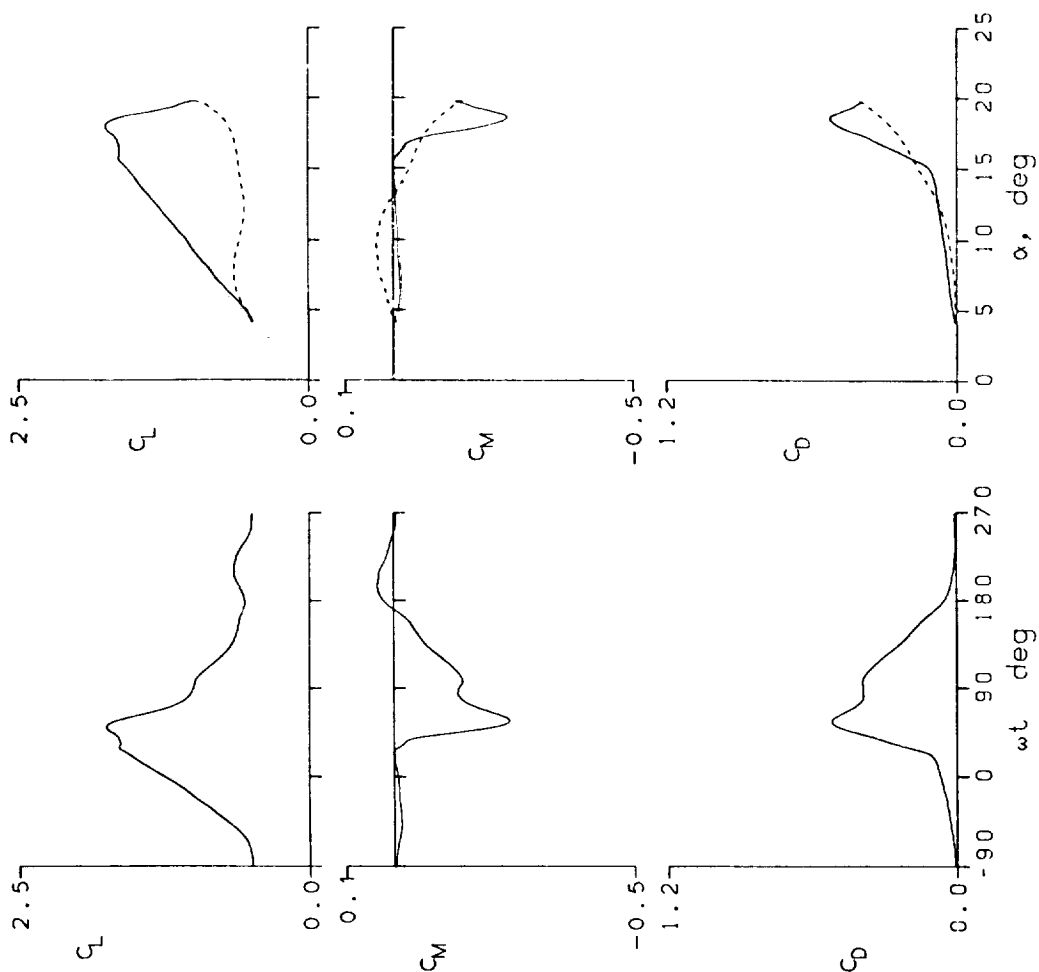


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10108	$A_0 = 11.95^\circ$	$k = 0.125$
$Re = 3.64 \times 10^6$	$A_1 = 7.89^\circ$	$M = 0.296$
$C_{Lmax} = 1.97$	$C_{Mmin} = -0.33$	$C_{Dmax} = 0.64$
$\alpha_{Lmax} = 19.1^\circ$	$\xi = 0.203$	$M_{max} = 1.214$
$\alpha_{Cmin} = 11.7^\circ$	$-C_{Pmax} = 9.3$	$\alpha_{Mmax} = 15.4^\circ$

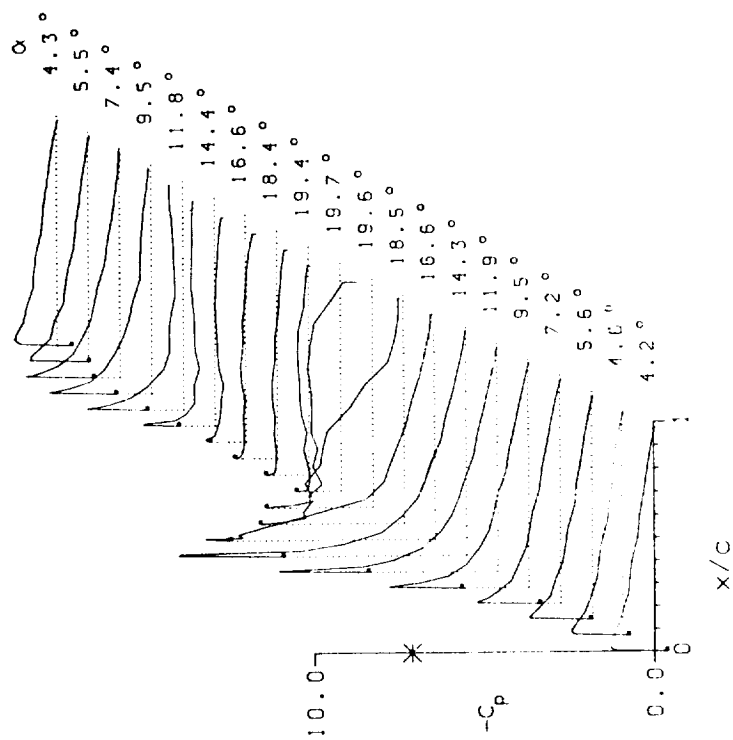
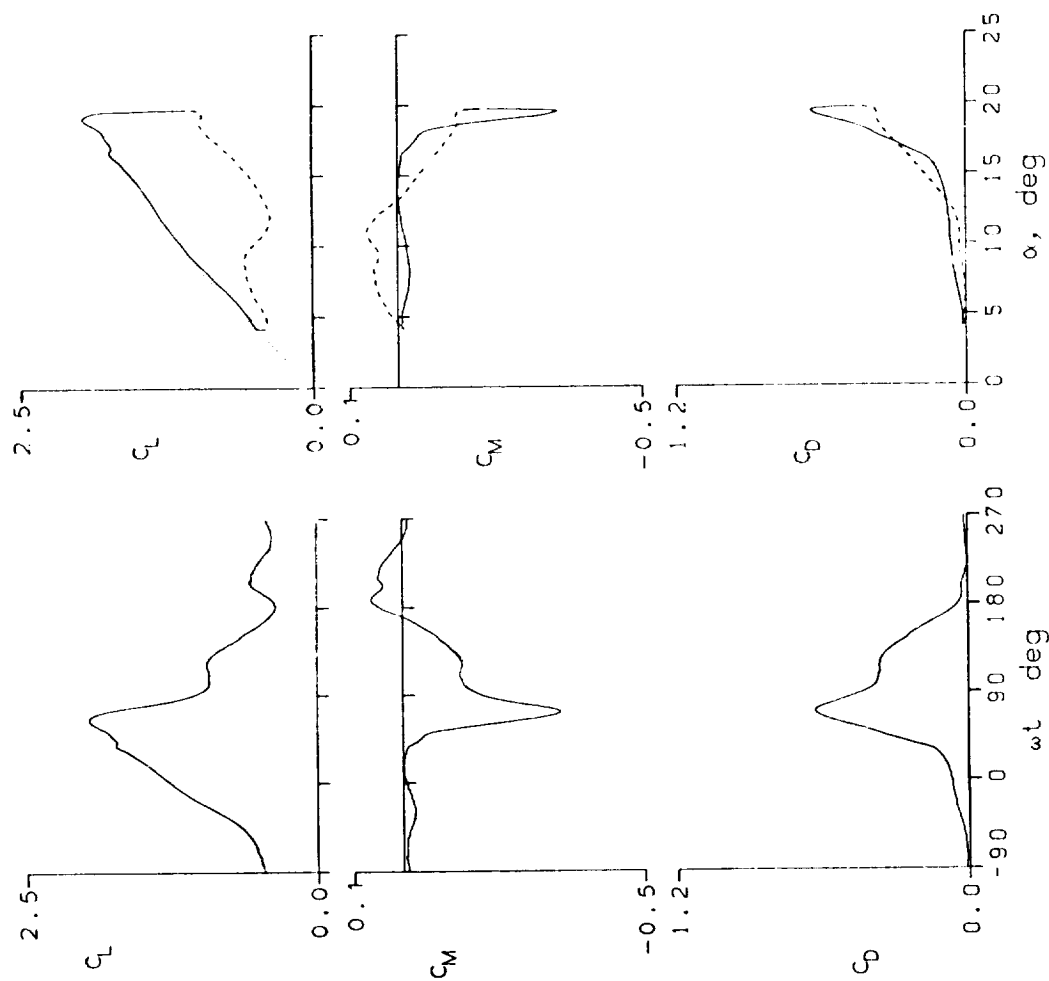


Figure 12.- Continued.

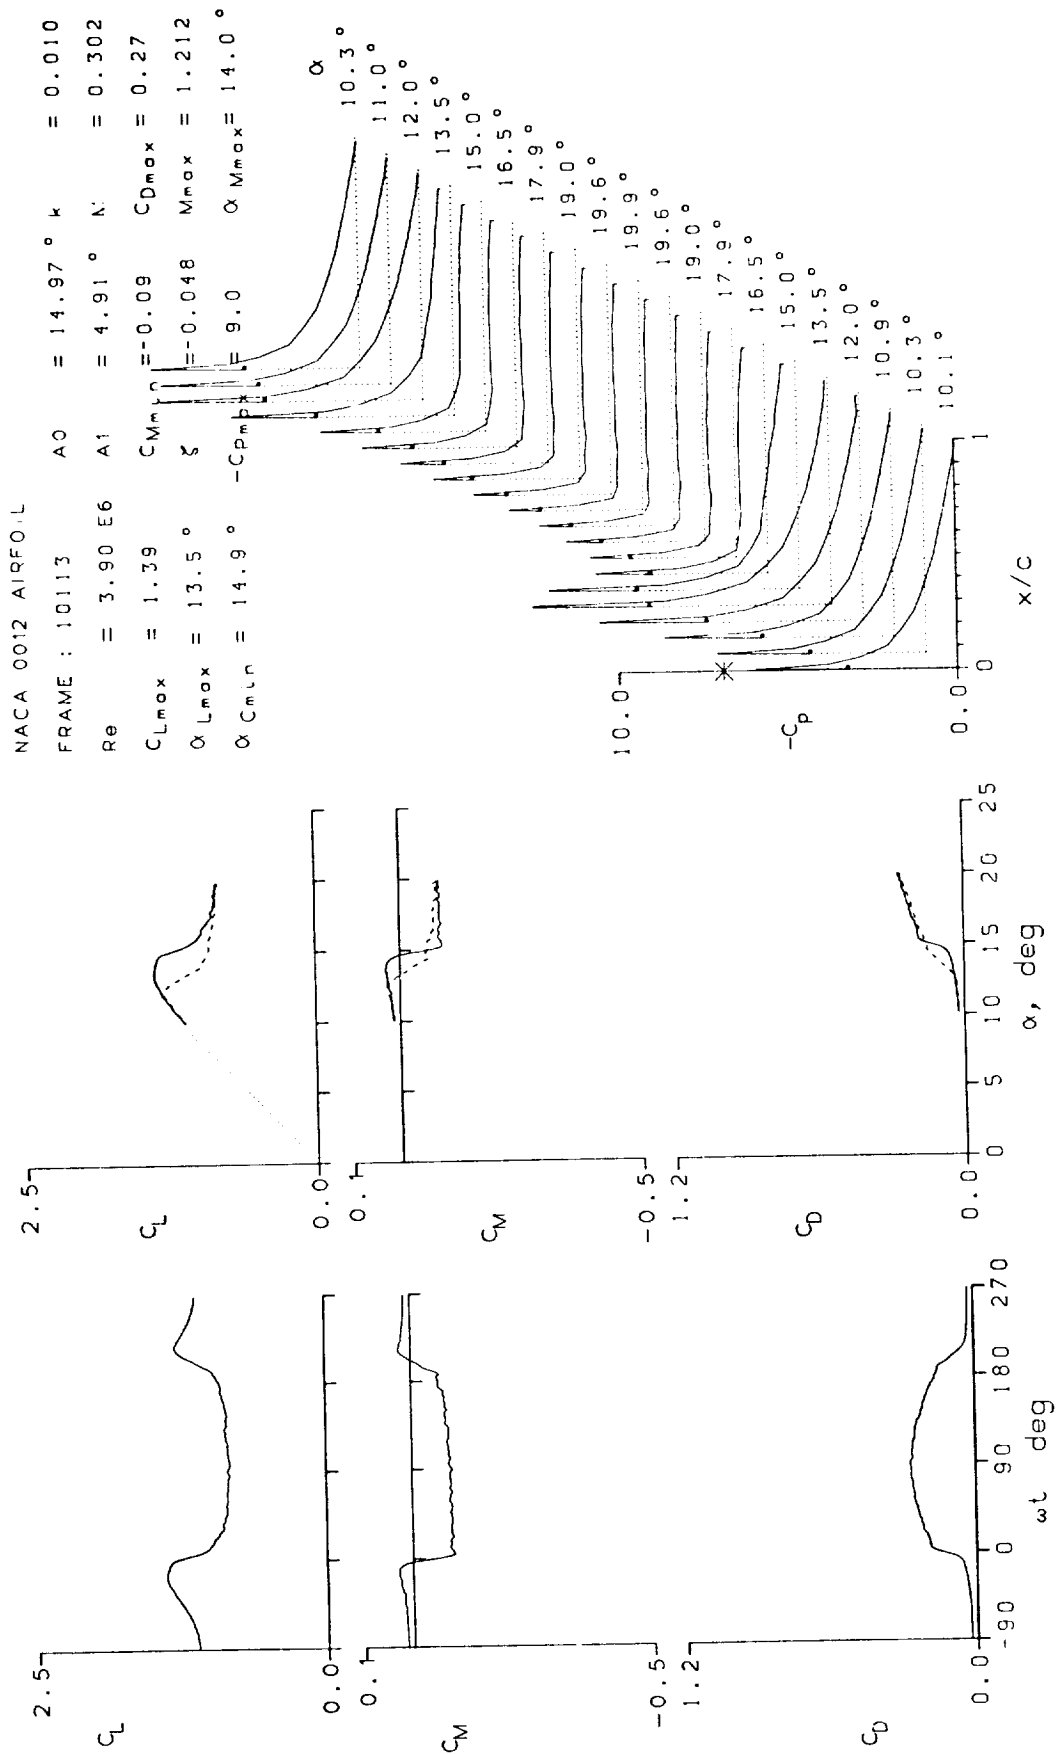


Figure 12.- Continued.

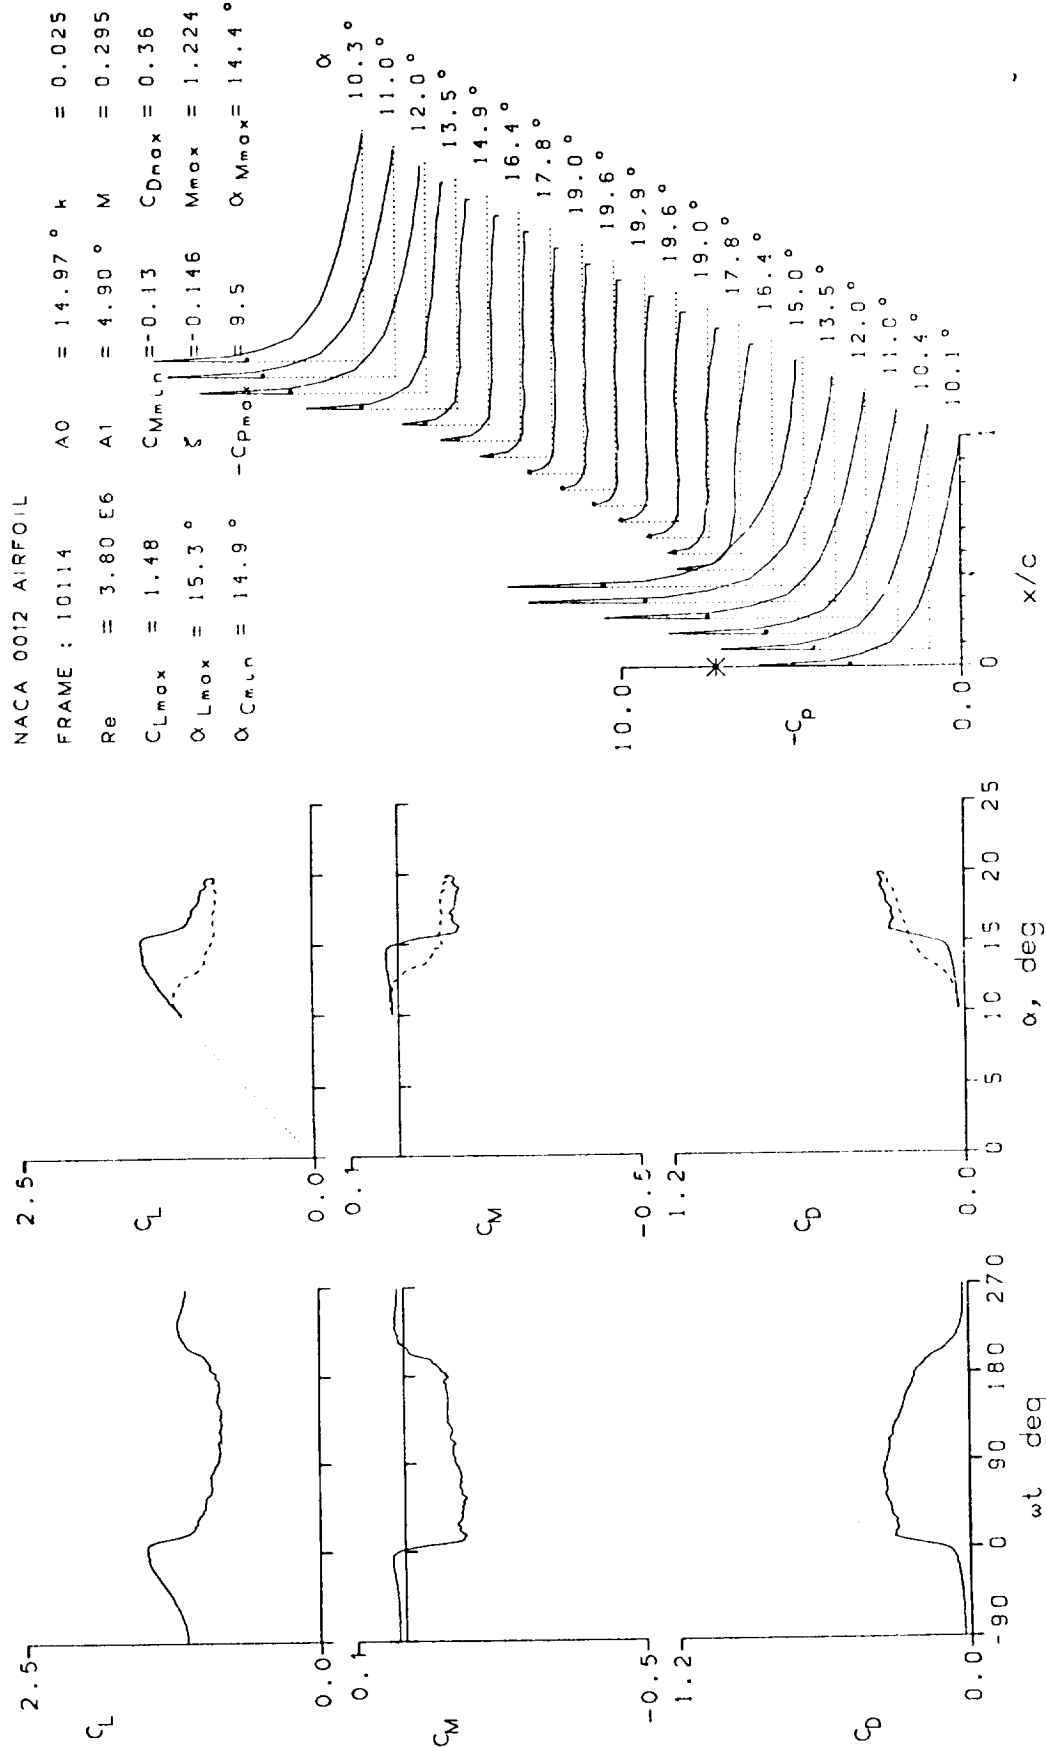


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10117 $A_0 = 14.96^\circ$ $k = 0.050$
 $Re = 3.80 \text{ E}6$ $A_1 = 4.90^\circ$ $M = 0.295$
 $C_{Lmax} = 1.61$ $C_{Mmin} = -0.13$ $C_{Dmax} = 0.33$
 $\alpha_{Lmax} = 16.3^\circ$ $\xi = -0.006$ $M_{max} = 1.236$
 $\alpha_{Cmin} = 14.8^\circ$ $-C_{Pmax} = 9.6$ $\alpha_{Mmax} = 14.8^\circ$

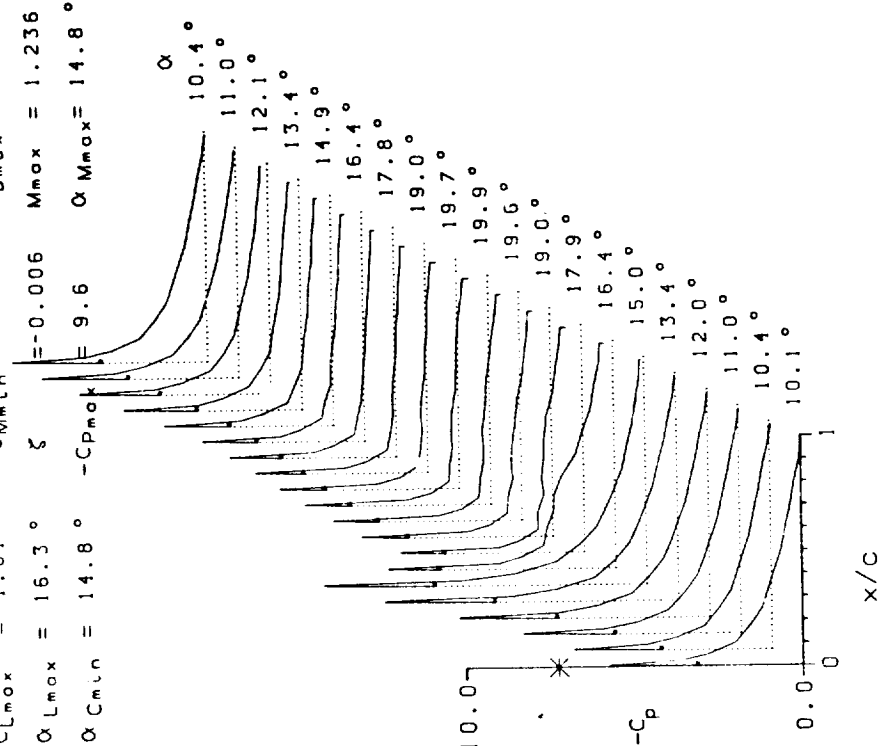
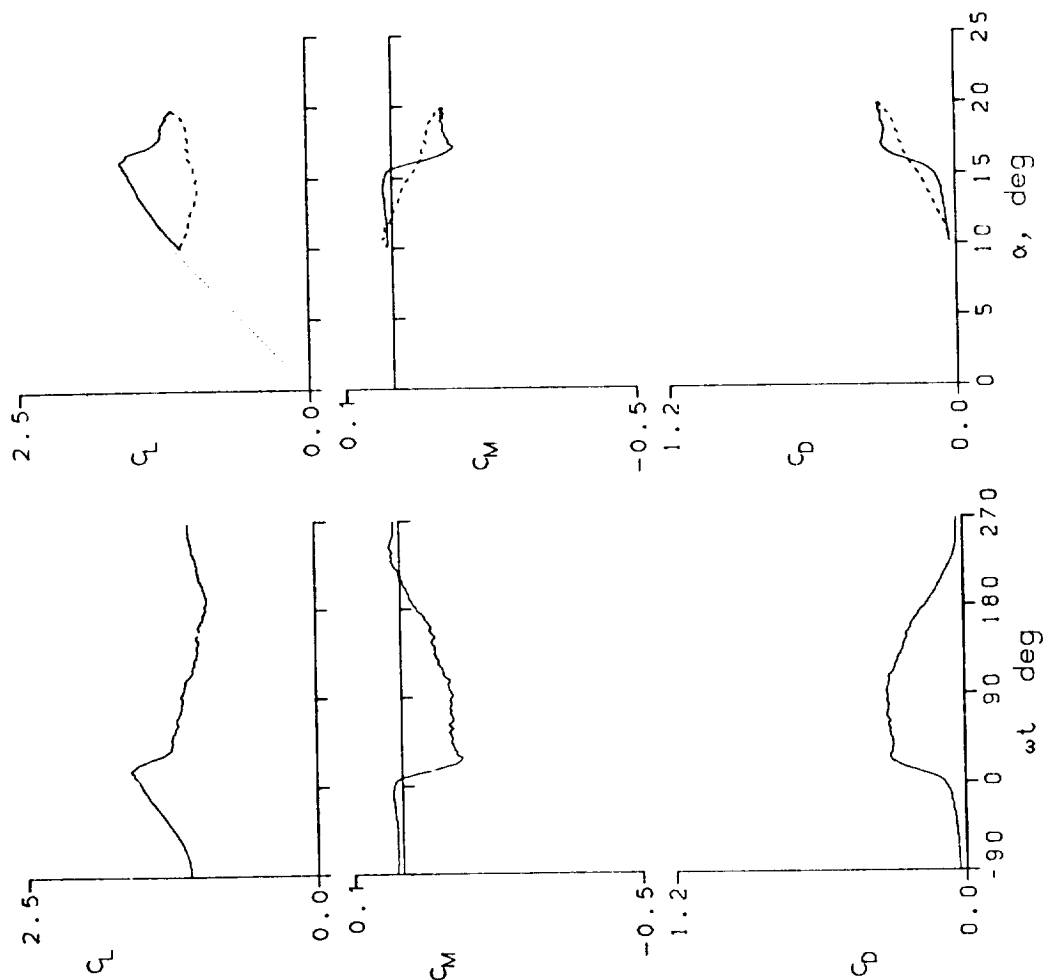


Figure 12.- Continued.

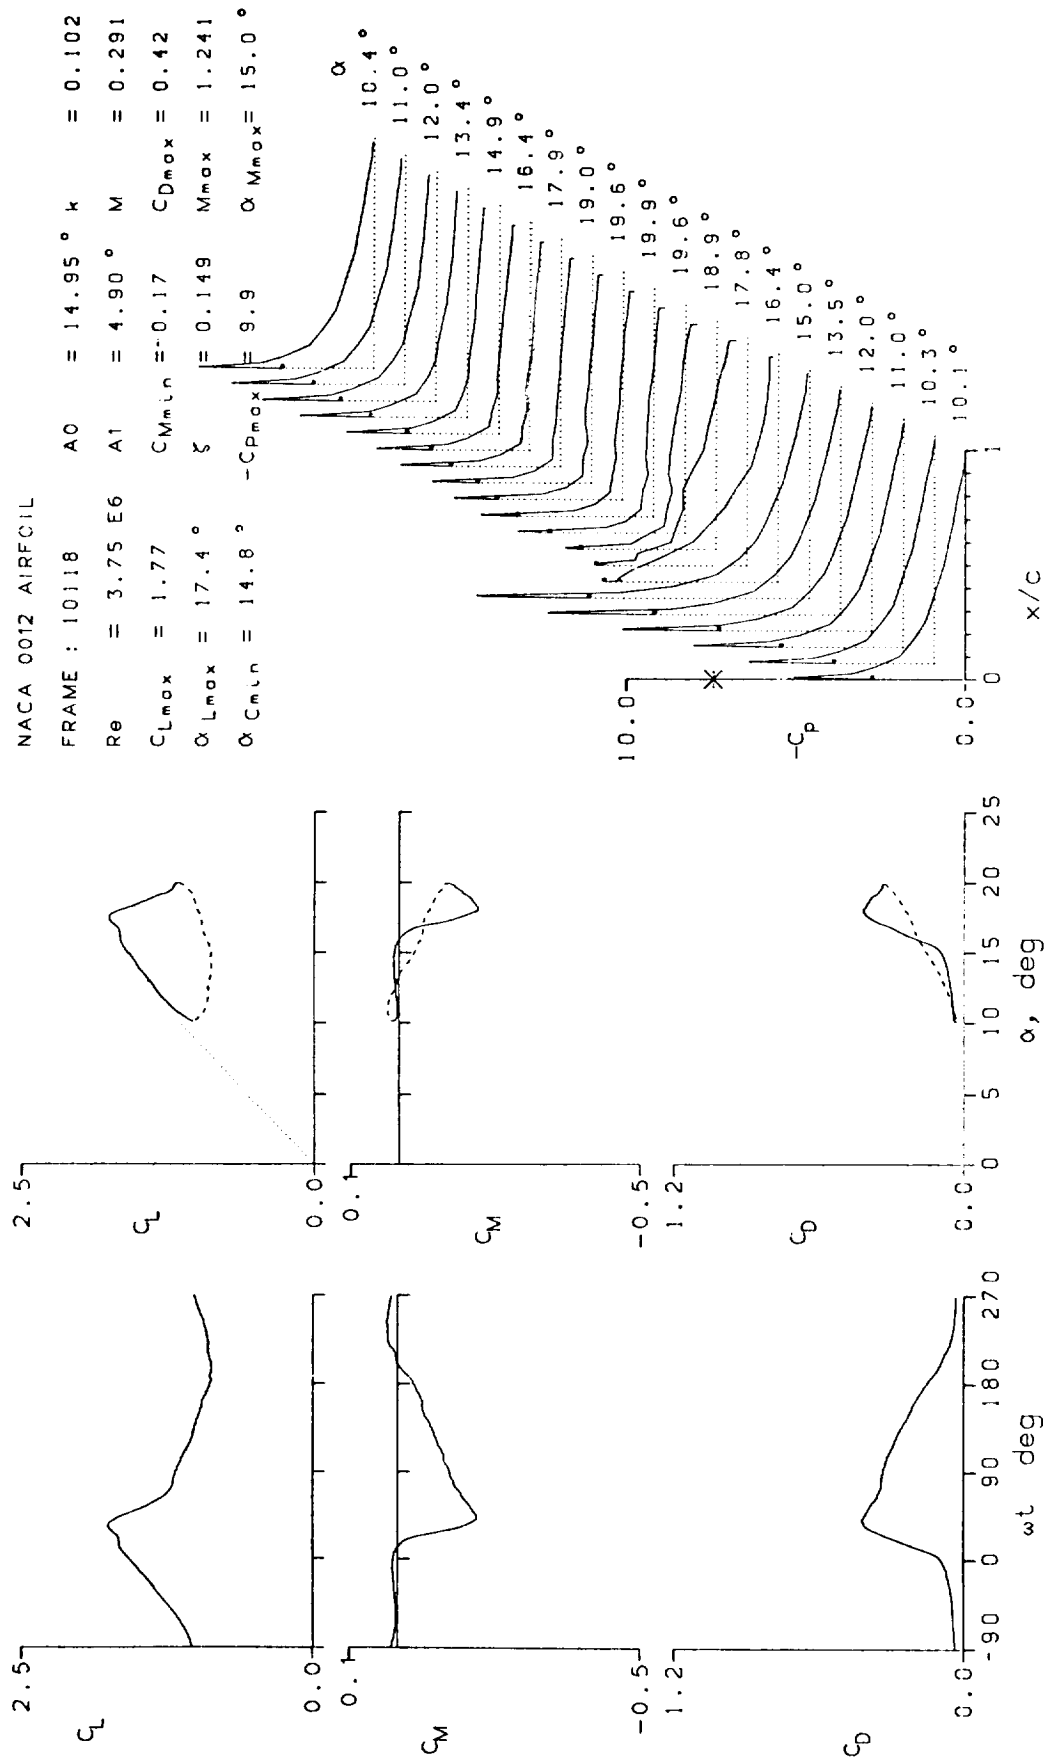


Figure 12.- Continued.

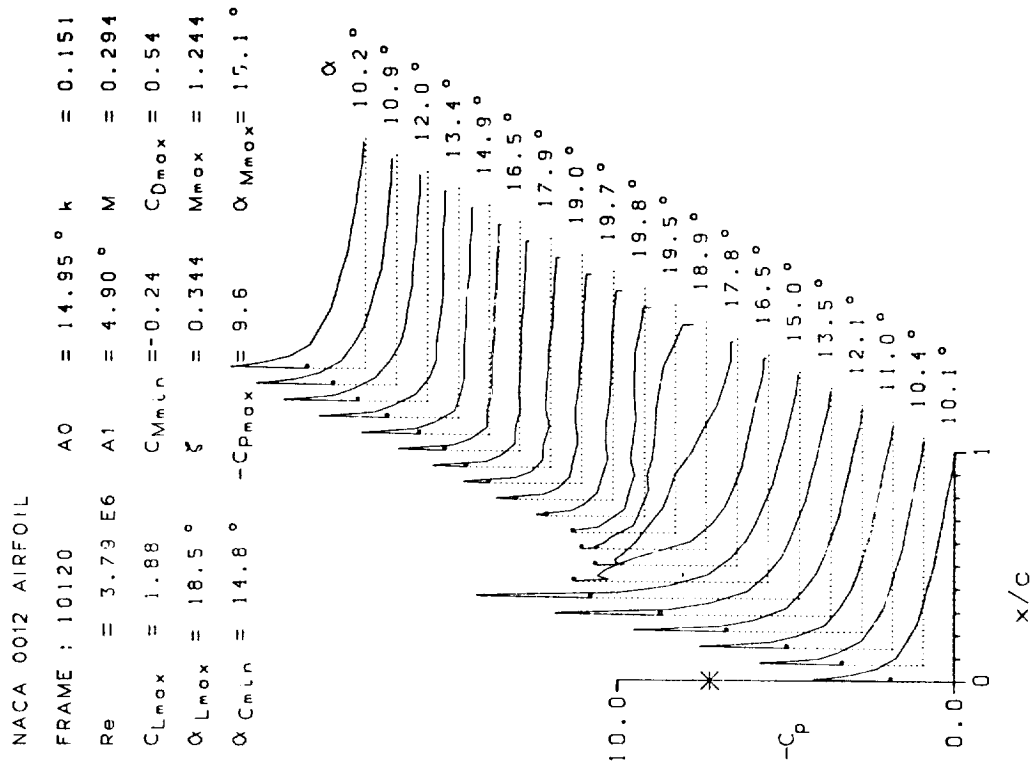
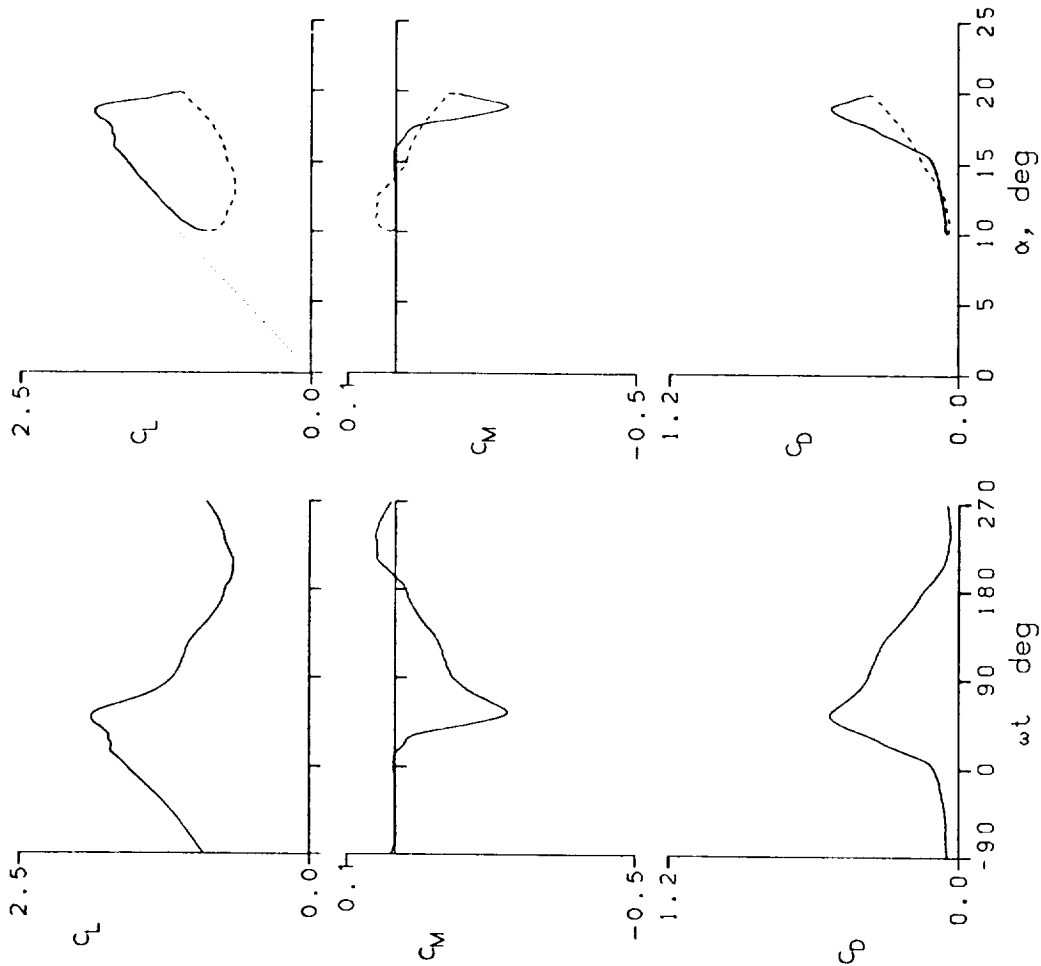


Figure 12.- Continued.

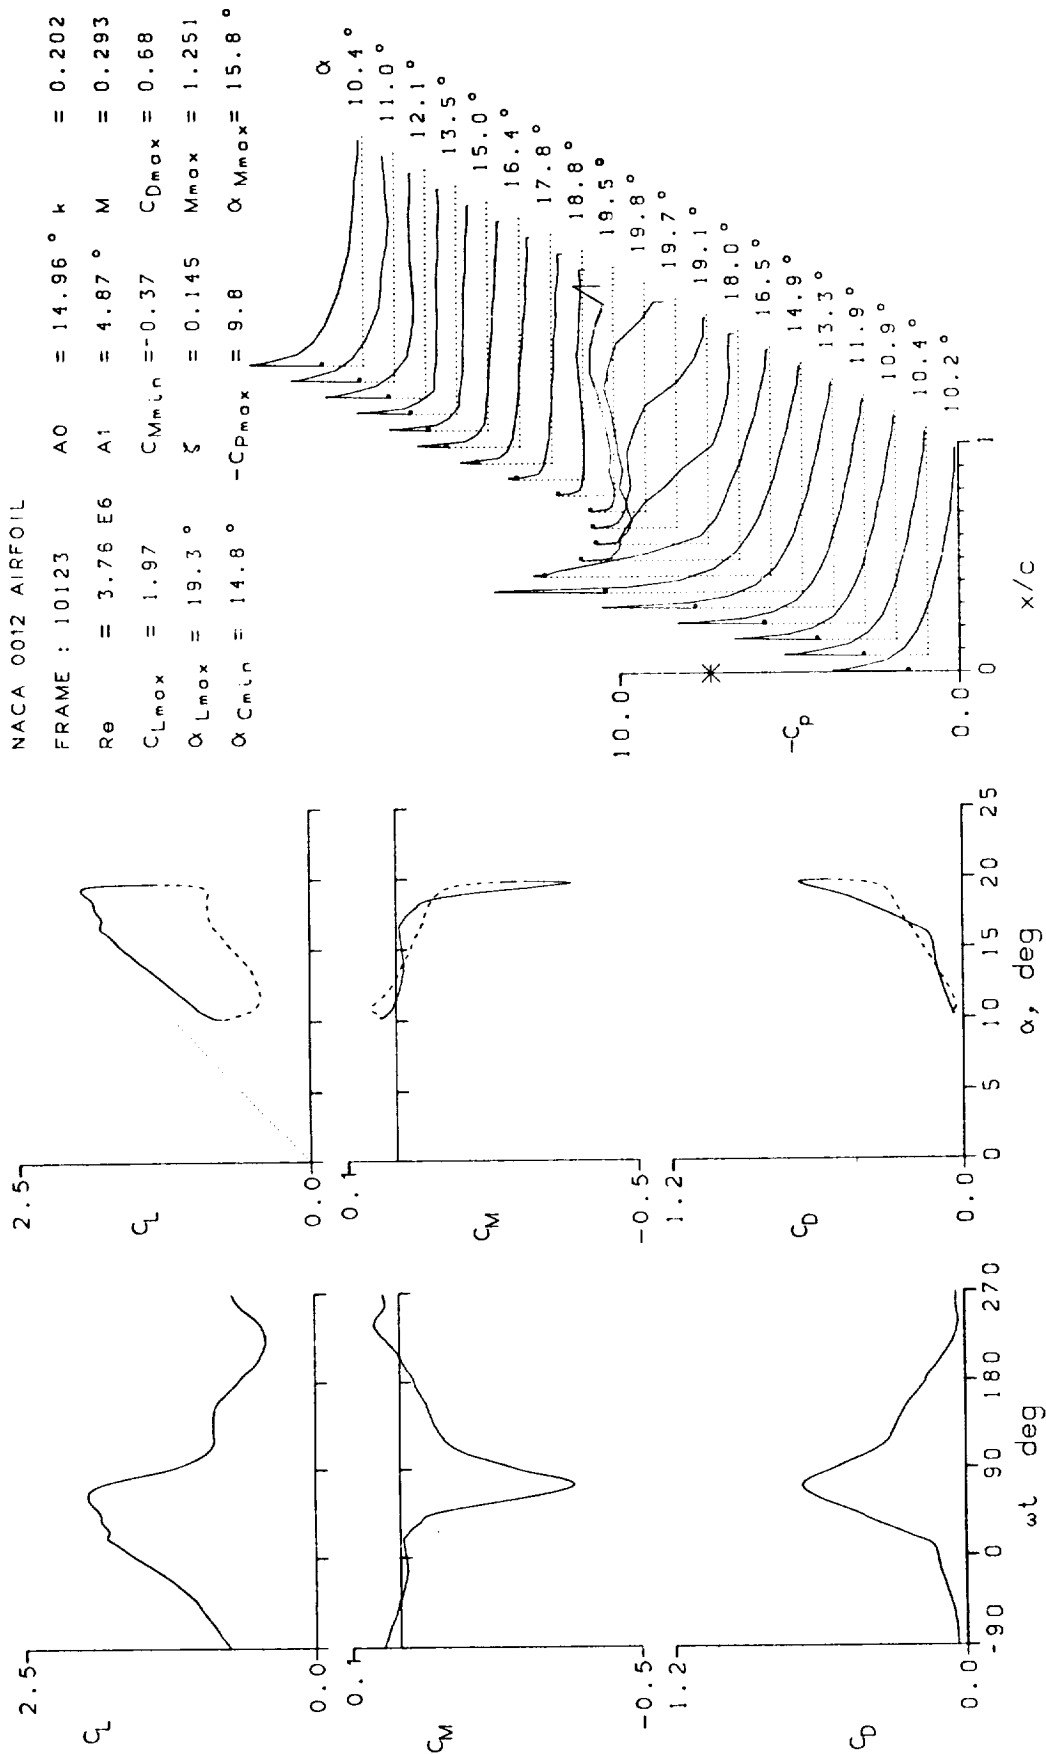


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10202	A0 = 9.95 °	k = 0.010
Re = 3.86 E6	A1 = 4.90 °	M = 0.301
$C_{Lmax} = 1.37$	$C_{Mmin} = -0.06$	$C_{Dmax} = 0.15$
$\alpha_{Lmax} = 13.6 °$	$\zeta = -0.110$	$M_{max} = 1.219$
$\alpha_{Cmin} = 9.8 °$	$-C_{pmax} = 9.0$	$\alpha_{Mmax} = 13.7 °$

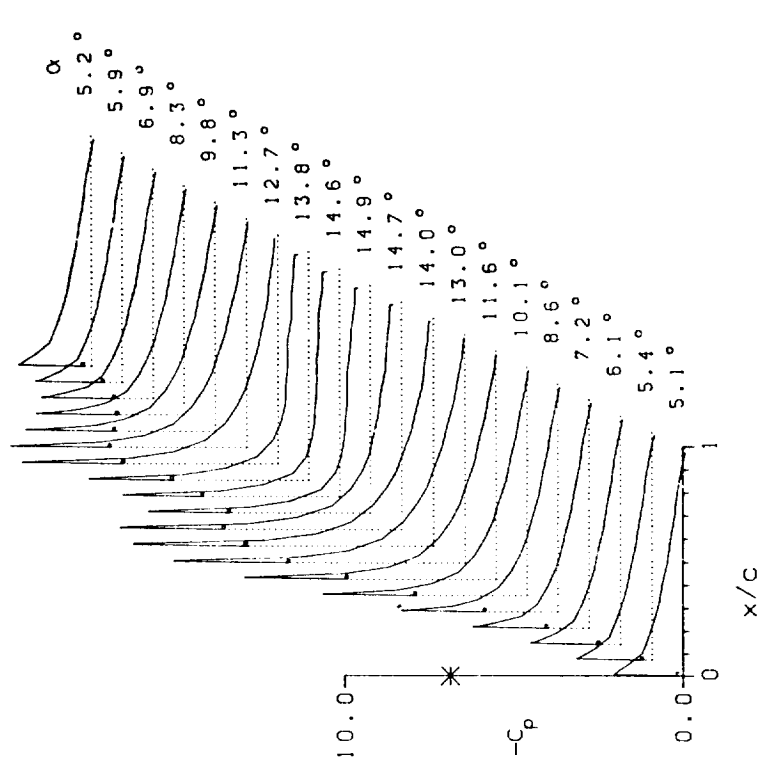
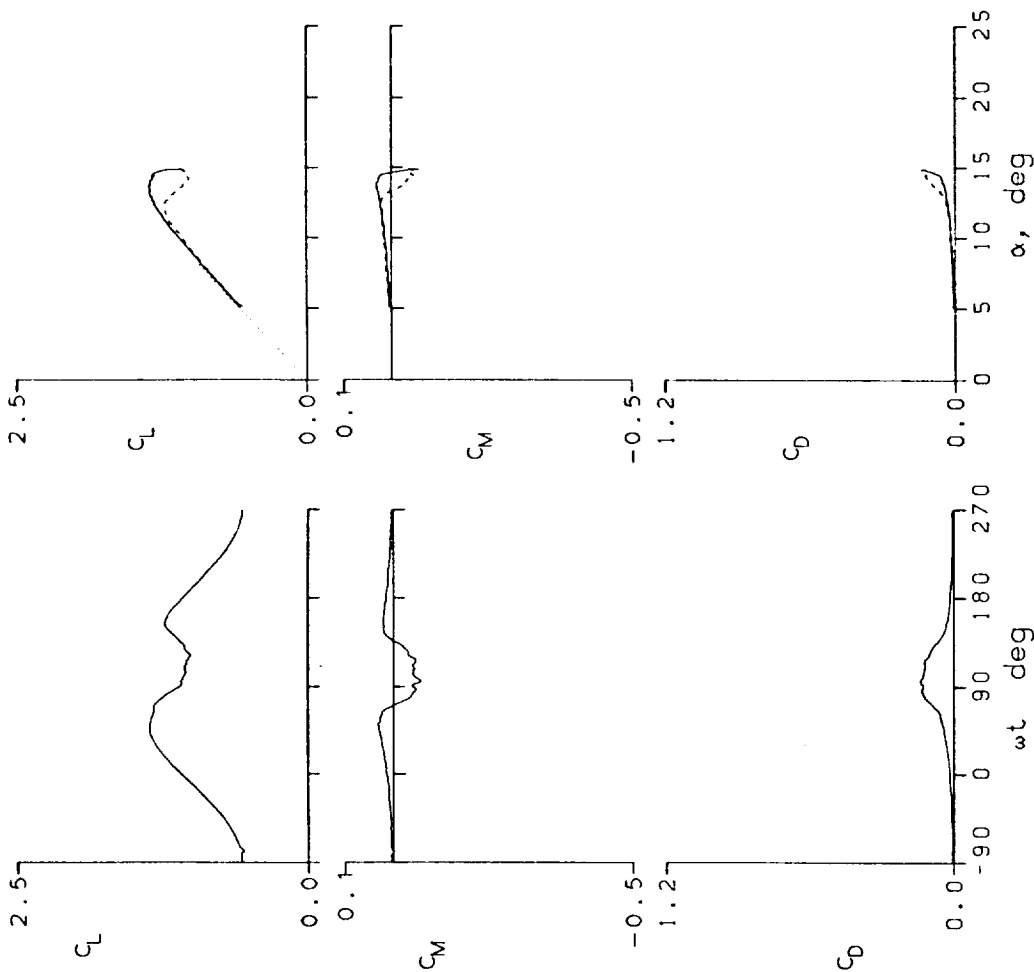


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10203	A0 = 9.95°	k = 0.025
Re = 3.85 E6	A1 = 4.90°	M = 0.301
CLmax = 1.38	CMmin = -0.04	CDmax = 0.13
αLmax = 13.5°	ξ = -0.050	Mmax = 1.227
αCMmin = 9.8°	-CPmax = 9.1	αMmax = 14.1°

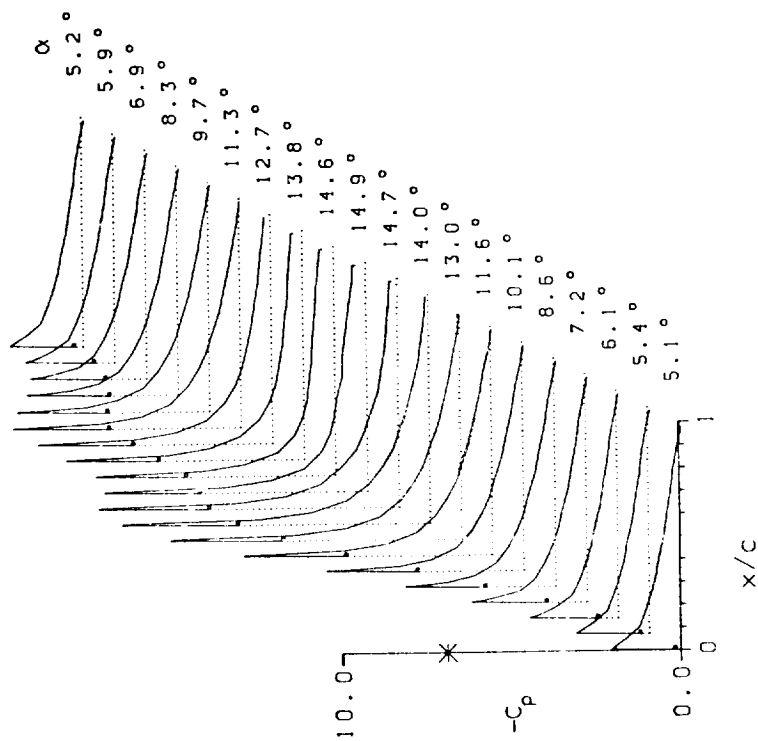
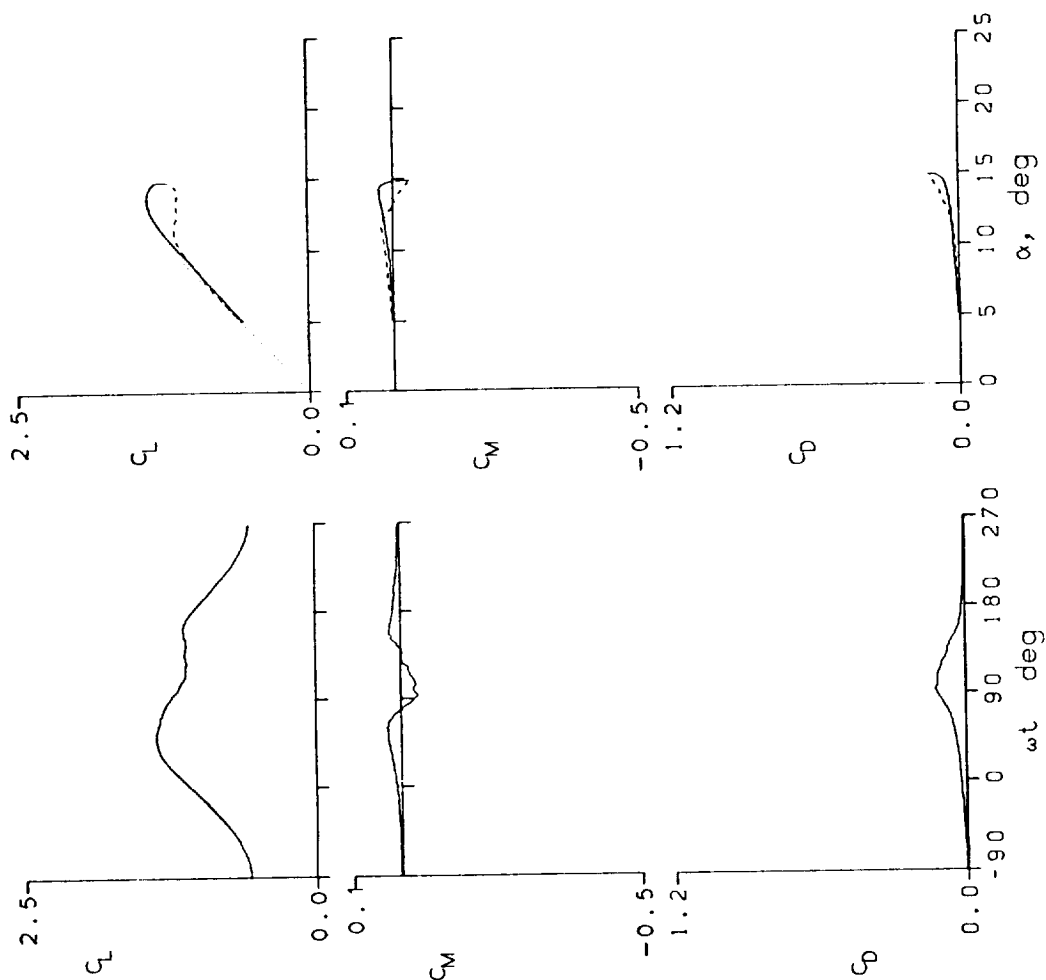


Figure 12.- Continued.

NACA 0012 AIRFOIL
 FRAME : 10204 $A_0 = 9.95^\circ$ $k = 0.049$
 $Re = 3.83 \text{ E}6$ $A_1 = 4.90^\circ$ $M = 0.300$
 $C_{Lmax} = 1.48$ $C_{Mmin} = -0.10$ $C_{Dmax} = 0.20$
 $\alpha_{Lmax} = 14.6^\circ$ $\zeta = -0.226$ $M_{max} = 1.248$
 $\alpha_{Cmin} = 9.8^\circ$ $-C_{Pmax} = 9.3$ $\alpha_{Mmax} = 13.9^\circ$

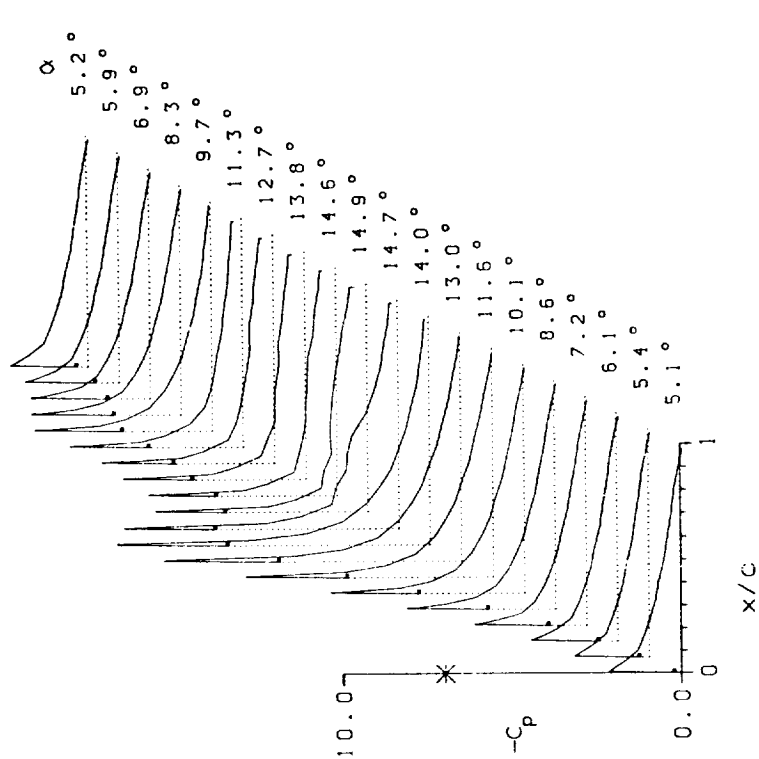
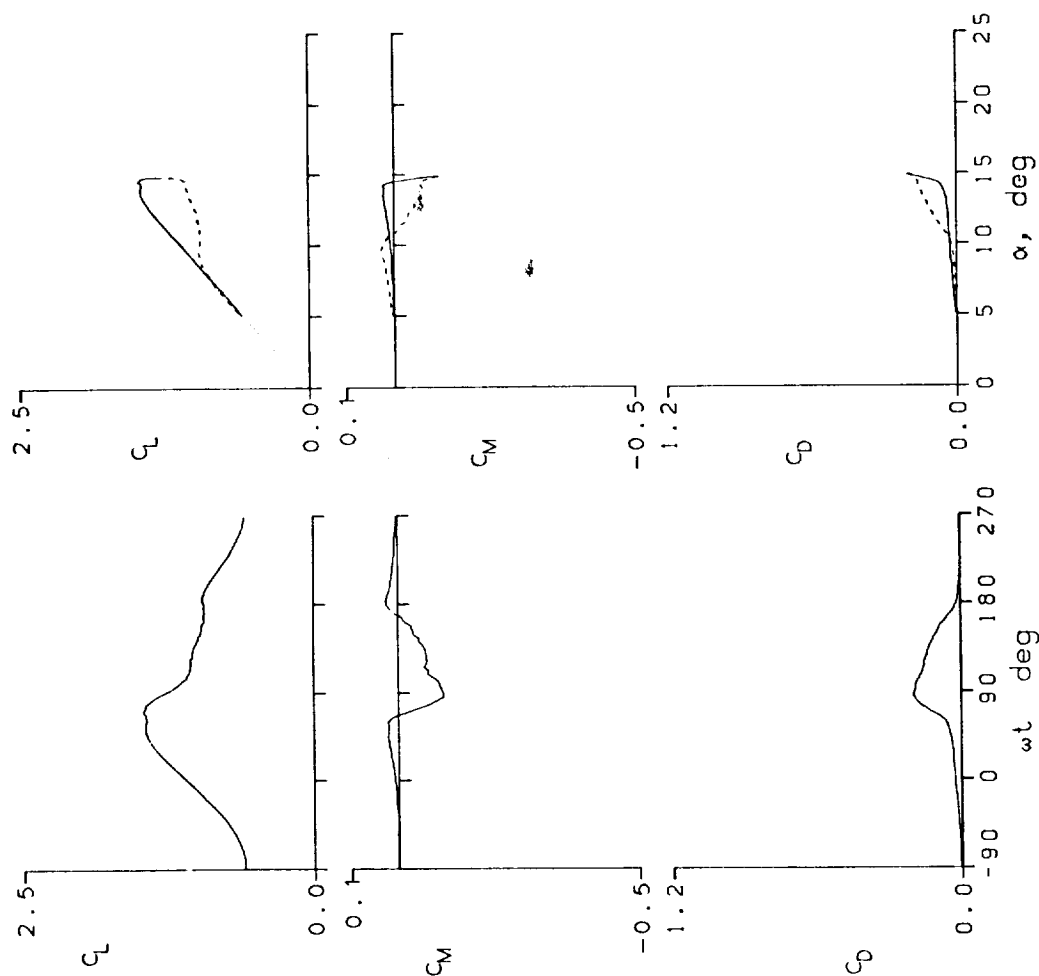


Figure 12.- Continued.

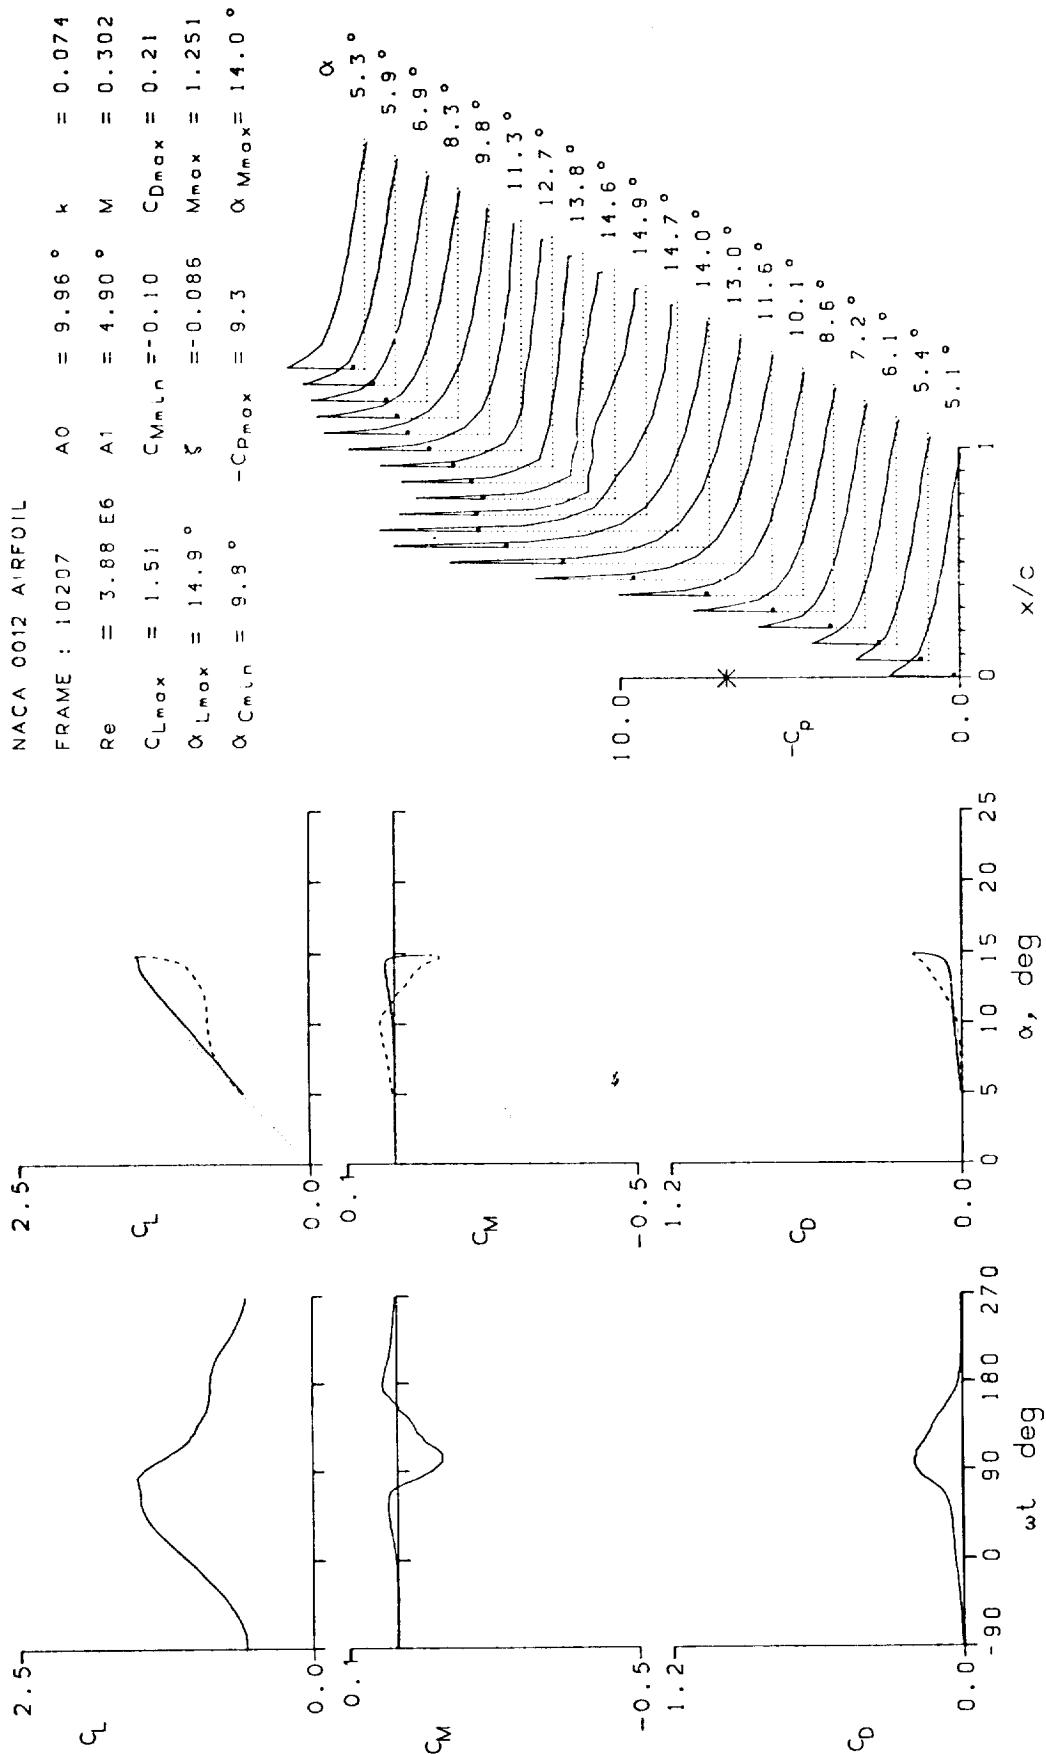


Figure 12.- Continued.

NACA 0012 AIRFOIL
 FRAME : 10208 $A_0 = 9.96^\circ$ $k = 0.099$
 $Re = 3.86 \text{ E} 6$ $A_1 = 4.90^\circ$ $M = 0.300$
 $C_{L_{max}} = 1.53$ $C_{M_{min}} = -0.09$ $C_{D_{max}} = 0.20$
 $\alpha_{L_{max}} = 14.5^\circ$ $\xi = -0.080$ $M_{max} = 1.250$
 $\alpha_{C_{min}} = 9.7^\circ$ $-C_{P_{max}} = 9.4$ $\alpha_{M_{max}} = 14.0^\circ$

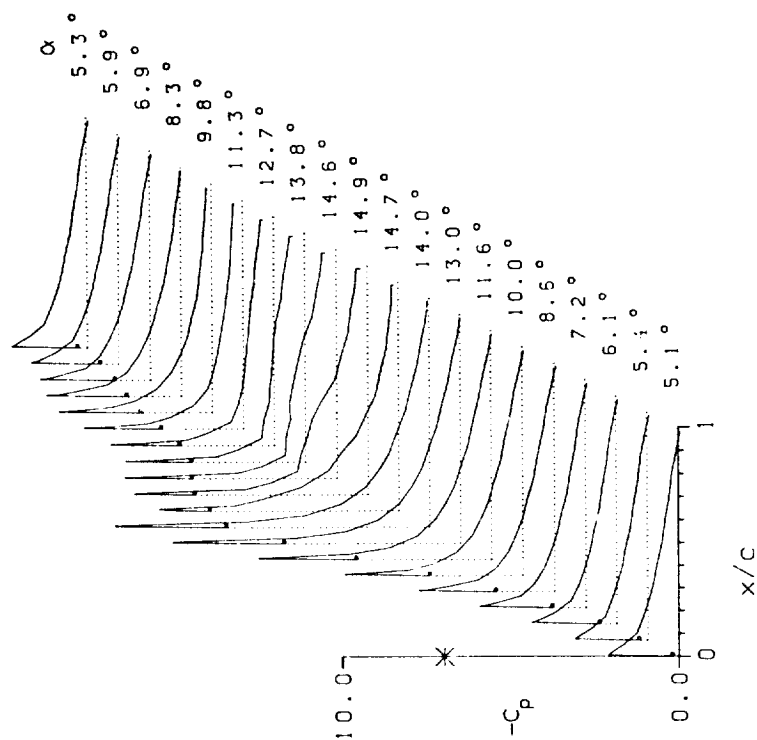
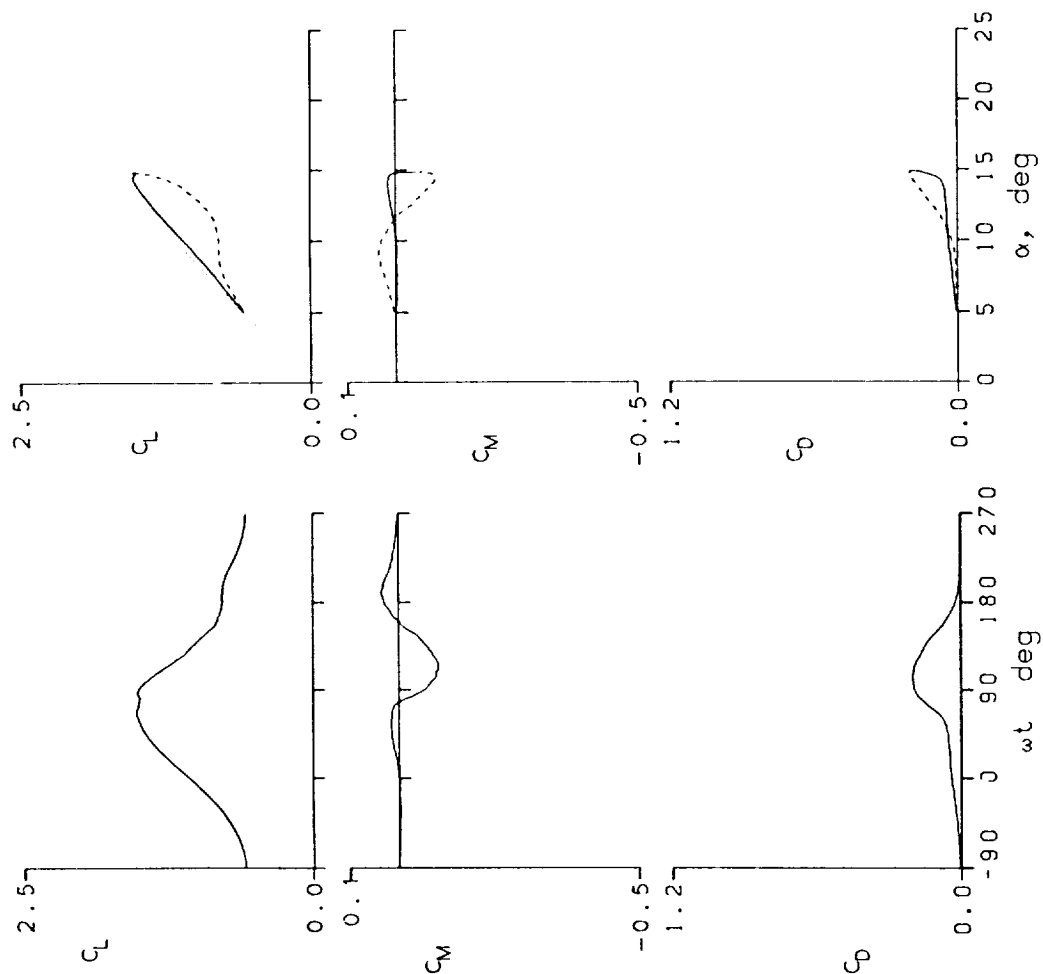


Figure 12.- Continued.

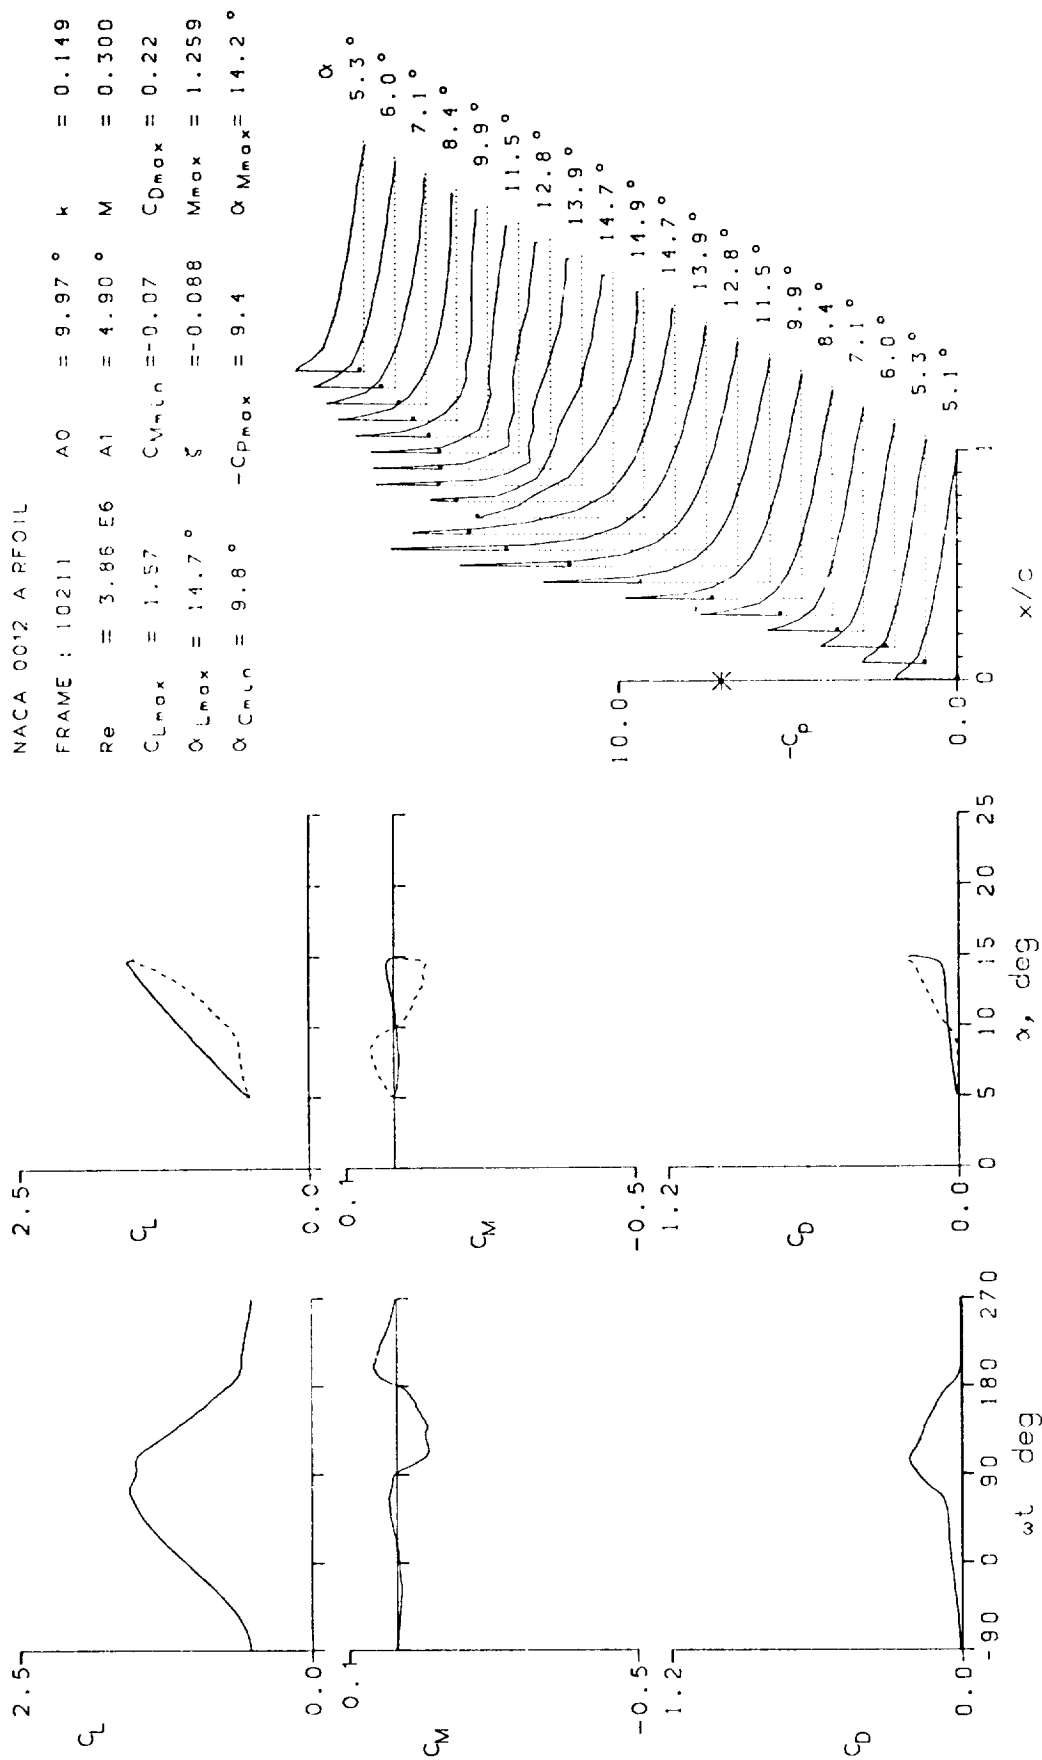


Figure 12.- Continued.

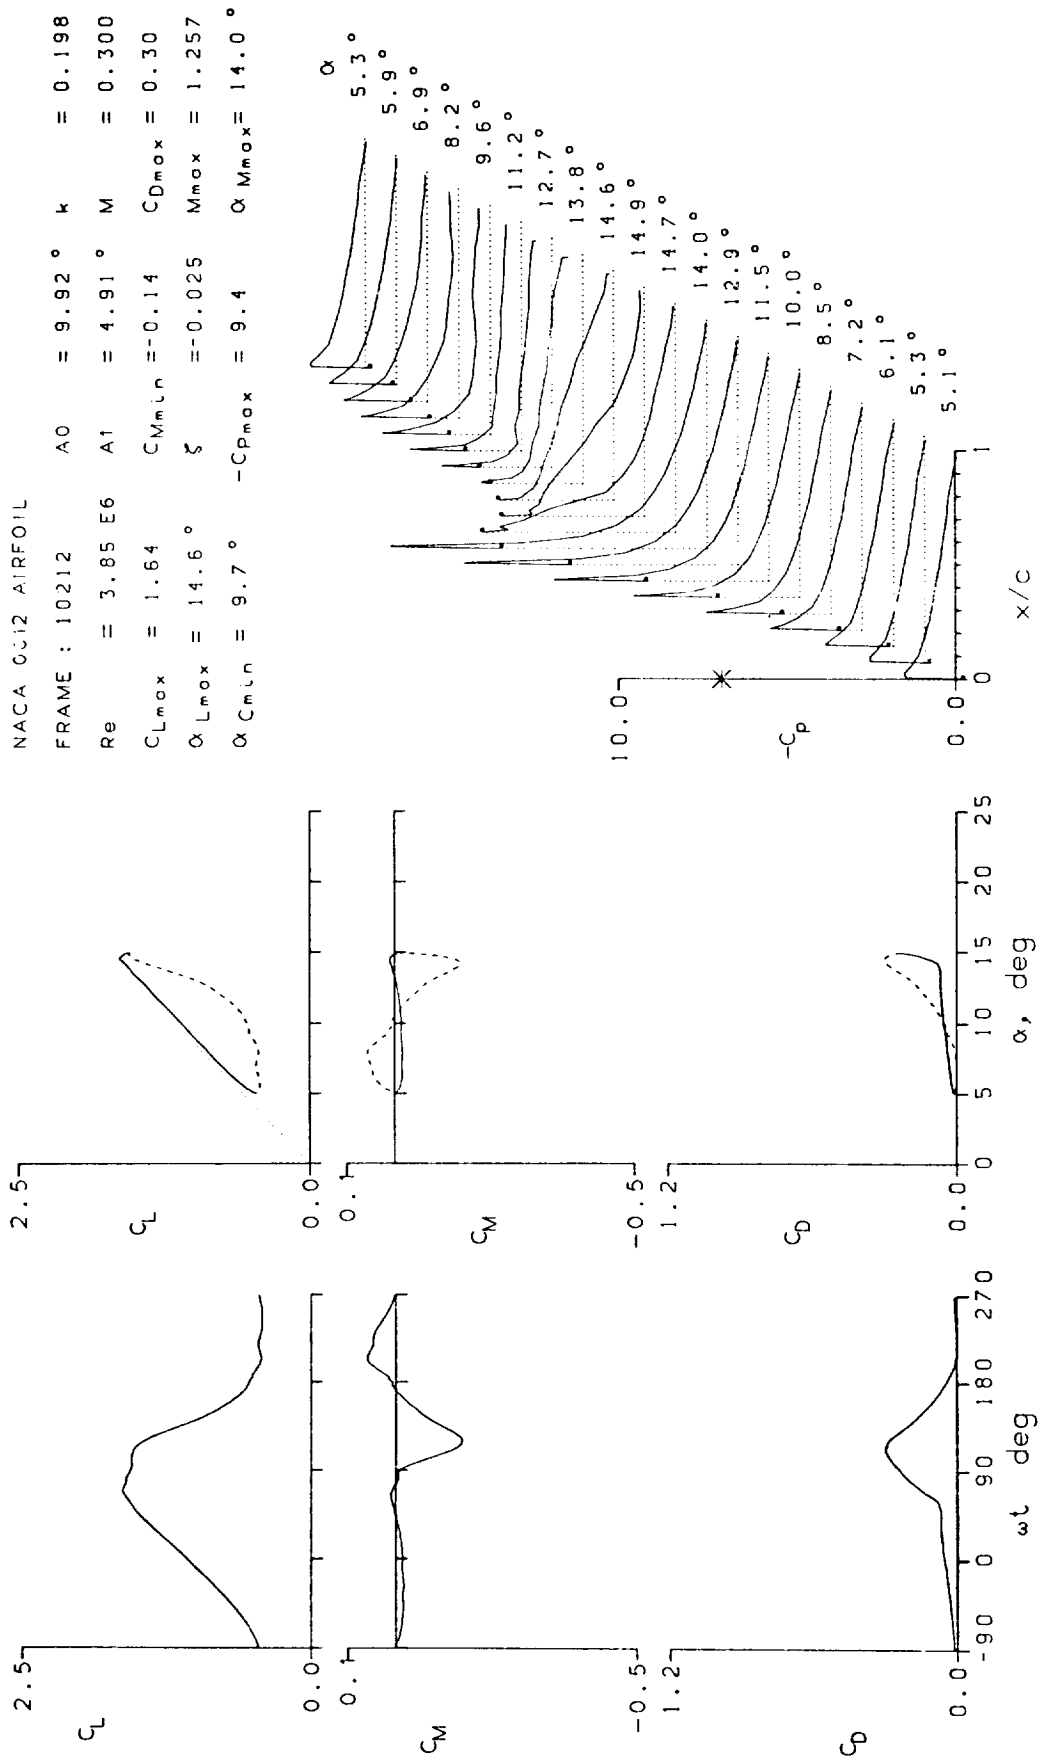


Figure 12.- Continued.

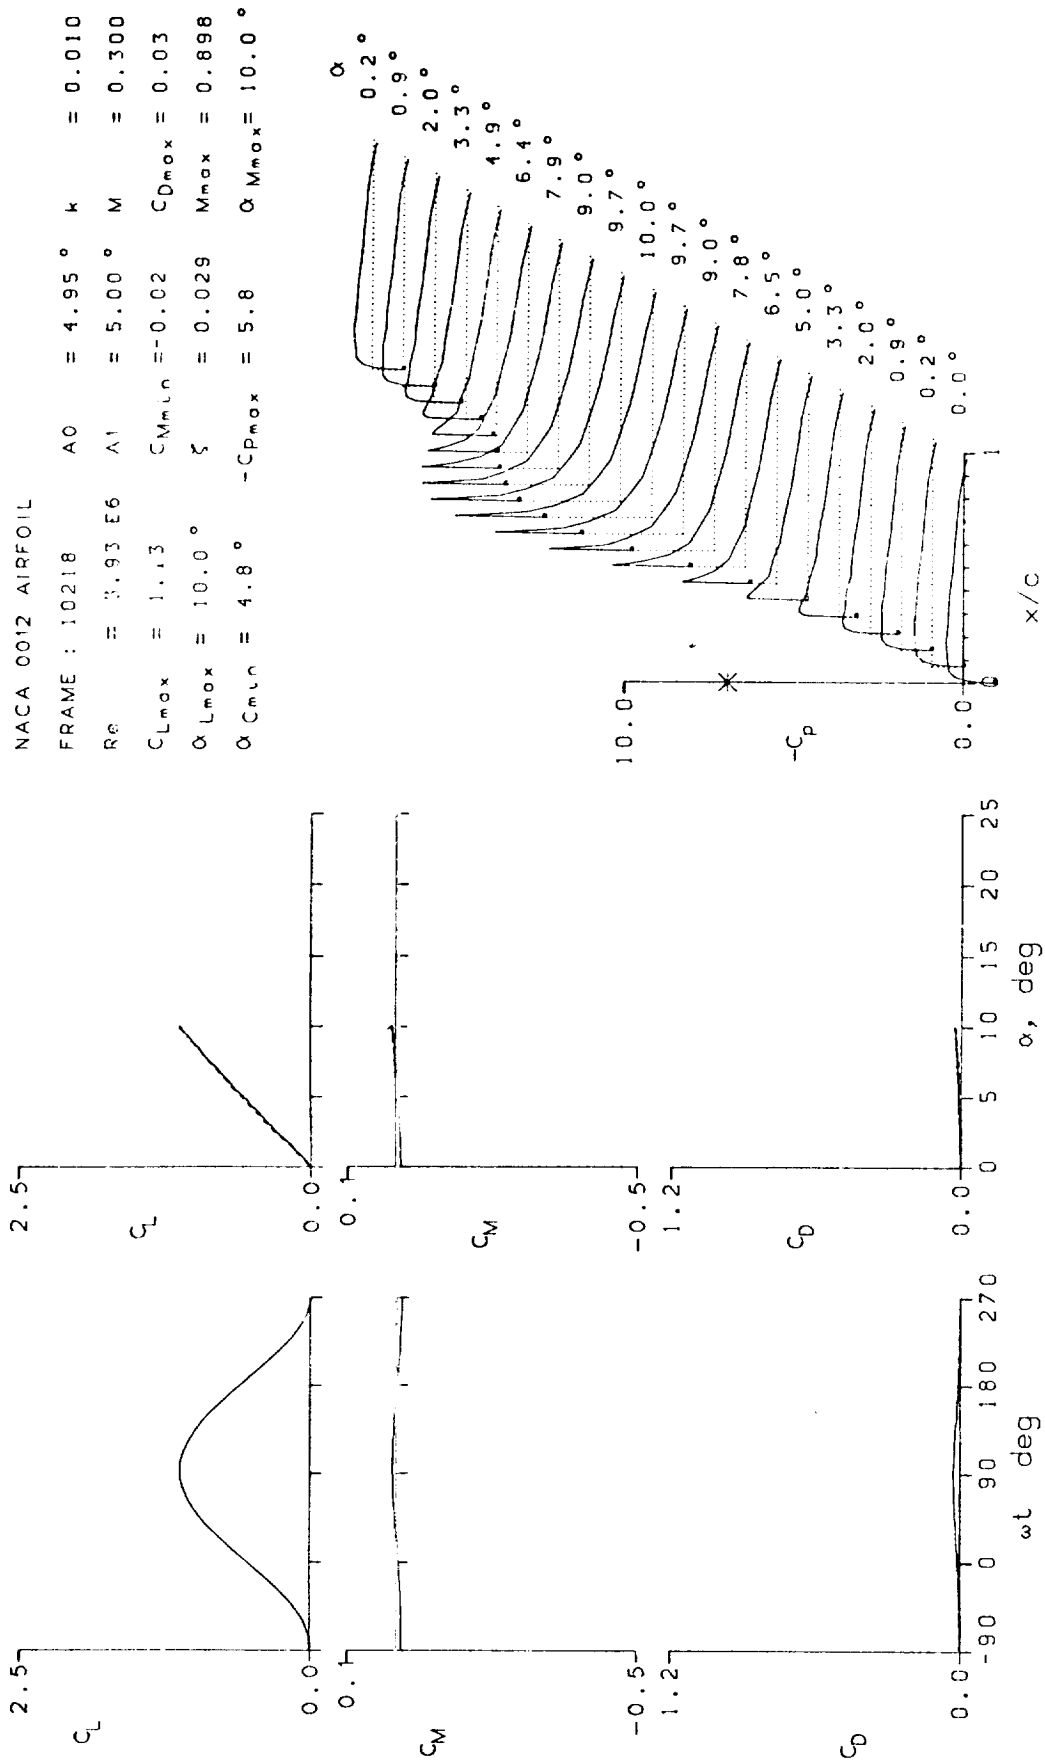


Figure 12.- Continued.

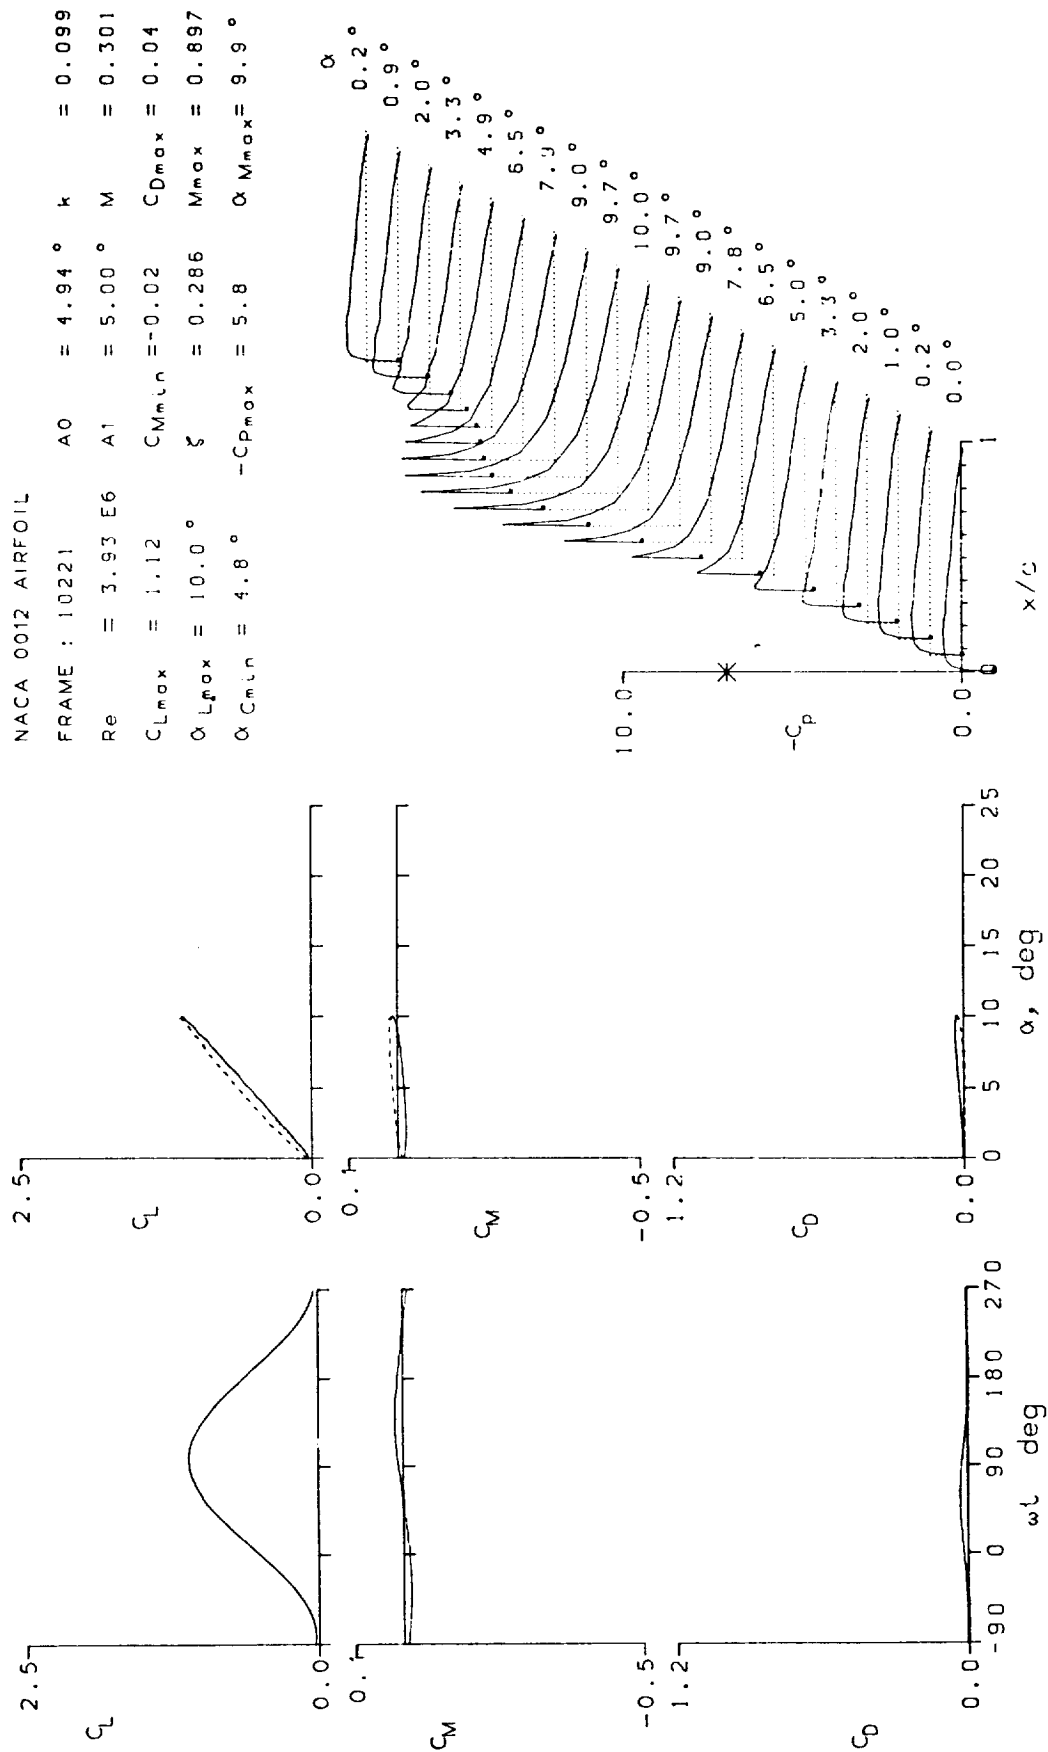


Figure 12.- Continued.

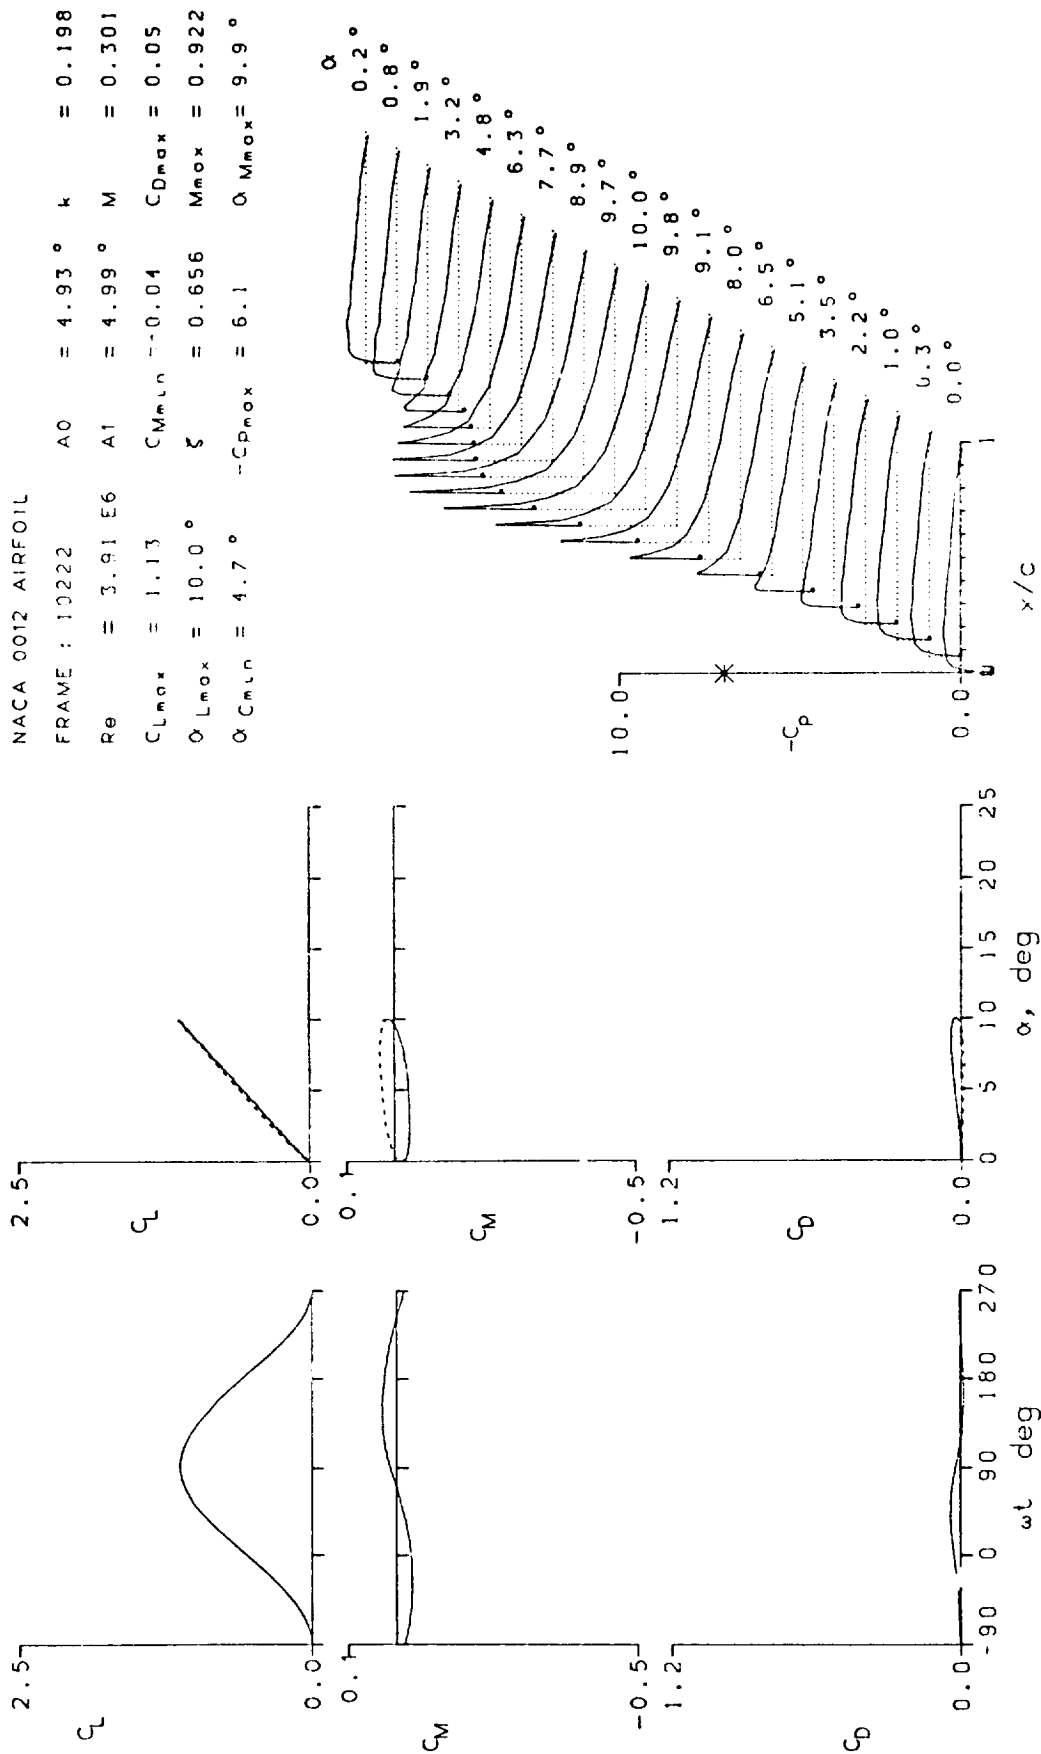


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10303	A0 = 4.86 °	k = 0.099
Re = 3.91 E6	A1 = 10.05 °	M = 0.301
CLmax = 1.57	CMmin = -0.08	CDmax = 0.20
α Lmax = 14.9 °	ξ = 0.169	Mmax = 1.239
α CMln = 4.3 °	-CPmax = 9.2	α Mmax = 14.5 °

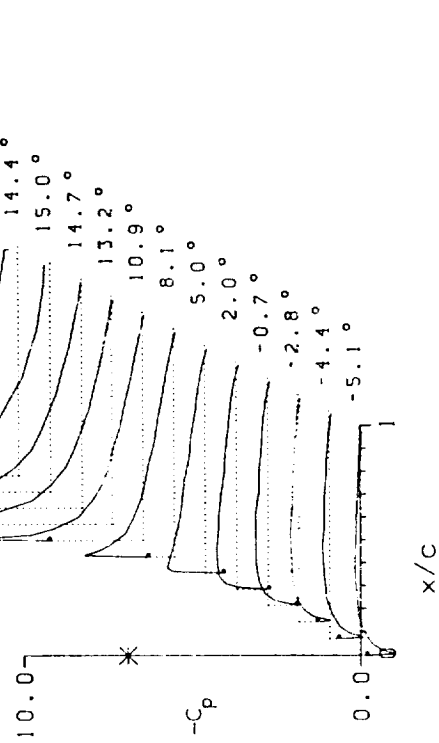
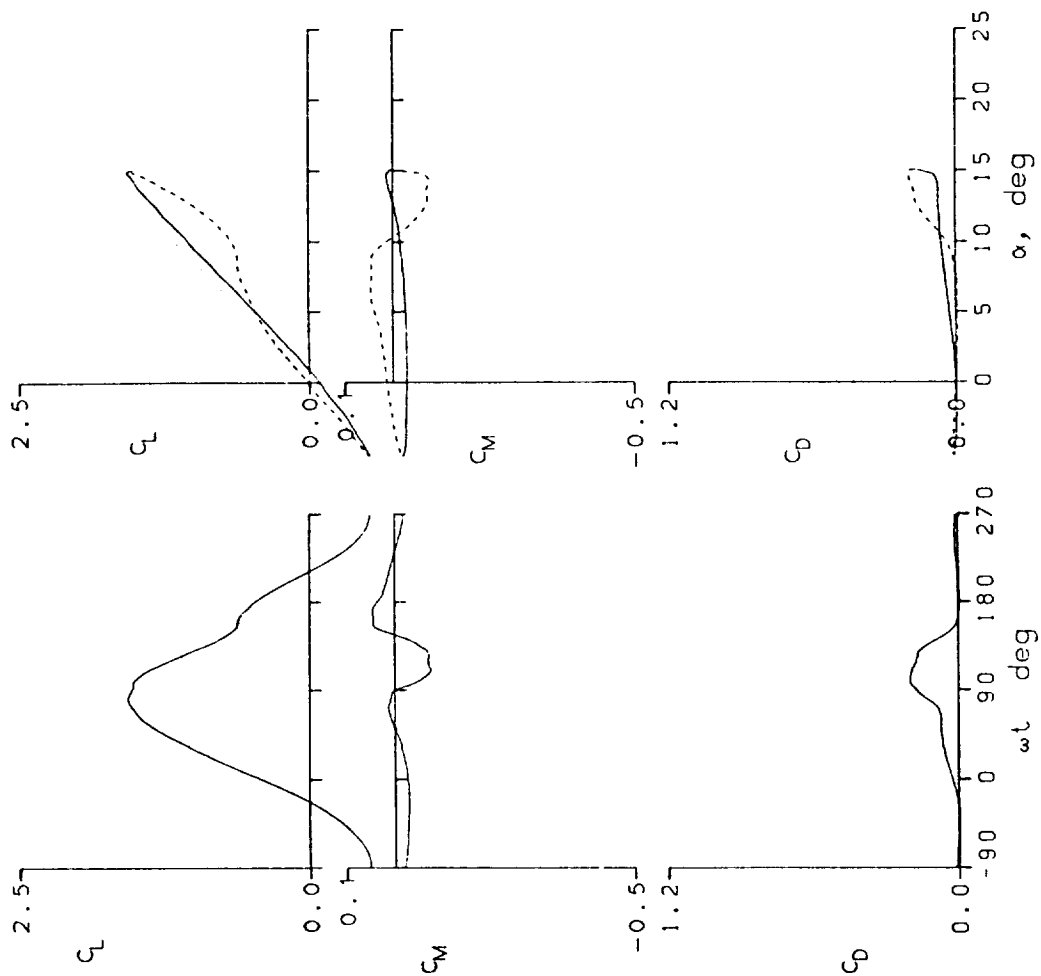


Figure 12.- Continued.

NACA 00'2 AIRFOIL

FRAME : 10305	A0 = 3.64 °	k = 0.099
Re = 3.91 E6	A1 = 10.11 °	M = 0.301
$C_{Lmax} = 1.49$	$C_{Mmin} = -0.04$	$C_{Dmax} = 0.07$
$\alpha_{Lmax} = 13.9 °$	$\xi = 0.255$	$M_{max} = 1.241$
$\alpha_{Cmin} = 0.0 °$	$-C_{pmax} = 9.2$	$\alpha_{Mmax} = 13.9 °$

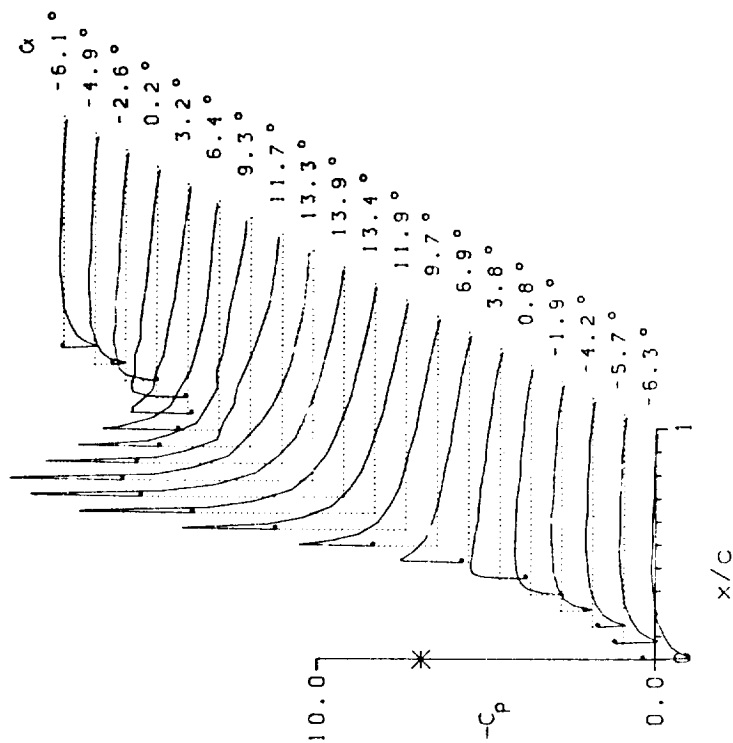
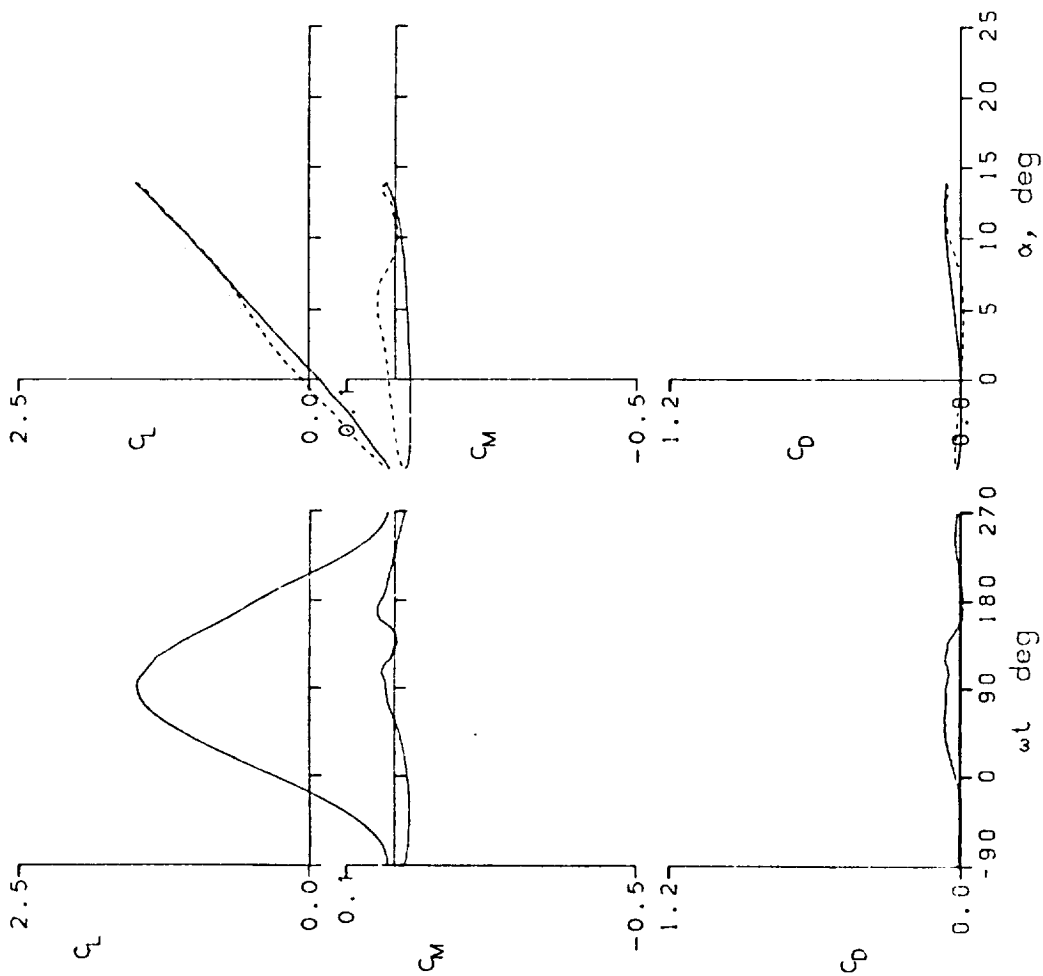


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 10309	A0 = 2.64 °	k = 0.099
Rθ = 3.90 E6	A1 = 10.16 °	M = 0.301
C _{Lmax} = 1.42	C _{Mmin} = -0.04	C _{Dmax} = 0.06
α _{Lmax} = 12.9 °	ζ = 0.309	M _{max} = 1.208
α _{Cmin} = -0.2 °	-C _{pmax} = 8.9	α _{Mmax} = 12.8 °

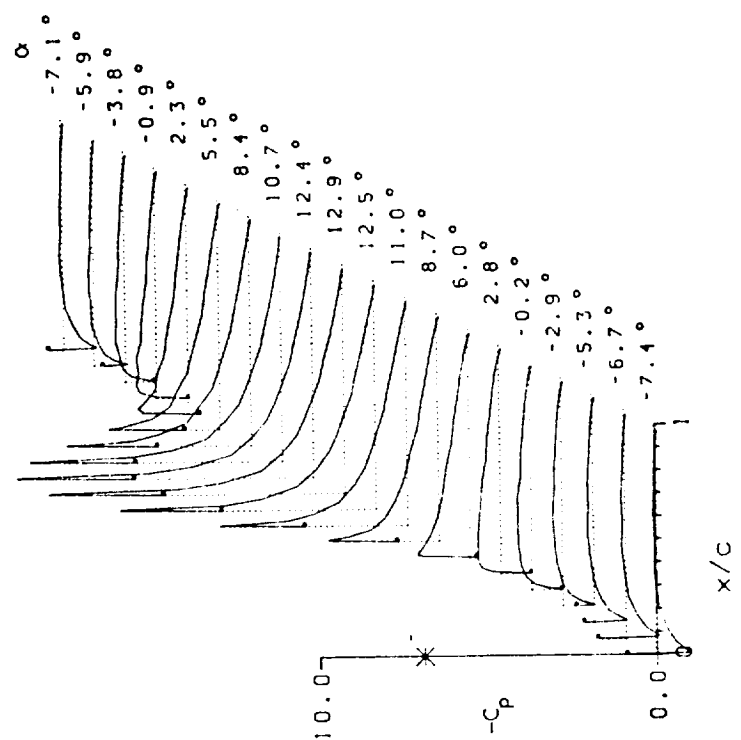
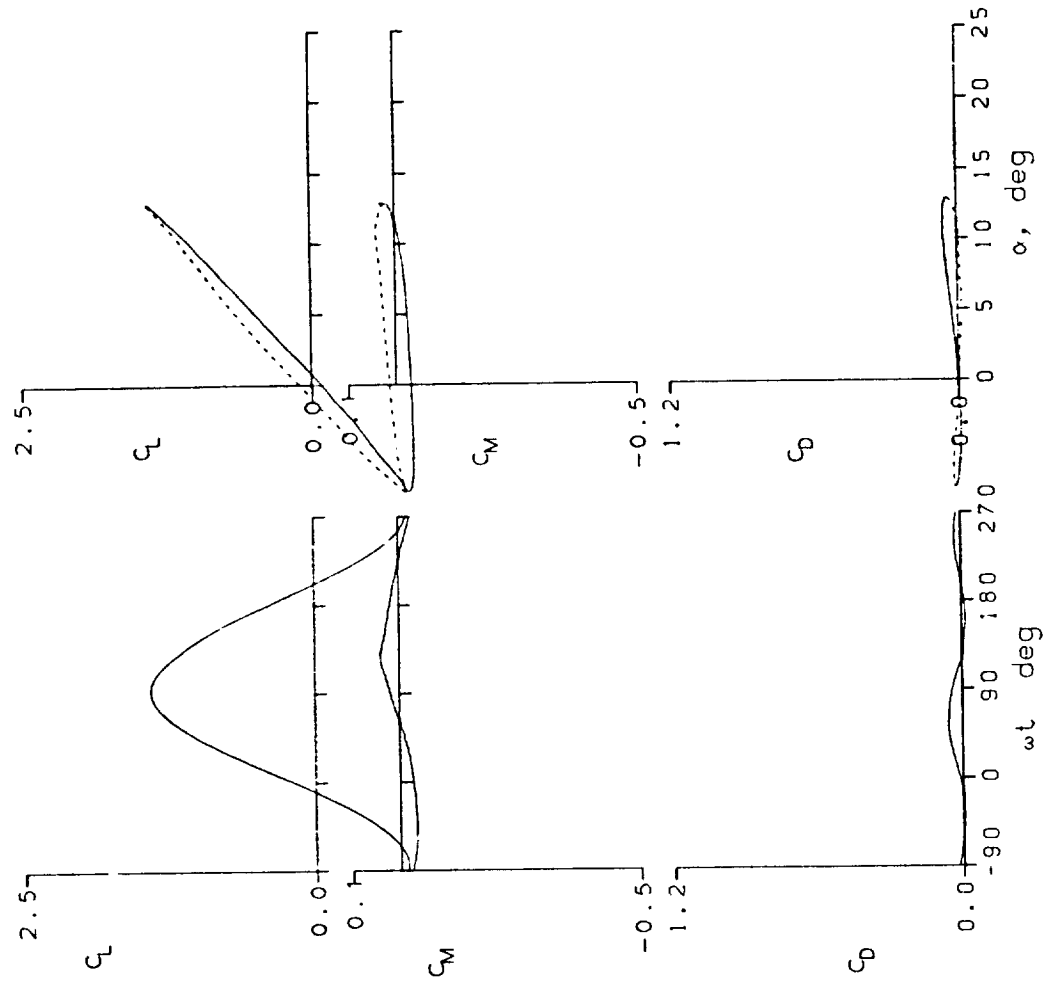


Figure 12.- Continued.

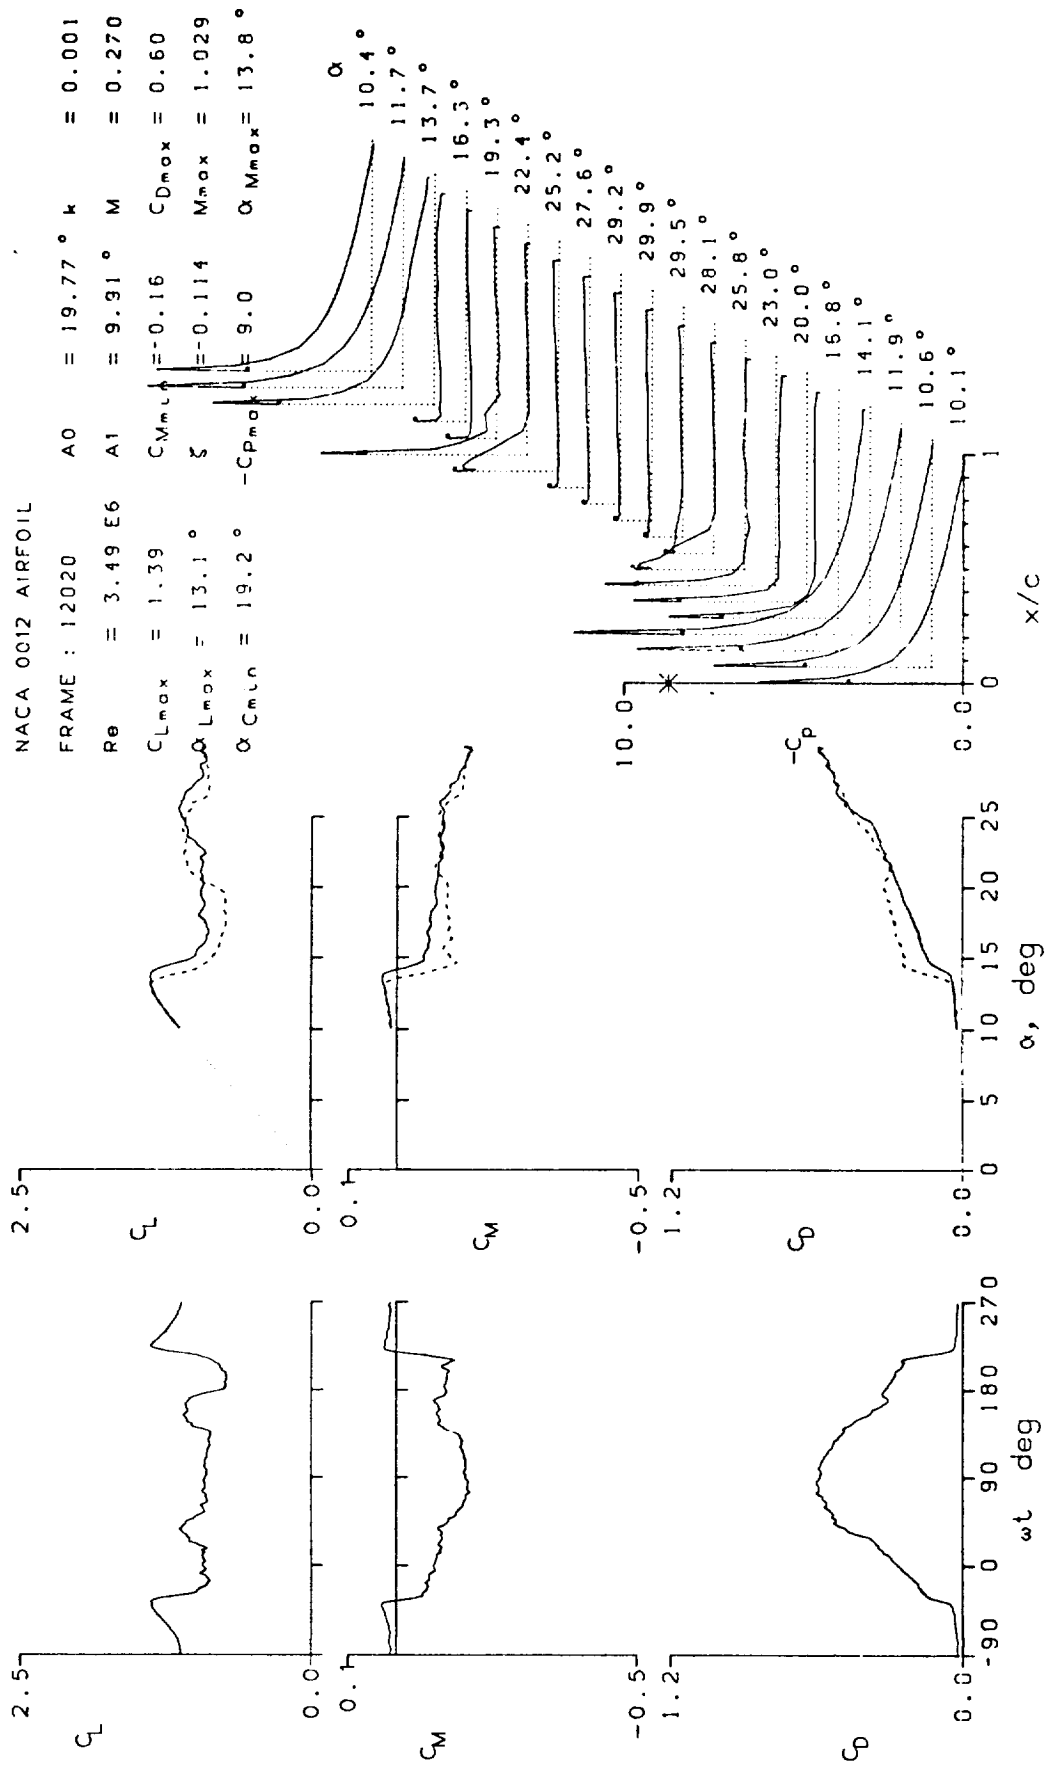


Figure 12.- Continued.

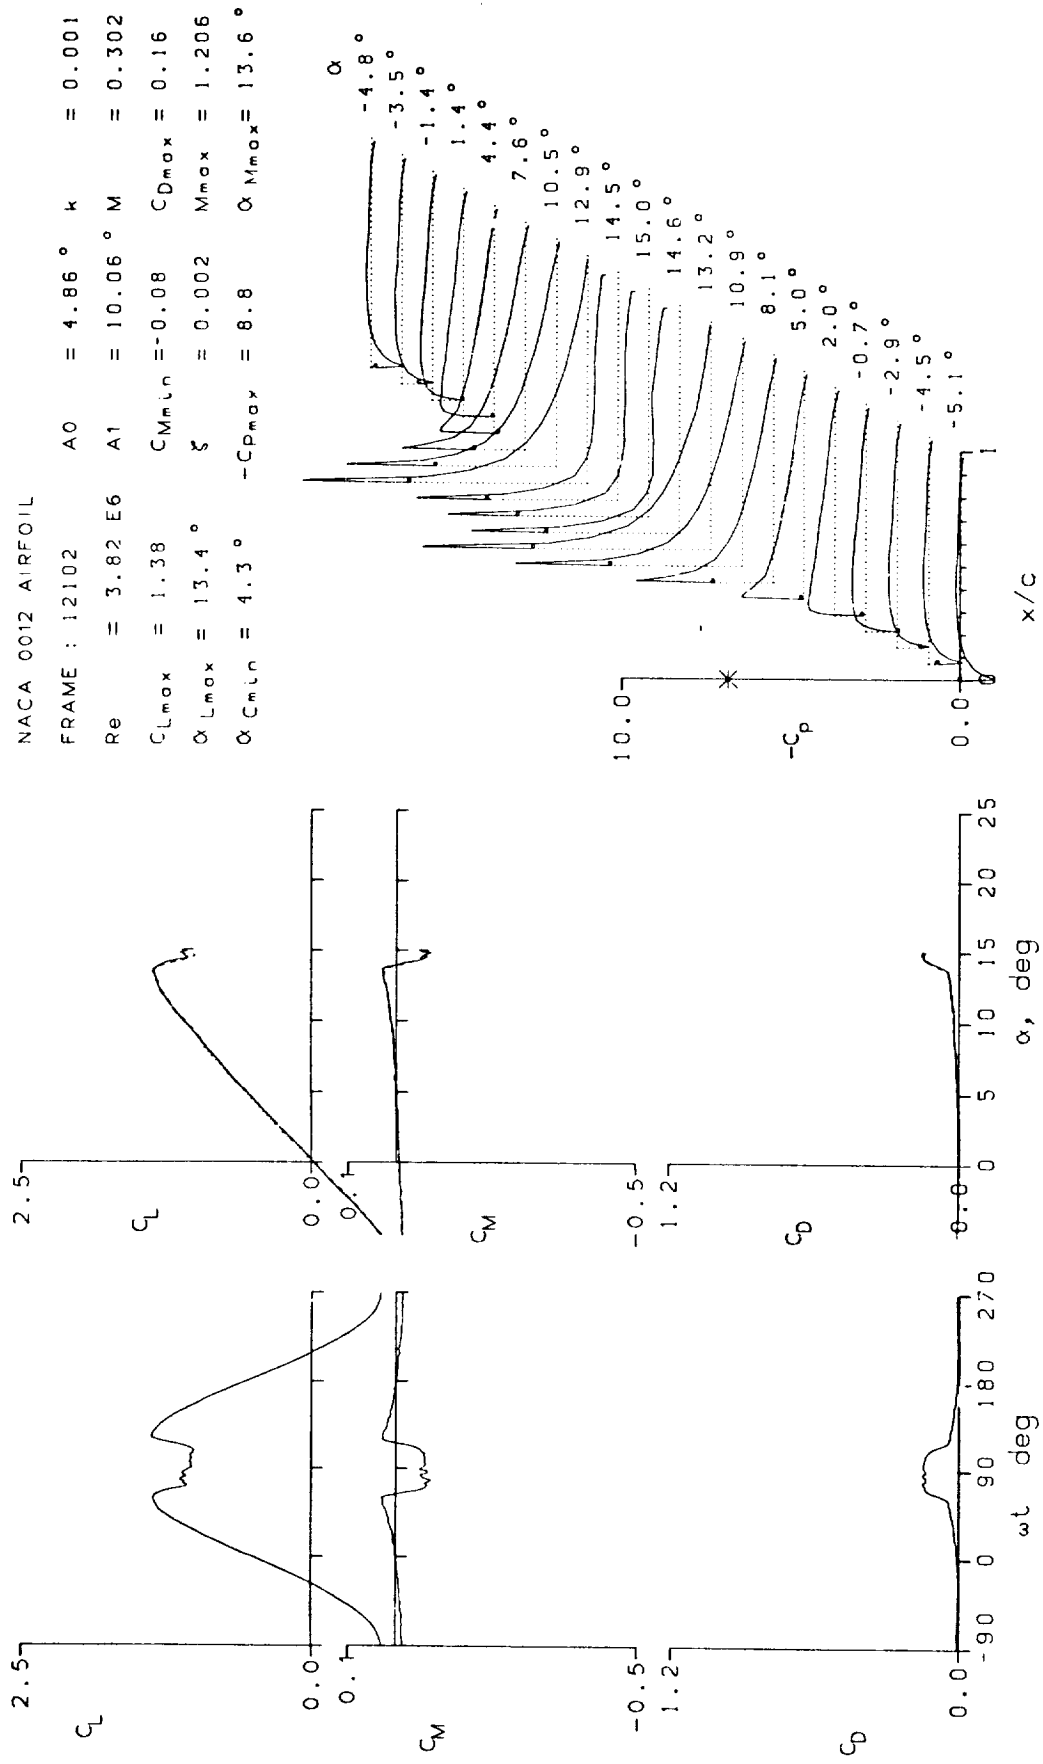


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 12109 A0 = 5.82° k = 0.001
 Re = 3.49 E6 A1 = 10.00° M = 0.279
 $C_{Lmax} = 1.43$ $C_{Mmin} = -0.08$ $C_{Dmax} = 0.18$
 $\alpha_{Lmax} = 14.3^\circ$ $\xi = -0.723$ $M_{max} = 1.114$
 $\alpha_{Cmin} = 5.3^\circ$ $-C_{pmax} = 9.5$ $\alpha_{Mmax} = 14.5^\circ$

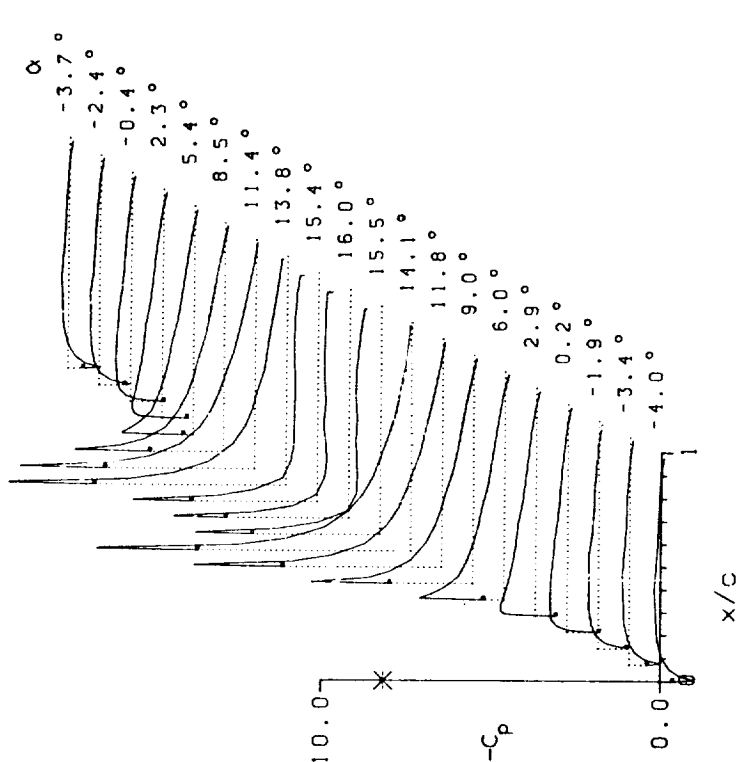
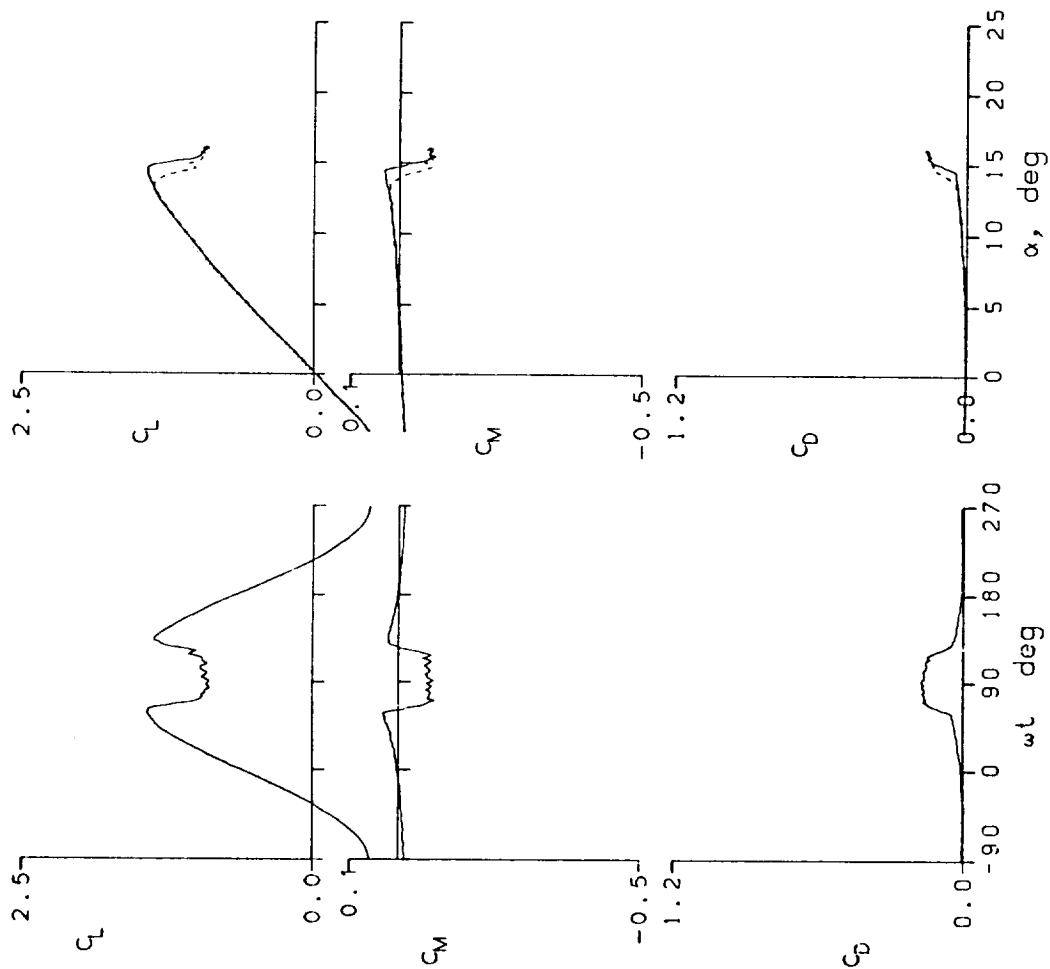


Figure 12.- Continued.

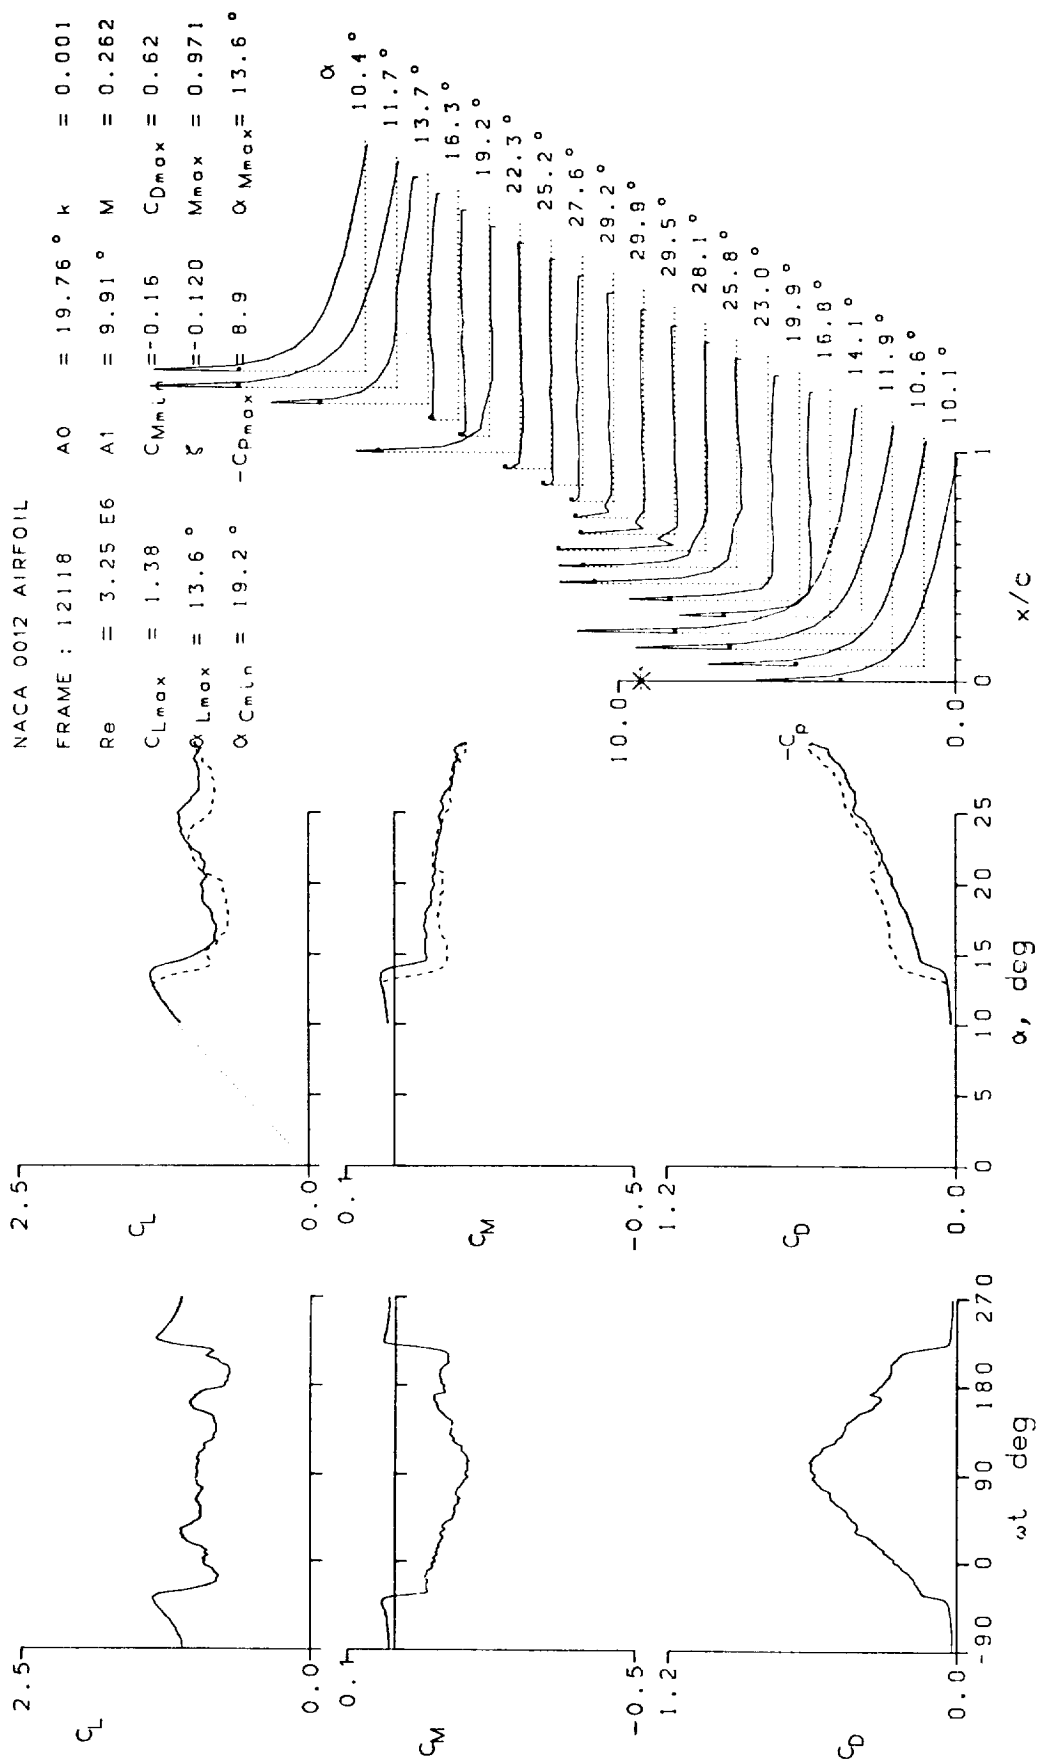


Figure 12.- Continued.

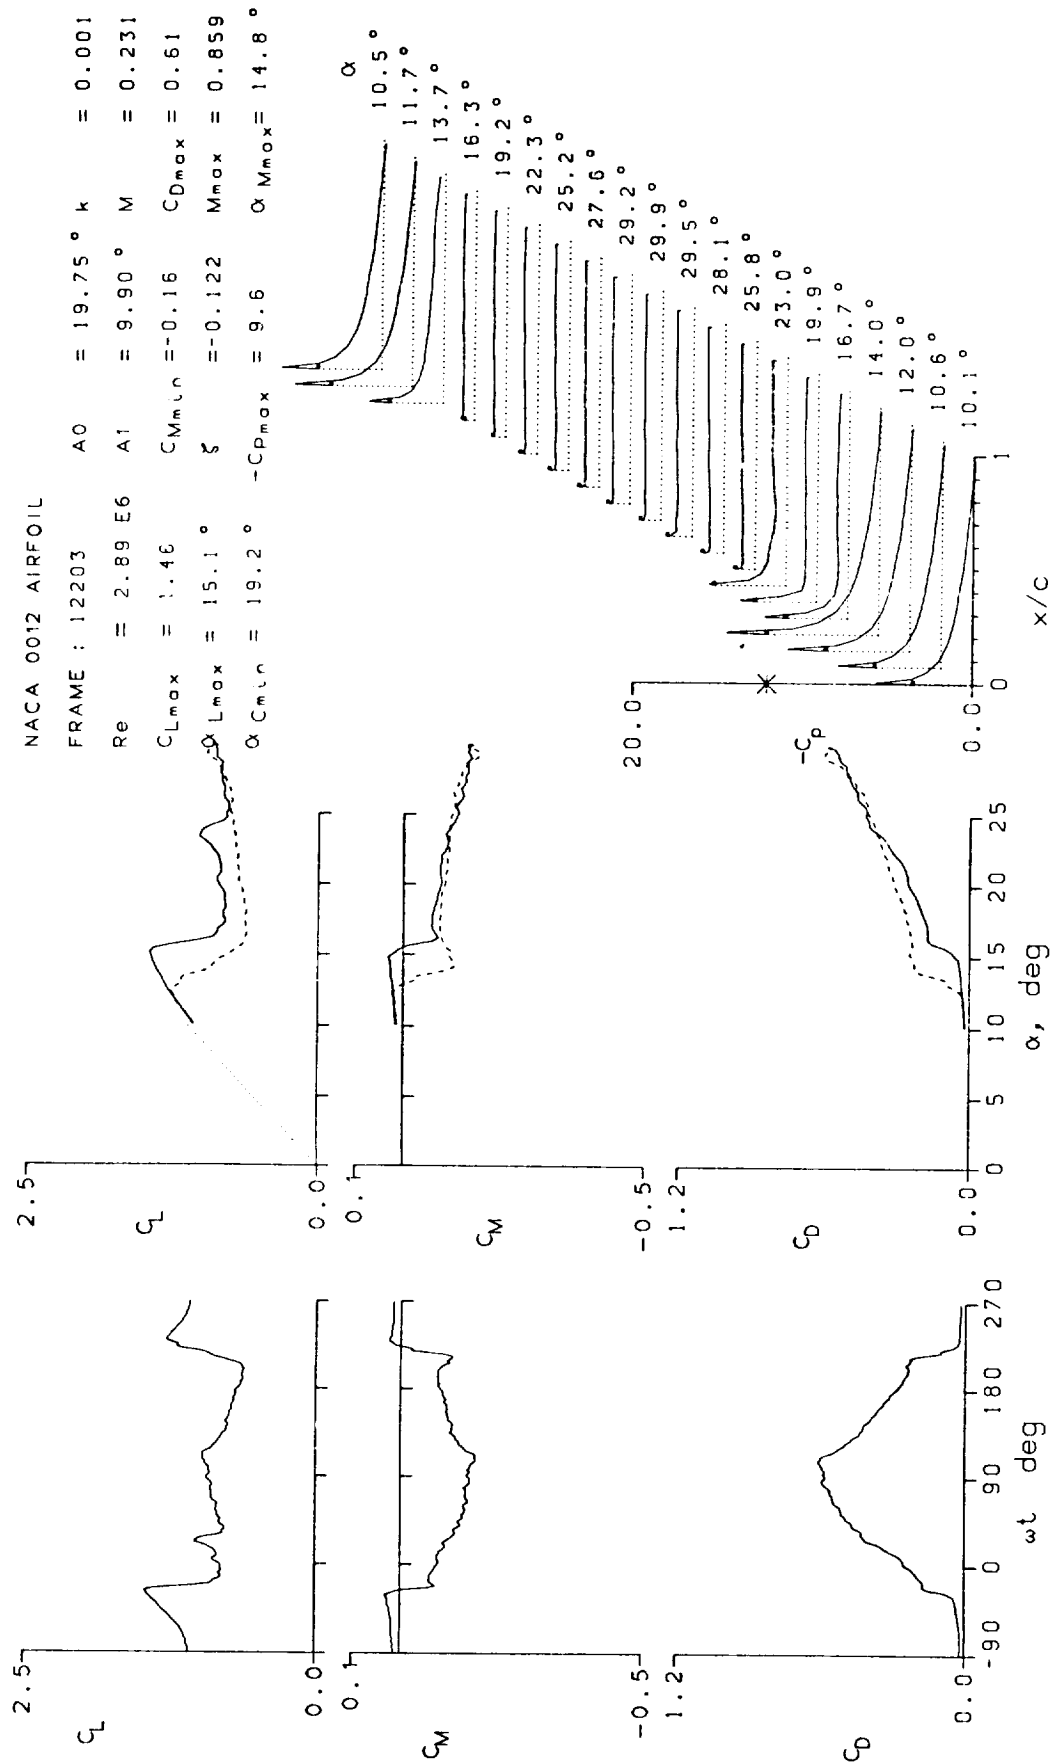


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 12208	A0 = 6.80 °	k = 0.001
Re = 3.27 E6	A1 = 10.00 °	M = 0.244
$C_{Lmax} = 1.57$	$C_{Mmin} = -0.08$	$C_{Dmax} = 0.19$
$\alpha_{Lmax} = 16.0 °$	$\xi = -0.069$	$M_{max} = 1.004$
$\alpha_{Cmin} = 6.3 °$	$-C_{Pmax} = 10.9$	$\alpha_{Mmax} = 16.1 °$

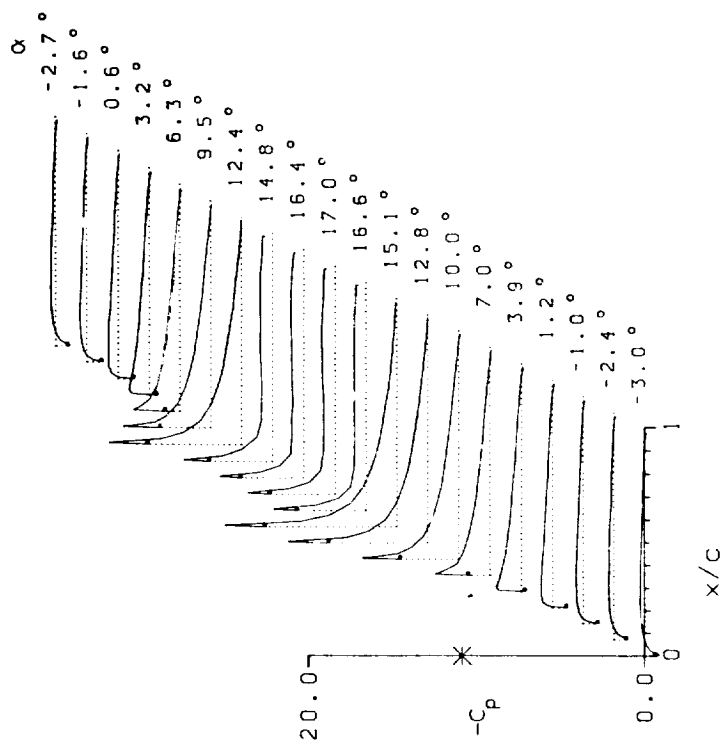
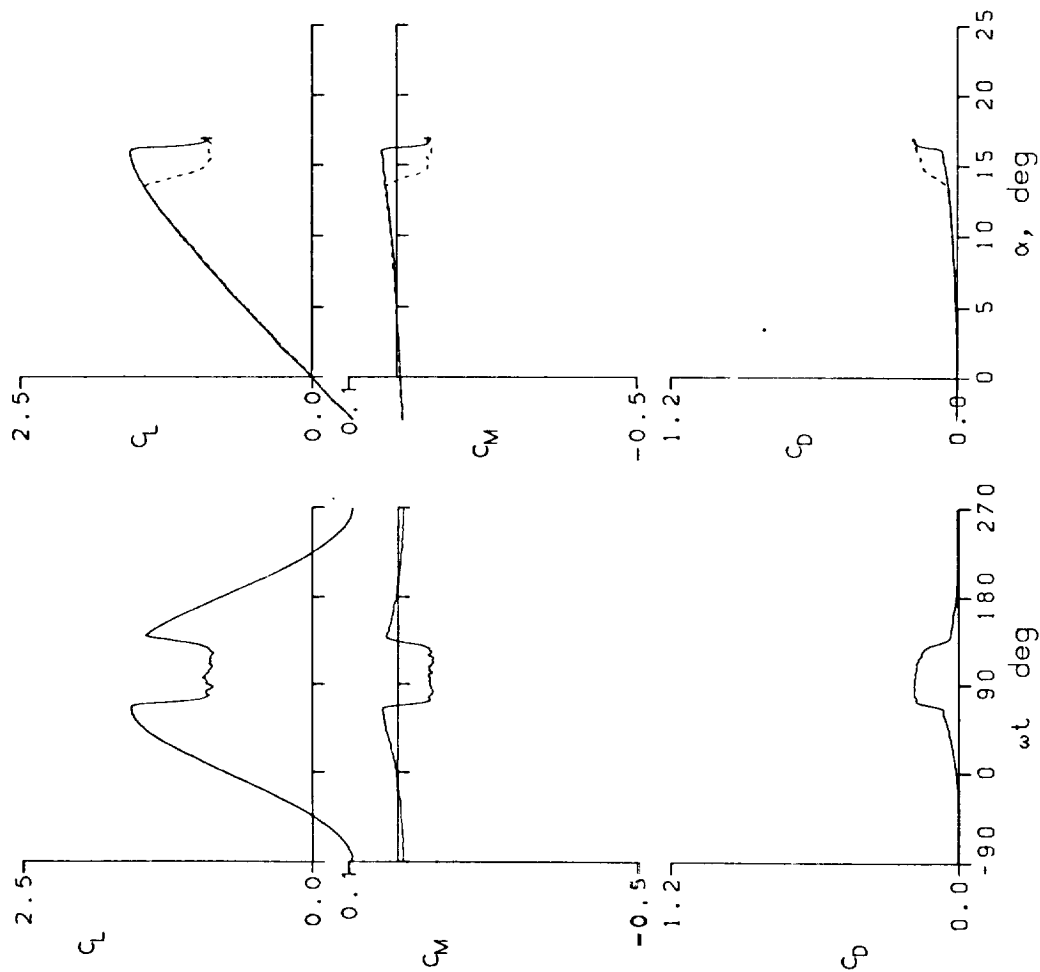


Figure 12.- Continued.

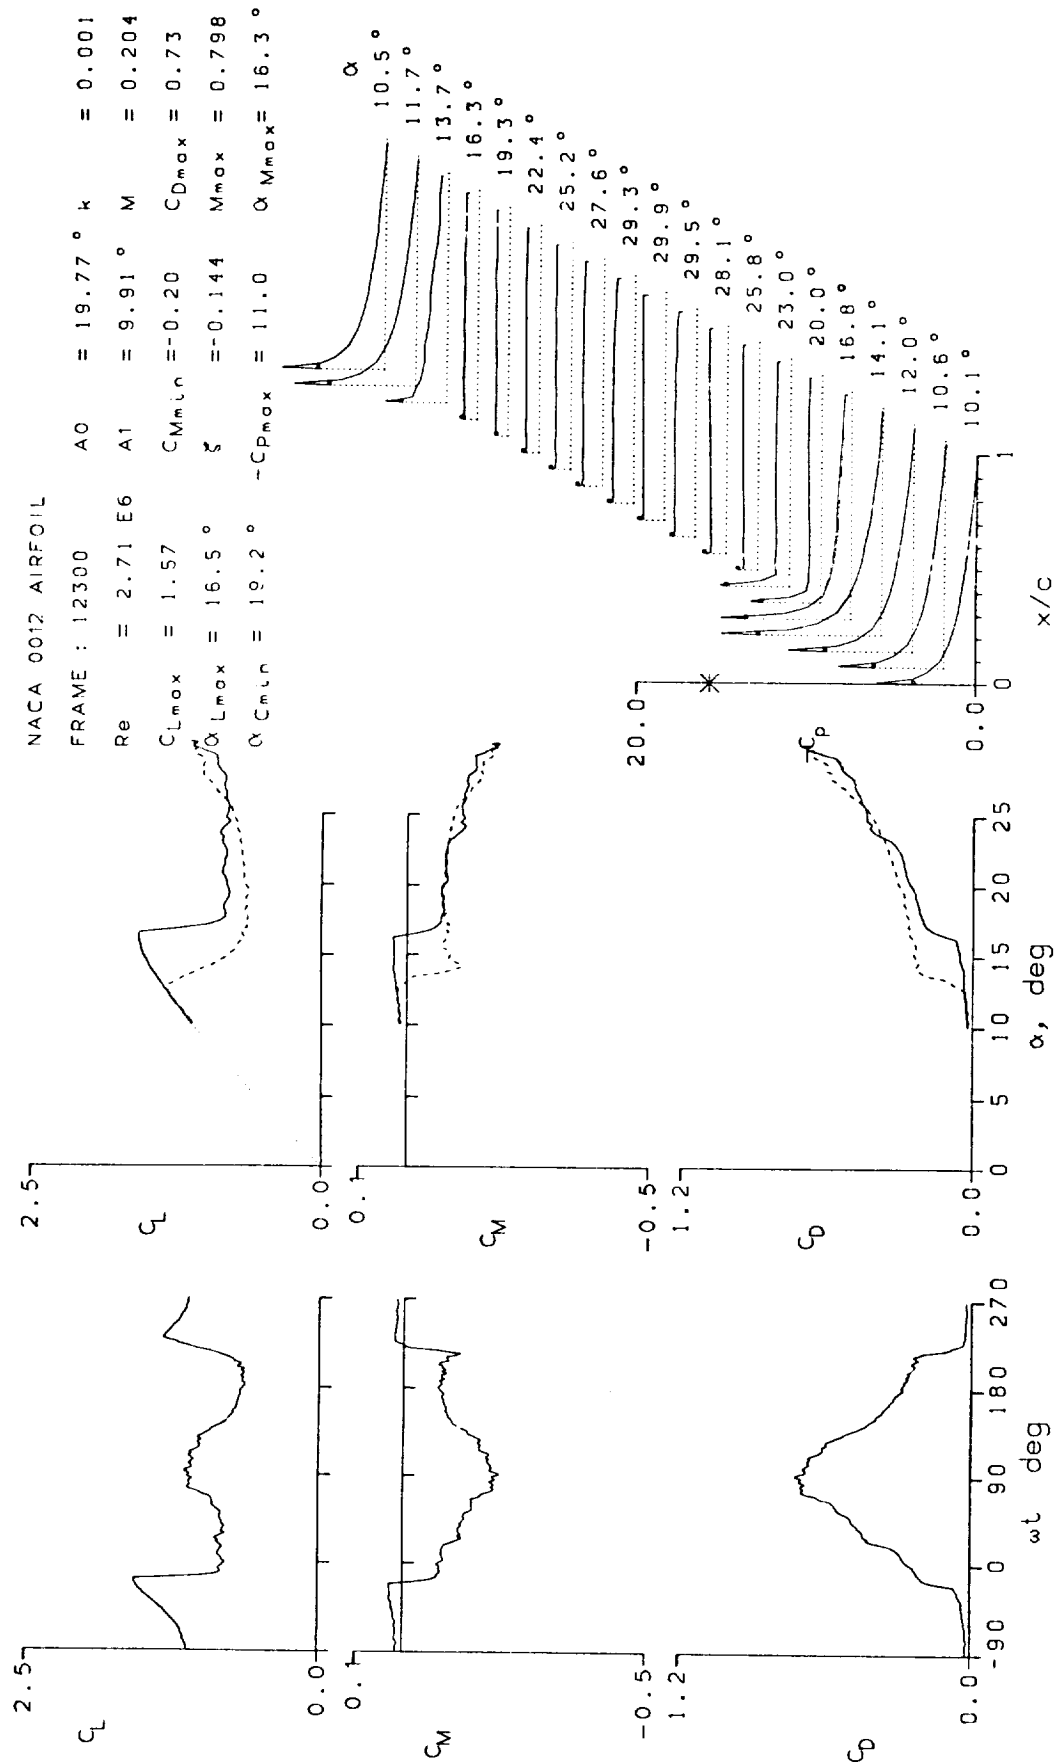


Figure 12.- Continued.

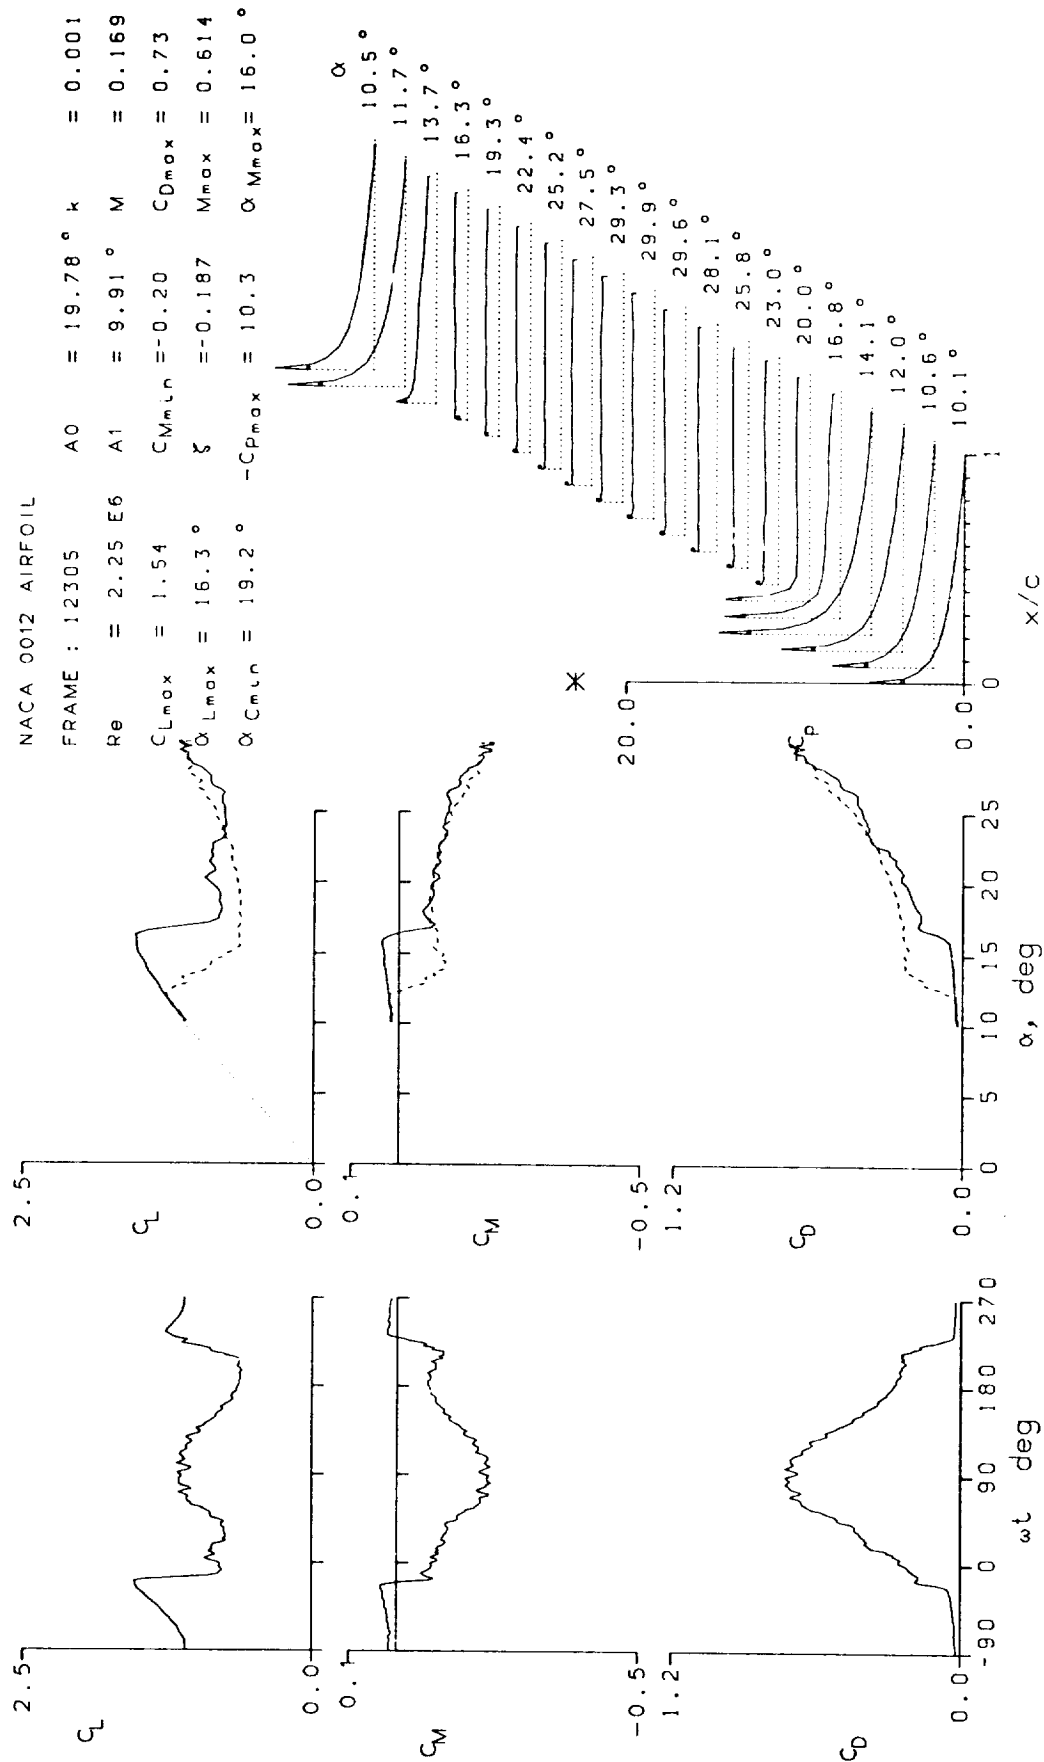


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 12310	A0 = 6.79 °	k = 0.001
Re = 2.47 E6	A1 = 10.00 °	M = 0.186
C _{Lmax} = 1.54	C _{Mmin} = -0.09	C _{Dmax} = 0.24
α _{Lmax} = 15.9 °	ξ = -0.106	M _{max} = 0.691
α _{Cmin} = 6.3 °	-C _{pmax} = 10.5	α _{Mmax} = 16.2 °

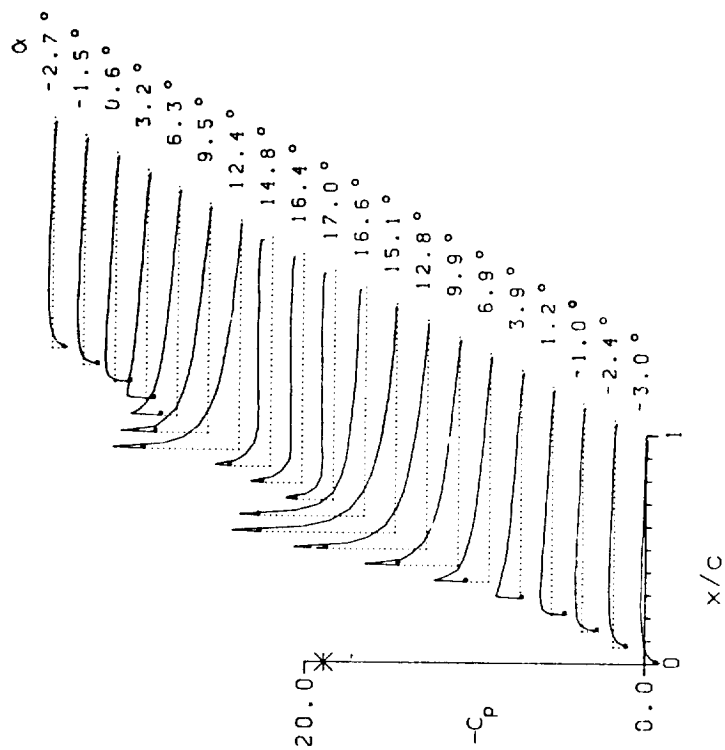
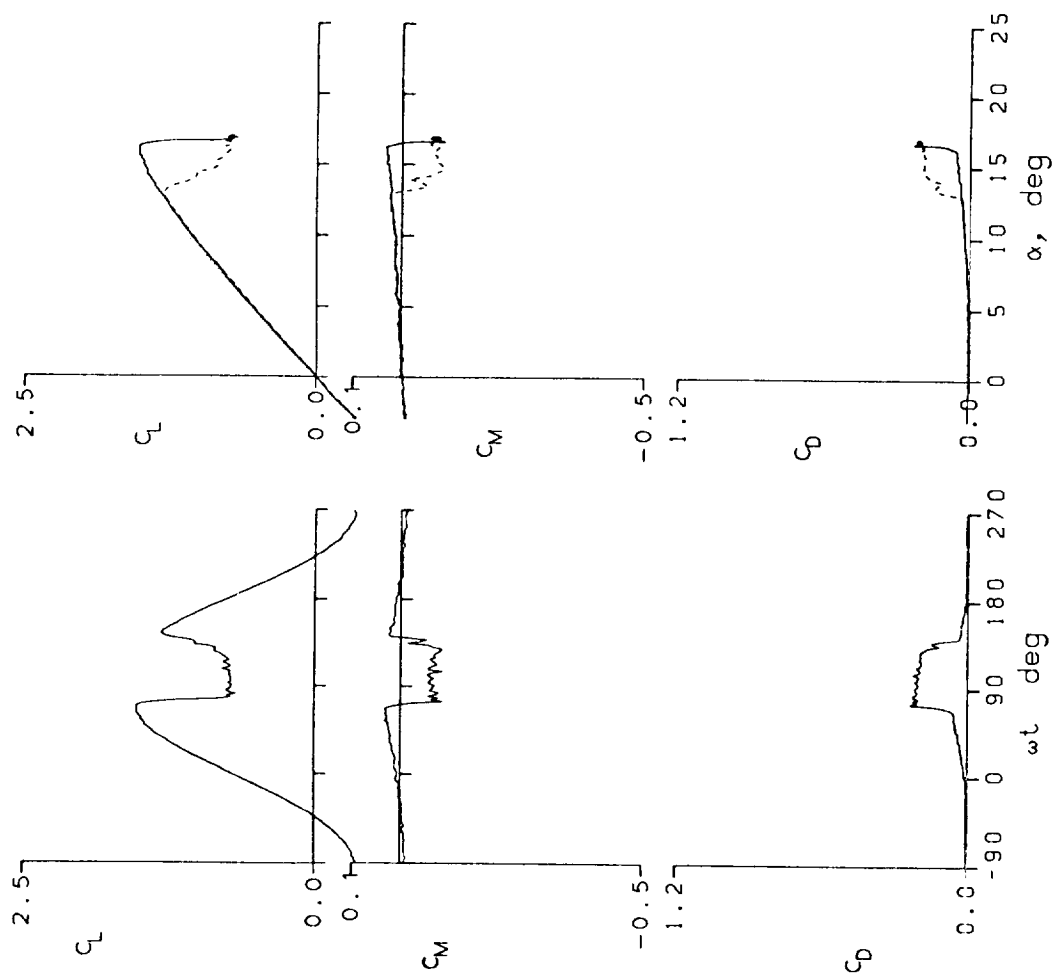


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 13021	A0 = 6.79 °	k = 0.002
Re = 1.50 E6	A1 = 10.00 °	M = 0.108
C _{Lmax} = 1.42	C _{Mmin} = -0.07	C _{Dmax} = 0.20
α _{Lmax} = 14.9 °	ξ = -0.059	M _{max} = 0.348
α _{Cmin} = 6.3 °	-C _{Pmax} = 8.9	α _{Mmax} = 14.7 °

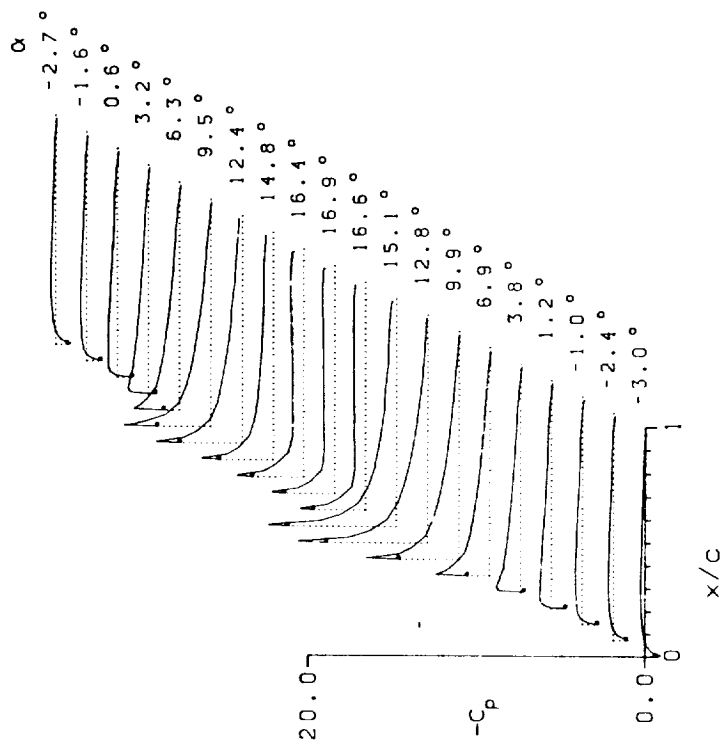
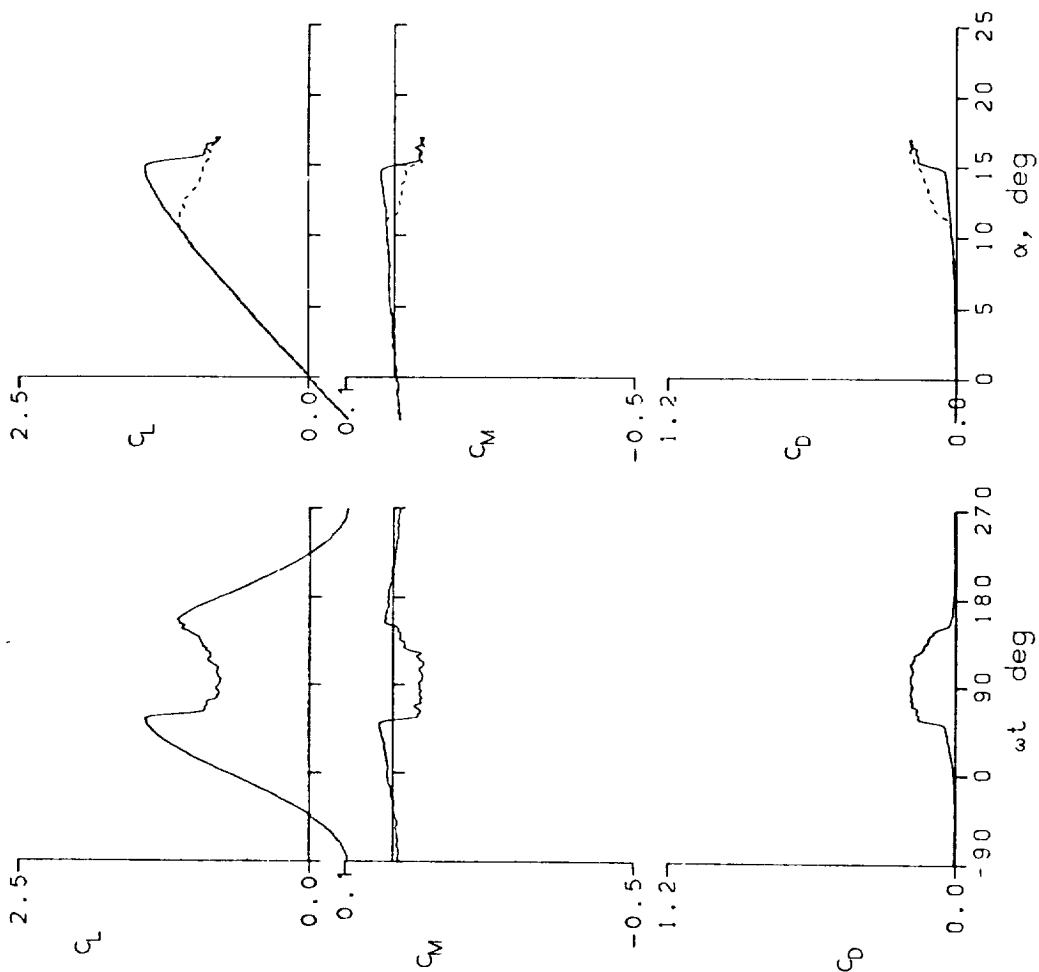


Figure 12.- Continued.

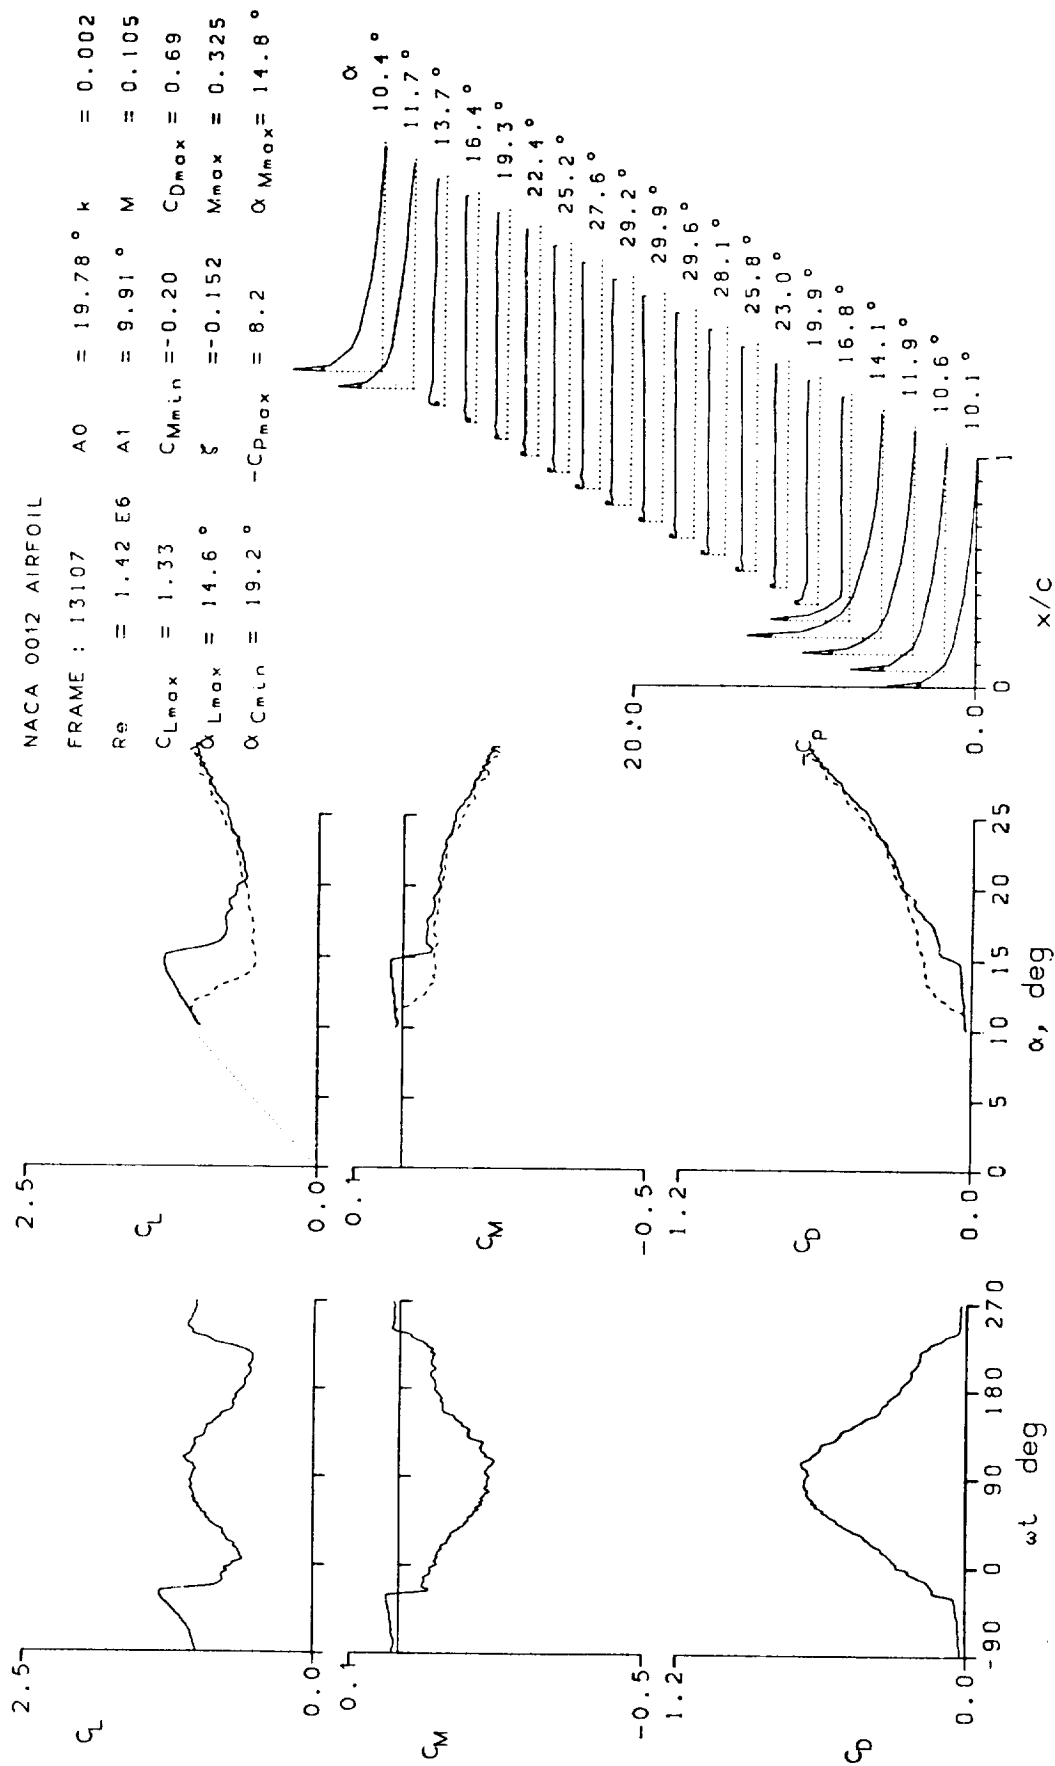


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 13115 AO = 19.78 ° K = 0.003

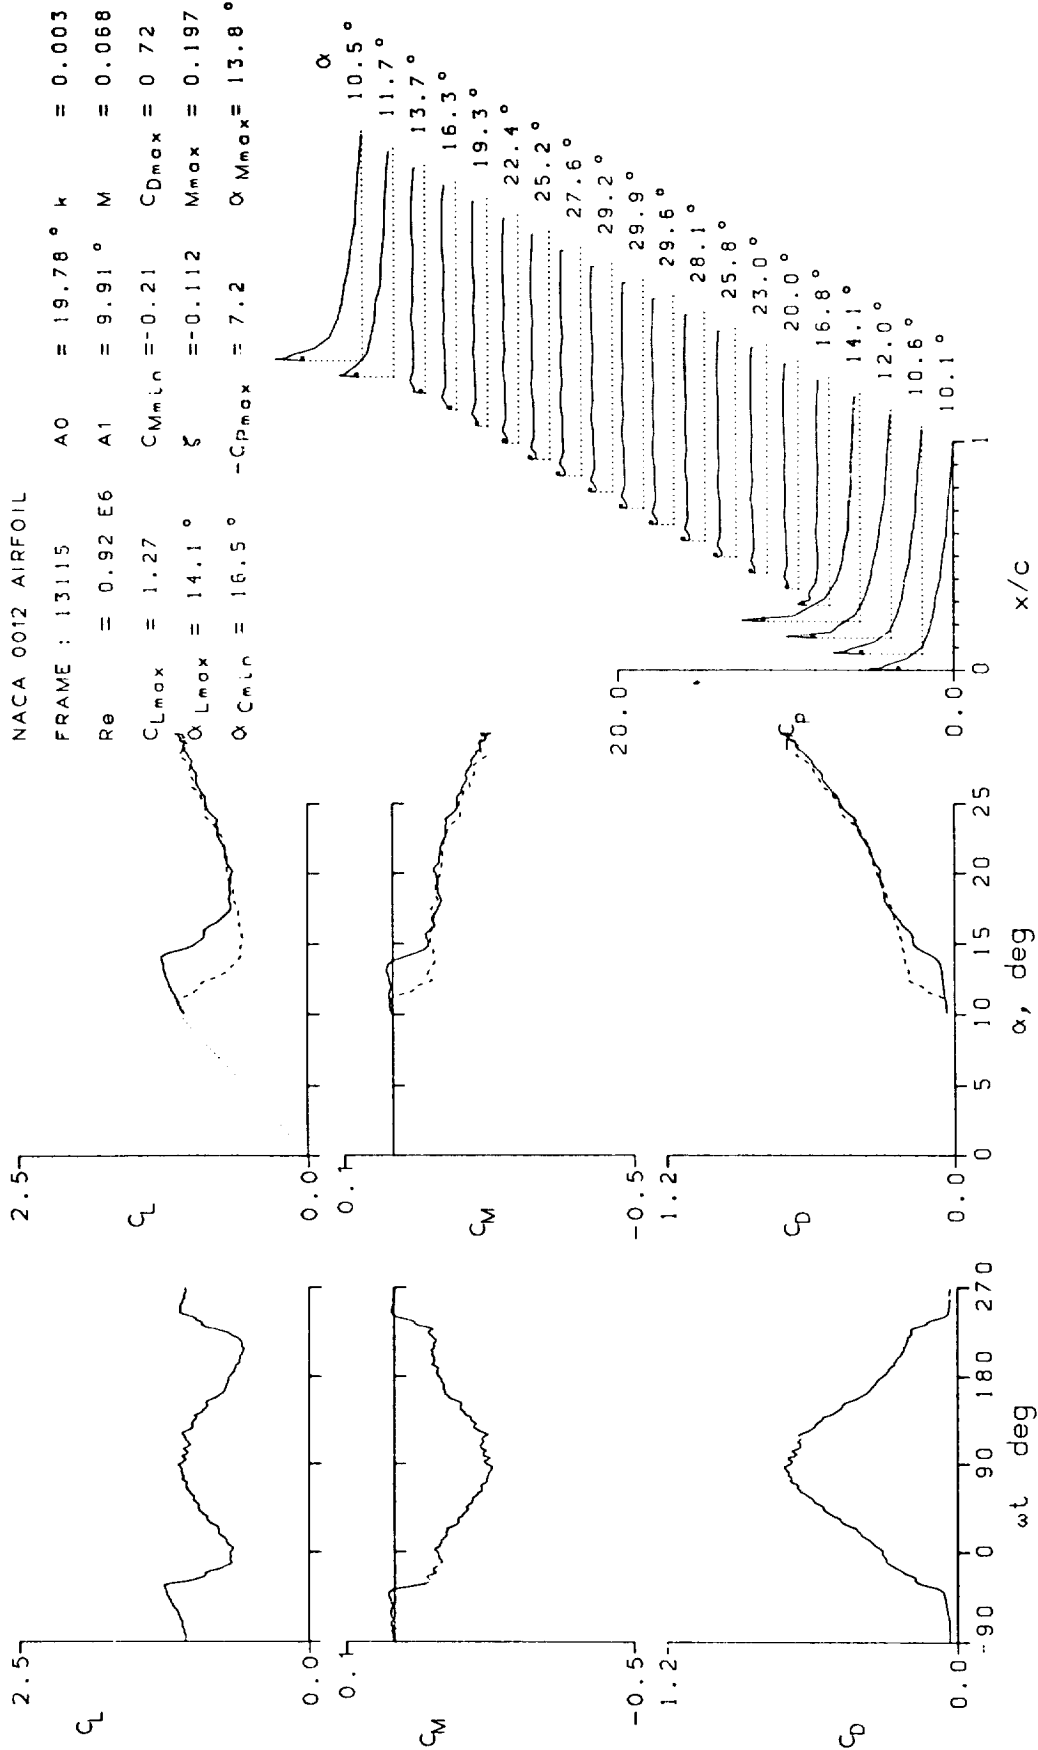
$$\text{Re} = 0.92 \text{ E6} \quad A1 = 9.91^\circ \quad M = 0.068$$
$$C_{L\max} = 1.27 \quad C_{M\min} = -0.21 \quad C_{D\max} = 0.72$$
$$\alpha_{\text{Leox}} = 14.1^\circ \quad \xi = -0.112 \quad M_{\text{max}} = 0.197$$
$$\alpha_{C_{10}H_8} = 16.5^\circ \quad -C_{10}H_8 = 7.2 \quad \alpha_{M_{max}} = 13.8^\circ$$


Figure 12.- Continued.

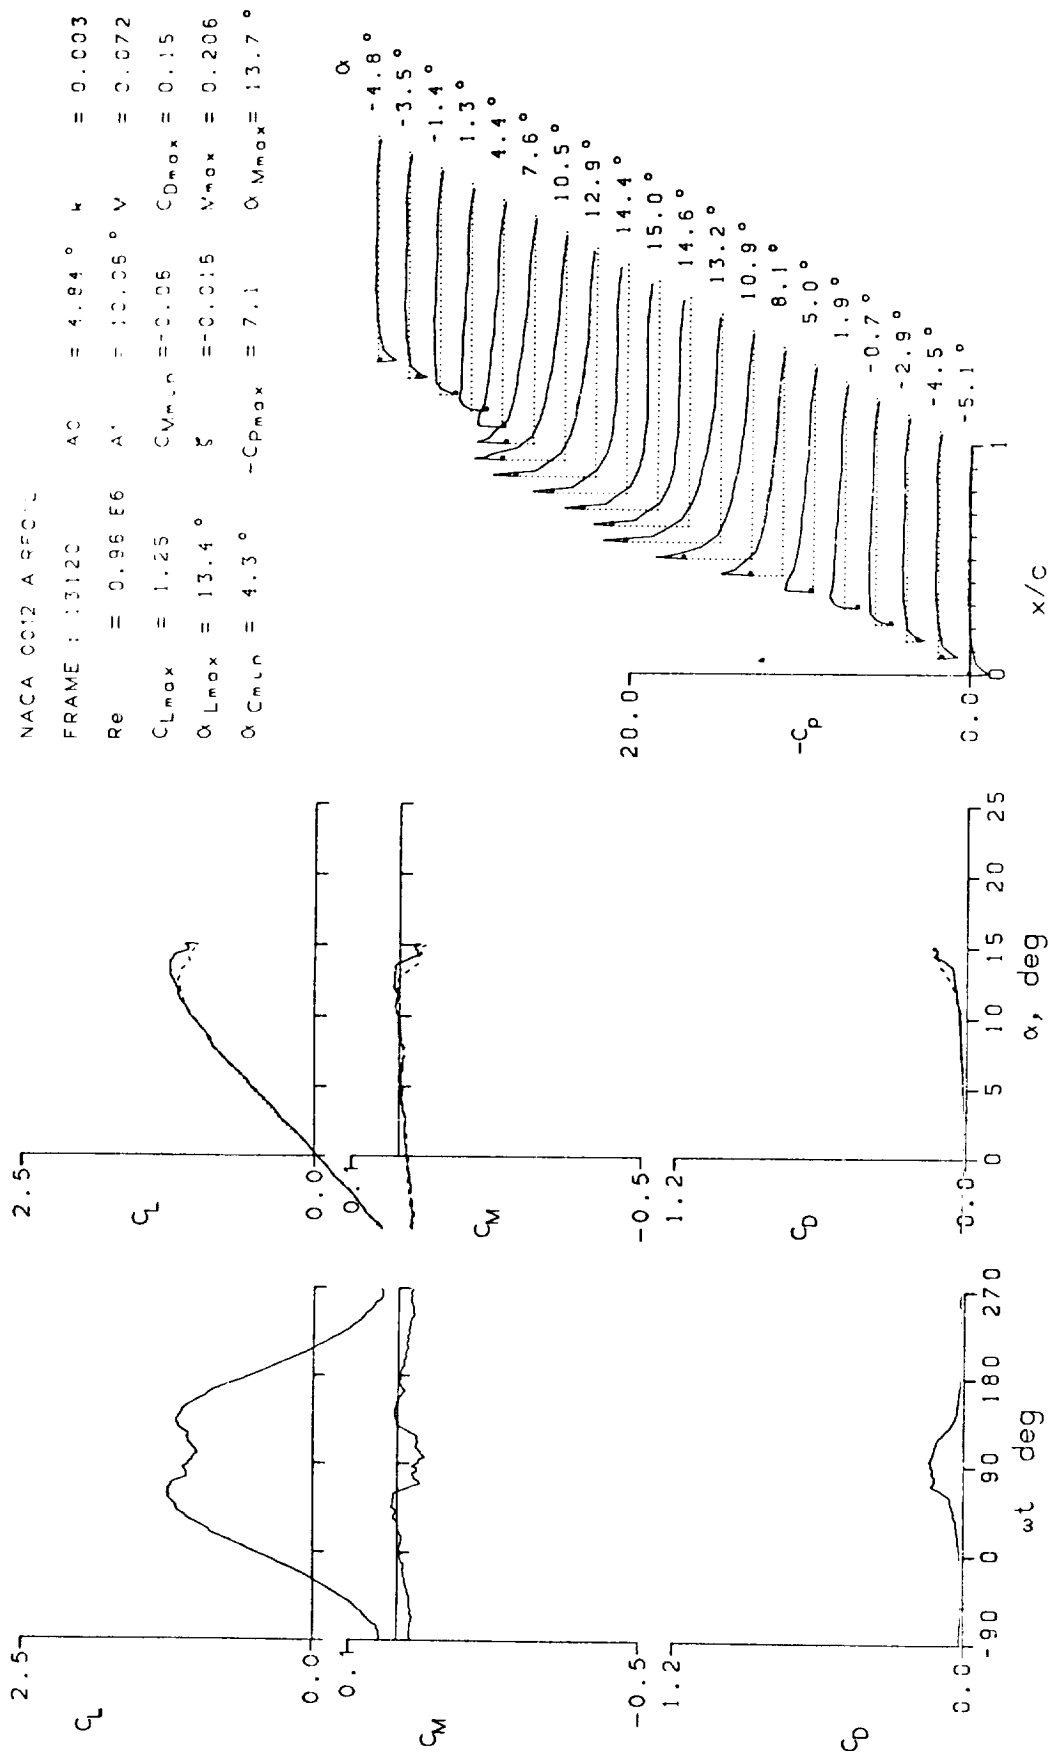


Figure 12.- Continued.

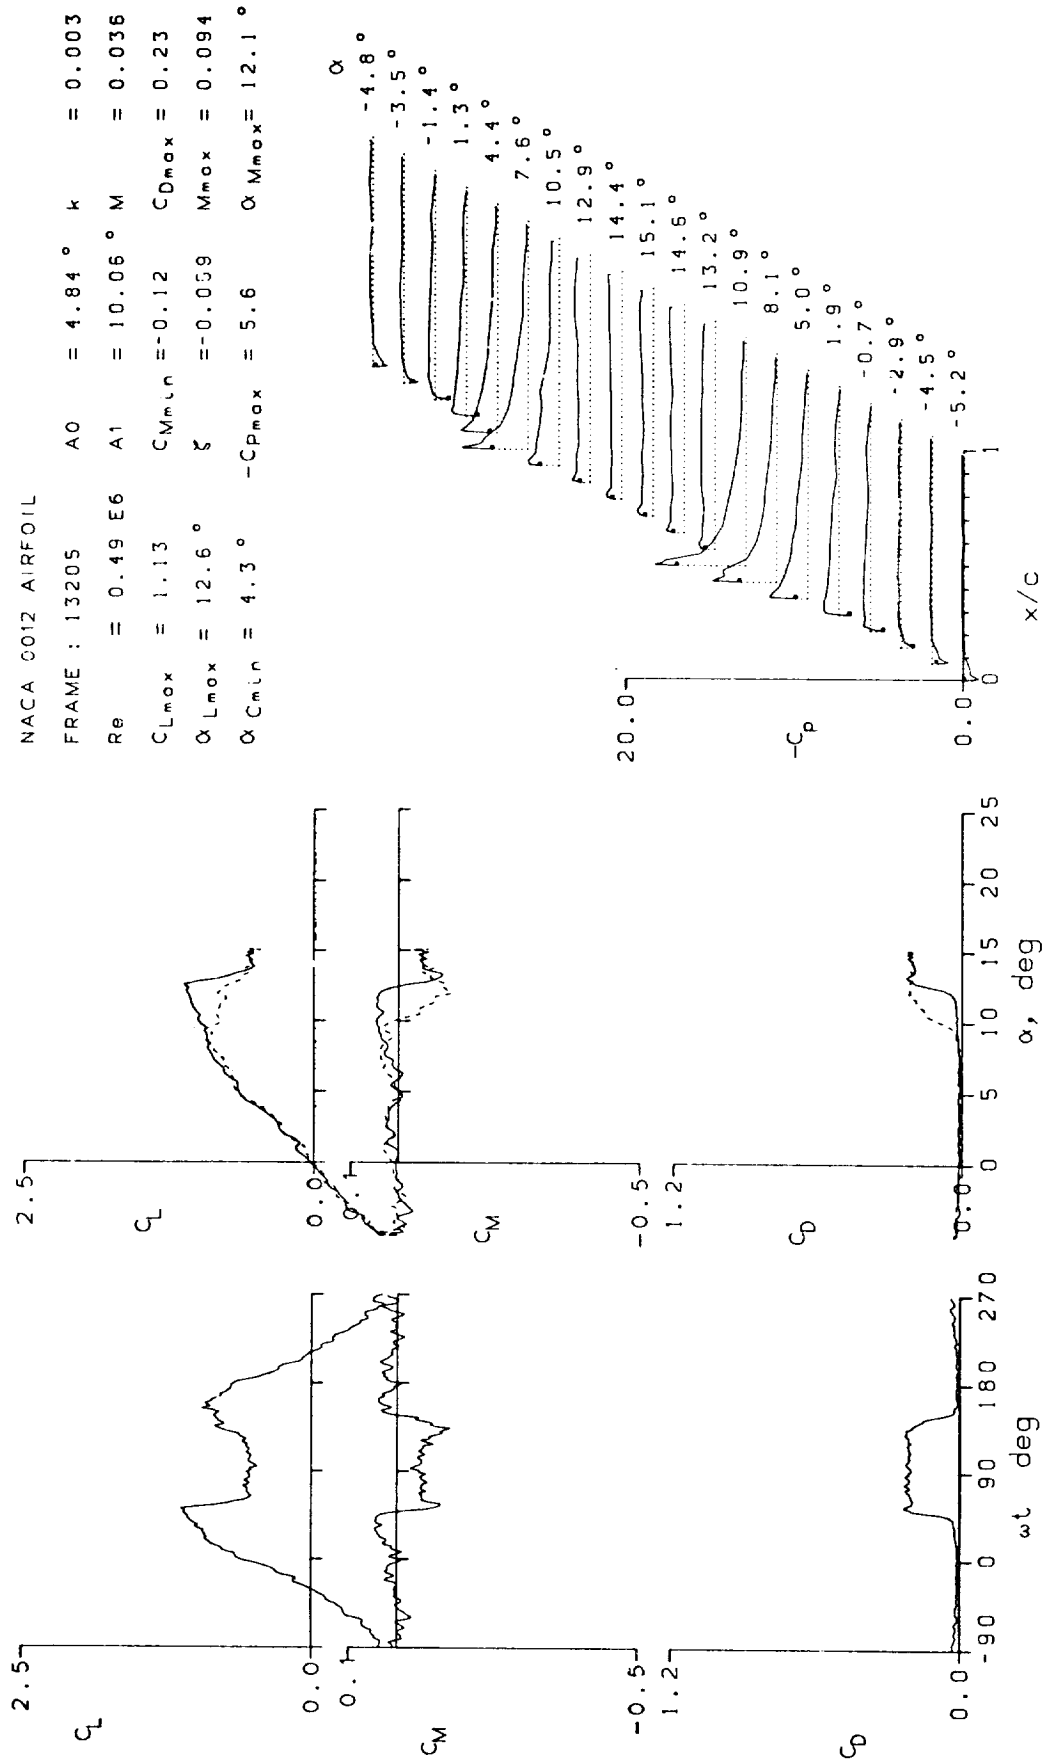


Figure 12.- Continued.

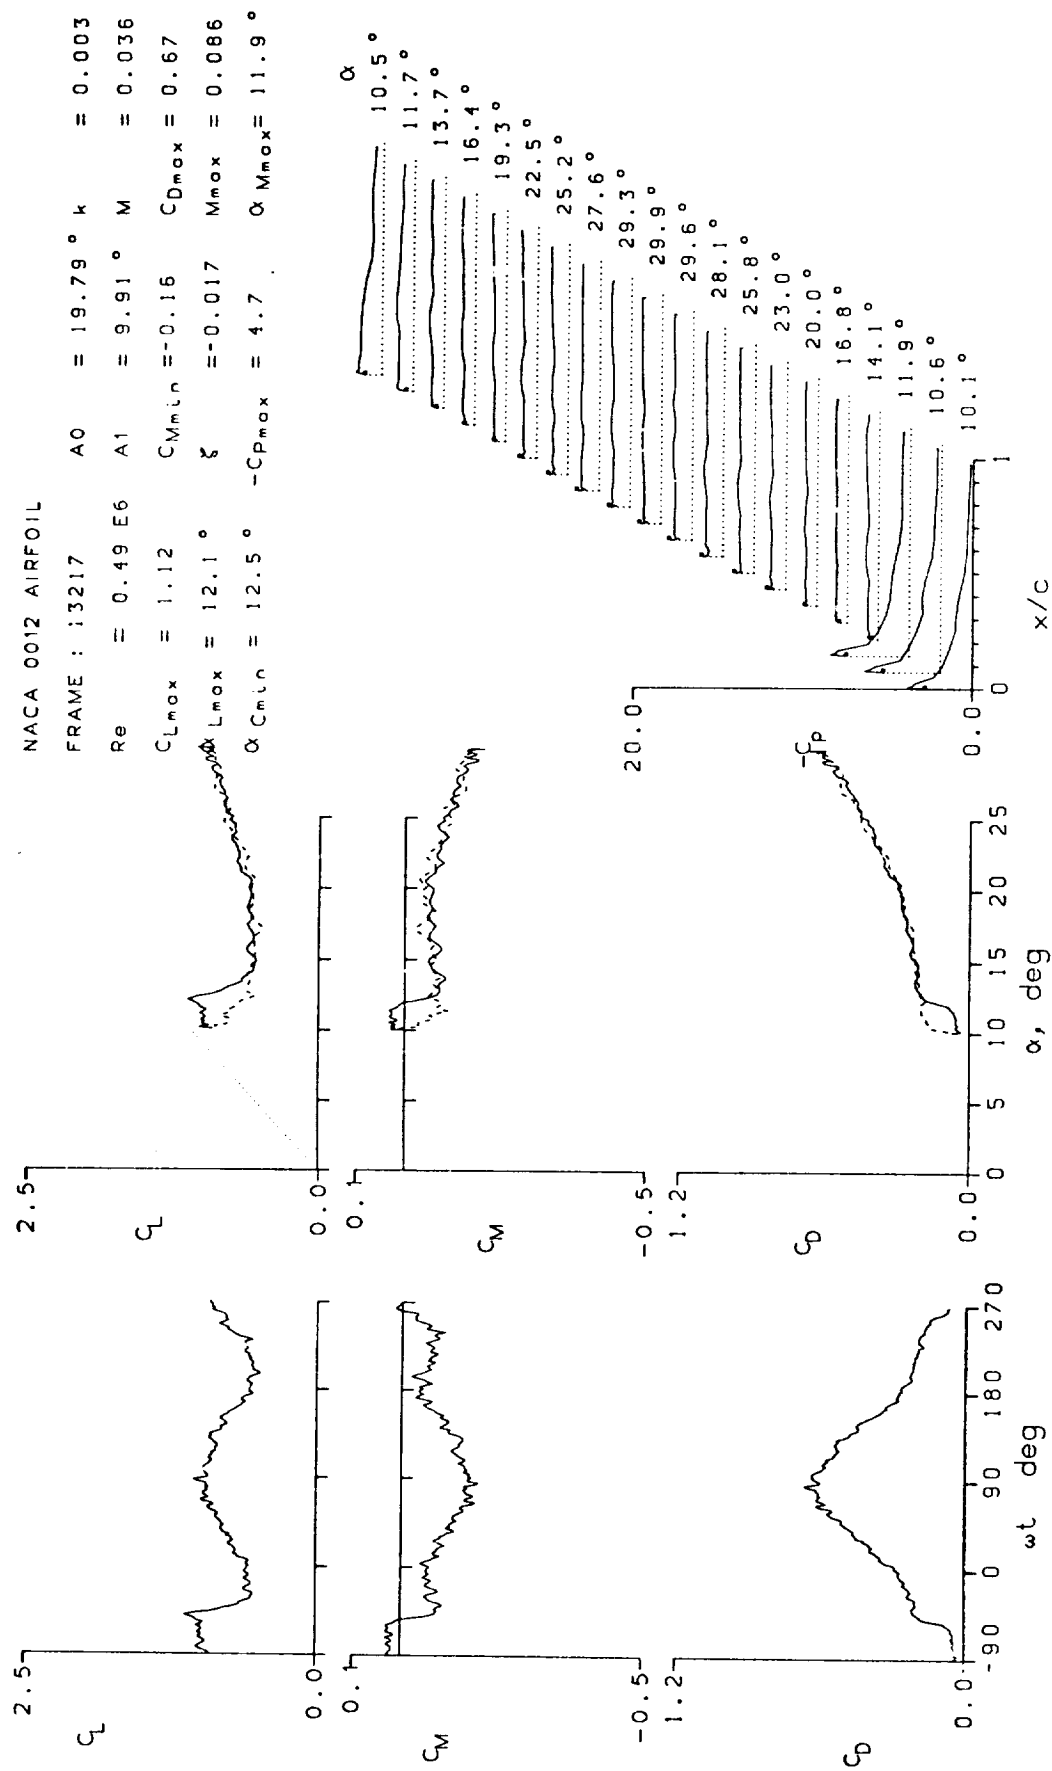


Figure 12.- Continued.



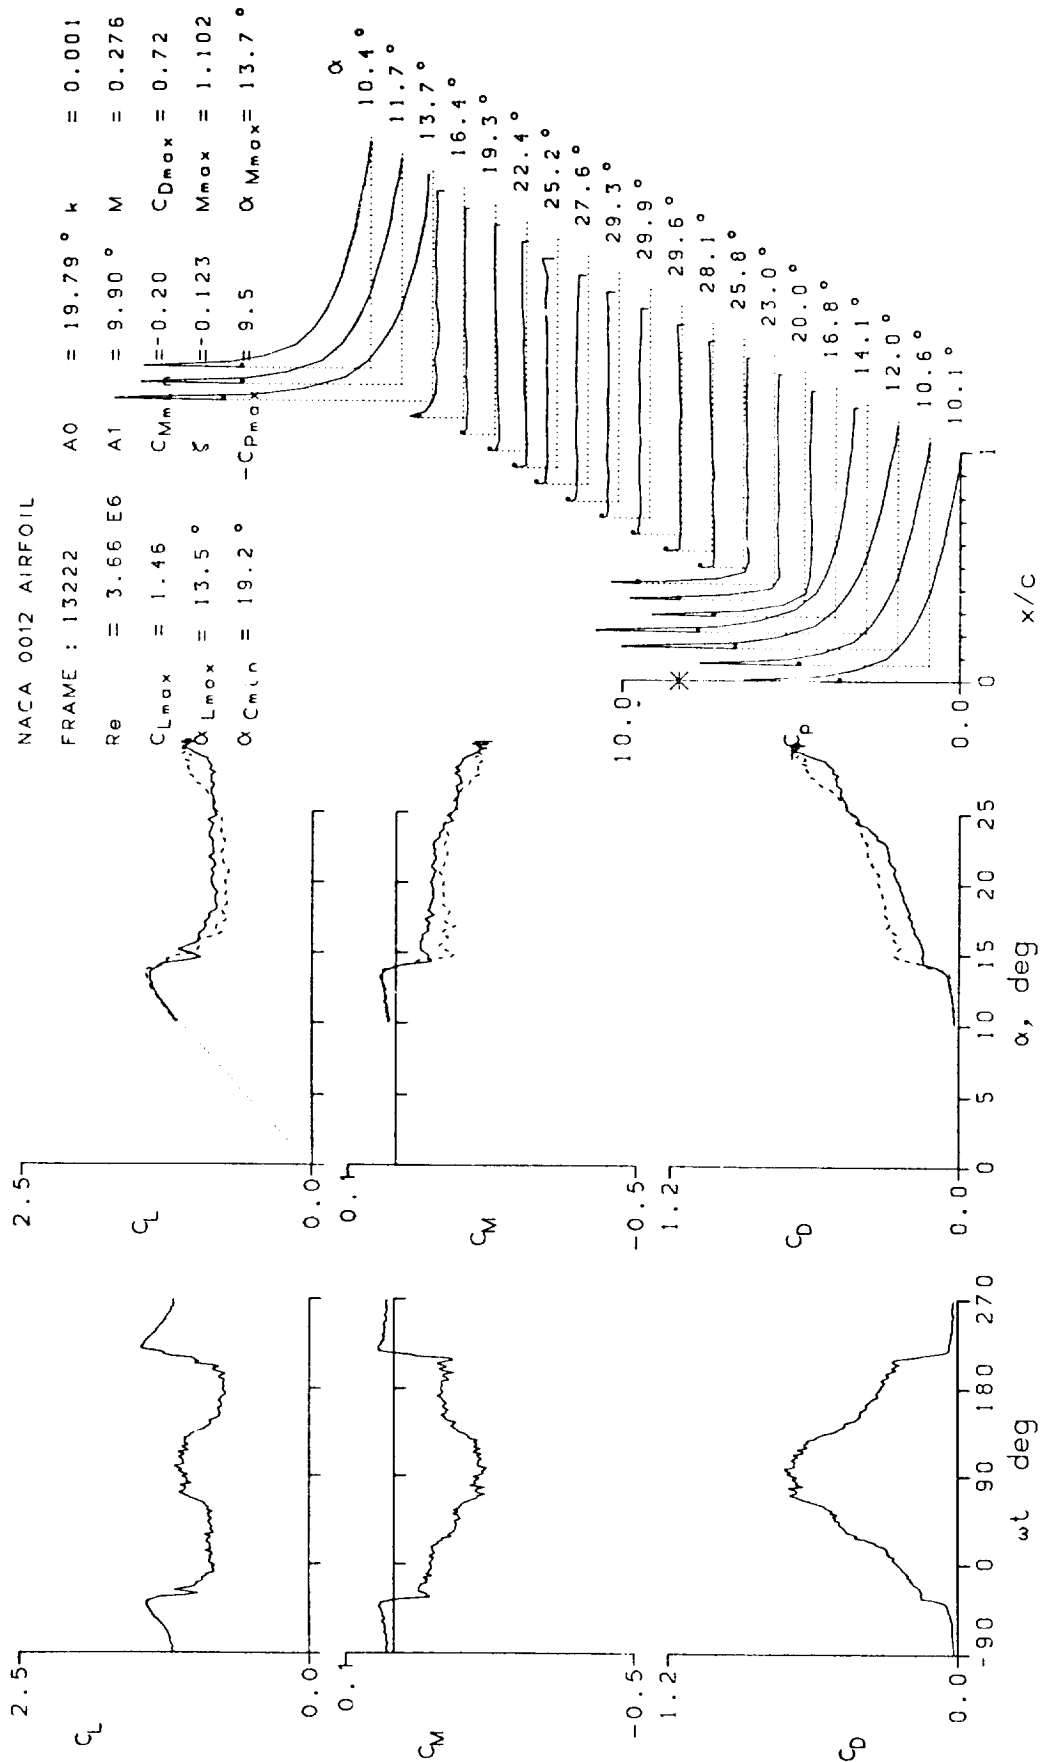


Figure 12.- Continued.

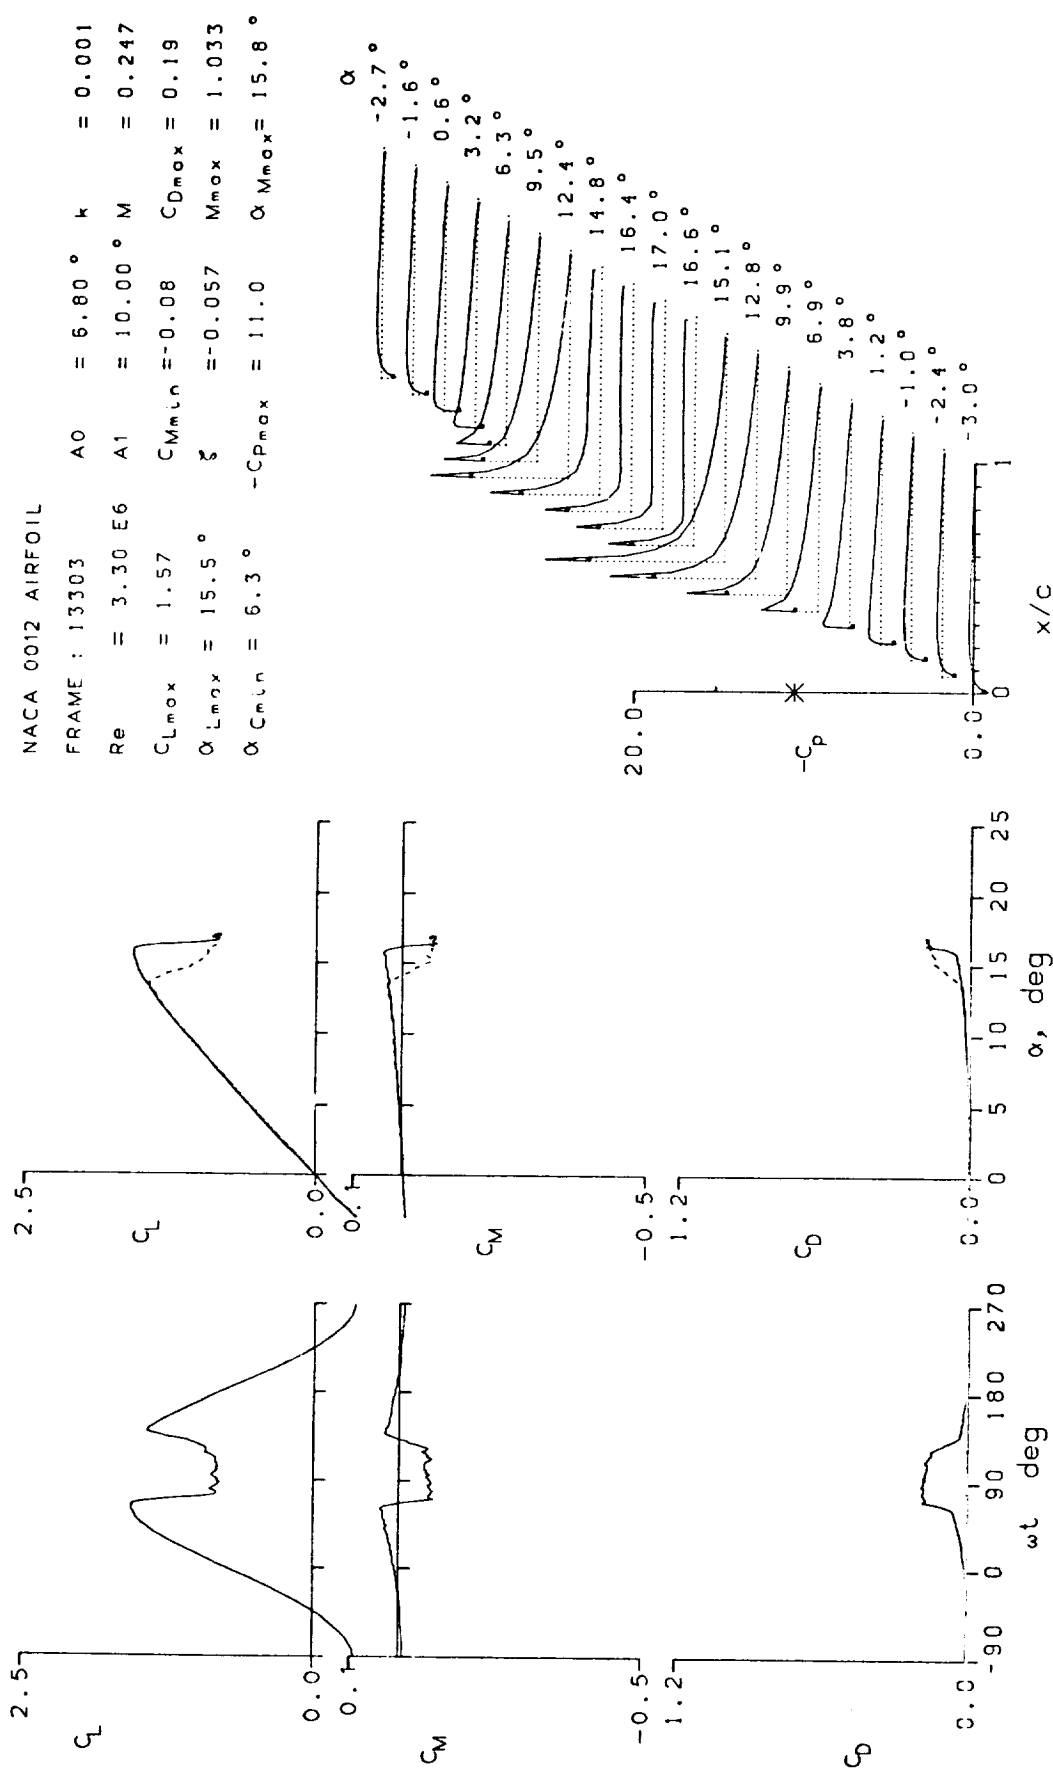

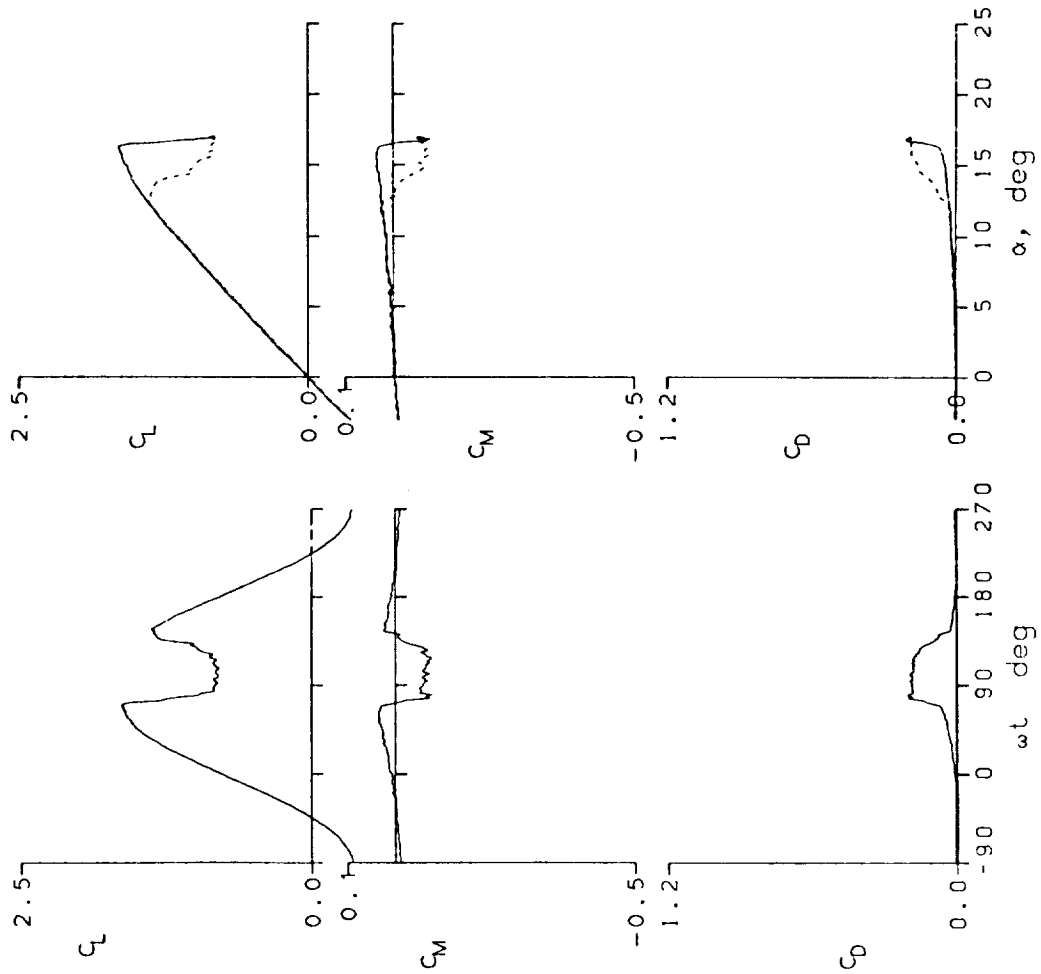

NACA 0012 AIRFOIL
 FRAME : 13308 $A_0 = 6.79^\circ$ $k = 0.001$
 $Re = 2.88 \text{ E}6$ $A_1 = 10.00^\circ$ $M = 0.215$
 $C_{L_{max}} = 1.64$ $C_{M_{min}} = -0.08$ $C_{D_{max}} = 0.21$
 $\alpha_{L_{max}} = 16.2^\circ$ $\xi = -0.100$ $M_{max} = 0.874$
 $\alpha_{C_{min}} = 6.3^\circ$ $-C_{p_{max}} = 11.5$ $\alpha_{M_{max}} = 16.3^\circ$

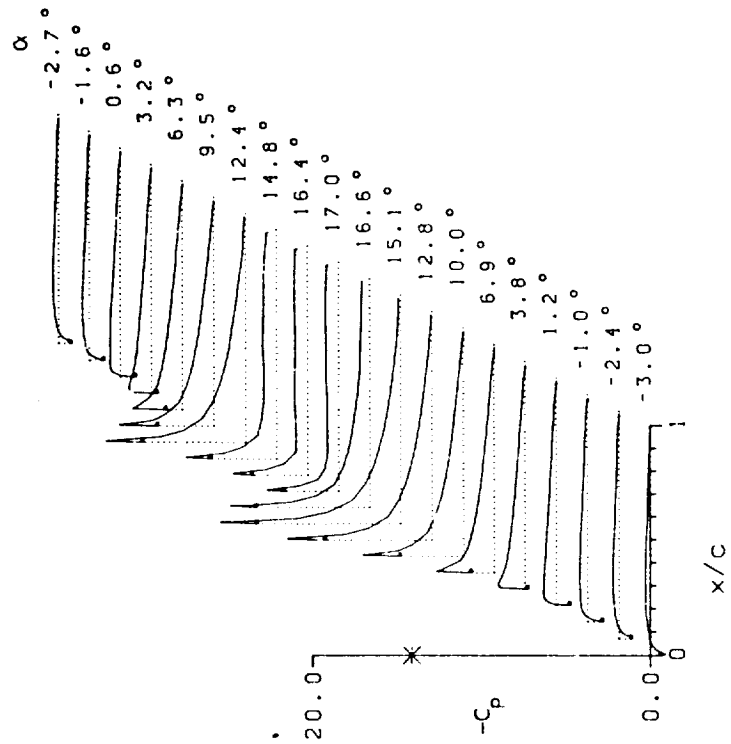


Figure 12.- Continued.

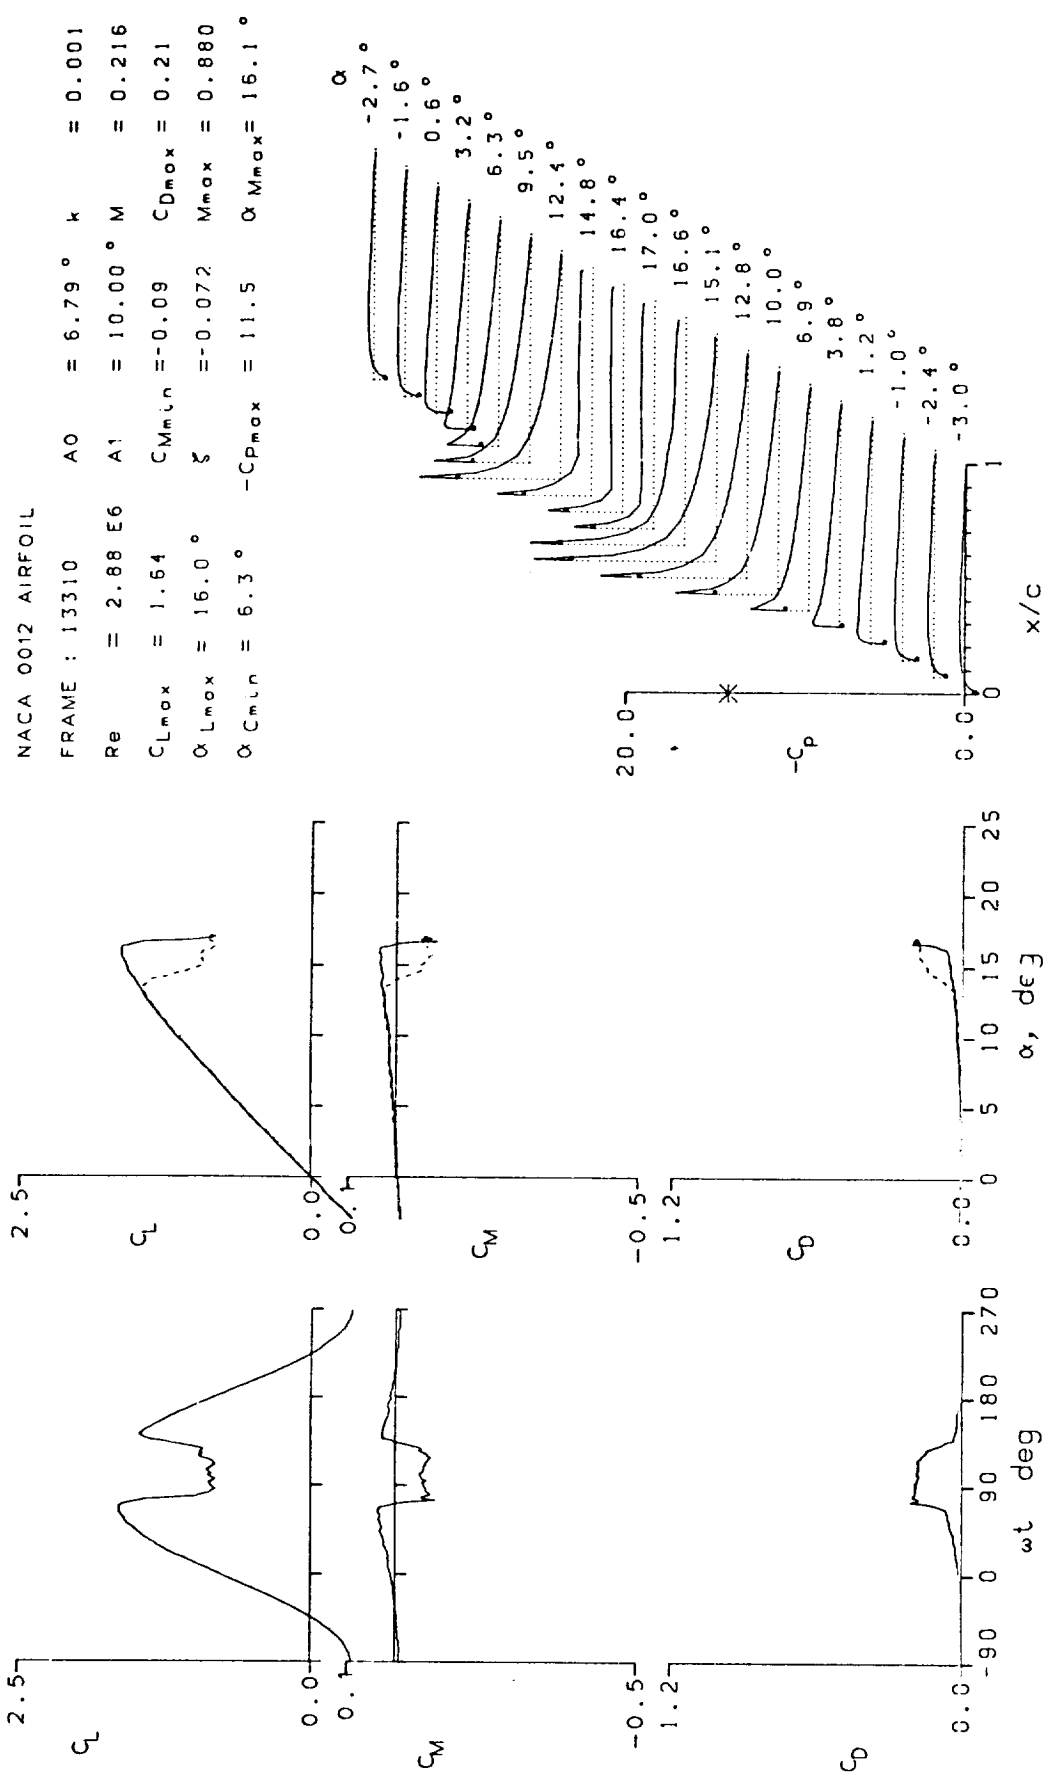
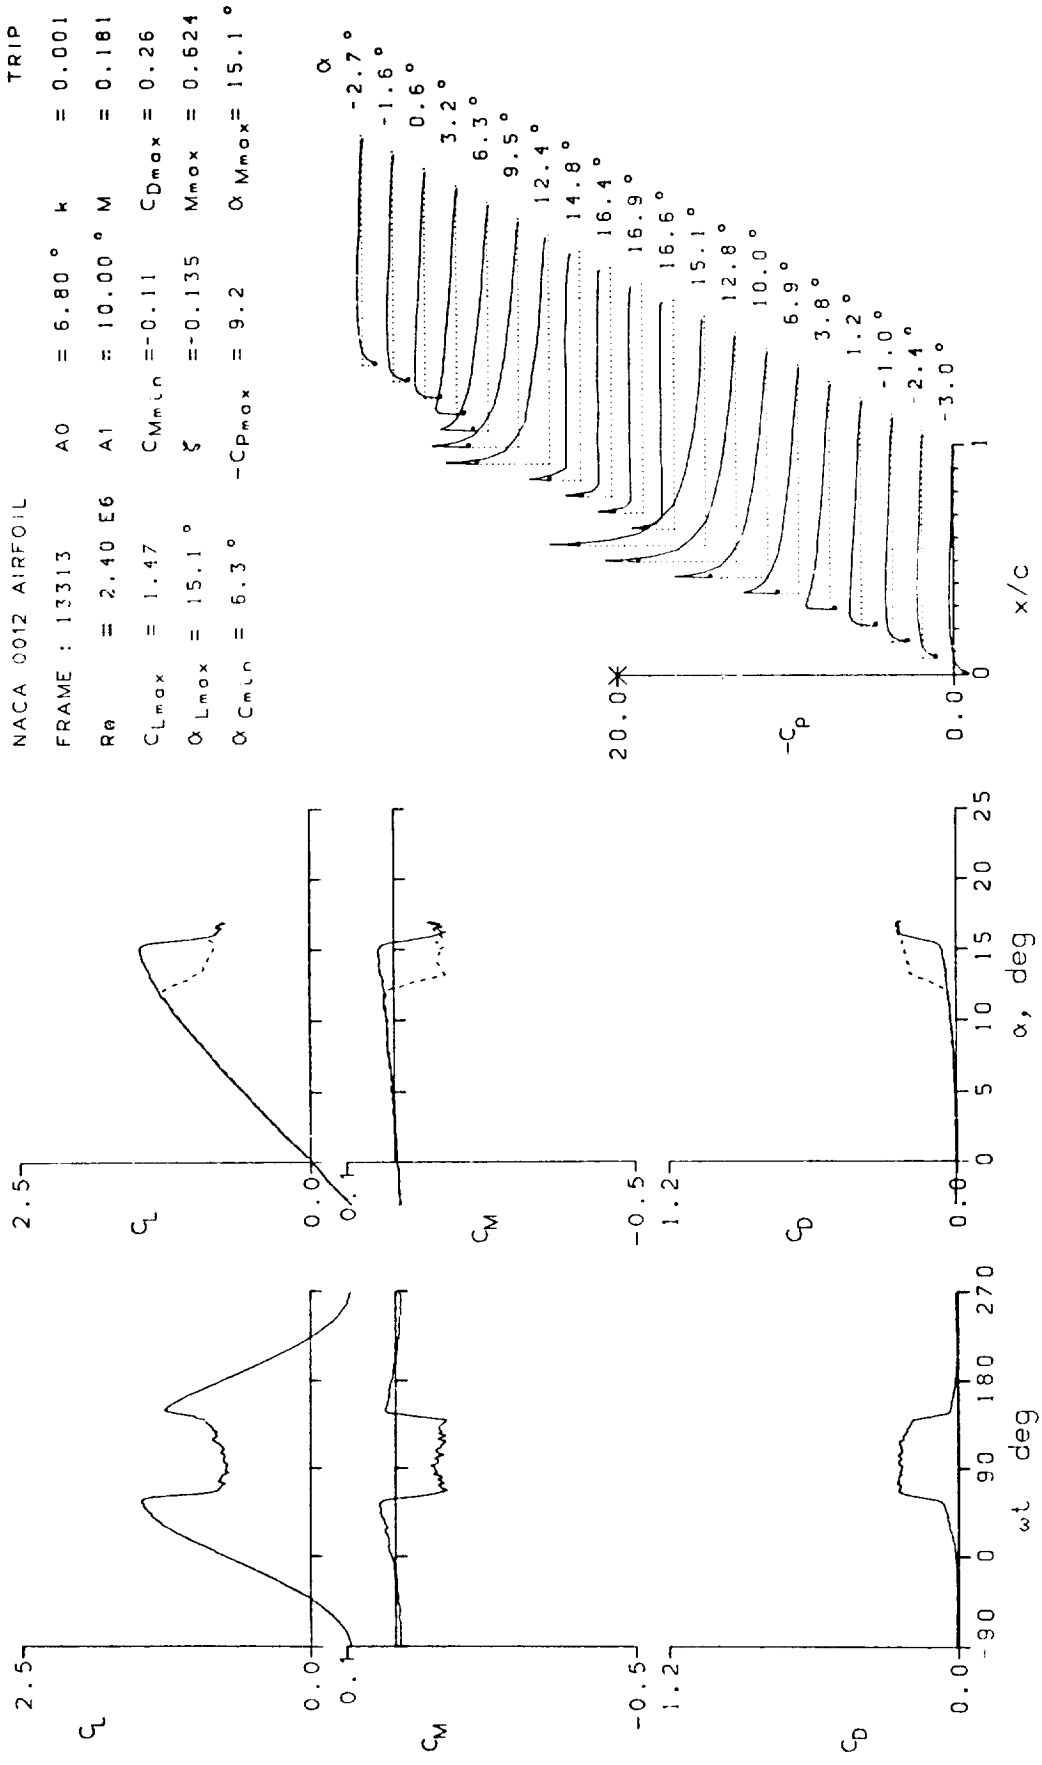


Figure 12.- Continued.



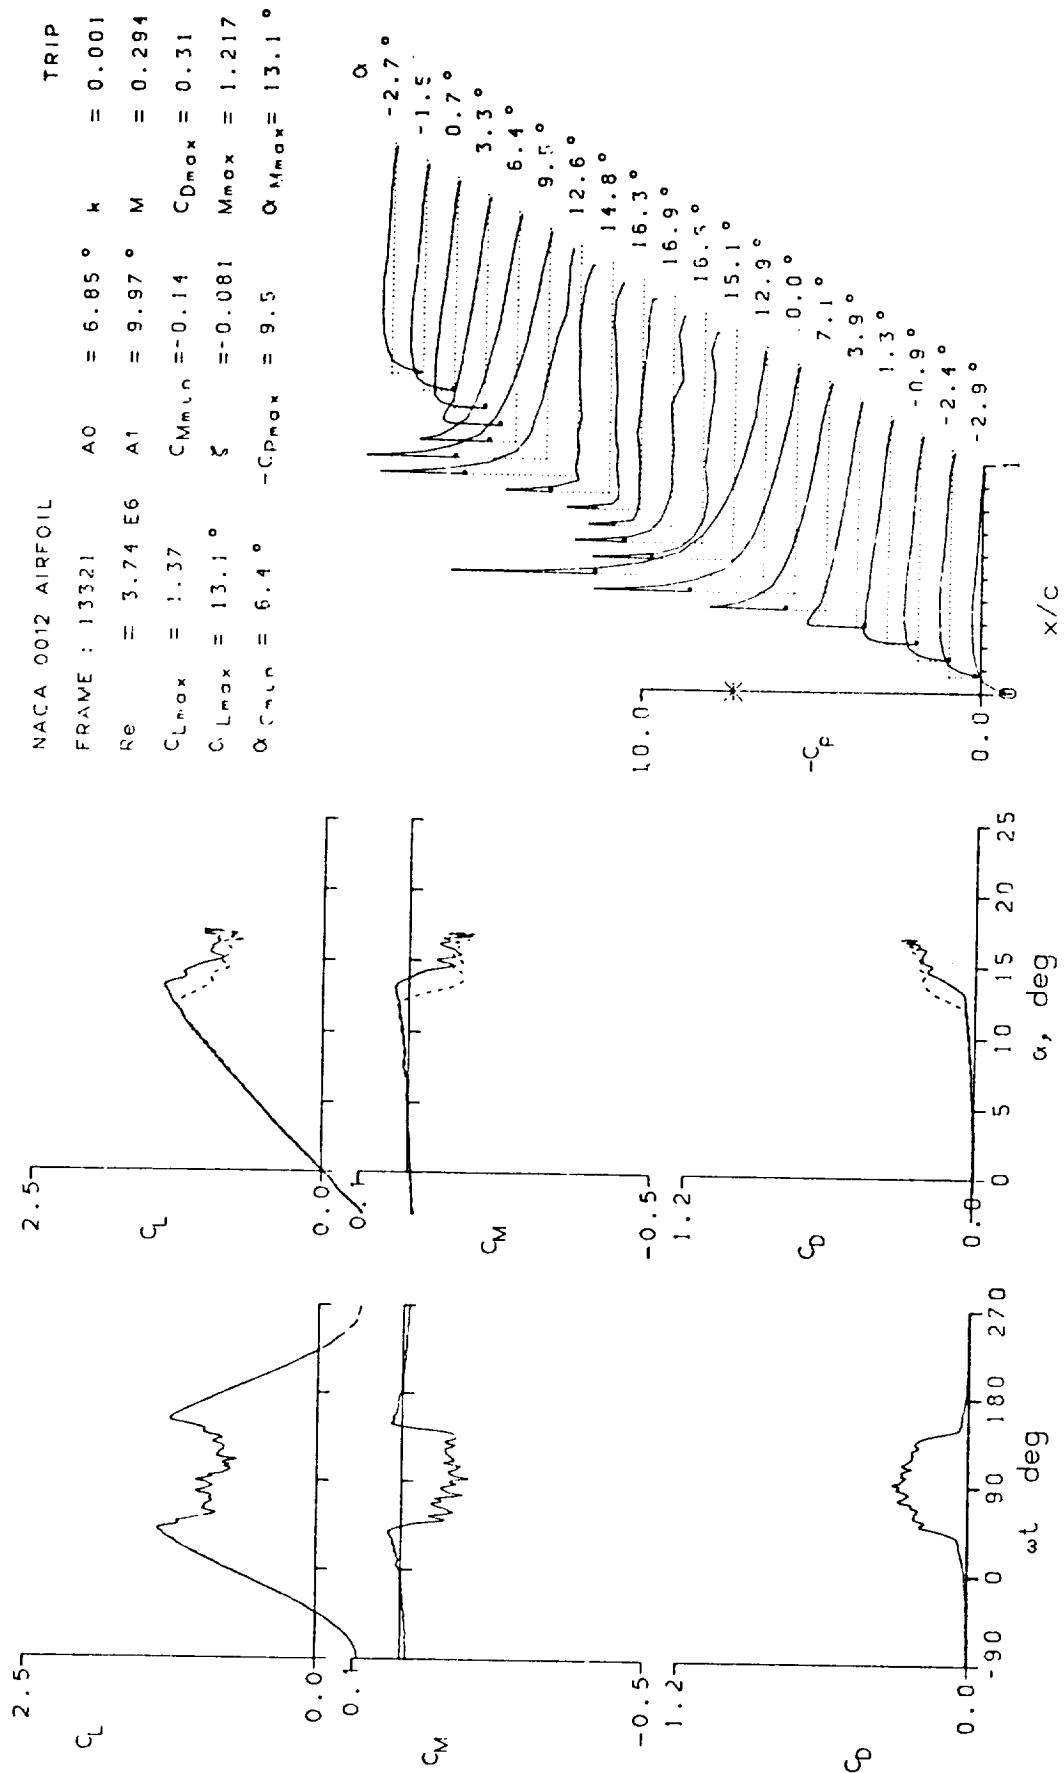


Figure 12.- Continued.

NACA 0012 AIRFOIL TRIP
 FRAME : 14019 A0 = 14.83° k = 0.050
 Re = 2.45 E6 A1 = 9.87° M = 0.183
 C_{Lmax} = 1.92 C_{Mmin} = -0.35 C_{Dmax} = 0.68
 α_{Lmax} = 19.8° ζ = 0.253 M_{max} = 0.694
 α_{Cmin} = 14.4° -C_{Pmax} = 11.0 α_{Mmax} = 17.7°

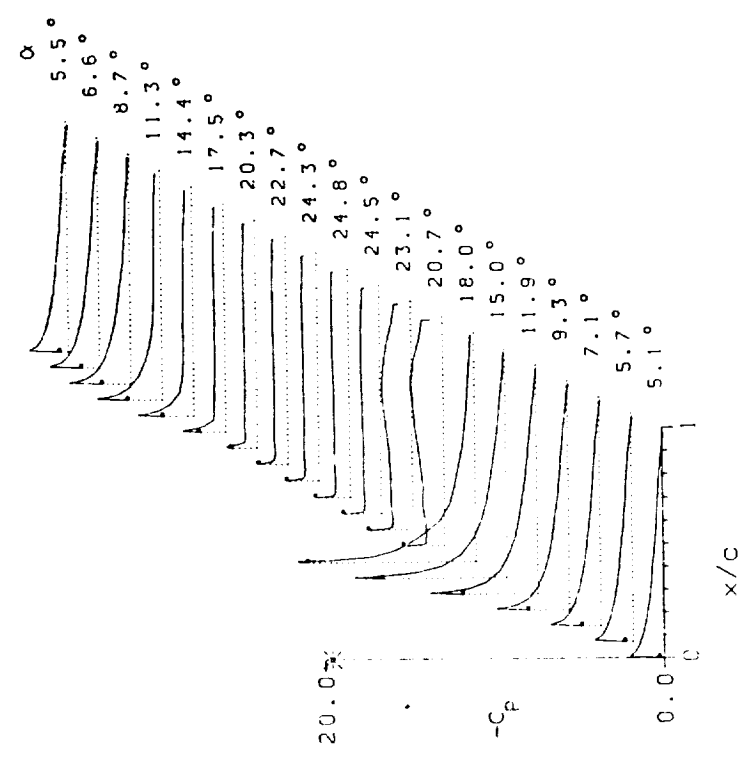
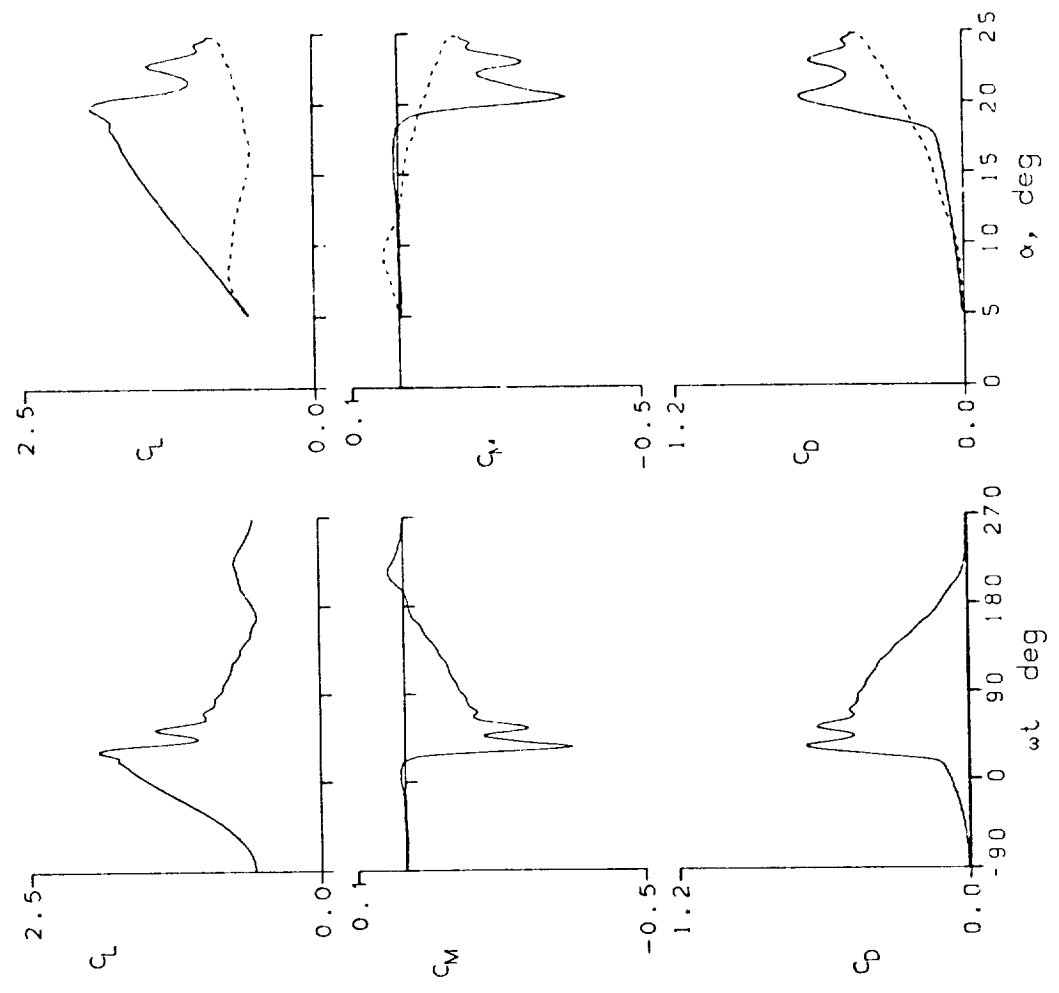
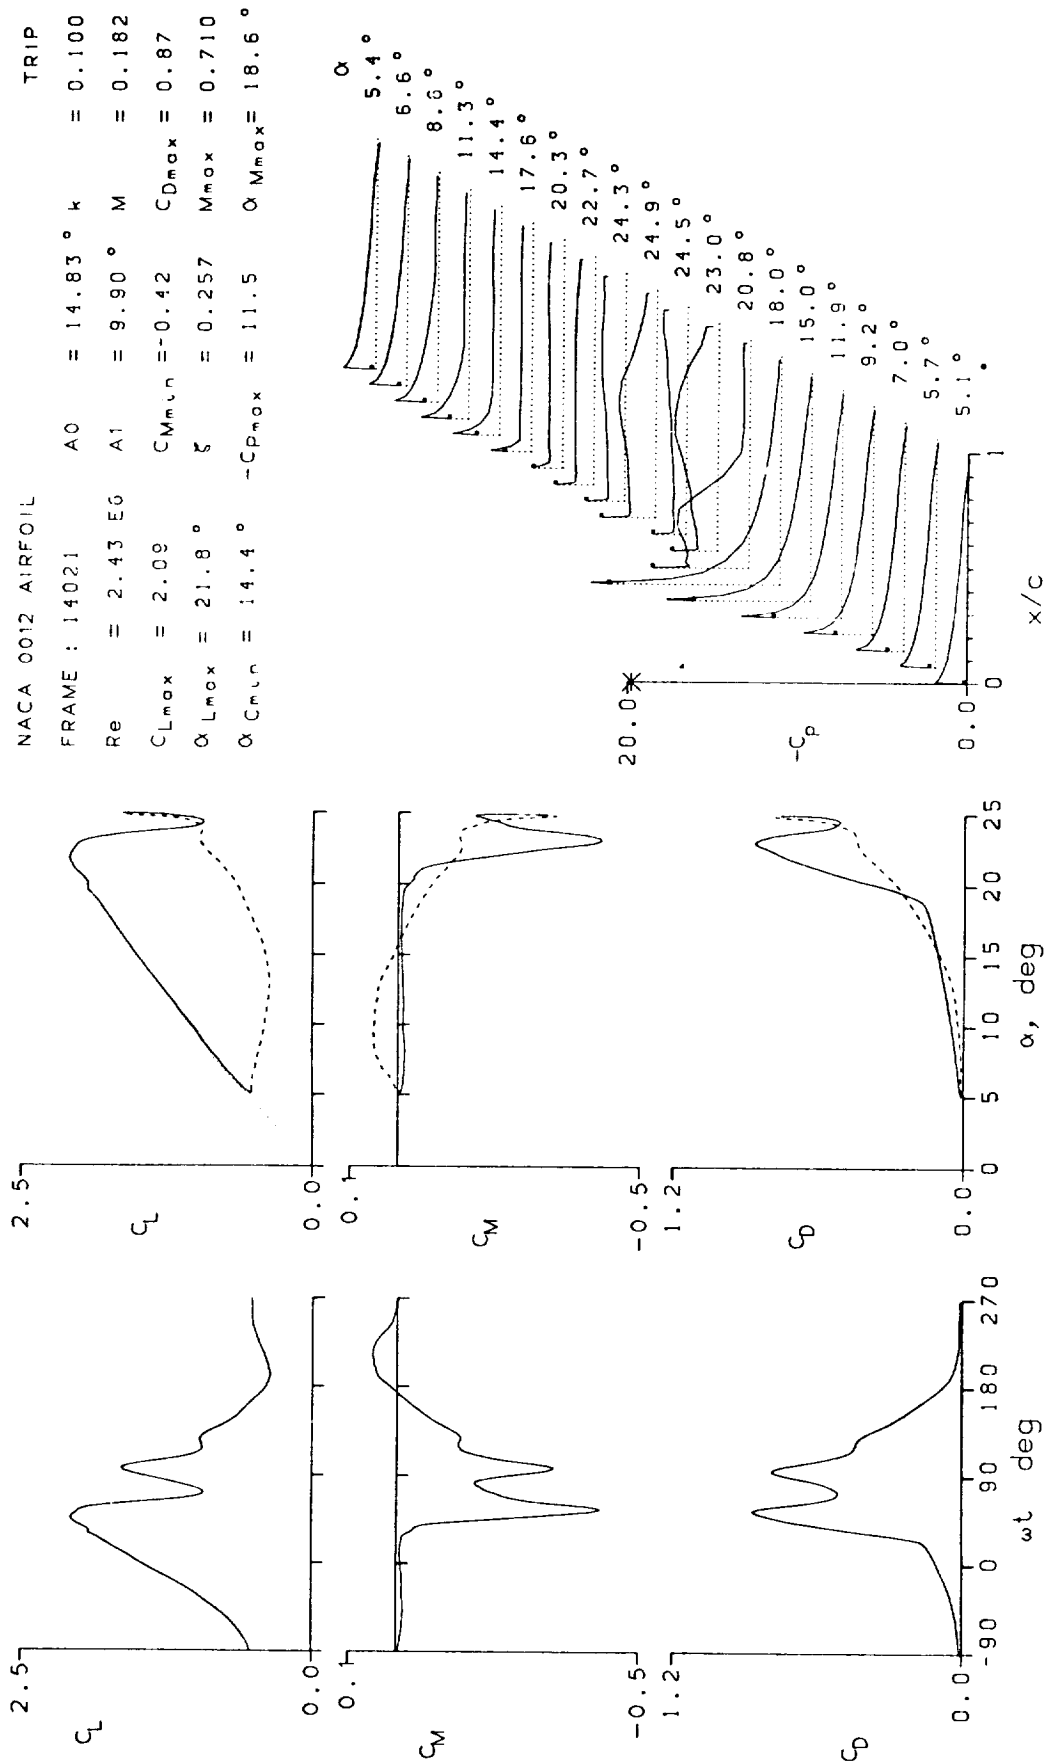


Figure 12.- Continued.



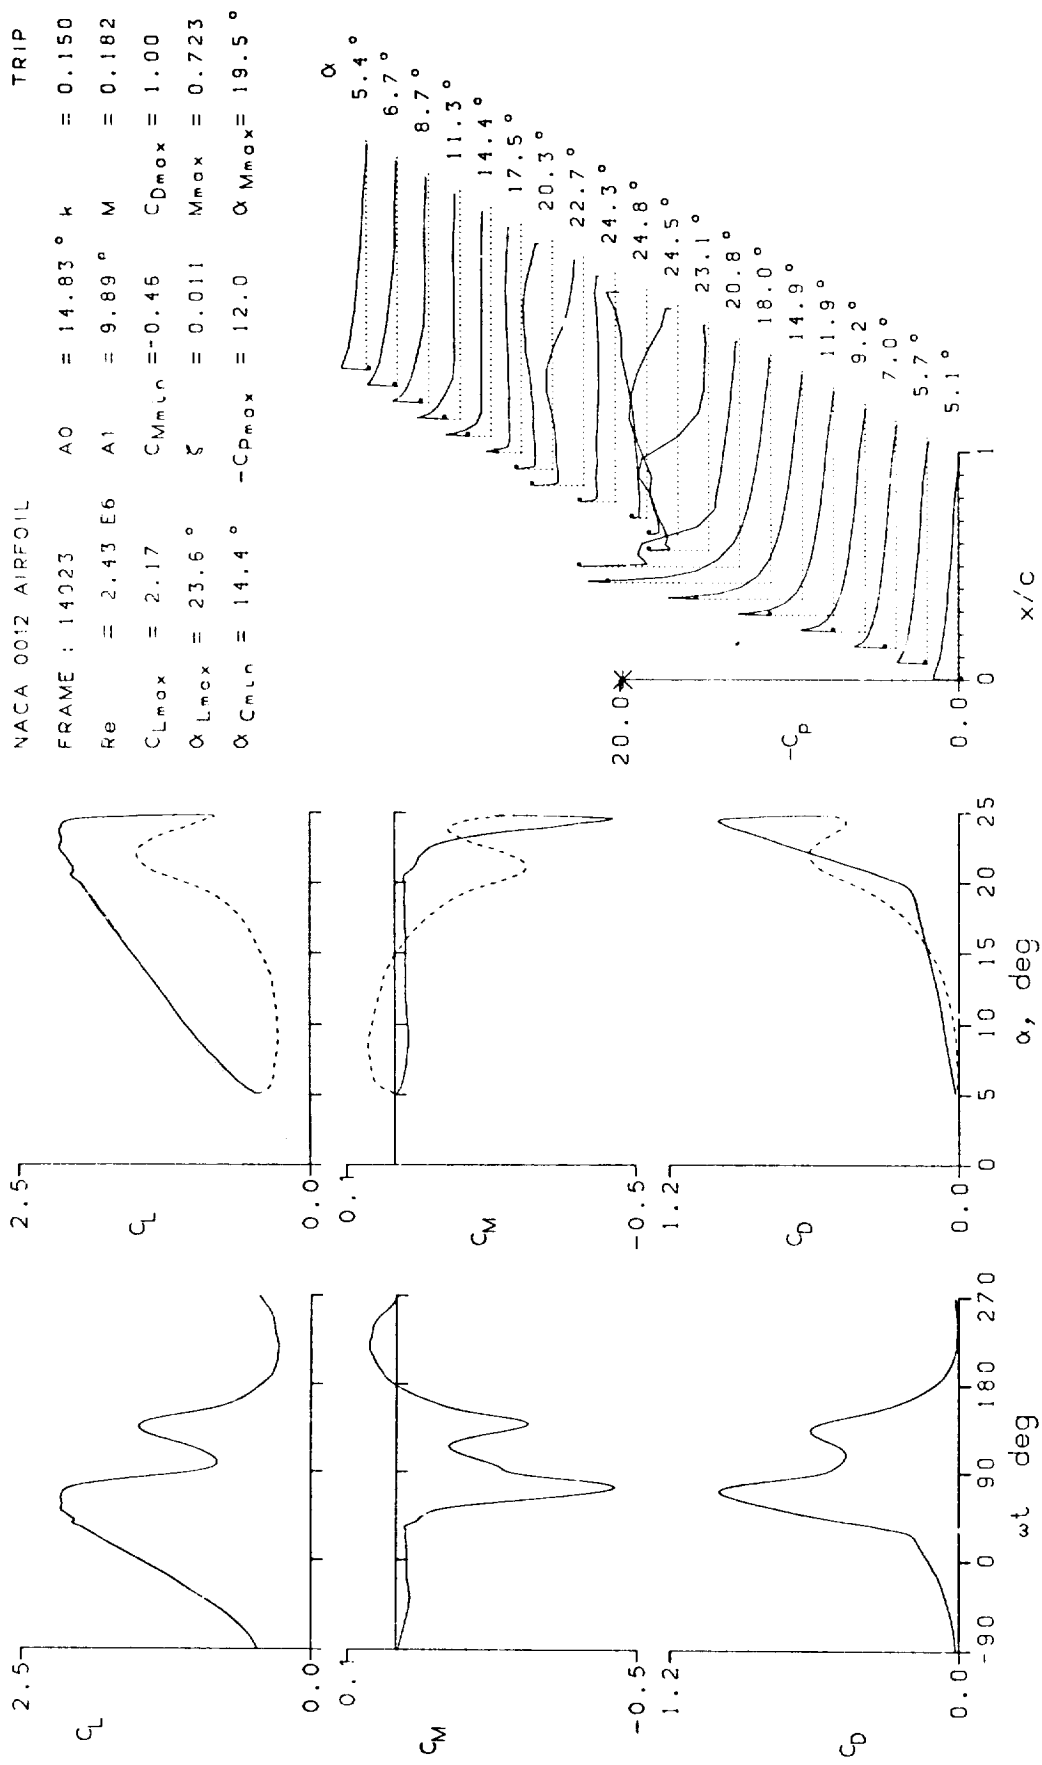


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 14104	A0 = 14.83°	k = 0.050	TRIP
Re = 2.45 E6	A1 = 9.90°	M = 0.183	
$C_{Lmax} = 1.91$	$C_{Mmin} = -0.35$	$C_{Dmax} = 0.67$	
$\alpha_{Lmax} = 19.8^\circ$	$\zeta = 0.251$	$M_{max} = 0.692$	
$\alpha_{Cmin} = 14.4^\circ$	$-C_{Pmax} = 10.9$	$\alpha_{Mmax} = 17.8^\circ$	

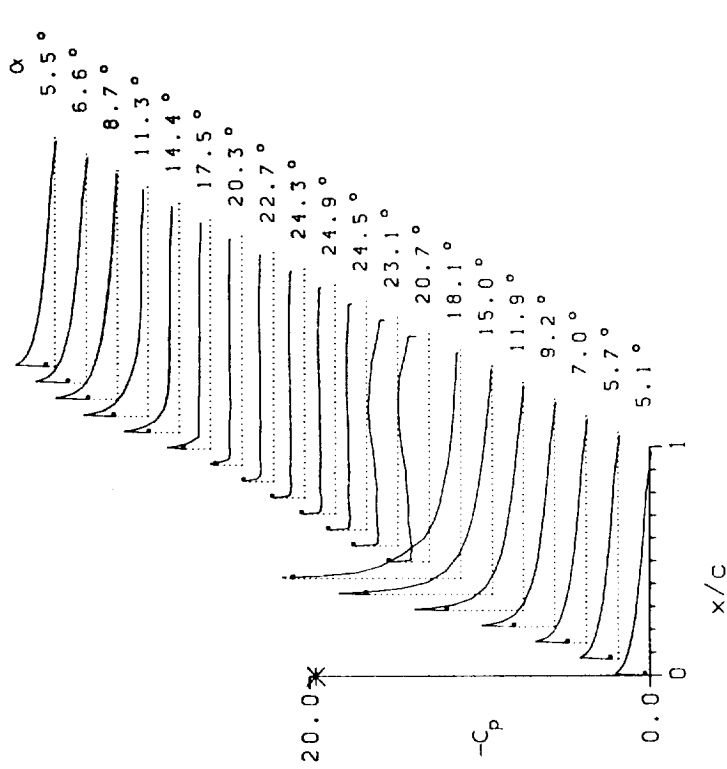
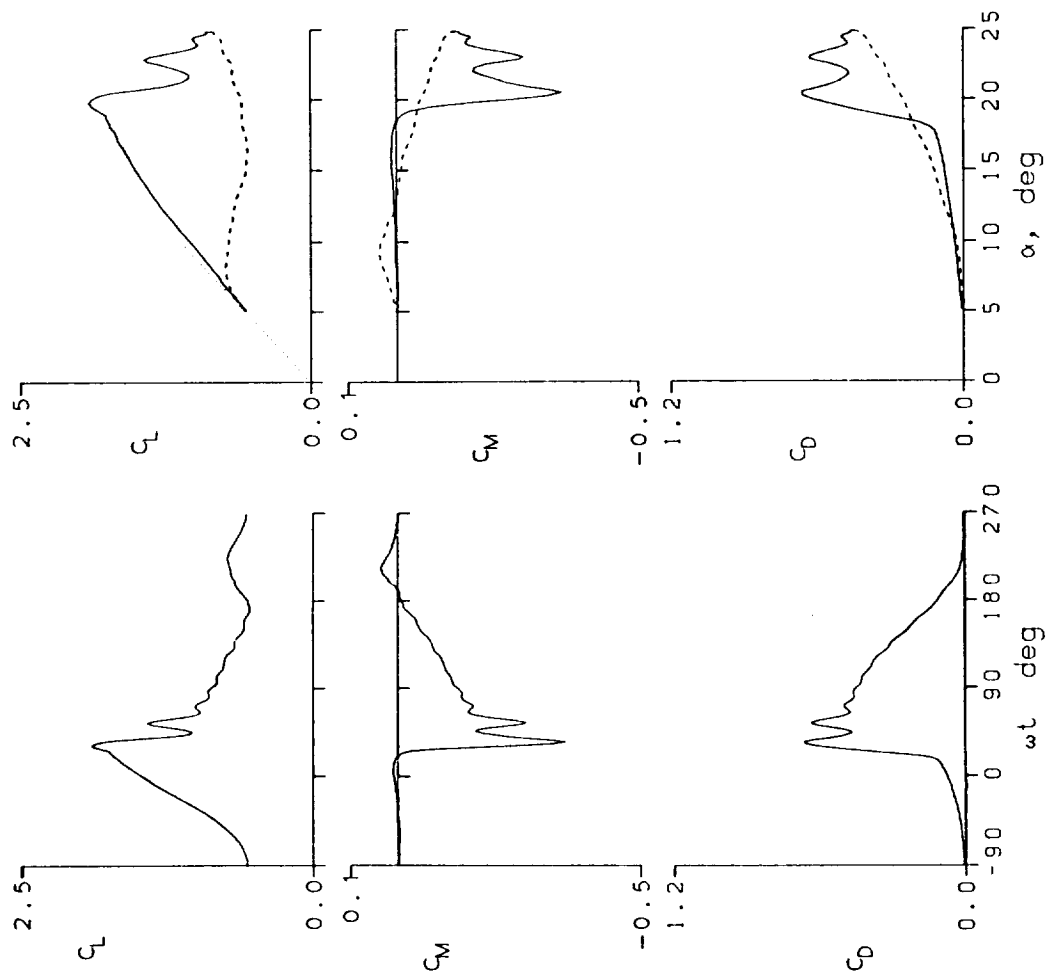


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 14106	A0 = 14.83 °	k = 0.099	TRIP
Re = 2.45 E6	A1 = 9.90 °	M = 0.184	
C _{Lmax} = 2.07	C _{Mmin} = -0.42	C _{Dmax} = 0.86	
α _{Lmax} = 21.9 °	ζ = 0.269	M _{max} = 0.714	
α _{Cmin} = 14.4 °	-C _{pmax} = 11.5	α _{Mmax} = 18.6 °	

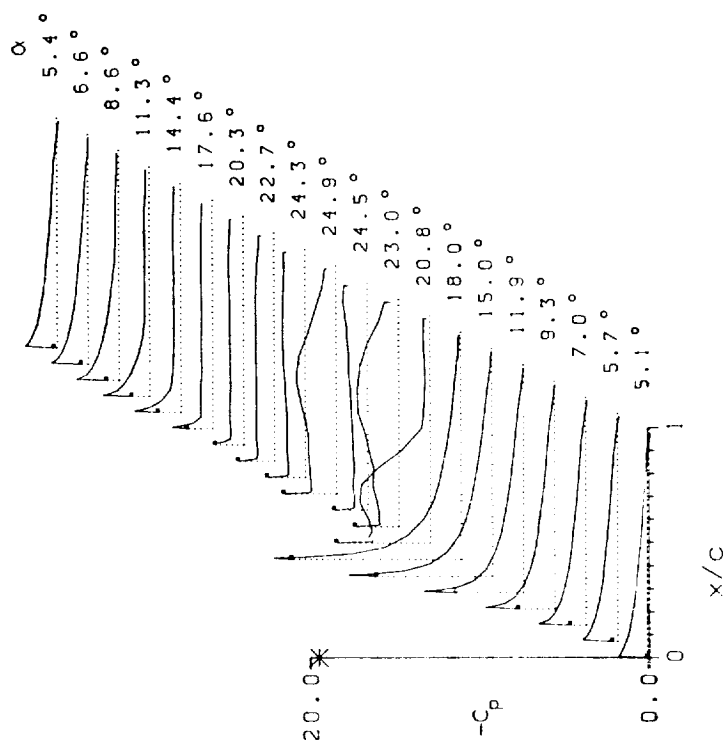
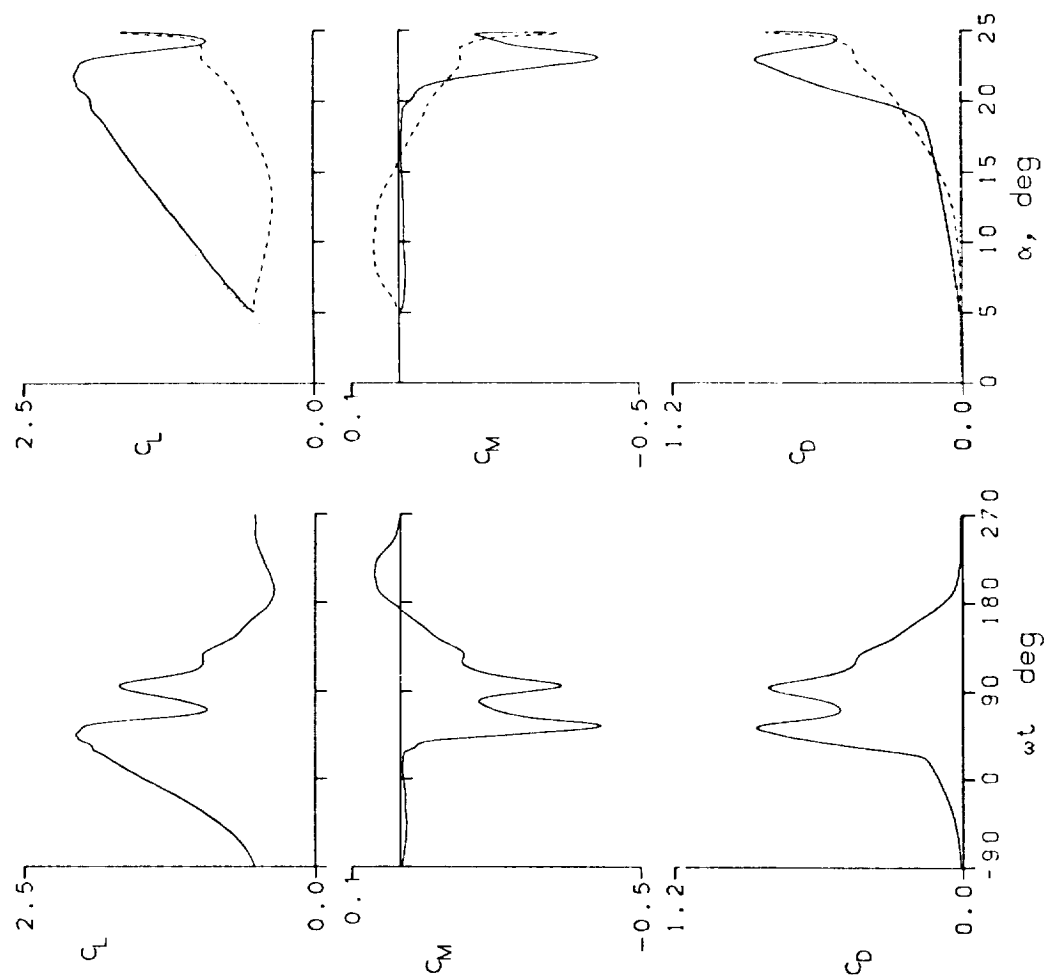


Figure 12.- Continued.

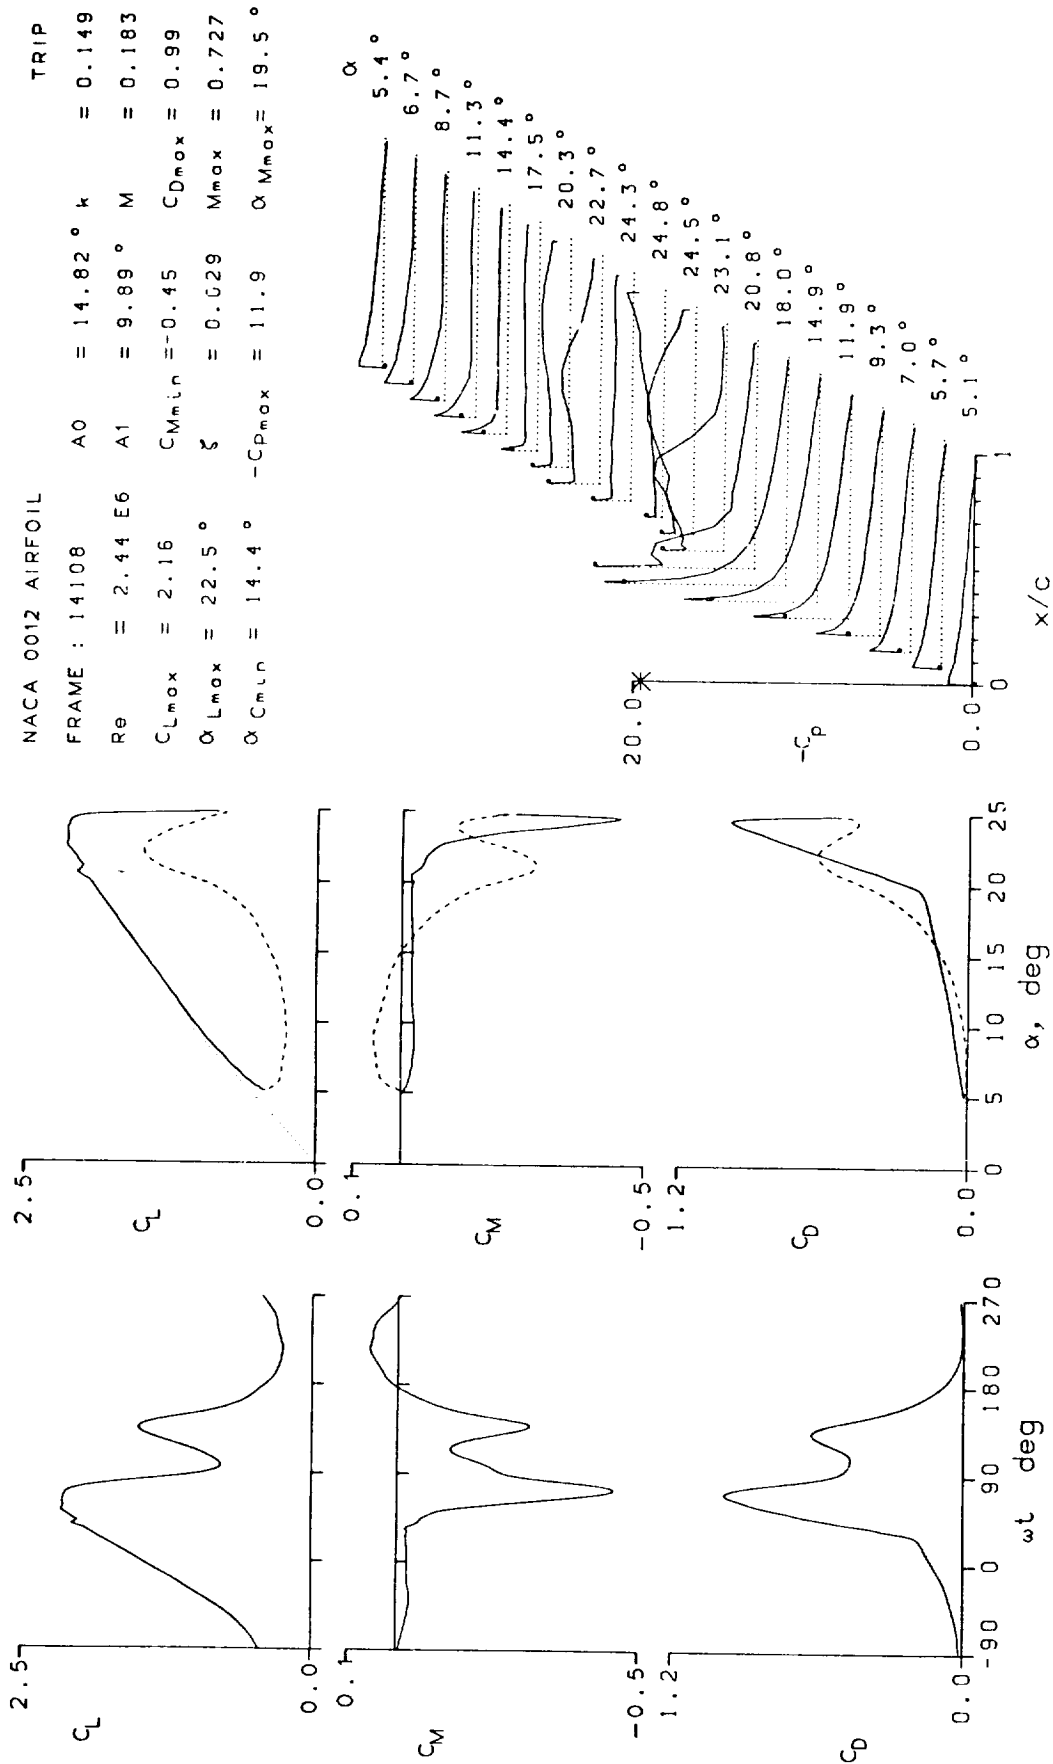


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 14117	A0 = 14.85 °	k = 0.026	TRIP
Re = 3.84 E6	A1 = 9.90 °	M = 0.293	
CLmax = 1.56	CMmin = -0.23	CDmax = 0.46	
αLmax = 15.0 °	ξ = 0.088	Mmax = 1.325	
αCmin = 14.4 °	-CPmax = 10.5	αMmax = 14.4 °	

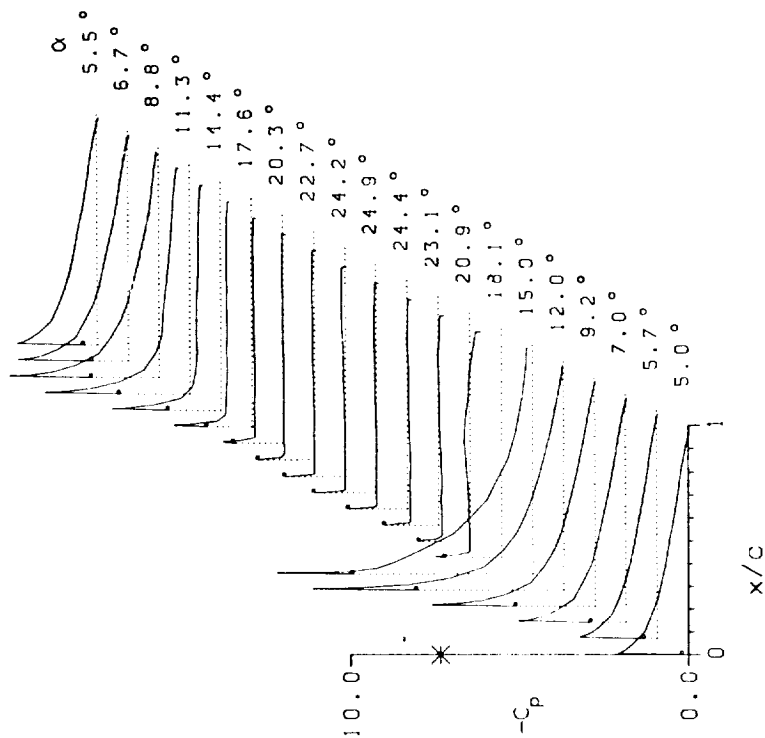
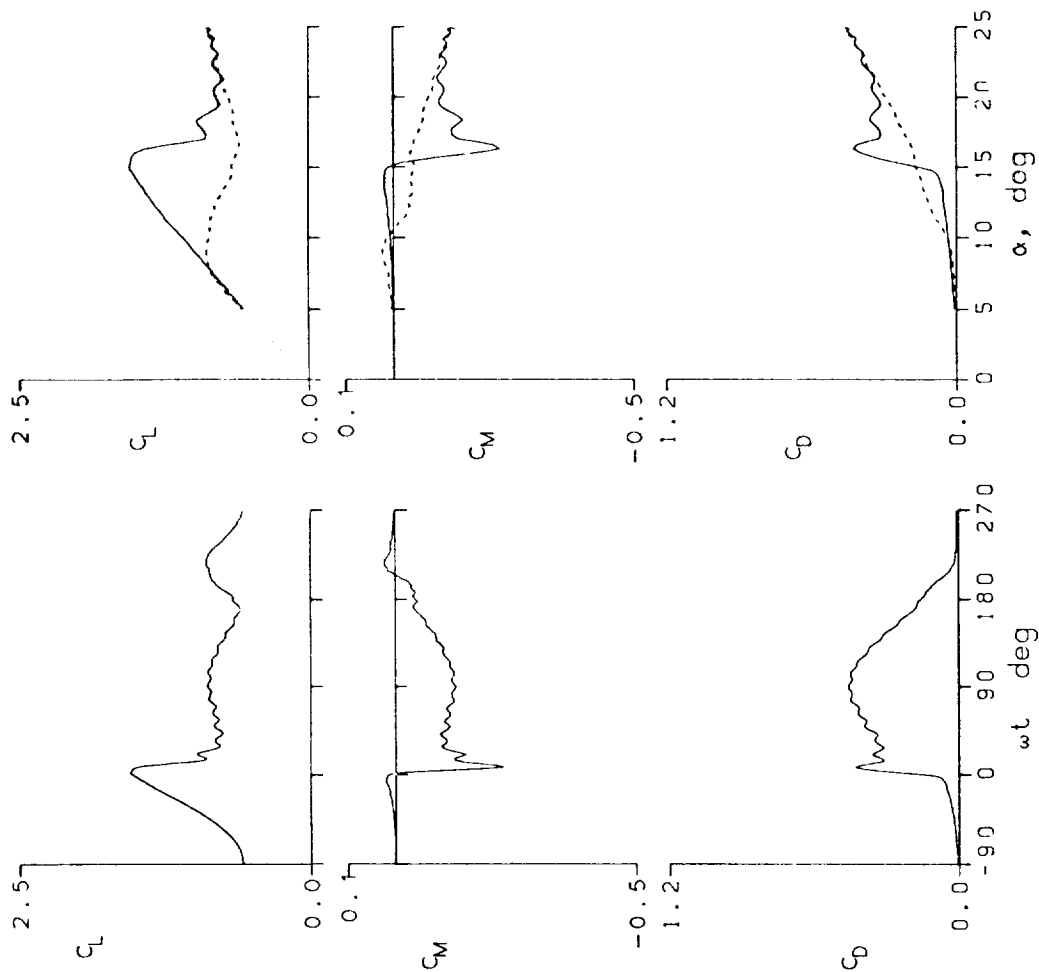


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 14119	A0 = 14.82 °	k = 0.051	TRIP
Re = 3.82 E6	A1 = 9.90 °	M = 0.293	
CLmax = 1.71	CMmin = -0.31	CDmax = 0.56	
α Lmax = 17.5 °	ξ = 0.341	Mmax = 1.336	
α Cmin = 14.4 °	-CPmax = 10.6	α Mmax = 15.0 °	

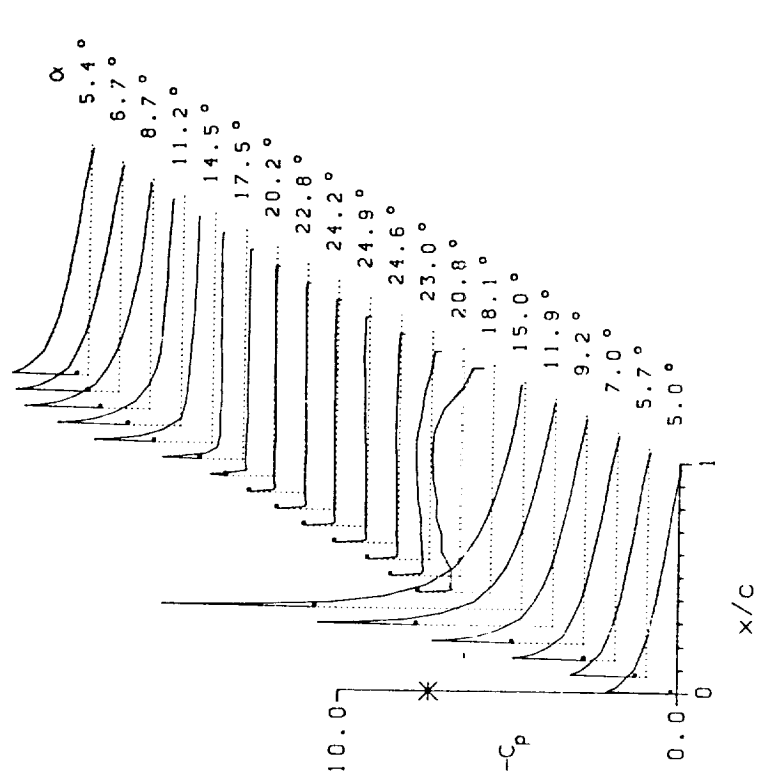
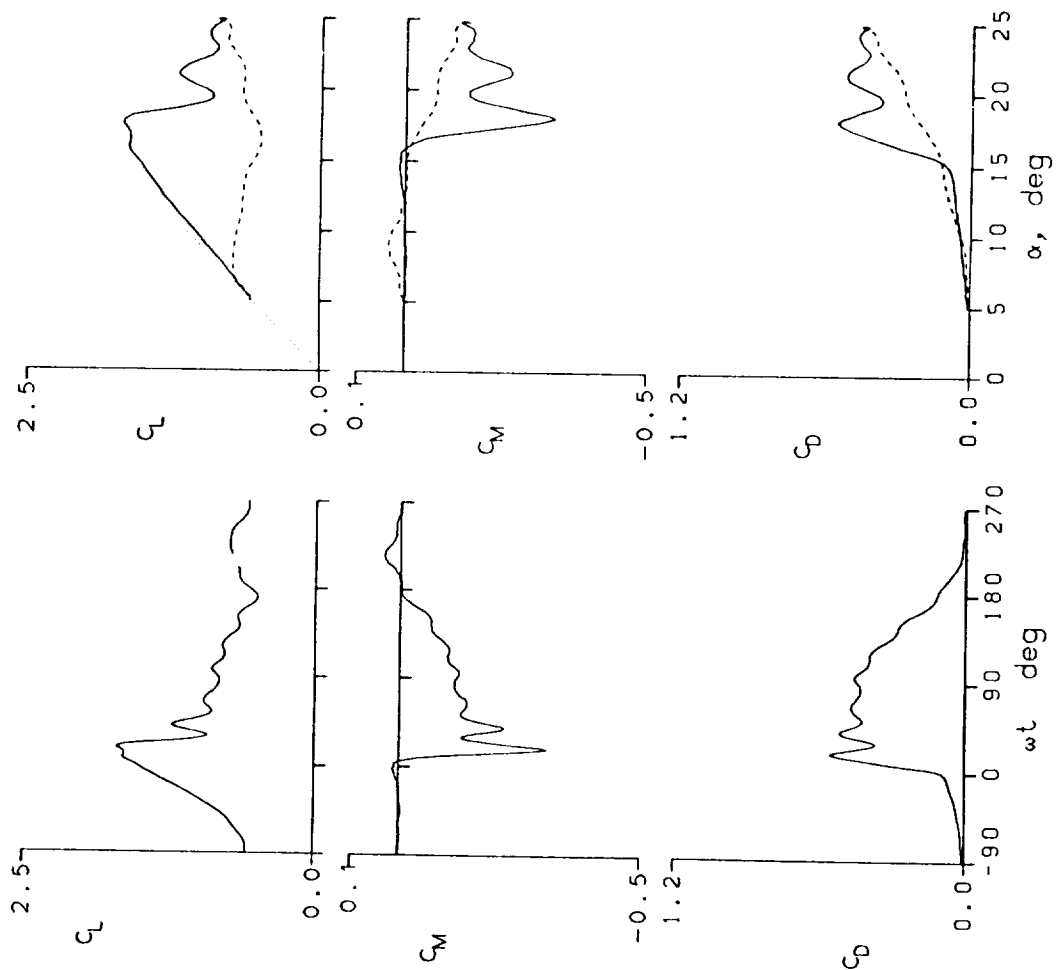


Figure 12.- Continued.

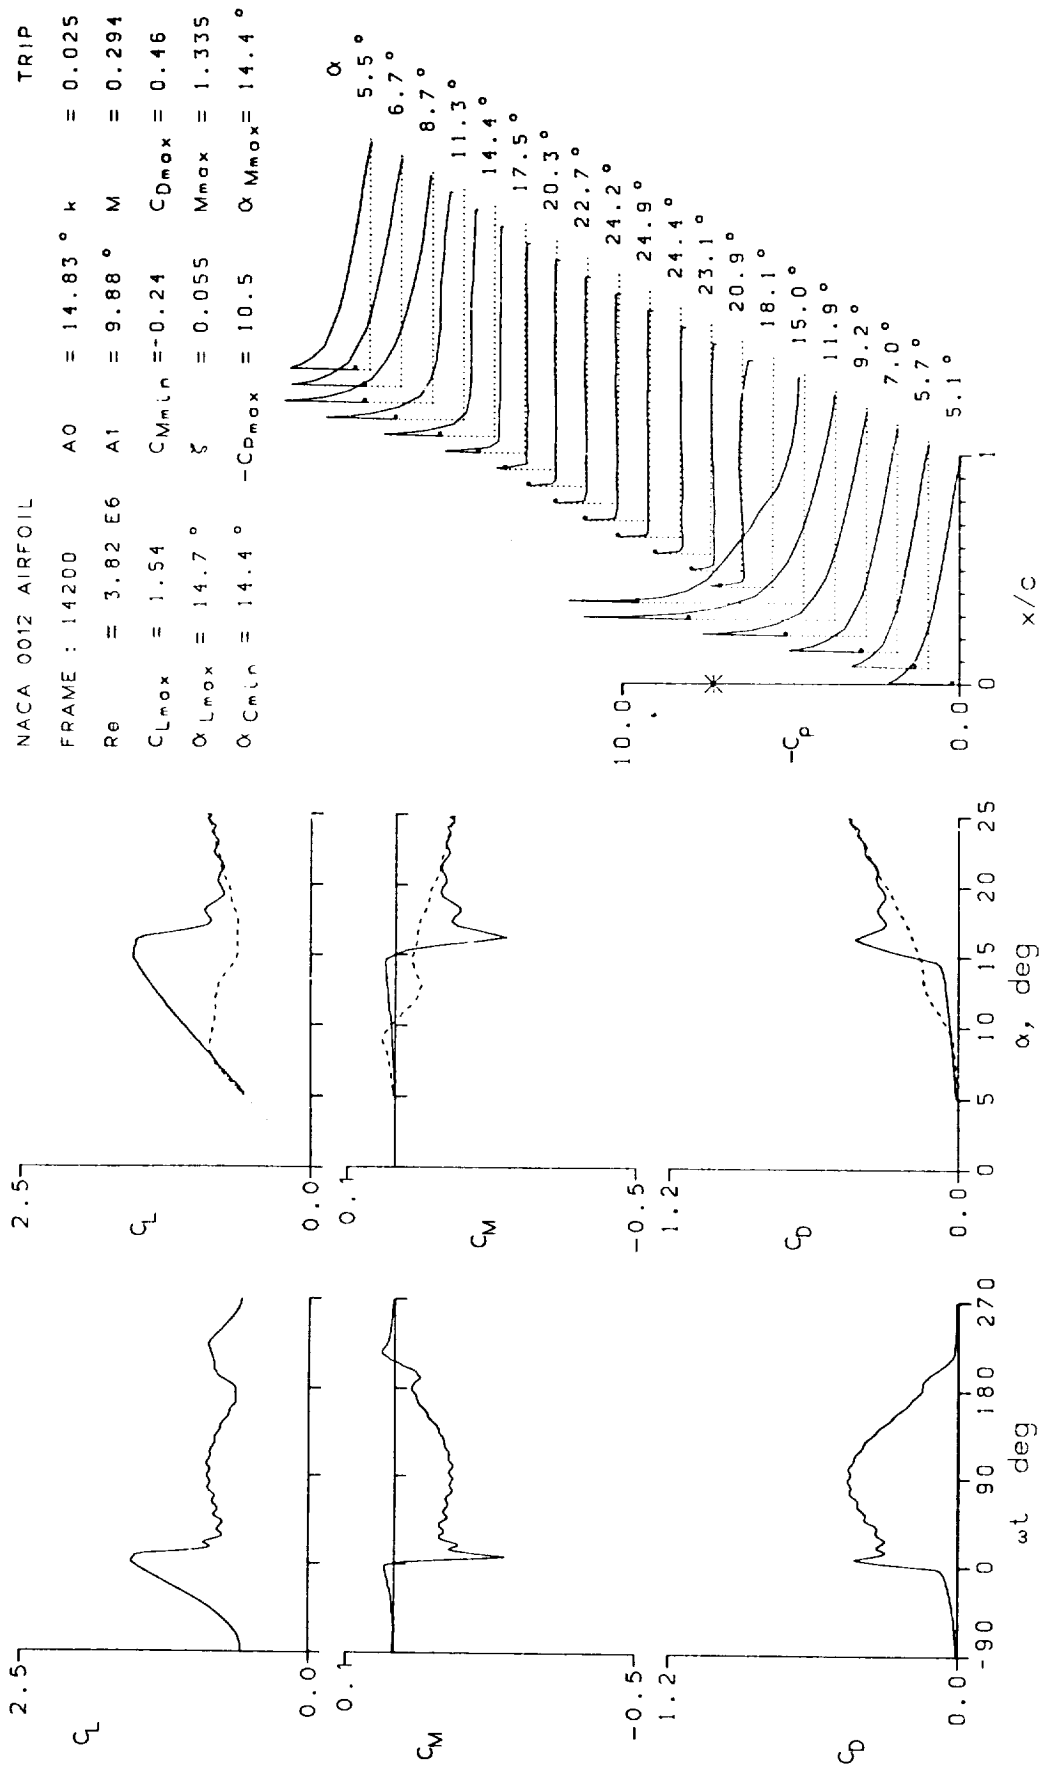


Figure 12.- Continued.

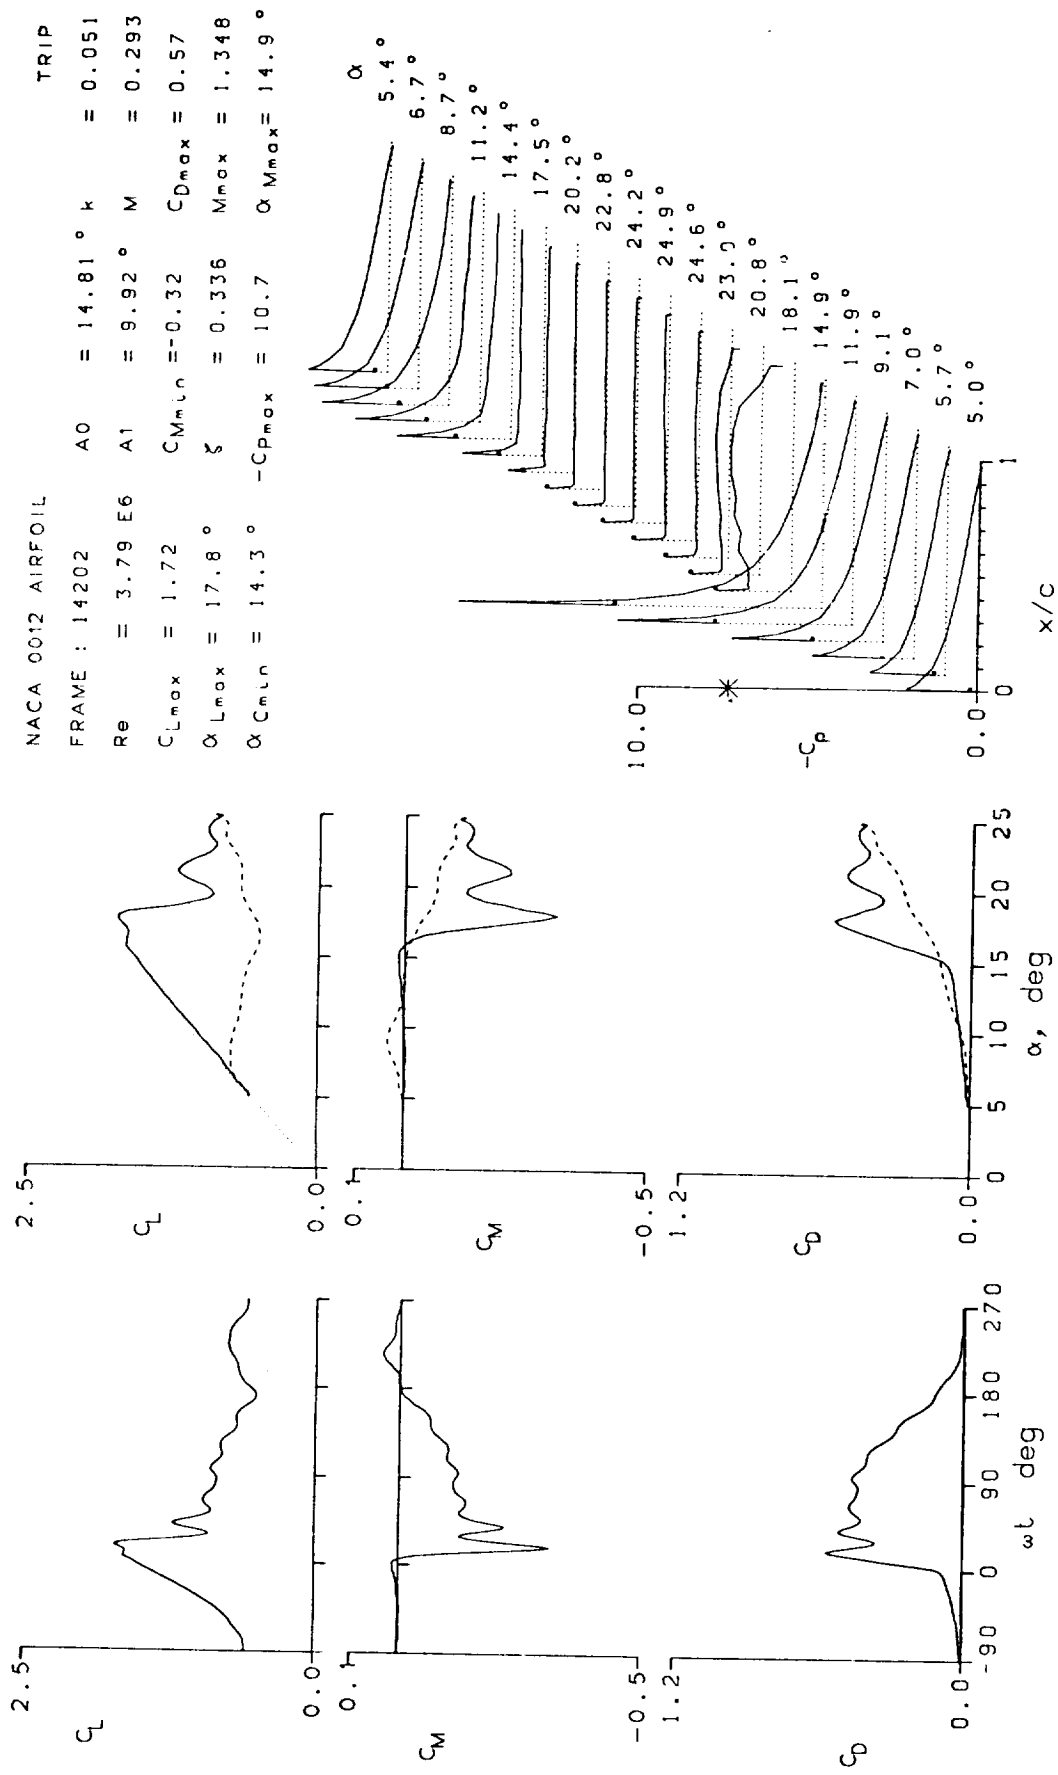


Figure 12.- Continued.

NACA 0012 AIRFOIL

FRAME : 14208	A0 = 14.84 °	k = 0.102
Re = 3.76 E6	A1 = 9.89 °	M = 0.291
C _{Lmax} = 1.96	C _{Mmin} = -0.42	C _{Dmax} = 0.77
α _{Lmax} = 20.5 °	ξ = 0.567	N _{max} = 1.366
α _{Cmin} = 14.4 °	-C _{pmax} = 11.0	α _{Mmax} = 16.0 °

TRIP

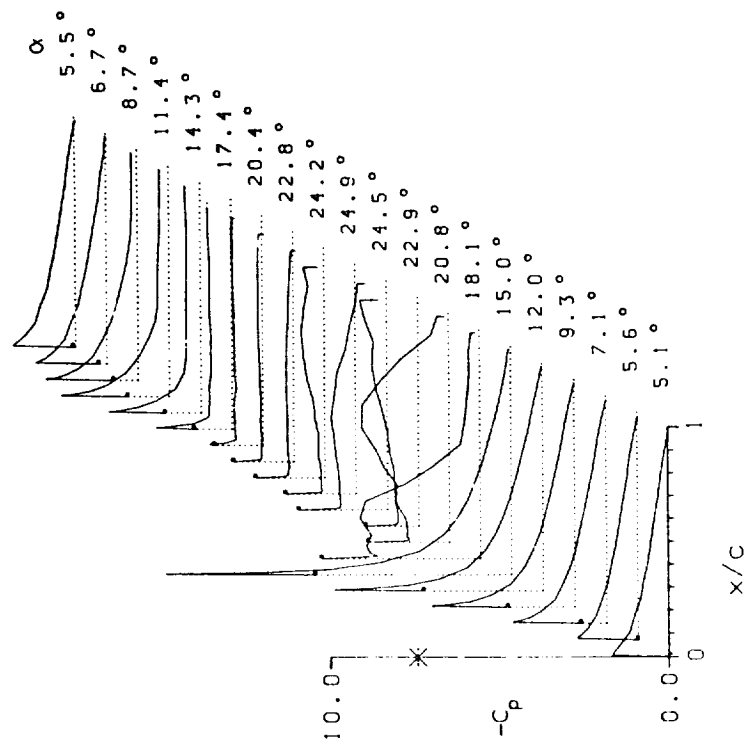
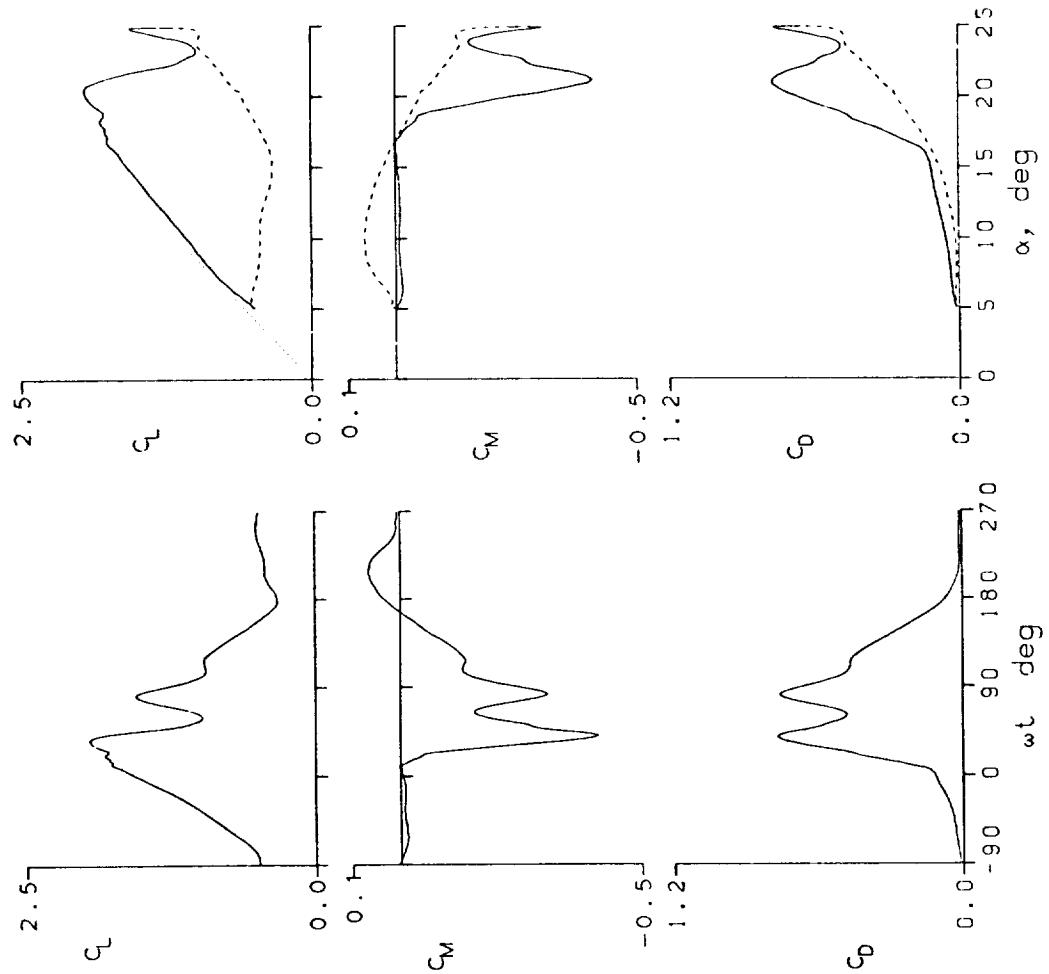


Figure 12.- Continued.

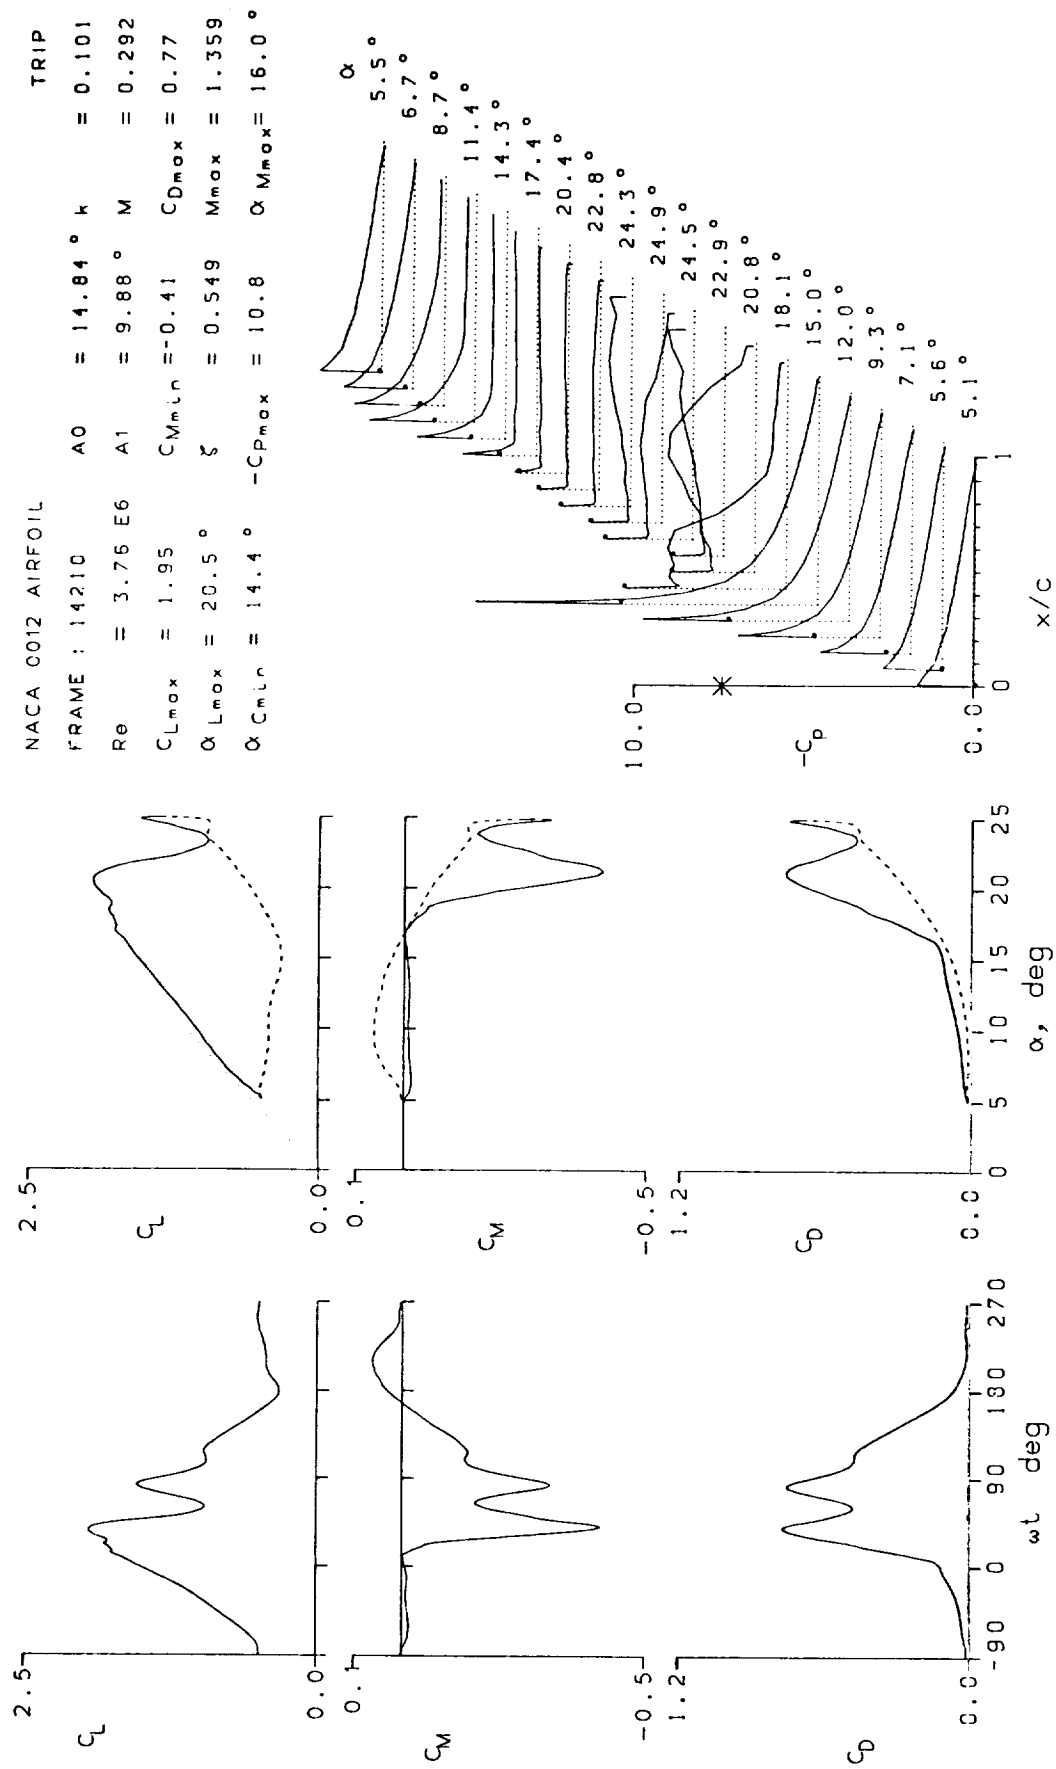


Figure 12.- Continued.

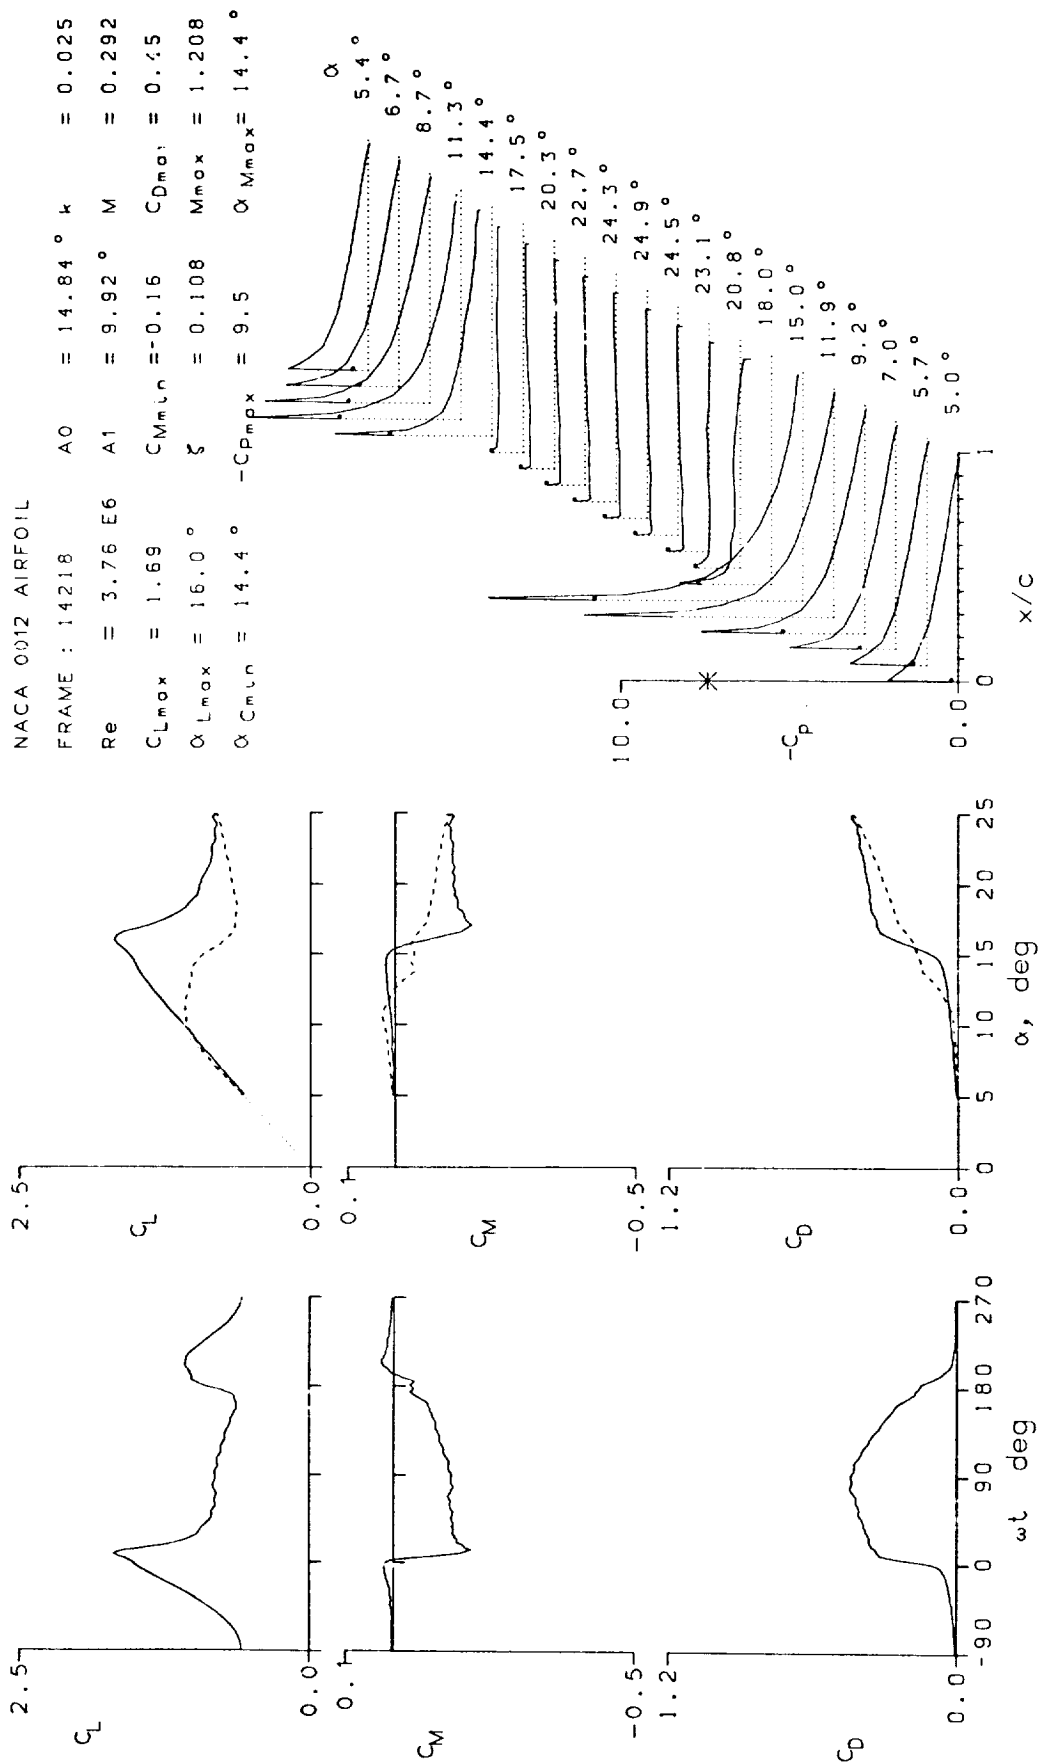


Figure 12.- Continued.

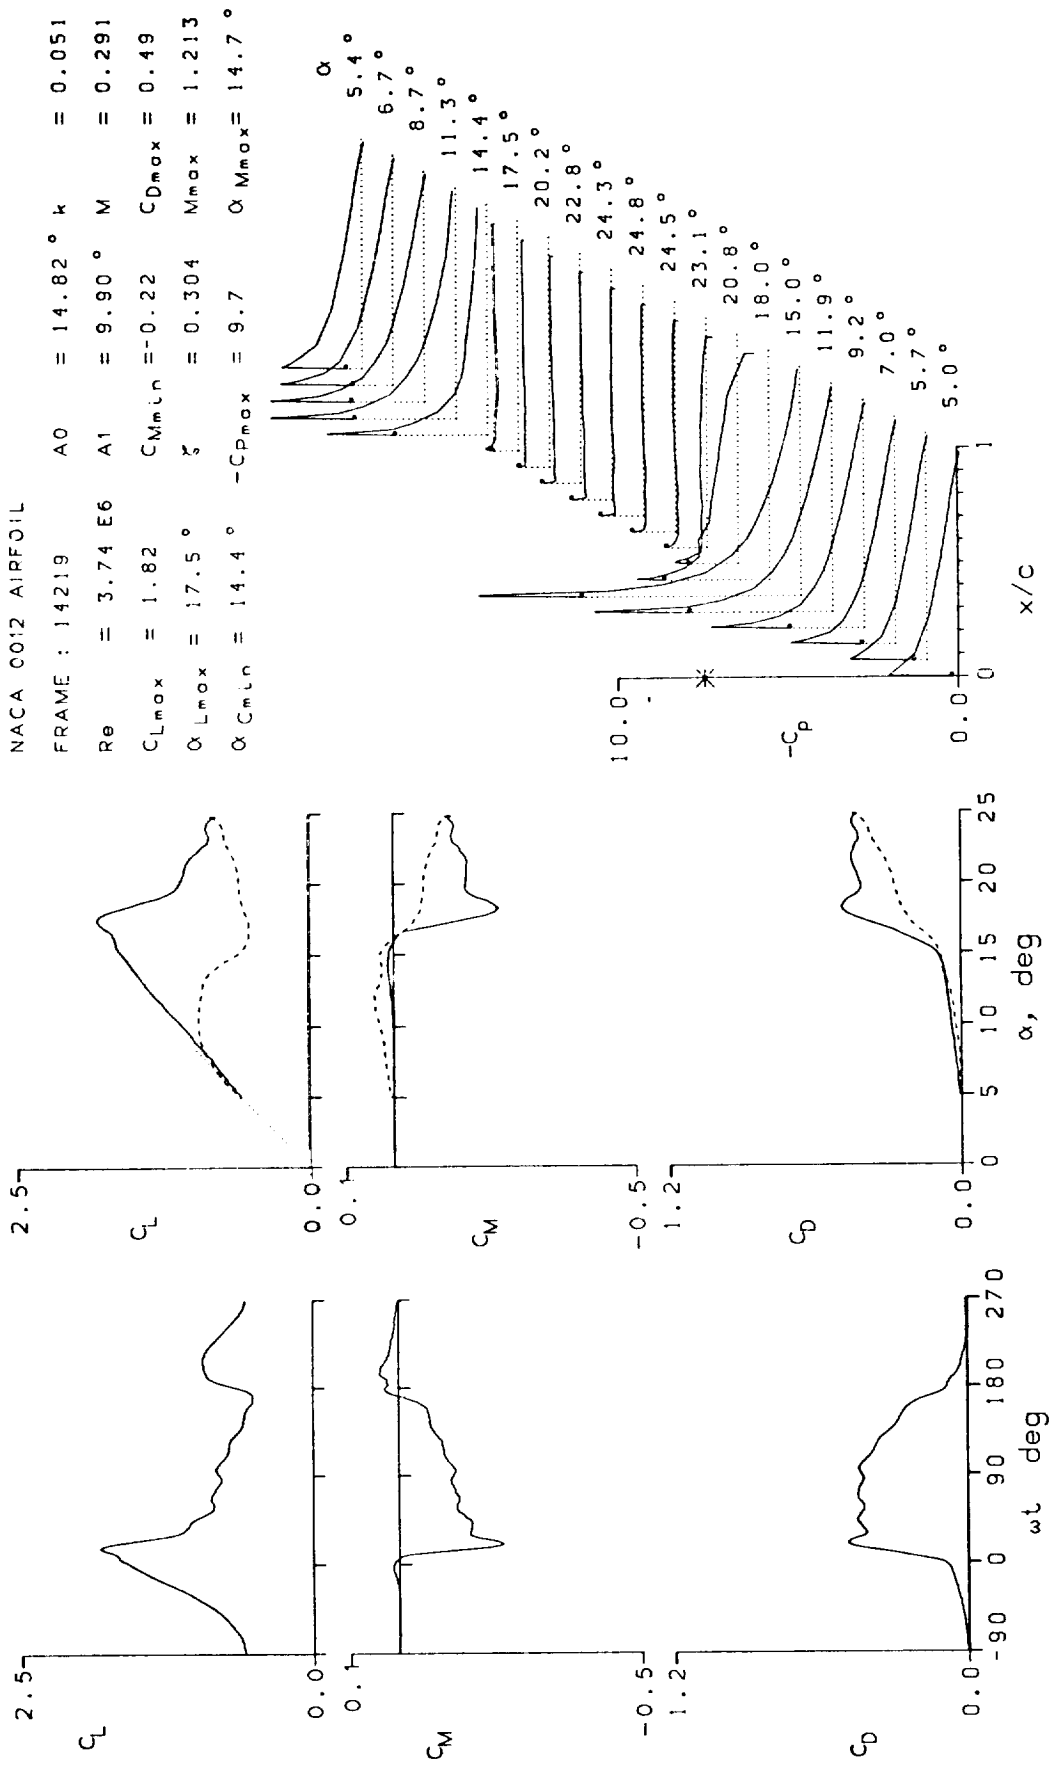


Figure 12.- Continued.

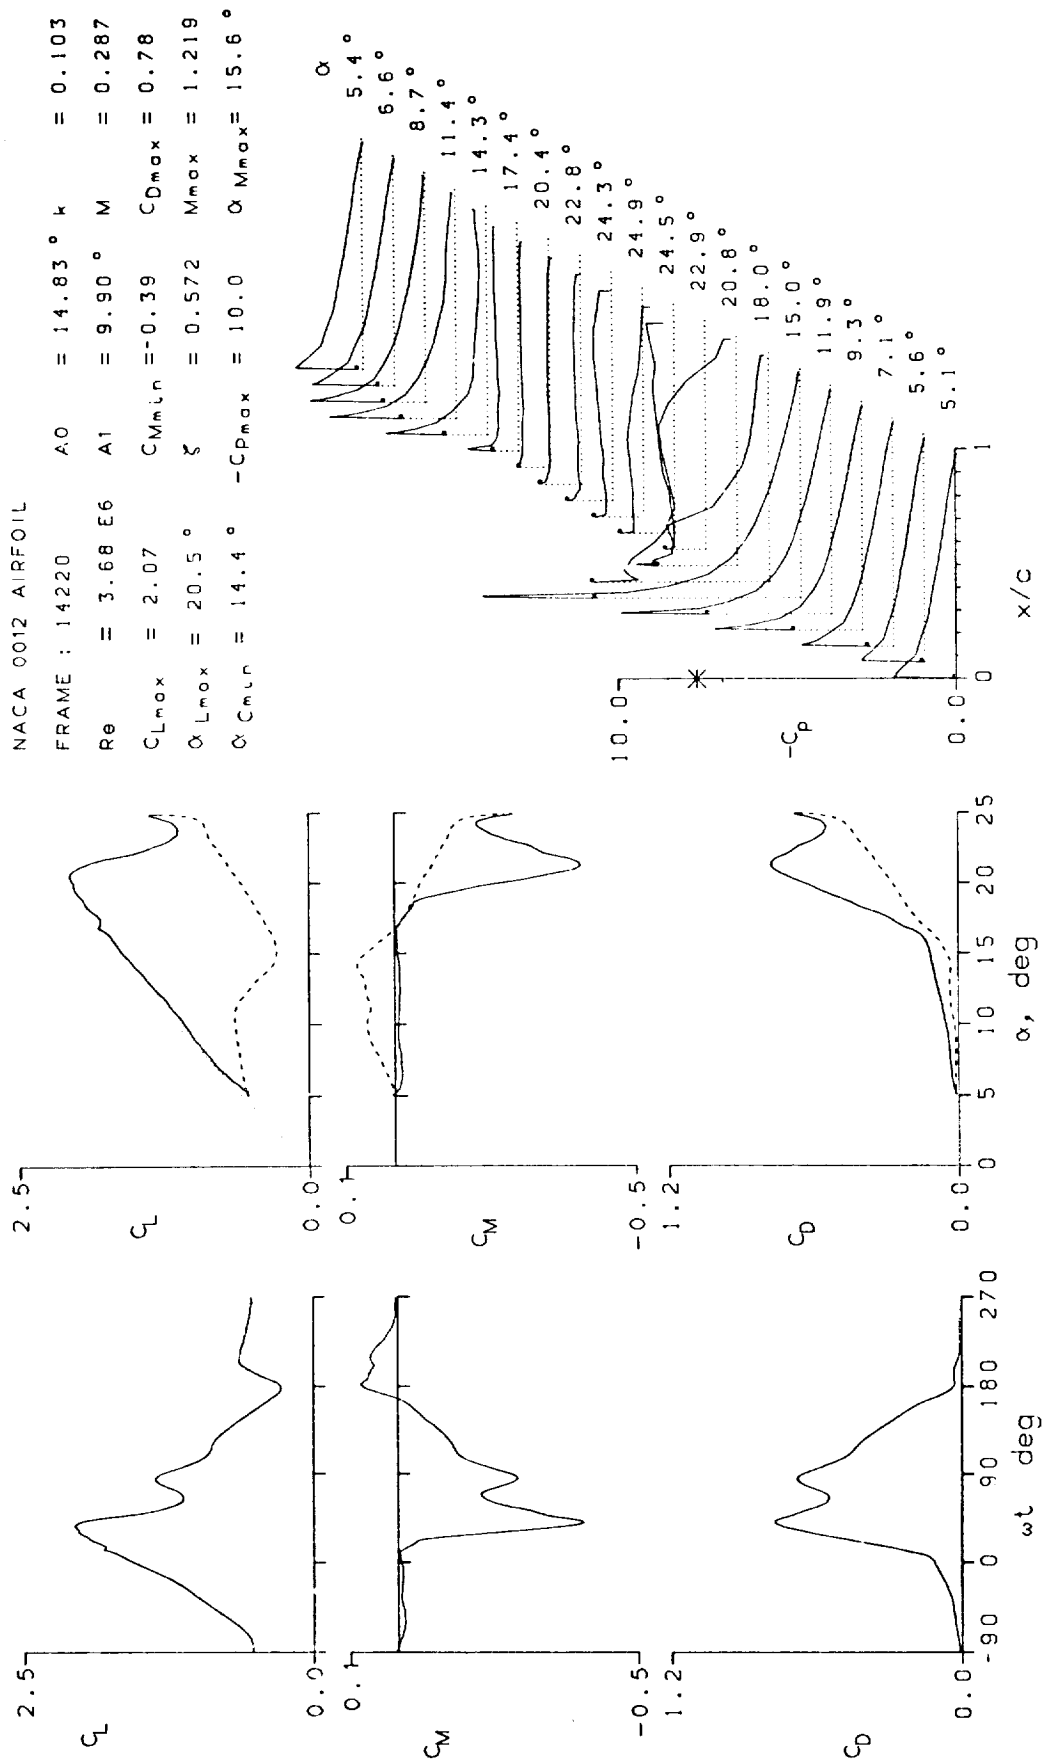


Figure 12.- Continued.

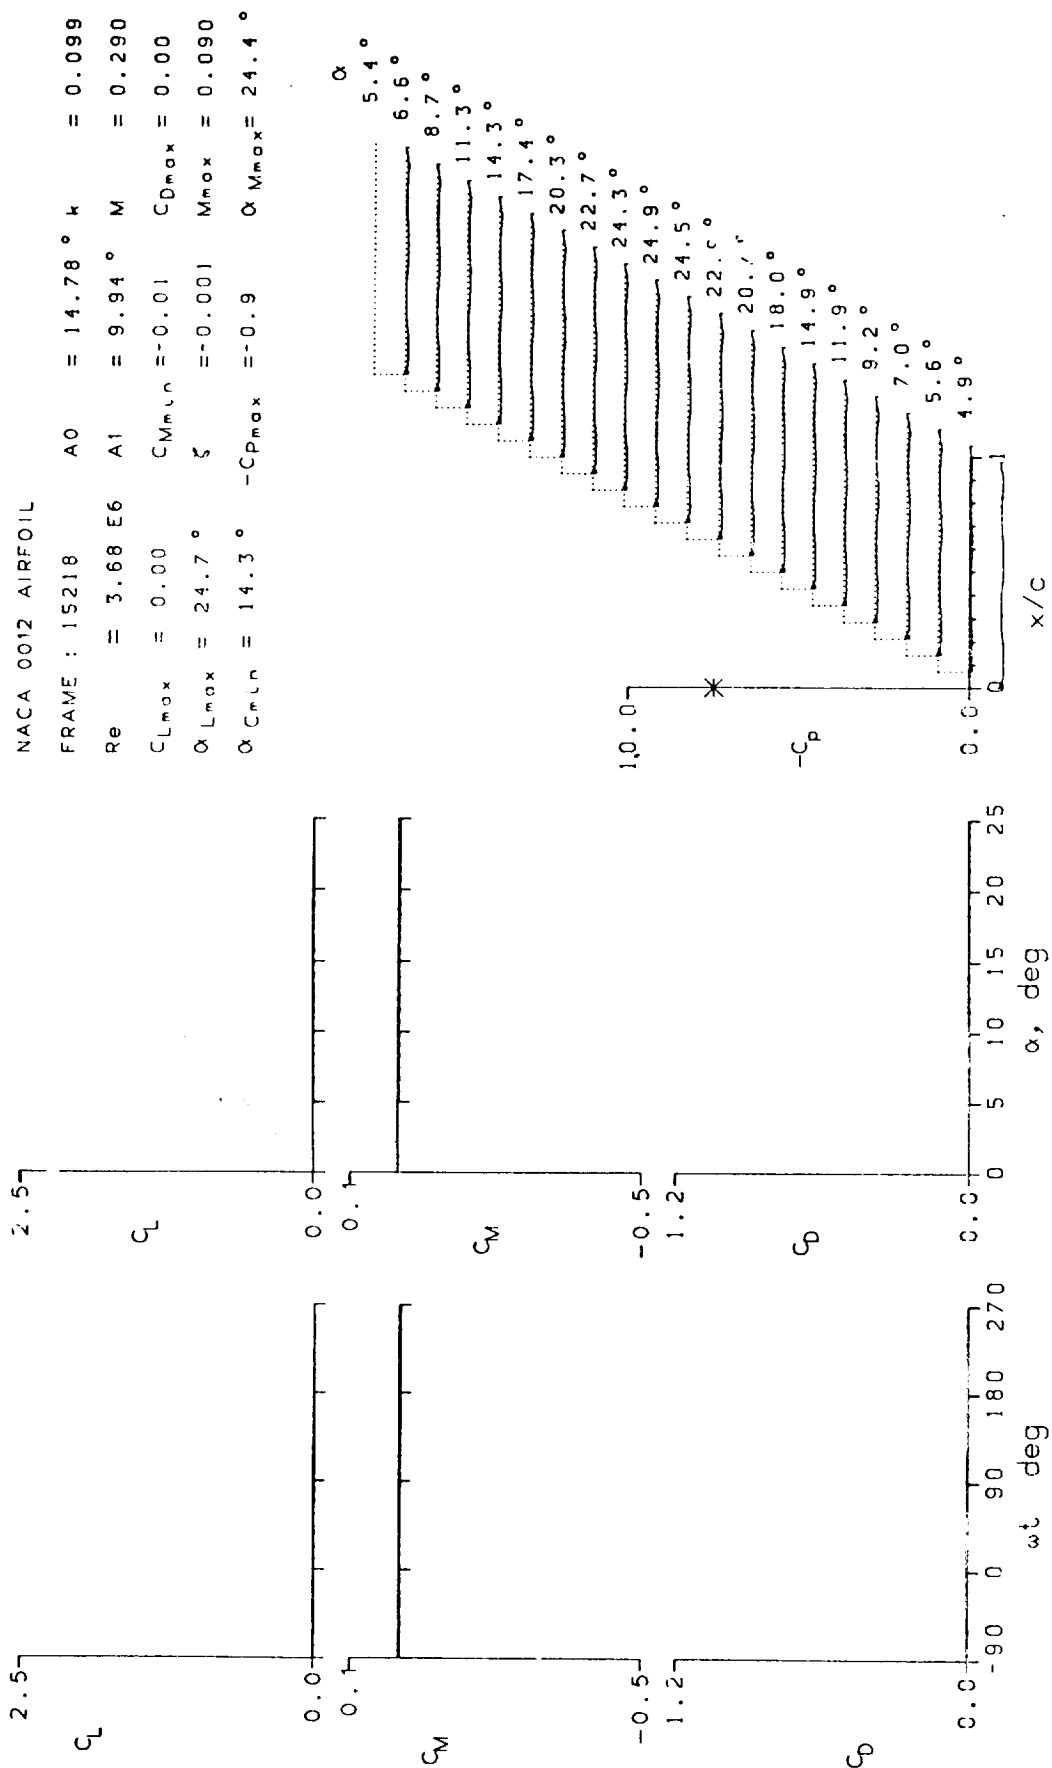


Figure 12.- Concluded.

AMES-01 AIRFOIL

FRAME : 24022	A0 = 14.84 °	k = 0.025
Re = 3.84 E6	A1 = 9.91 °	M = 0.296
C _{Lmax} = 1.81	C _{Mmin} = -0.19	C _{Dmax} = 0.41
α _{Lmax} = 17.2 °	ζ = 0.145	M _{max} = 1.262
α _{Cmin} = 14.4 °	-C _{Pmax} = 9.7	α _{Mmax} = 16.2 °

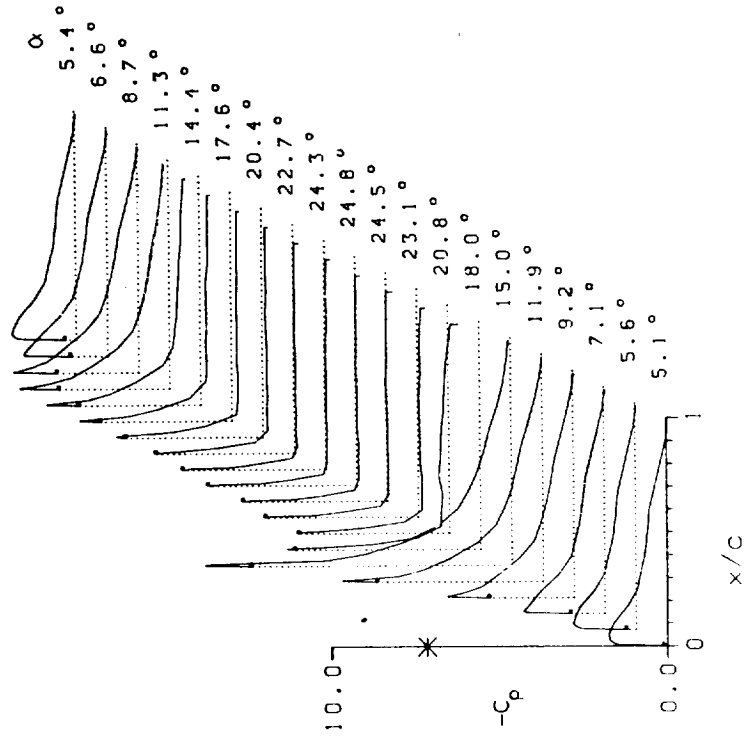
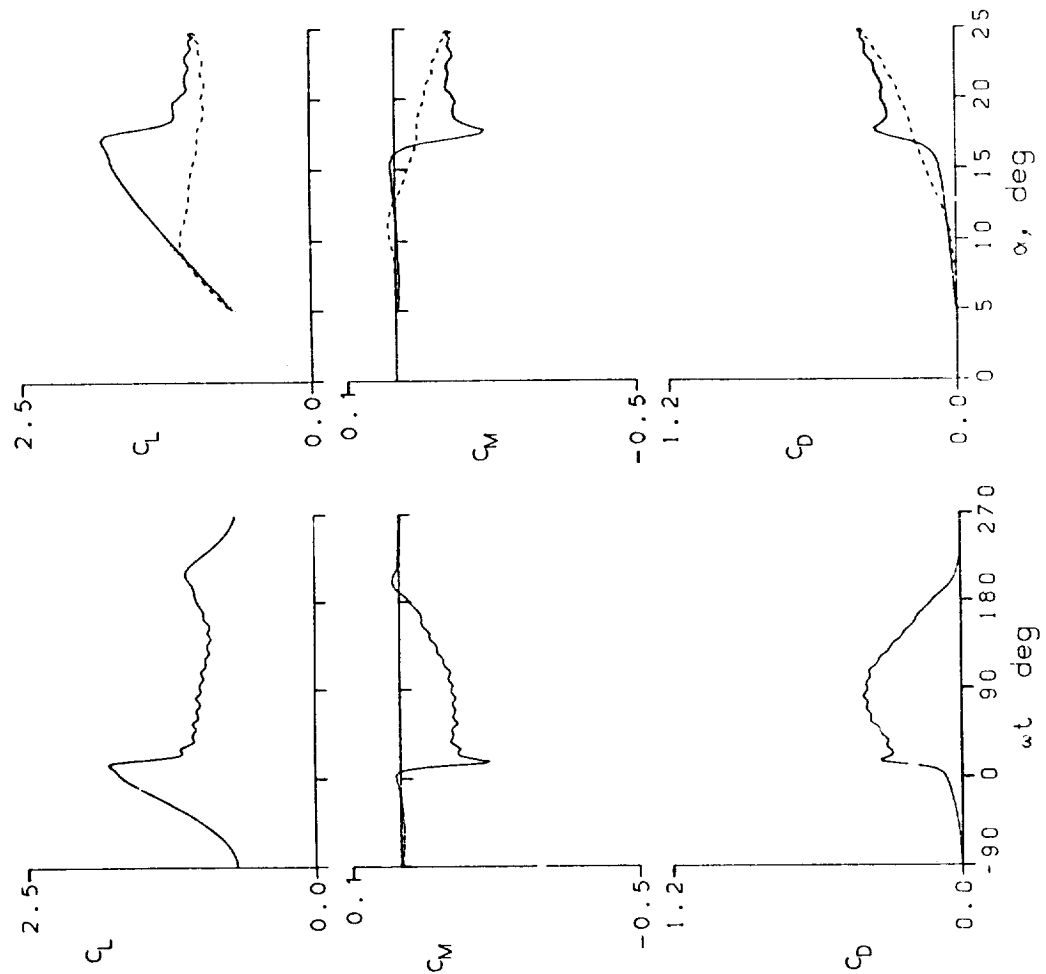


Figure 13.- Dynamic data for Ames A-01 airfoil.

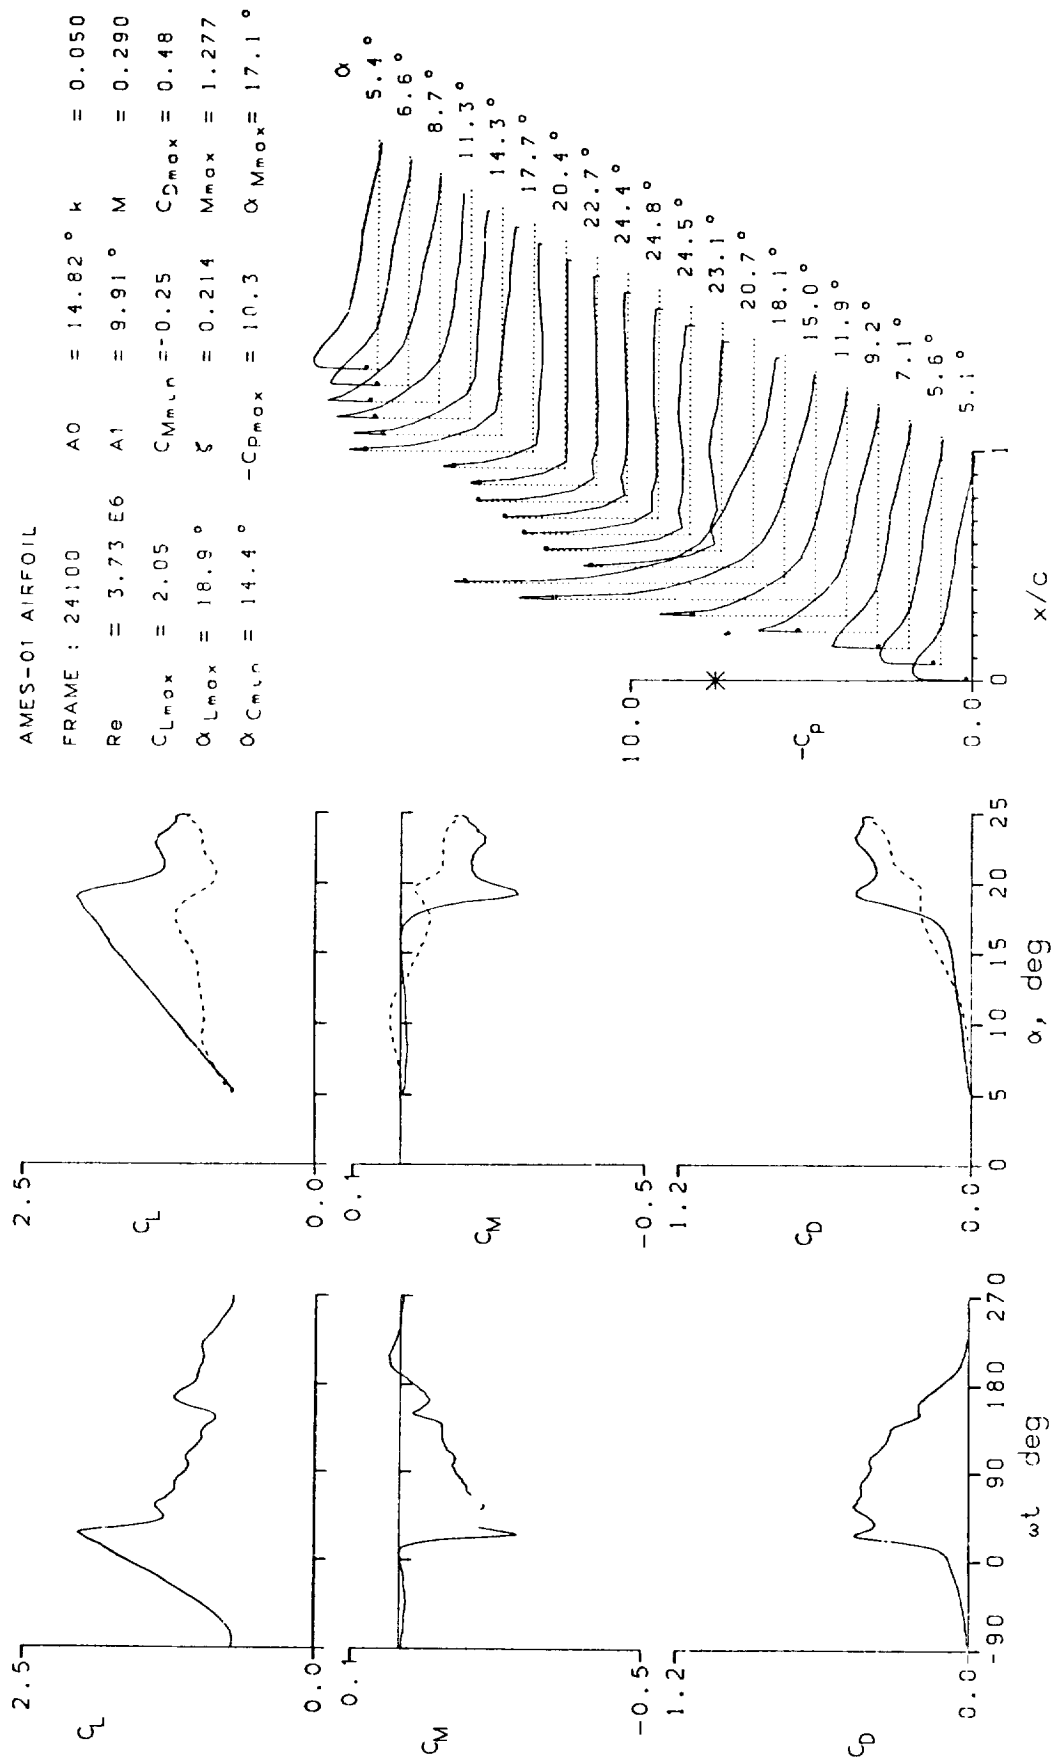


Figure 13.- Continued.

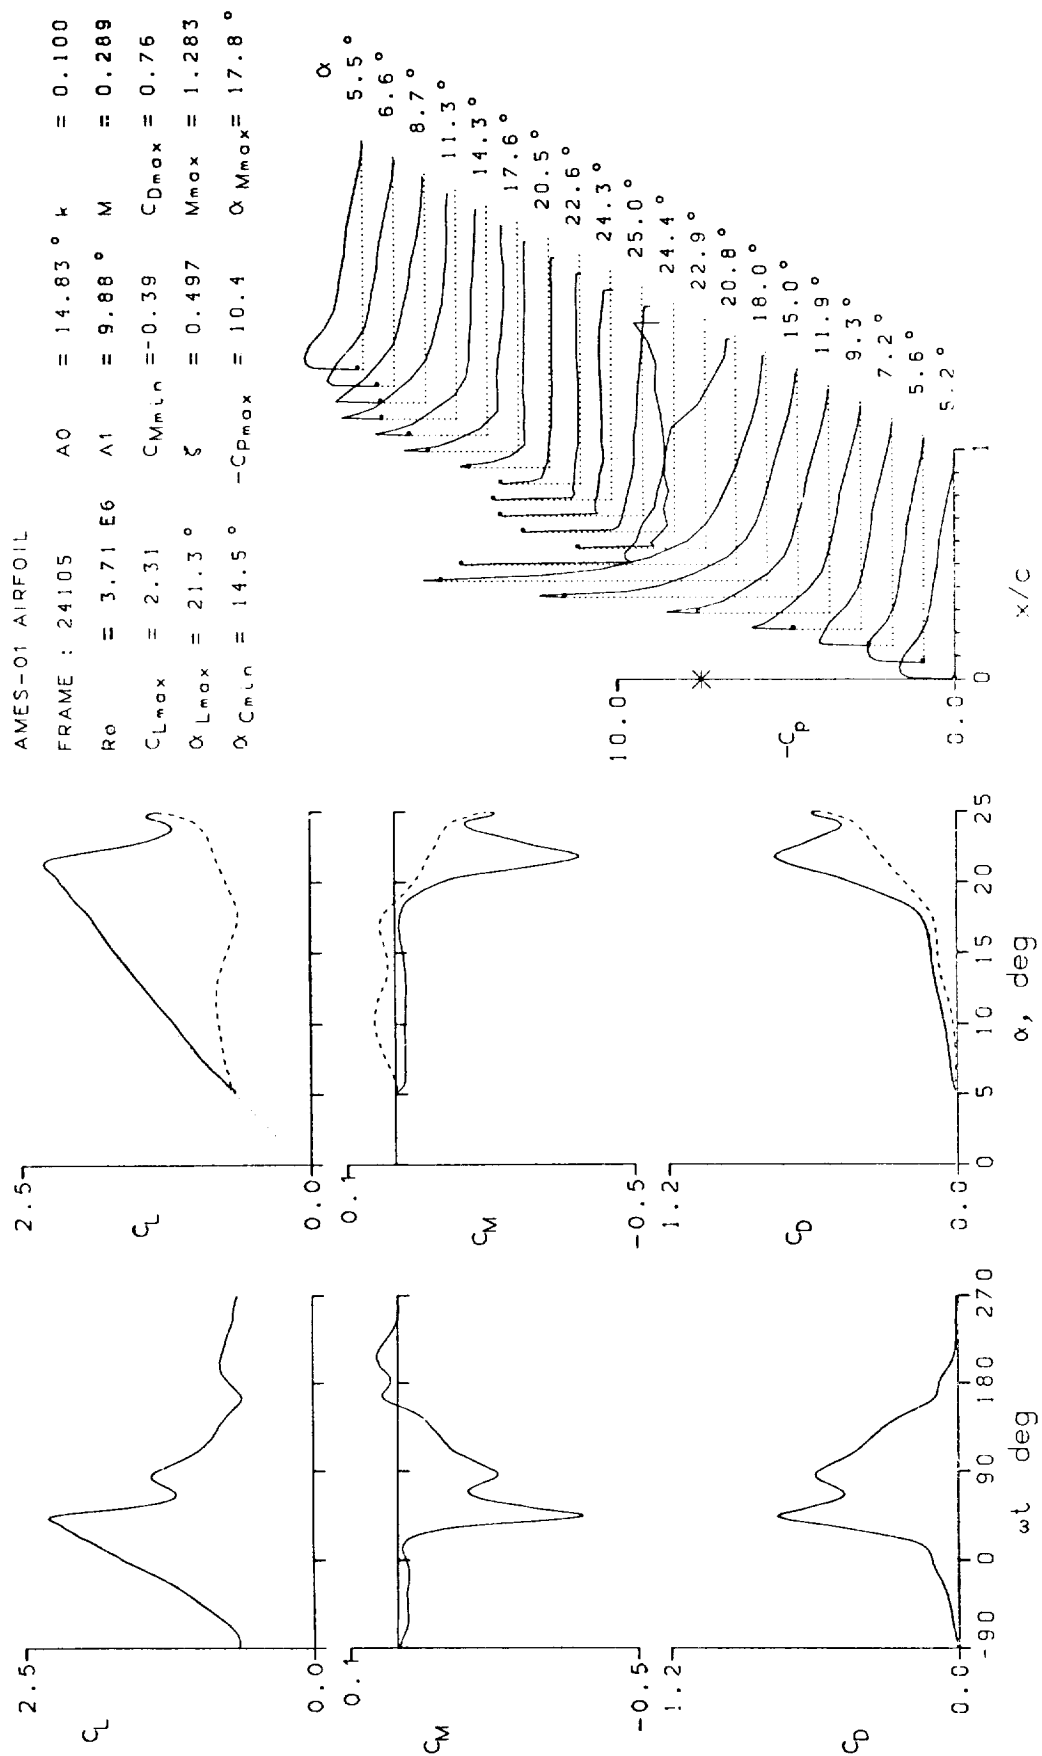


Figure 13.- Continued.

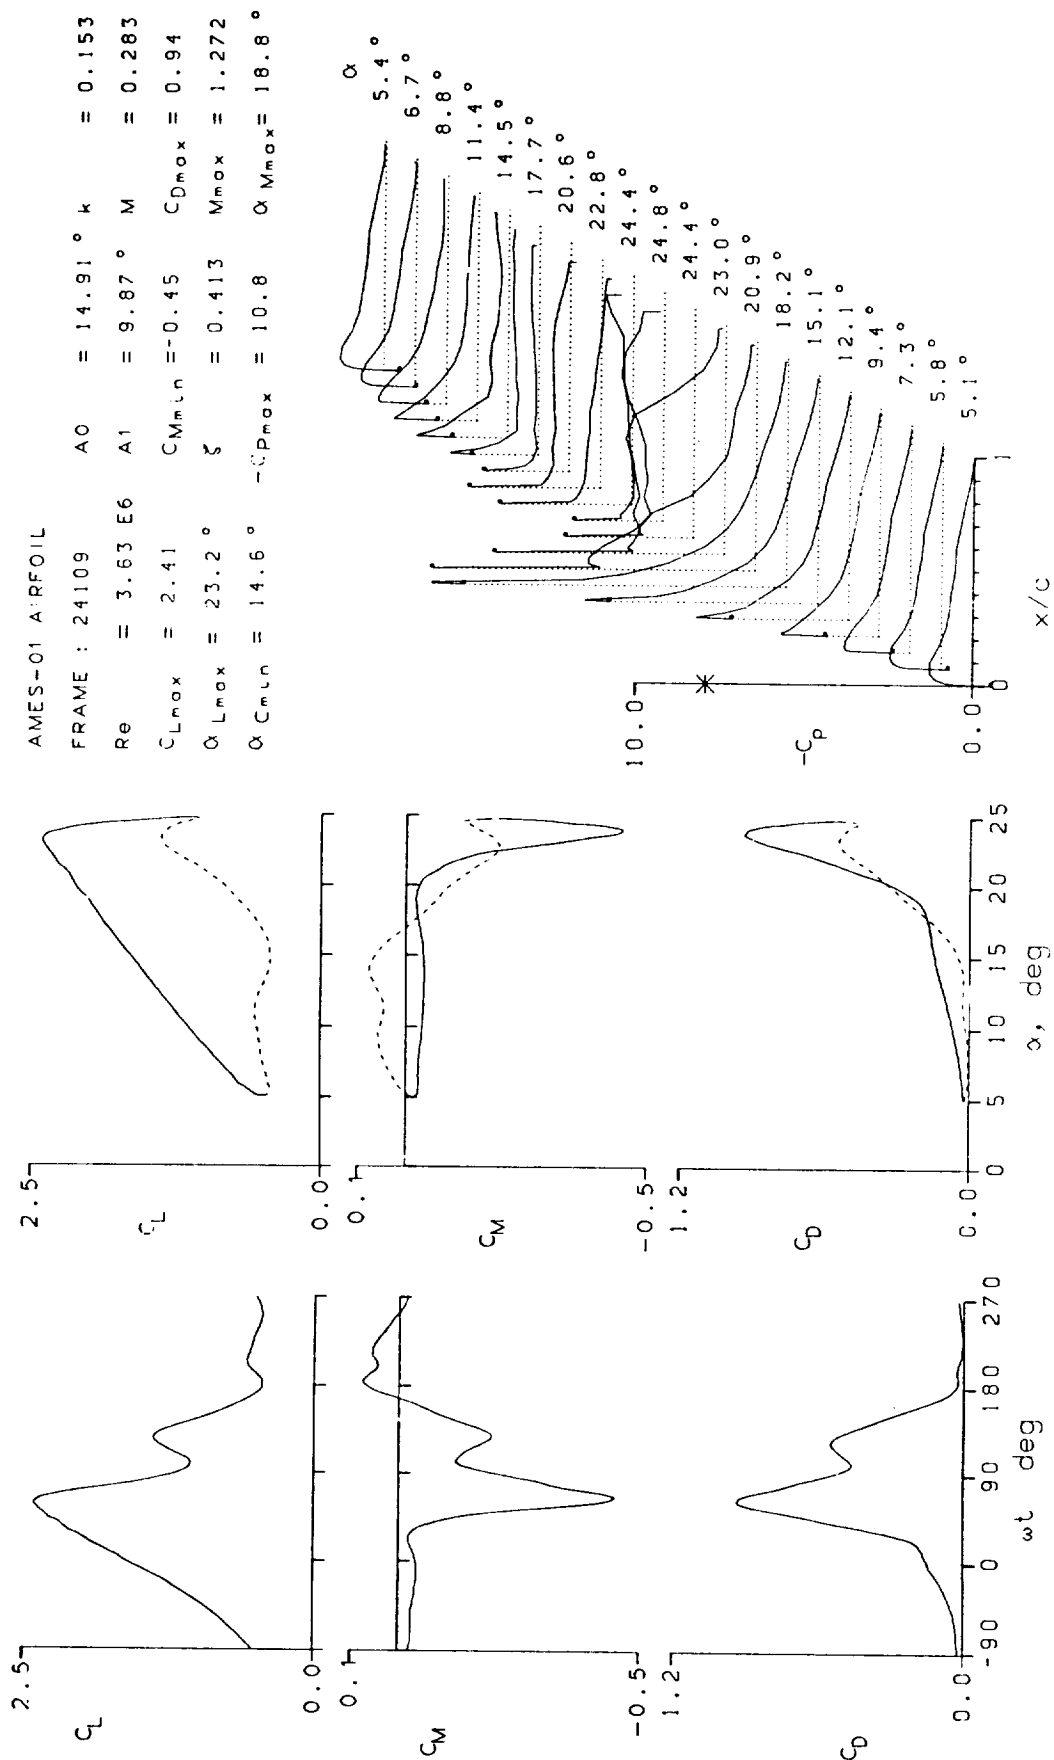


Figure 13.- Continued.

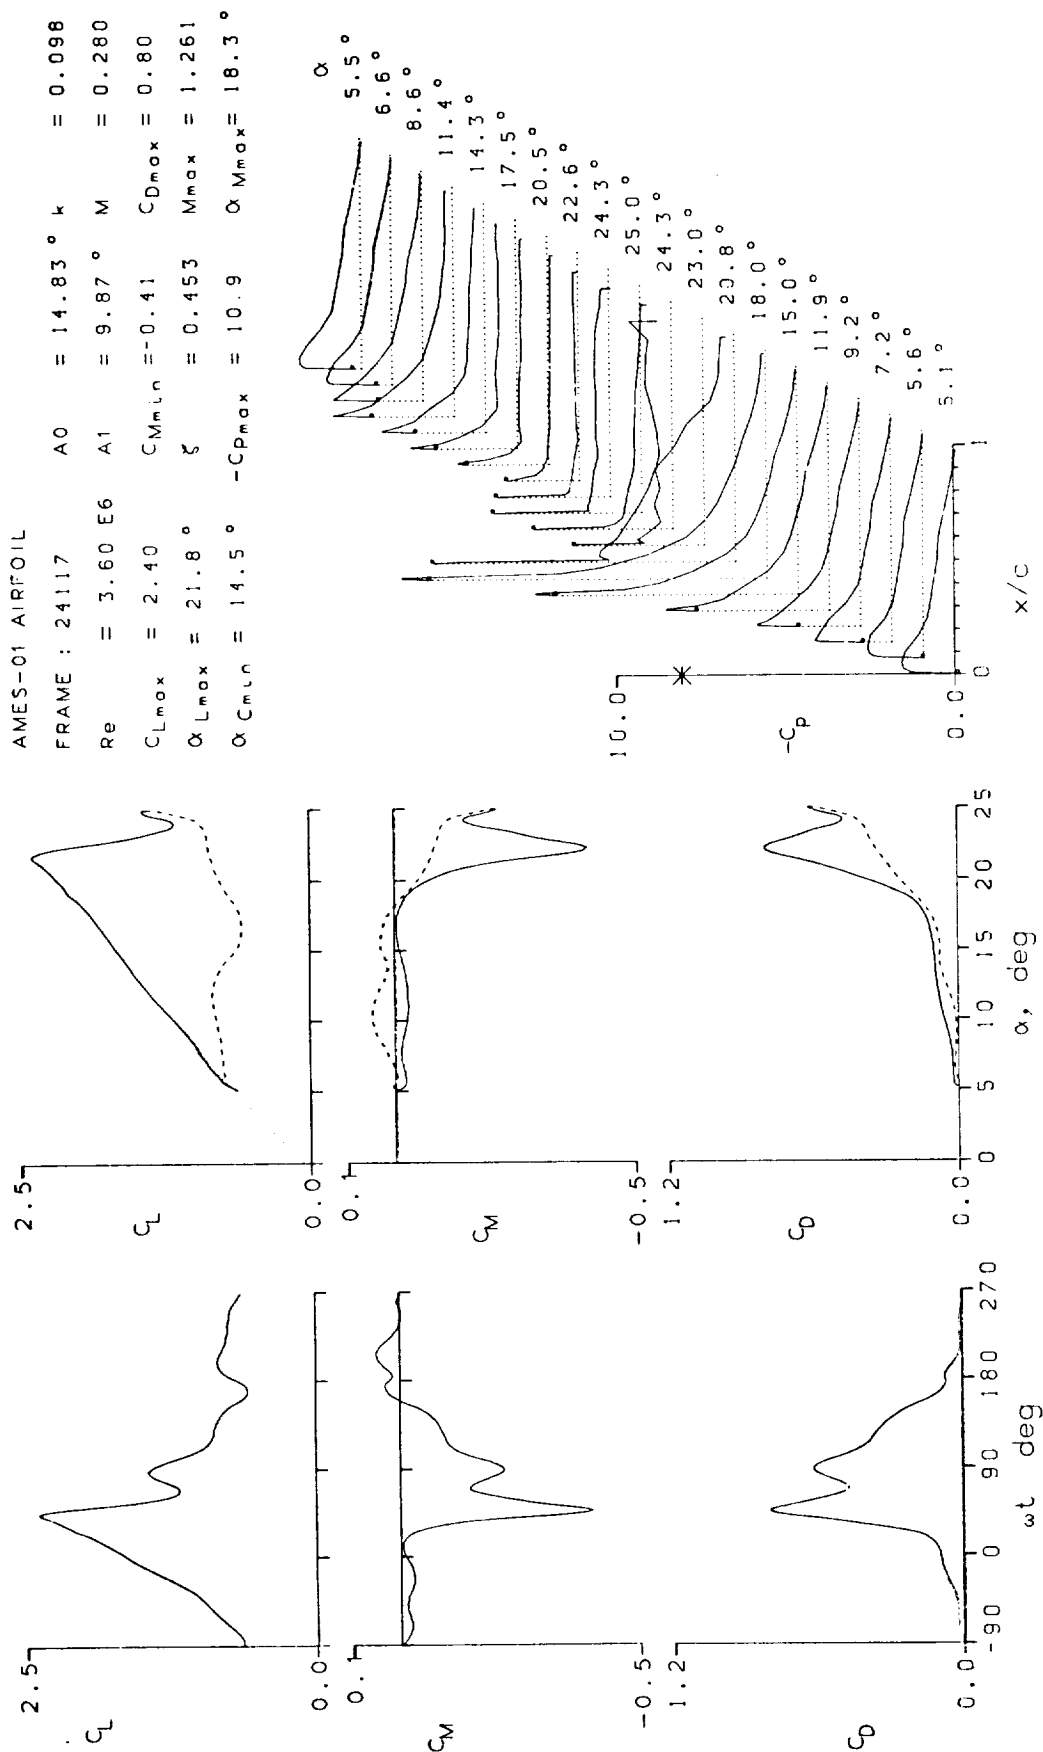


Figure 13.- Continued.

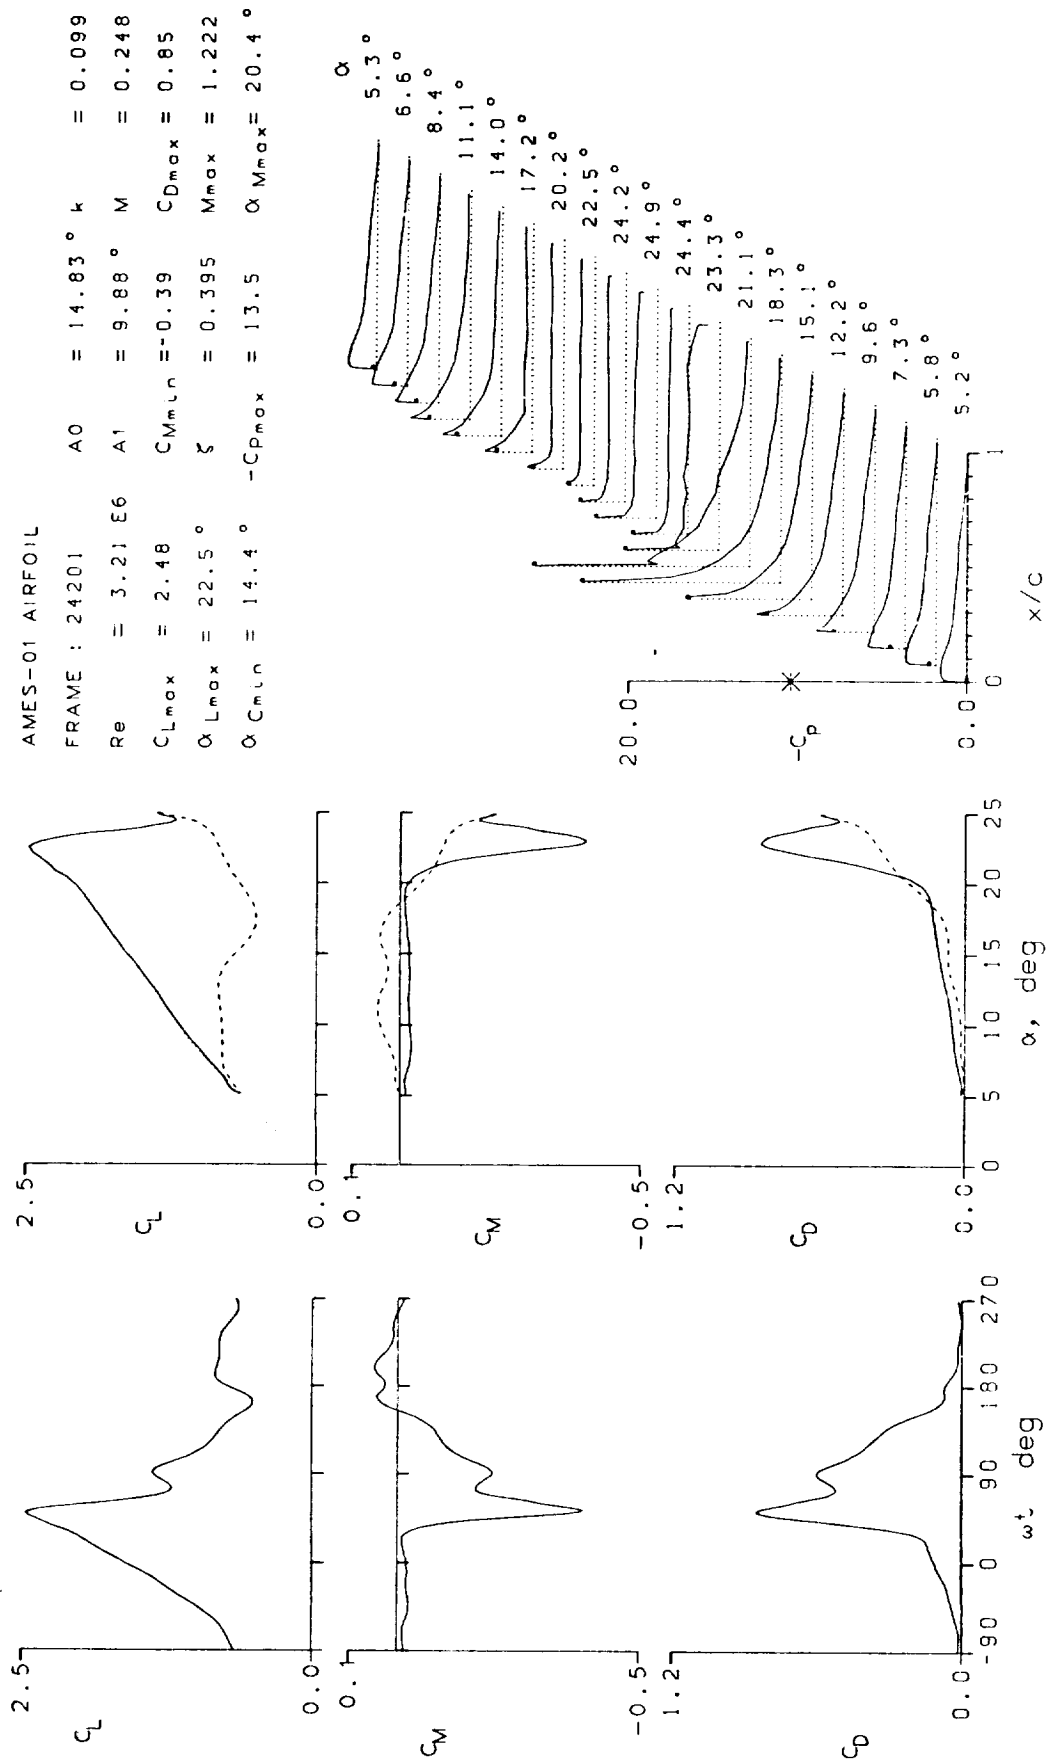


Figure 13.- Continued.

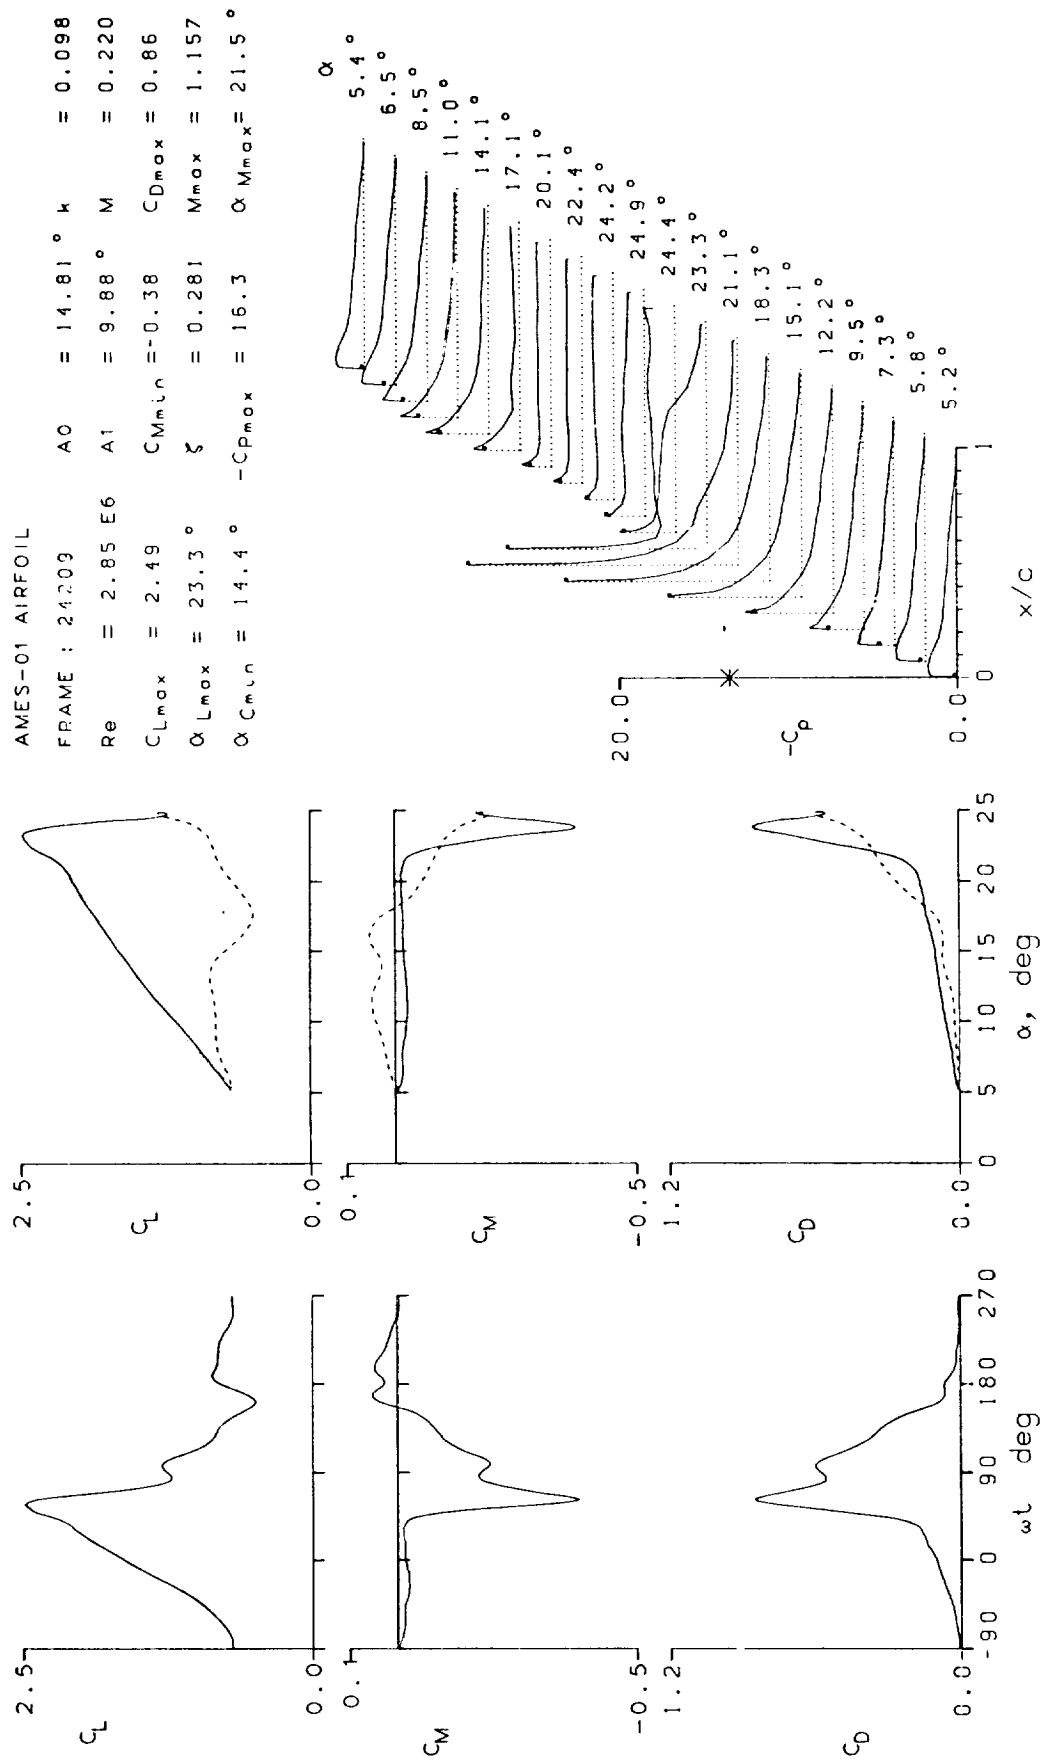


Figure 13.- Continued.

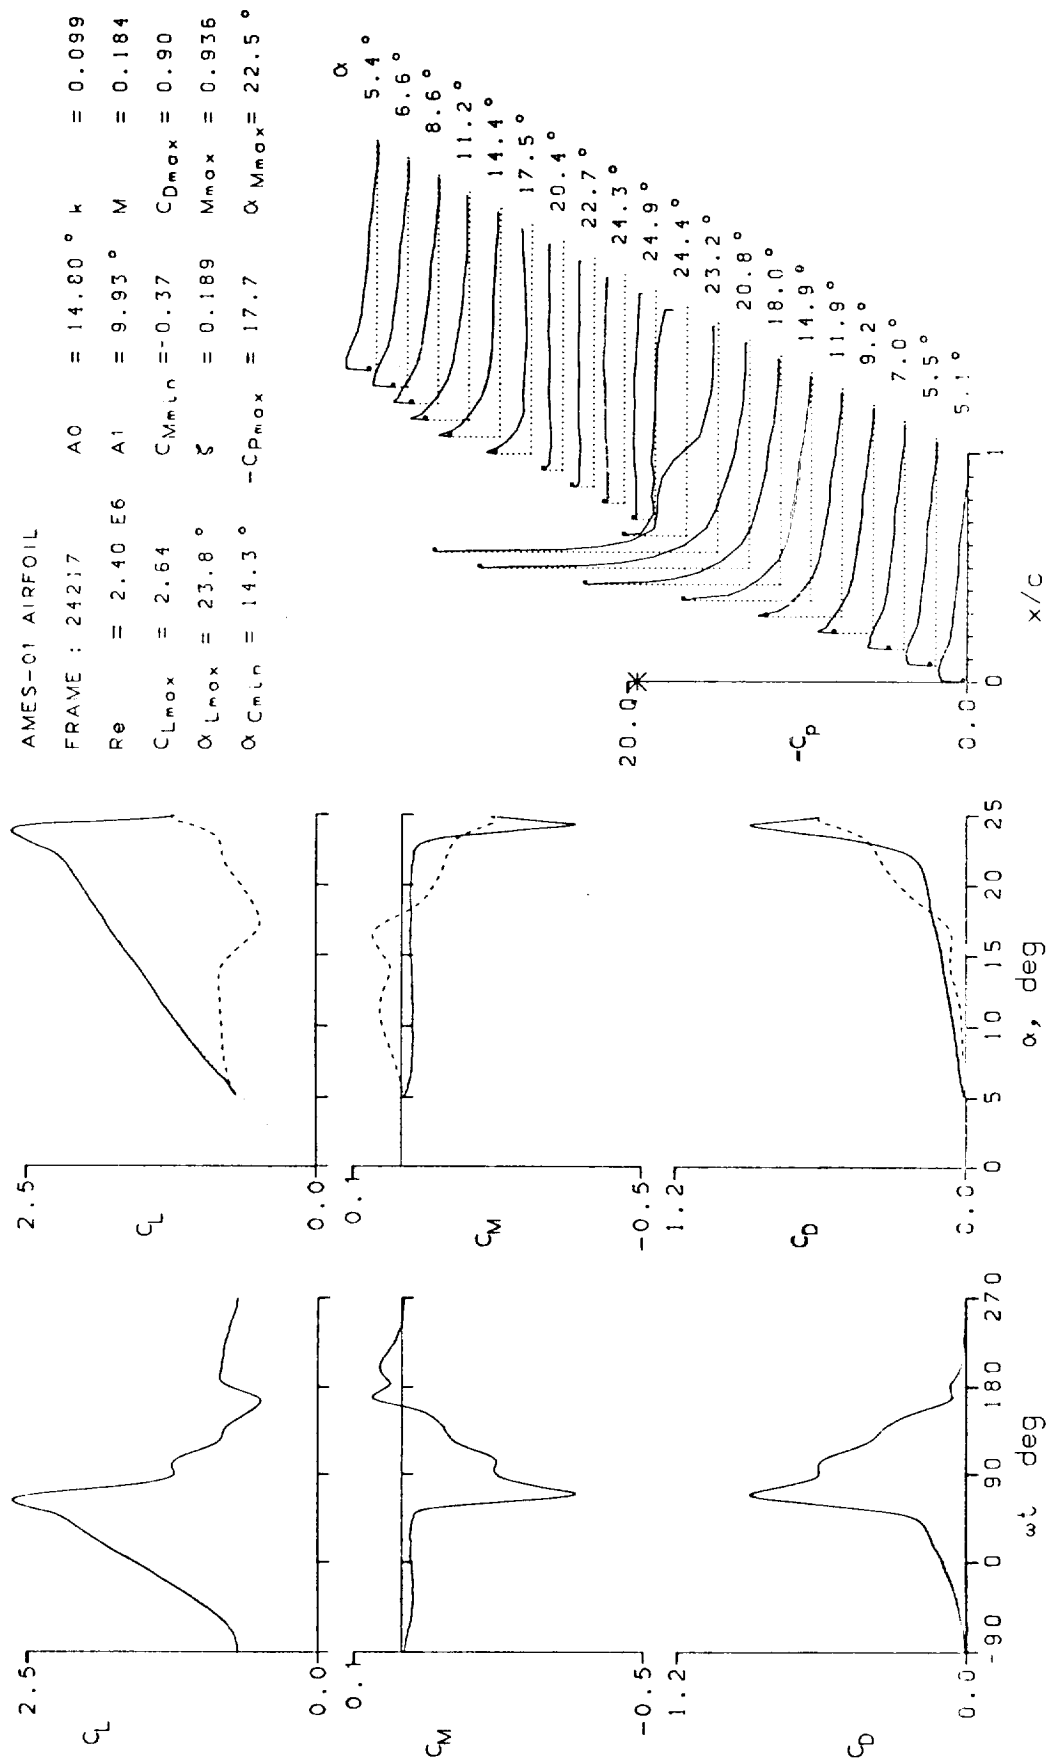


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 24302	A0 = 7.26 °	k = 0.049
Re = 2.40 E6	A1 = 10.01 °	M = 0.184
CLmax = 1.76	CMmin = -0.05	CDmax = 0.14
αLmax = 17.2 °	ξ = 0.059	Mmax = 0.713
αCMmin = 6.7 °	-CPmax = 11.4	αMmax = 17.5 °

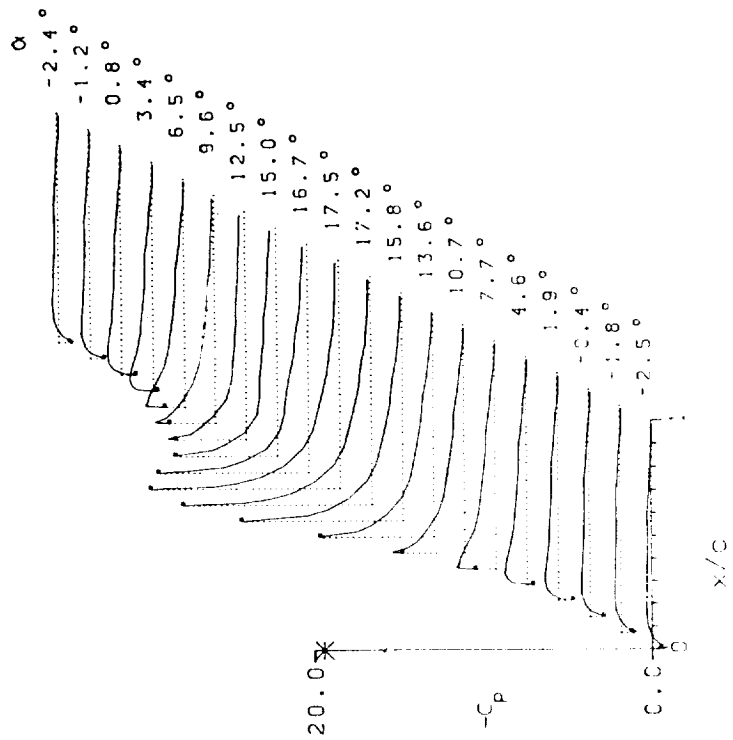
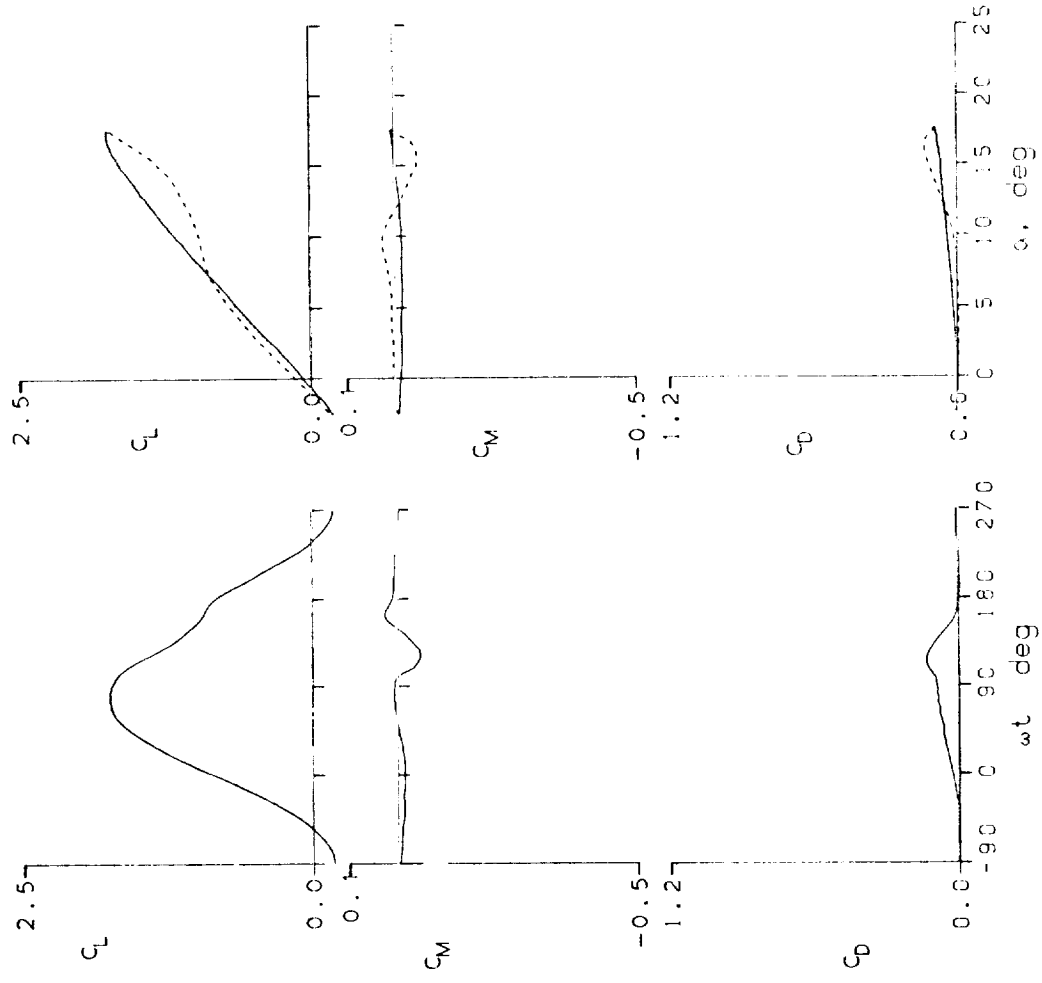


Figure 13.- Continued.

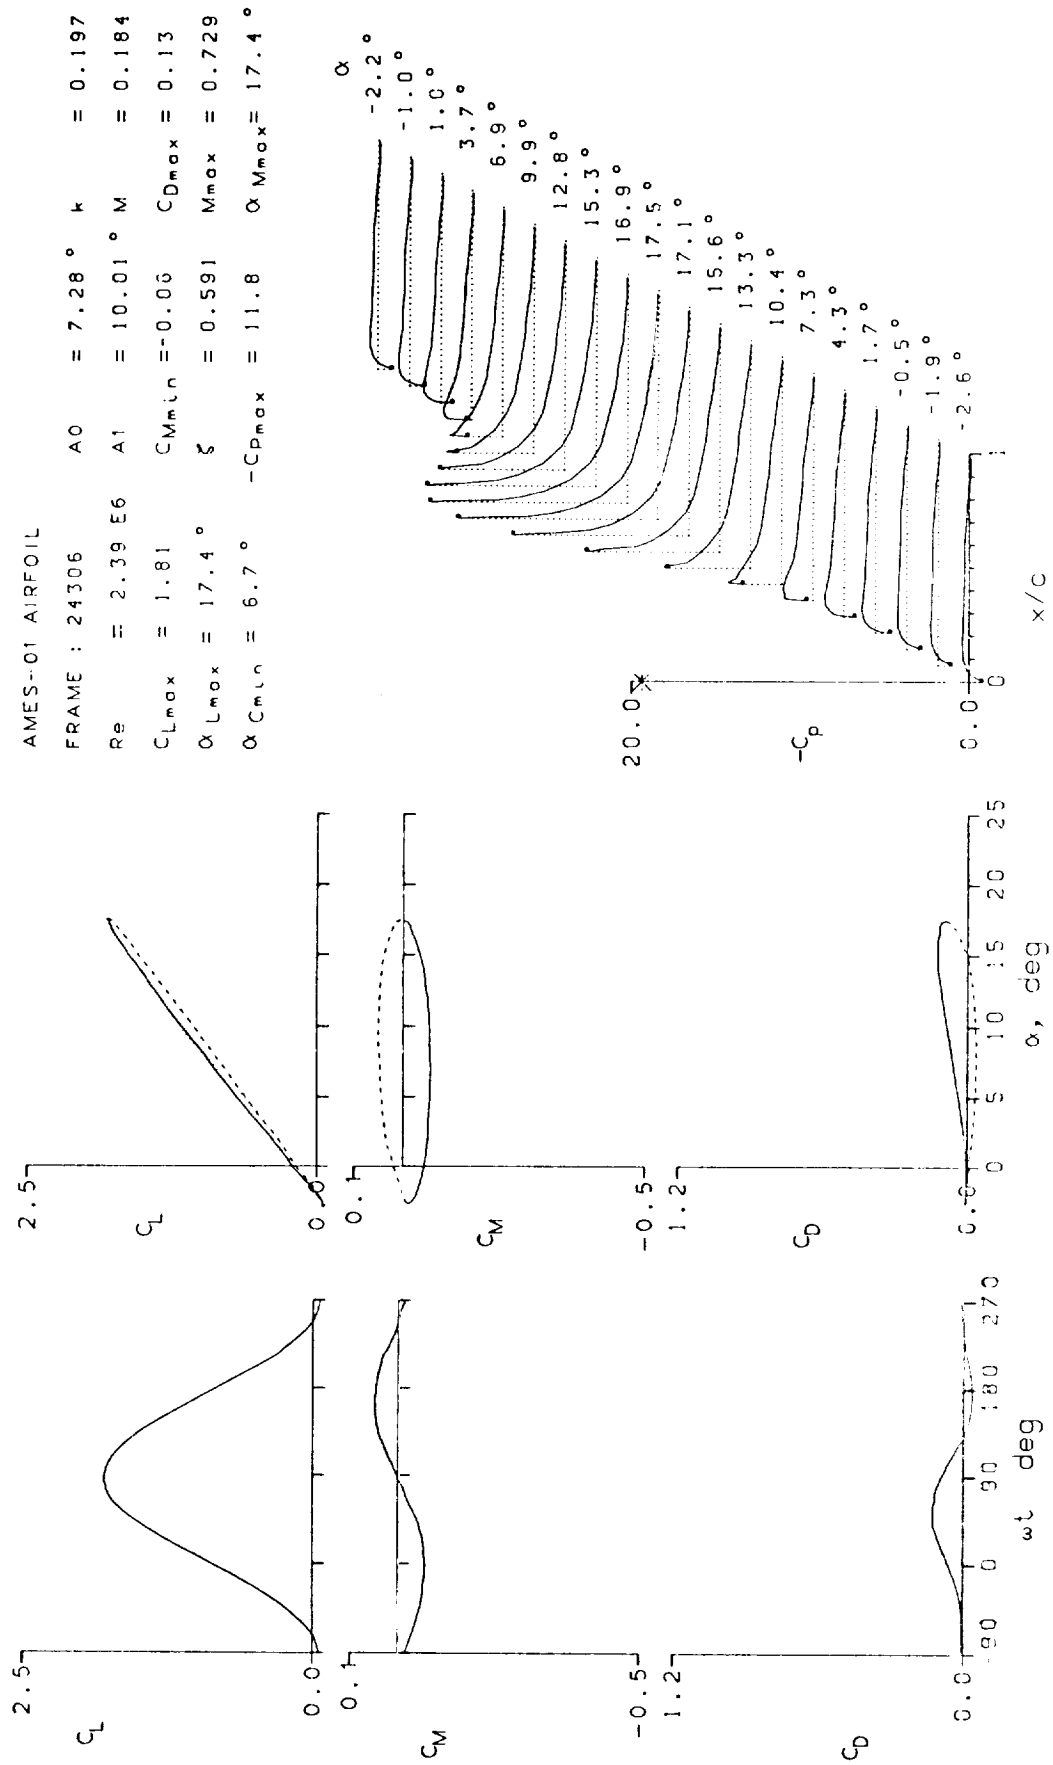


Figure 13.- Continued.

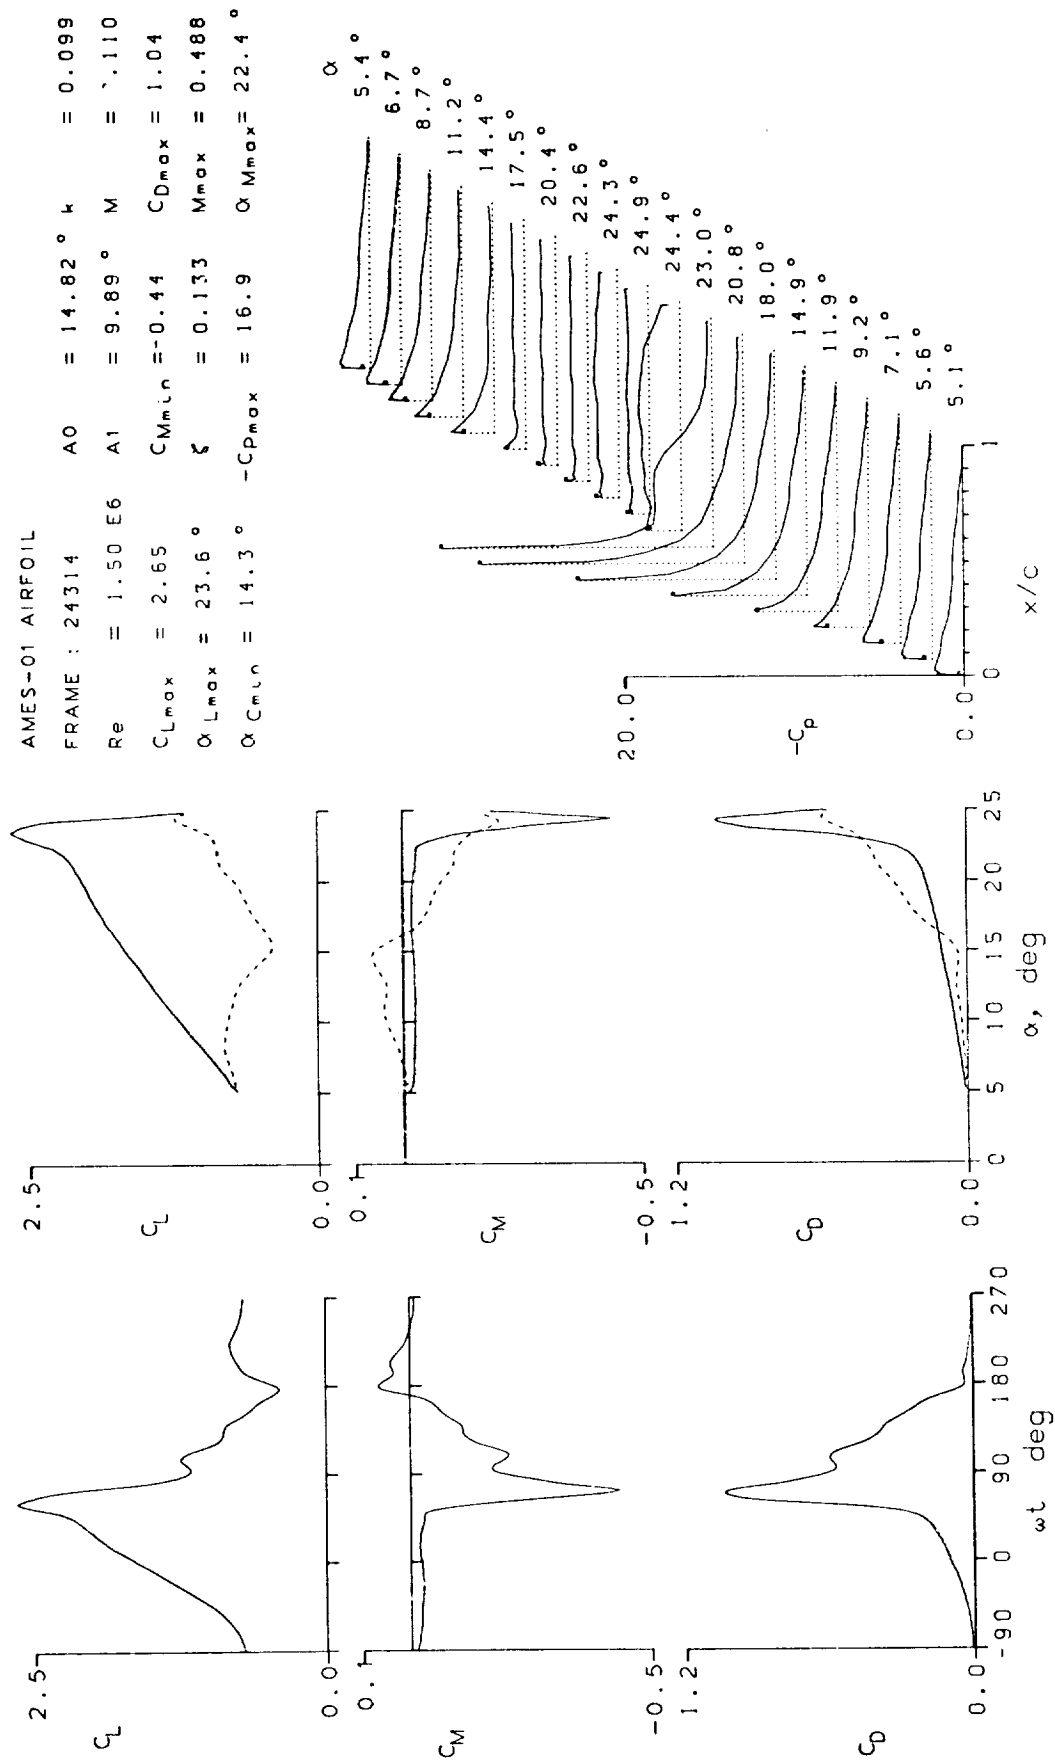


Figure 13.- Continued.

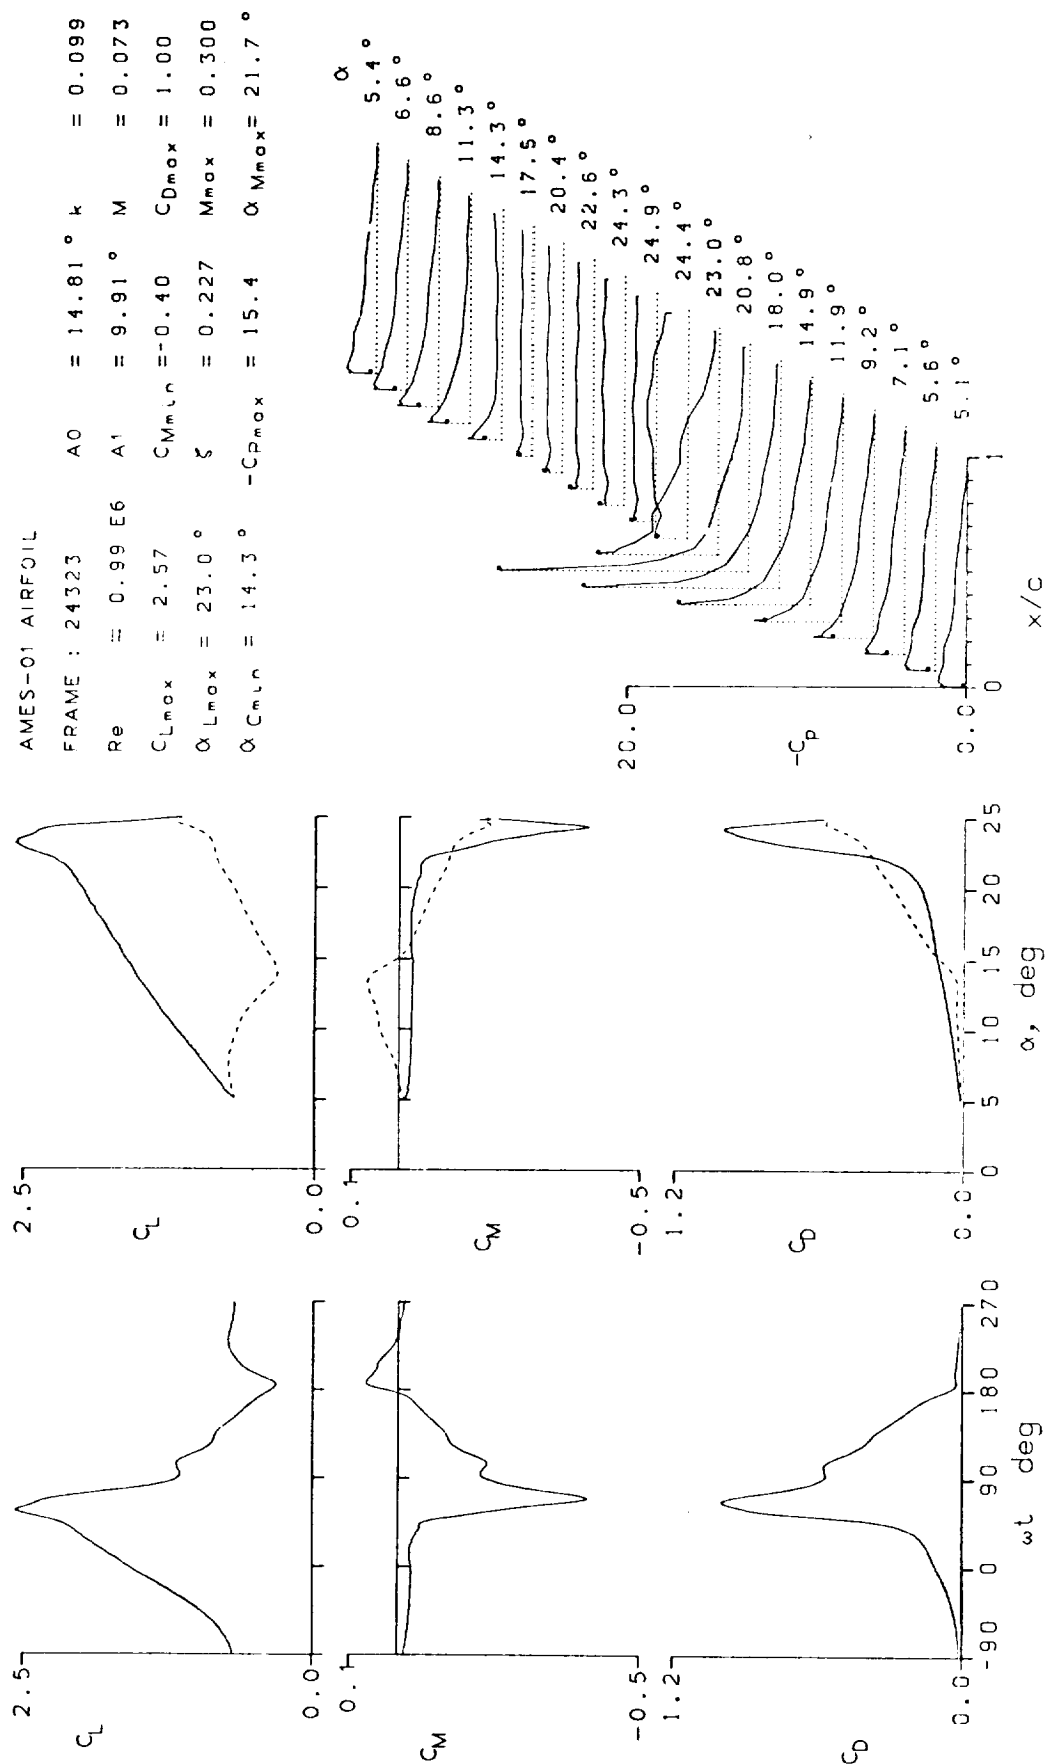


Figure 13.- Continued.

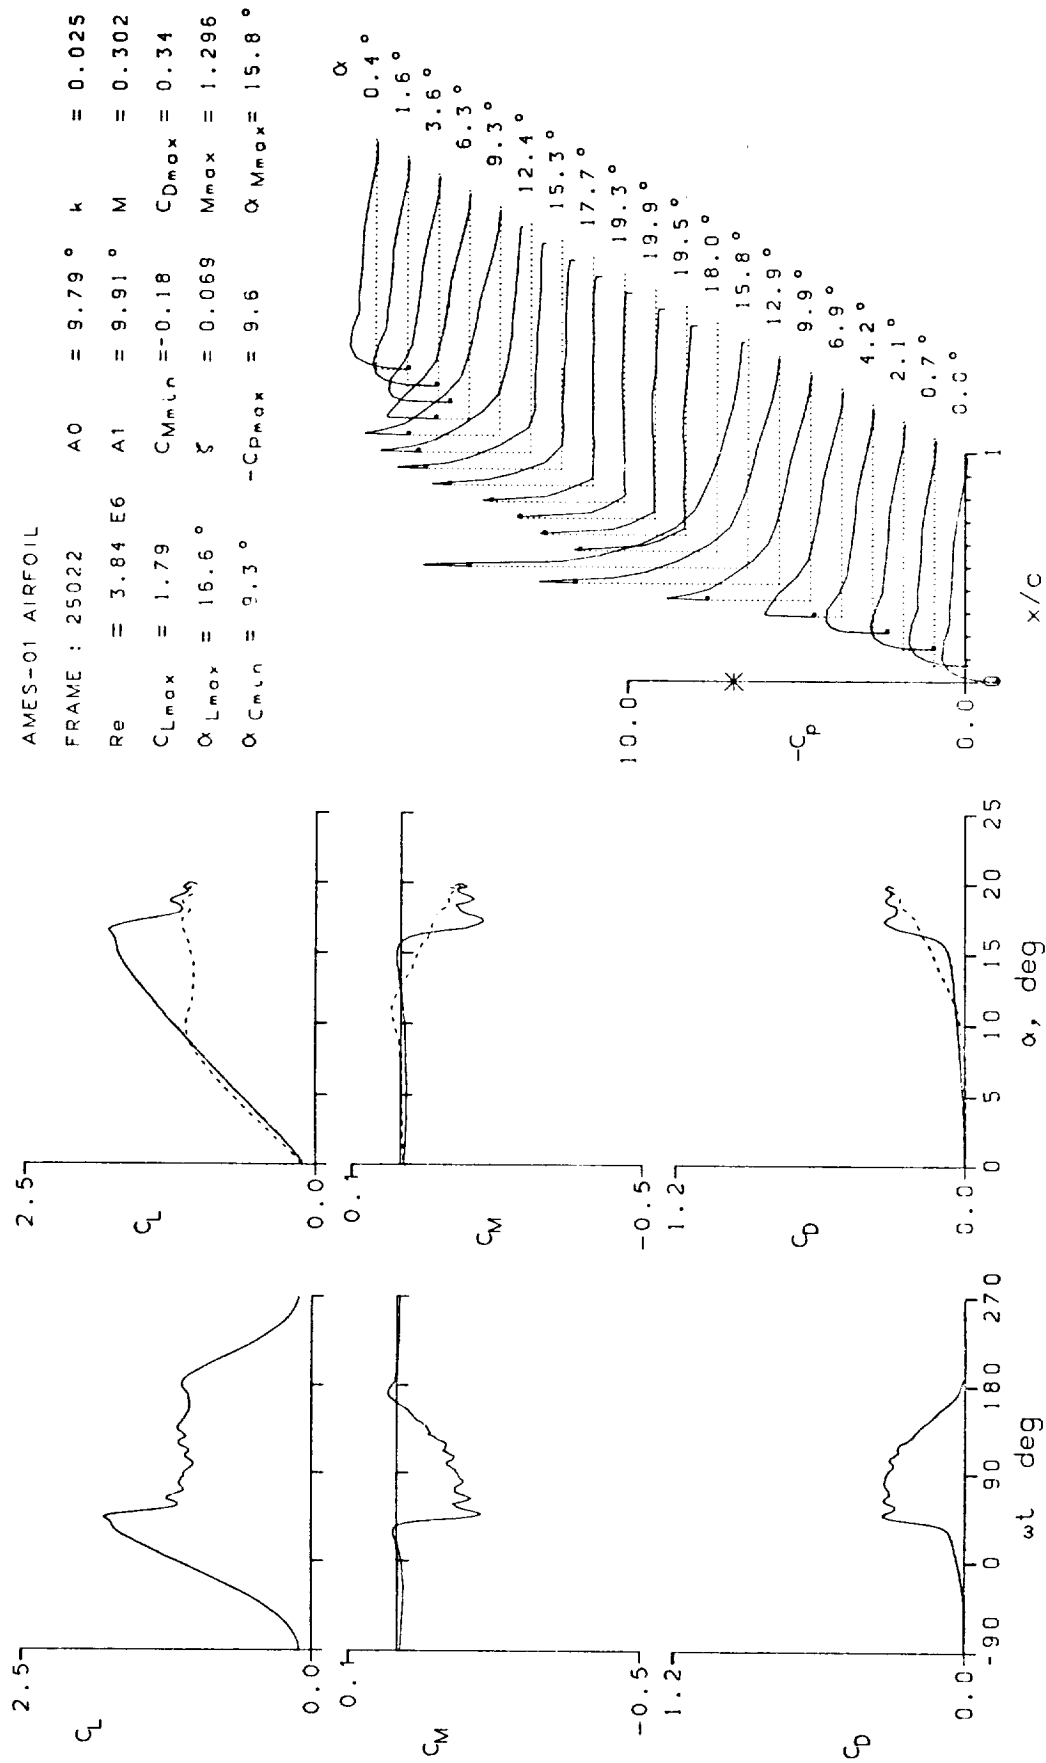


Figure 13.- Continued.

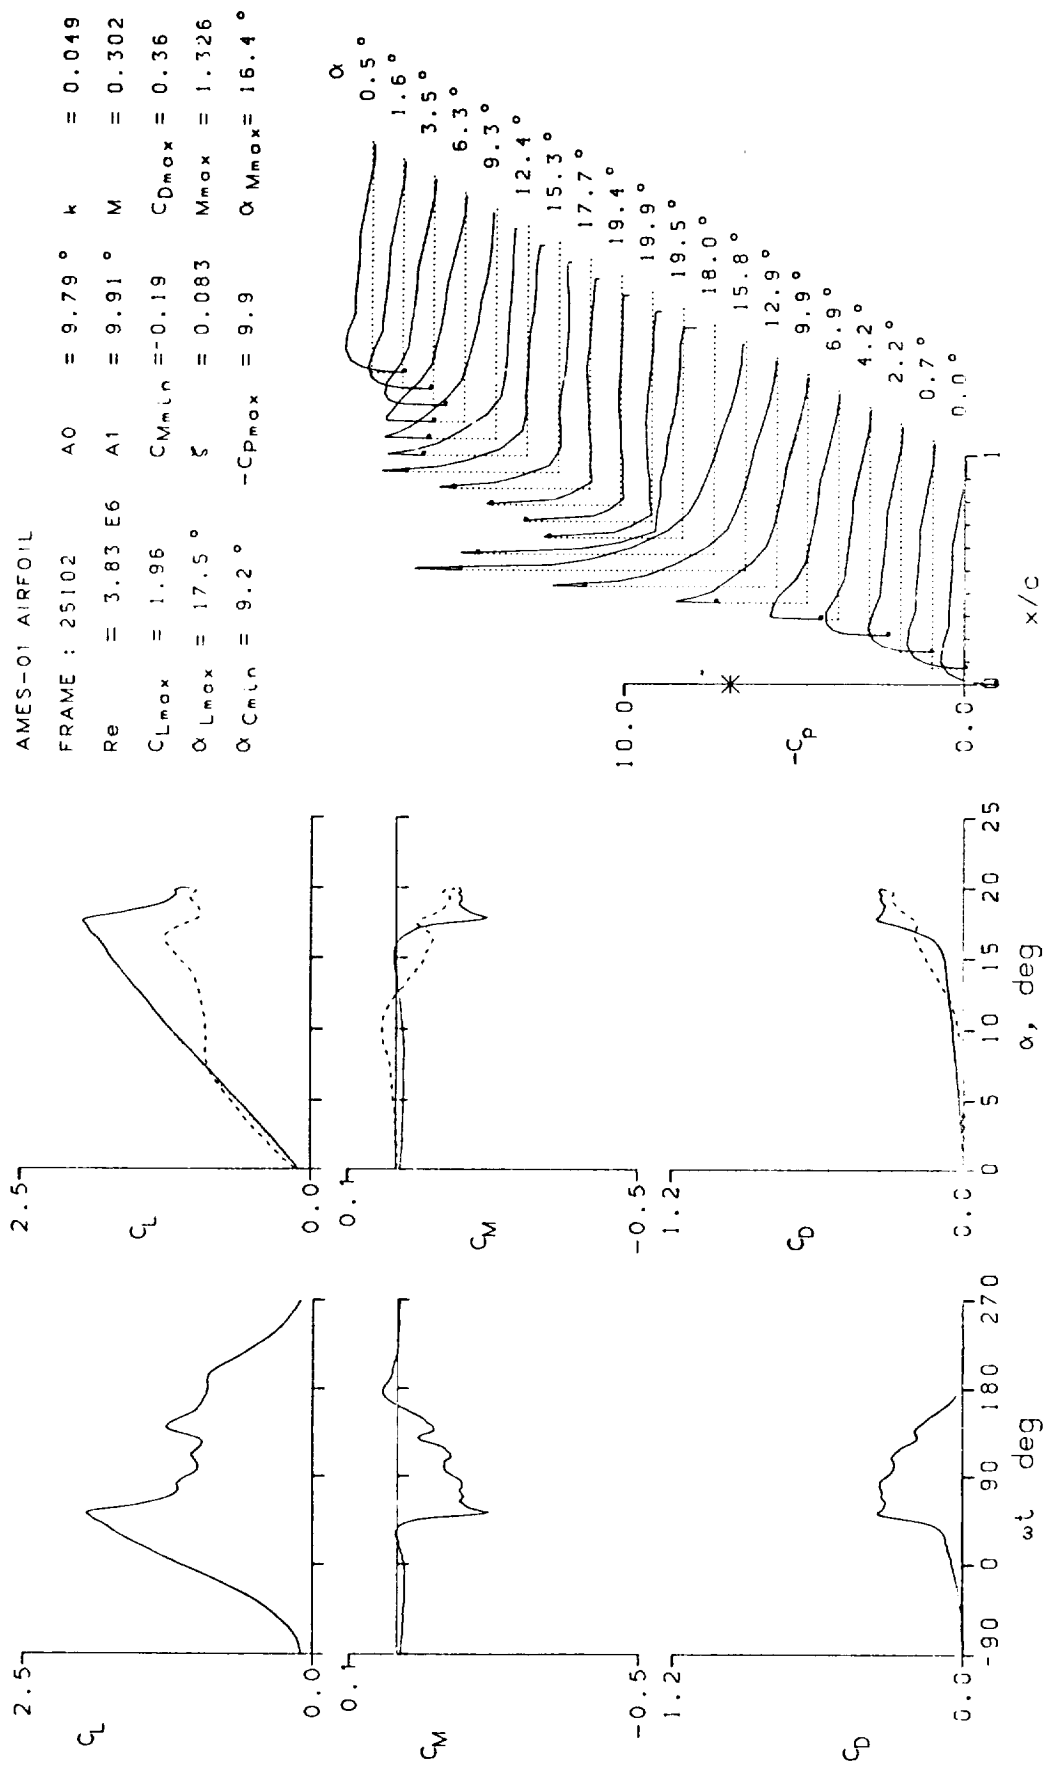


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 25104	A0 = 9.80 °	k = 0.098
Re = 3.82 E6	A1 = 9.88 °	M = 0.302
C _{Lmax} = 2.11	C _{Mmin} = -0.30	C _{Dmax} = 0.52
α _{Lmax} = 18.8 °	ζ = 0.258	Mr x = 1.333
α _{Cmin} = 9.3 °	-C _{Dmax} = 9.9	α _{Mmax} = 16.6 °



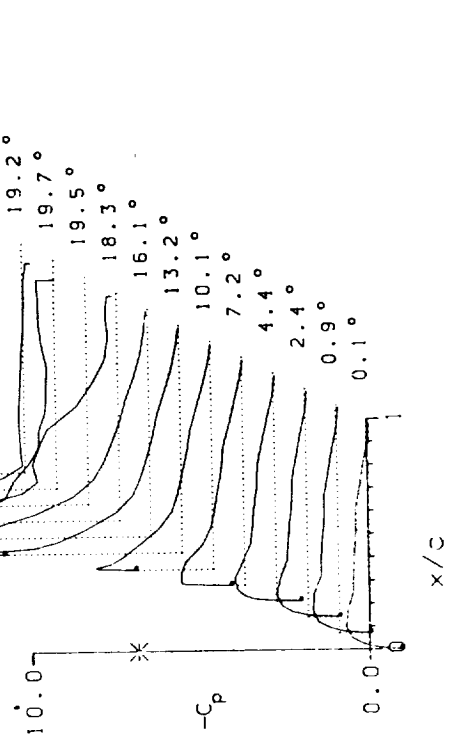


Figure 13.- Continued.

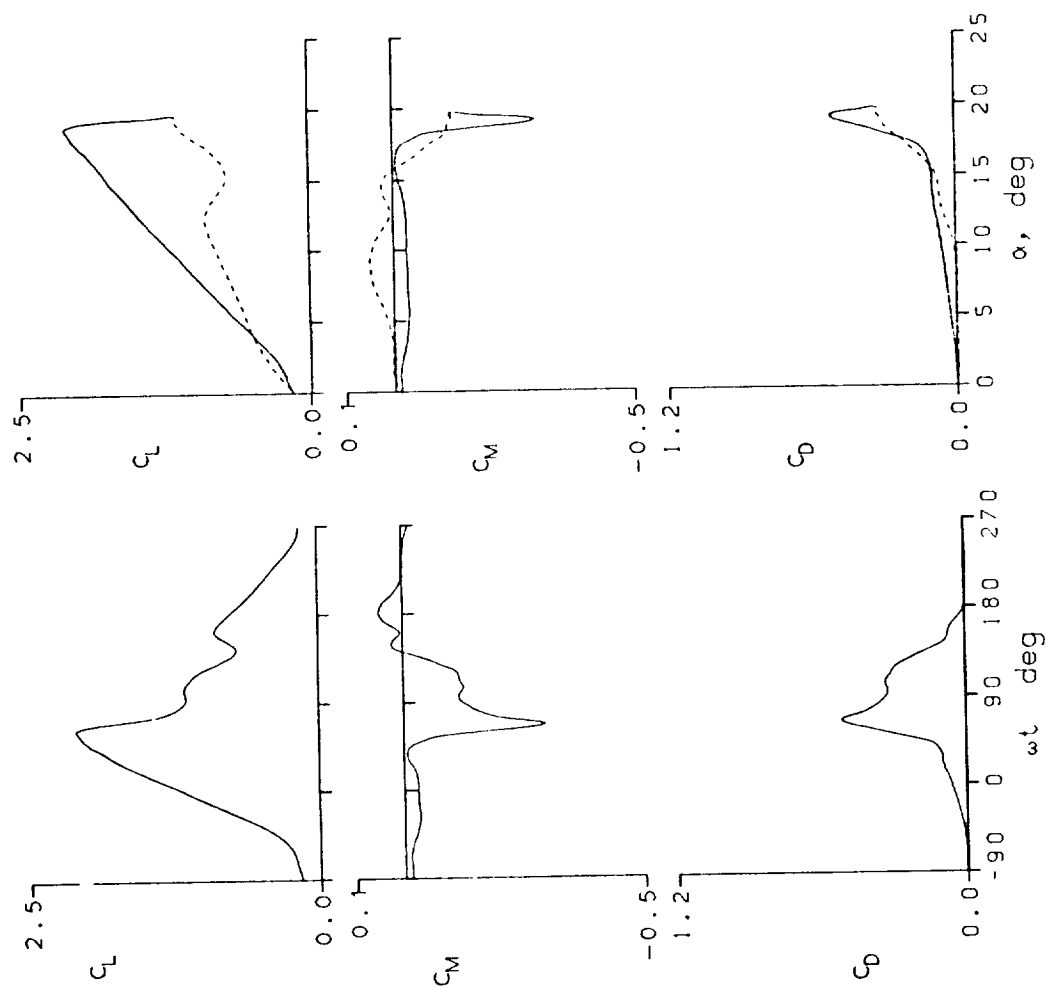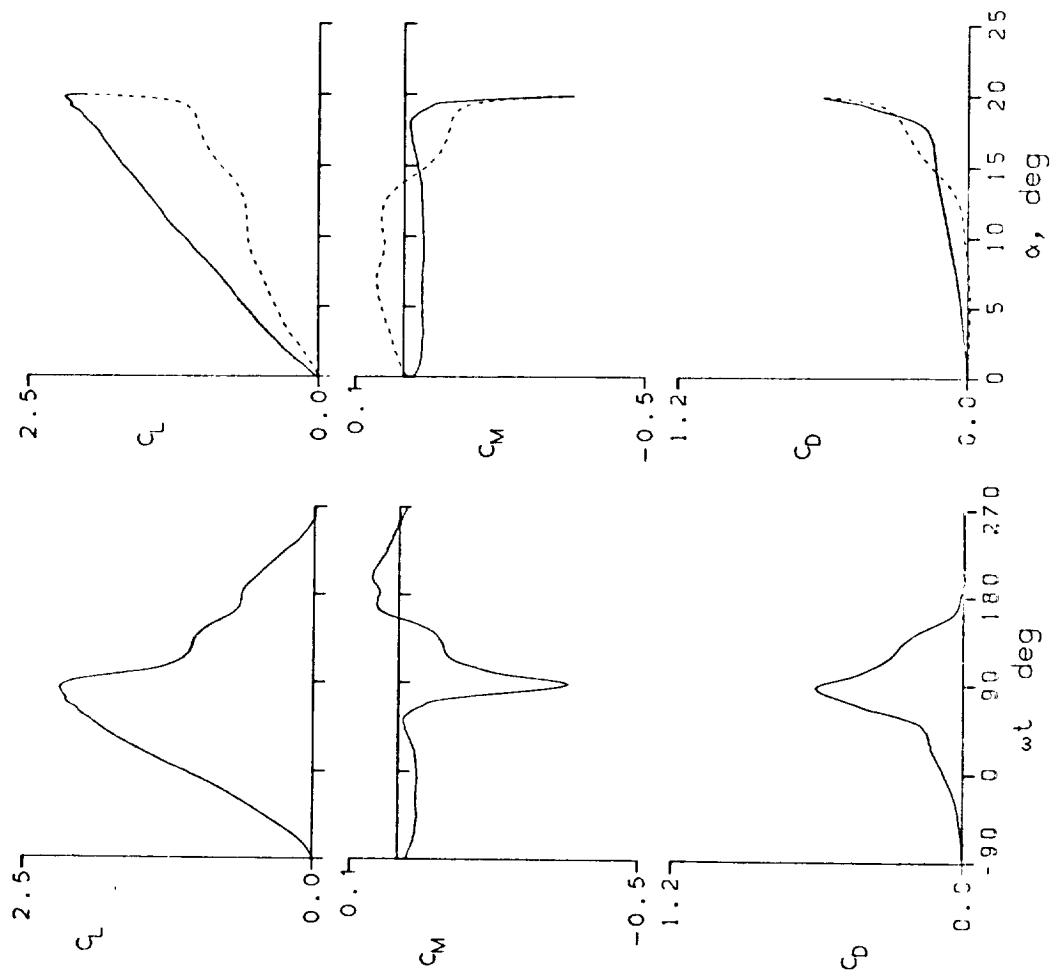

AMES-01 AIRFOIL

FRAME : 25109 A0 = 9.92 ° k = 0.147
 Re = 3.81 E6 A1 = 9.91 ° M = 0.302
 C_{Lmax} = 2.19 C_{Mmin} = -0.36 C_{Dmax} = 0.61
 α_{Lmax} = 19.7 ° ξ = 0.263 M_{max} = 1.348
 α_{Cmin} = 9.4 ° -C_{Pmax} = 10.1 α_{Mmax} = 17.5 °

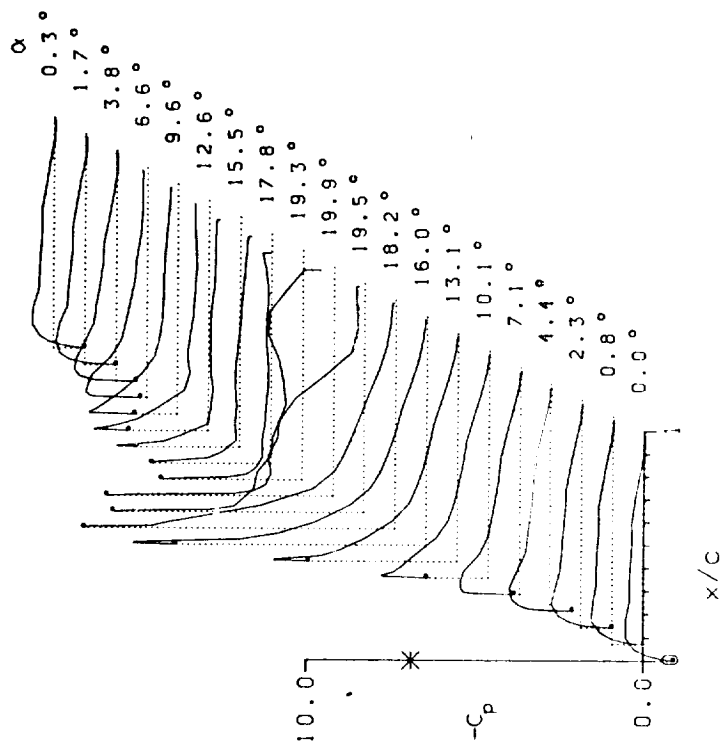


Figure 13.- Continued.

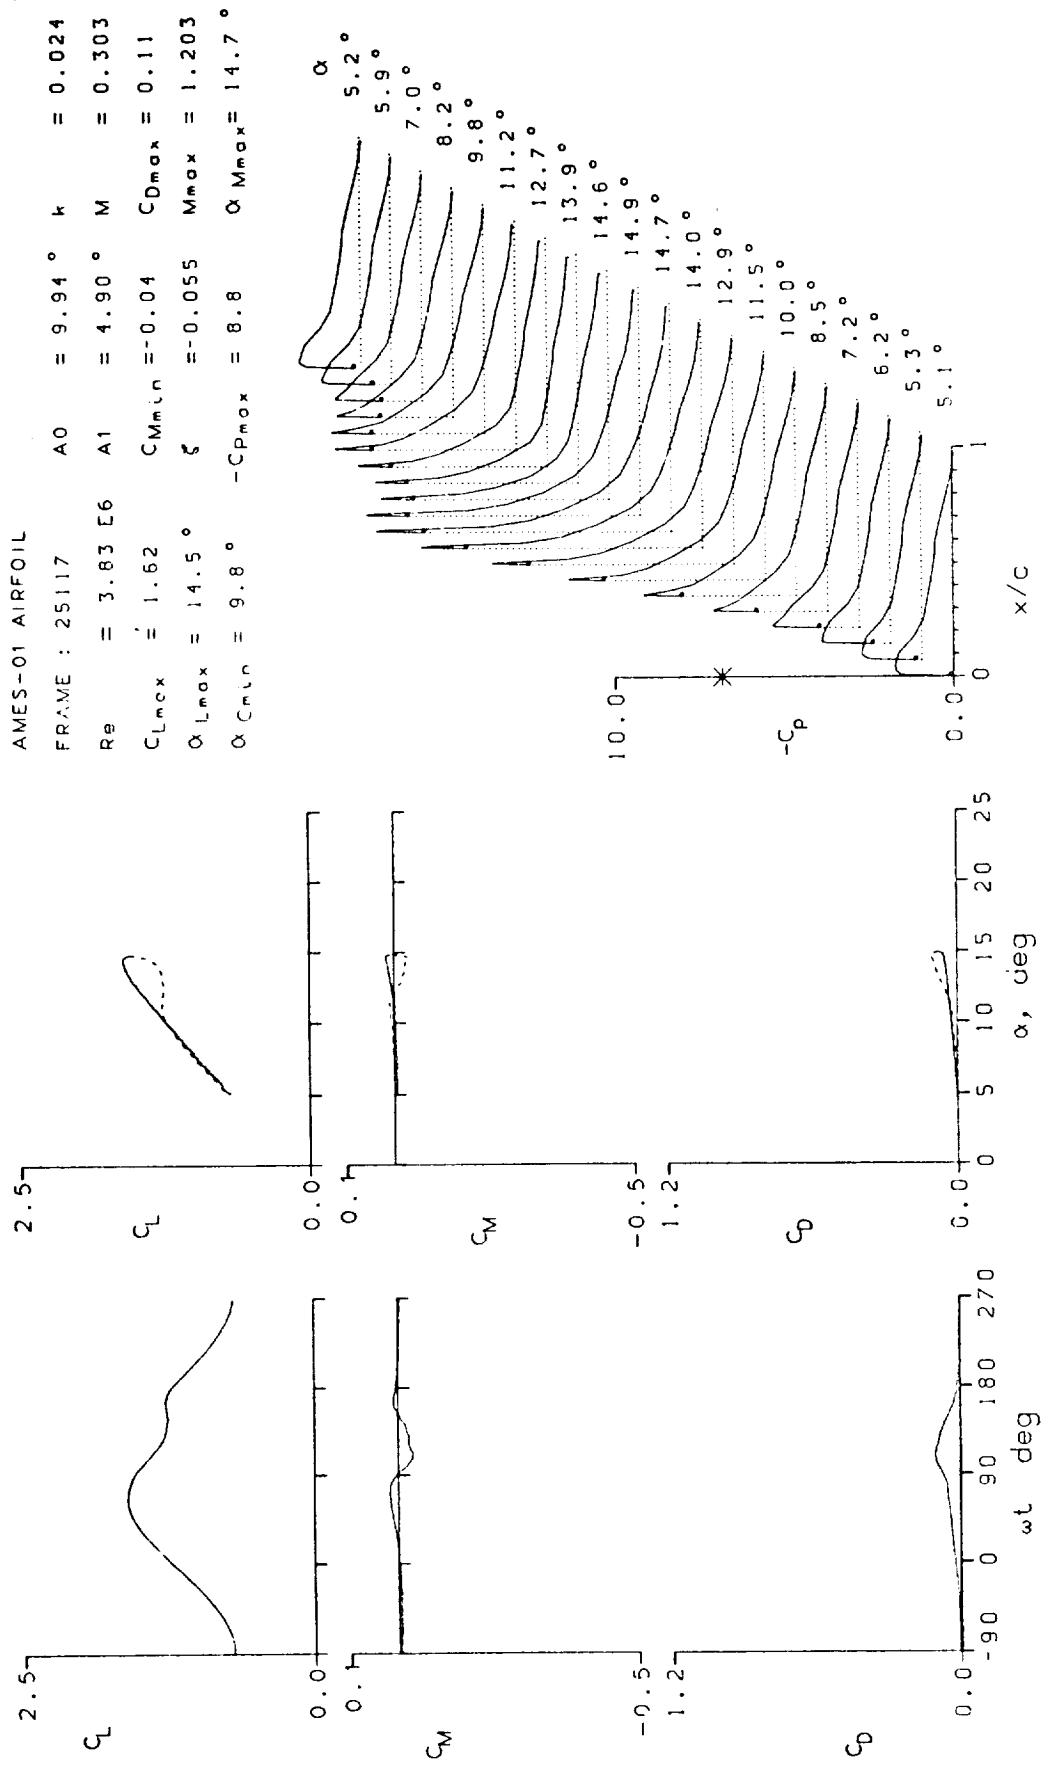


Figure 13.- Continued.

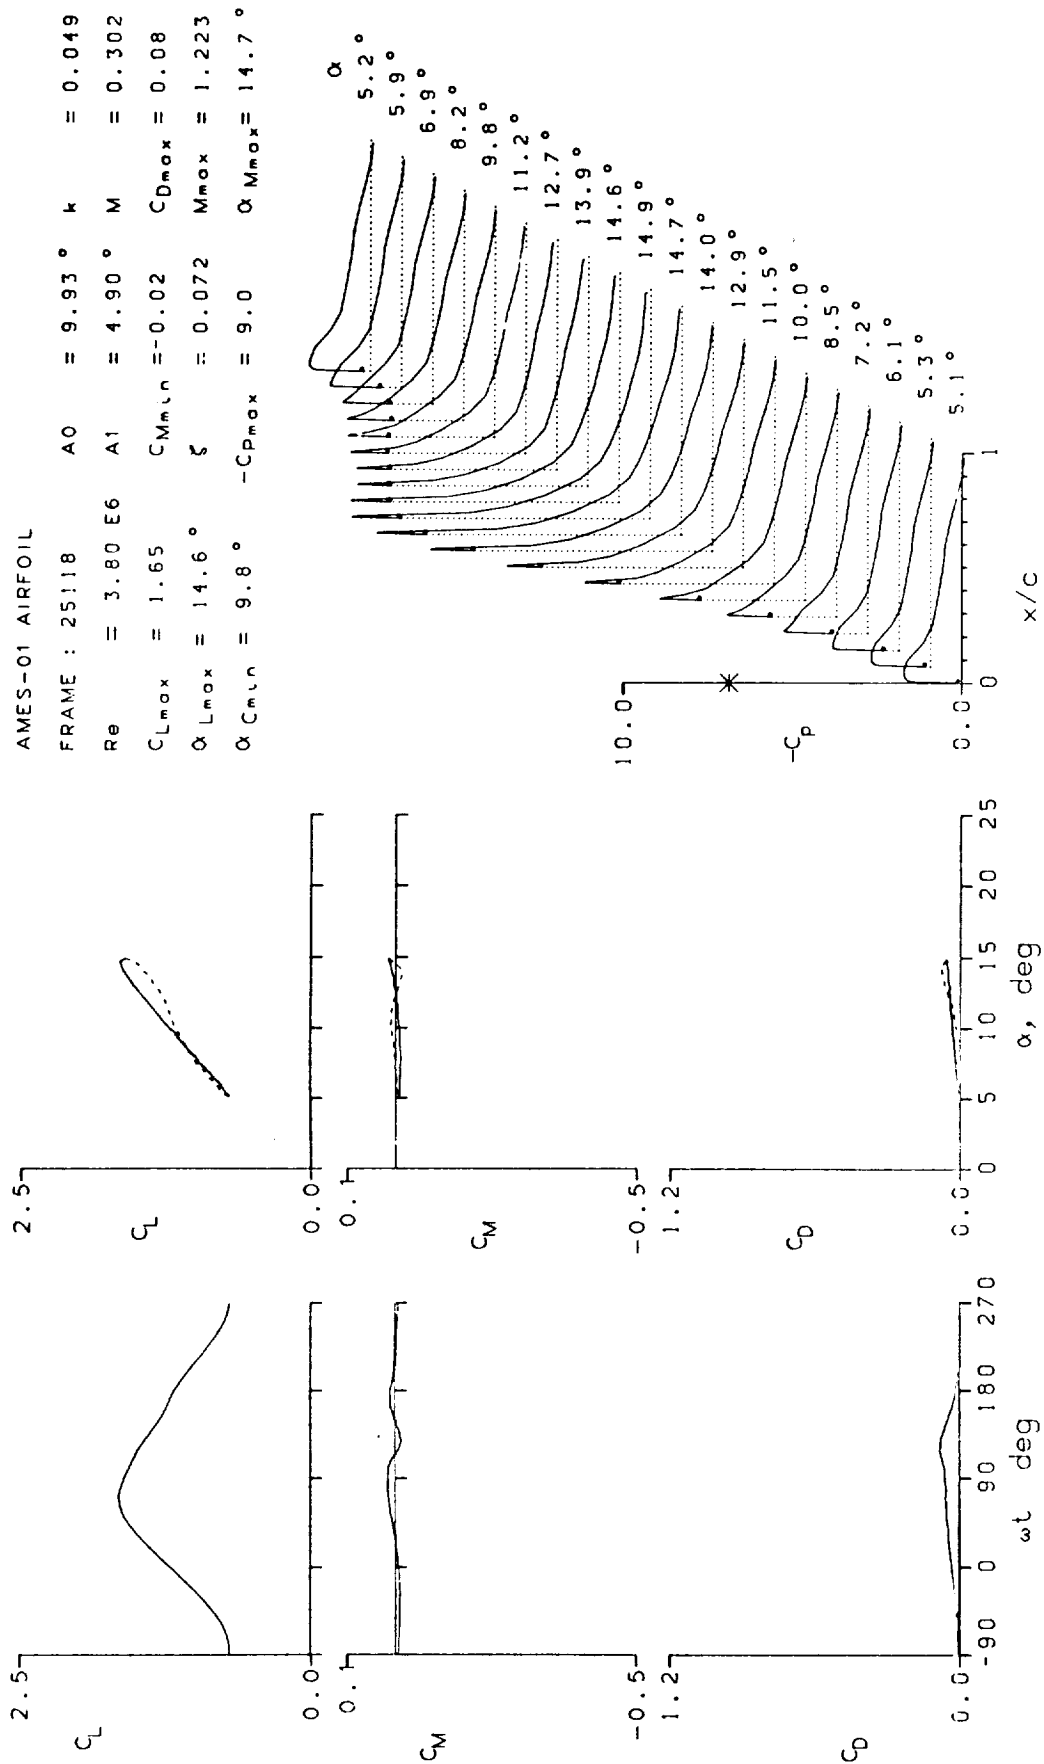


Figure 13.- Continued.

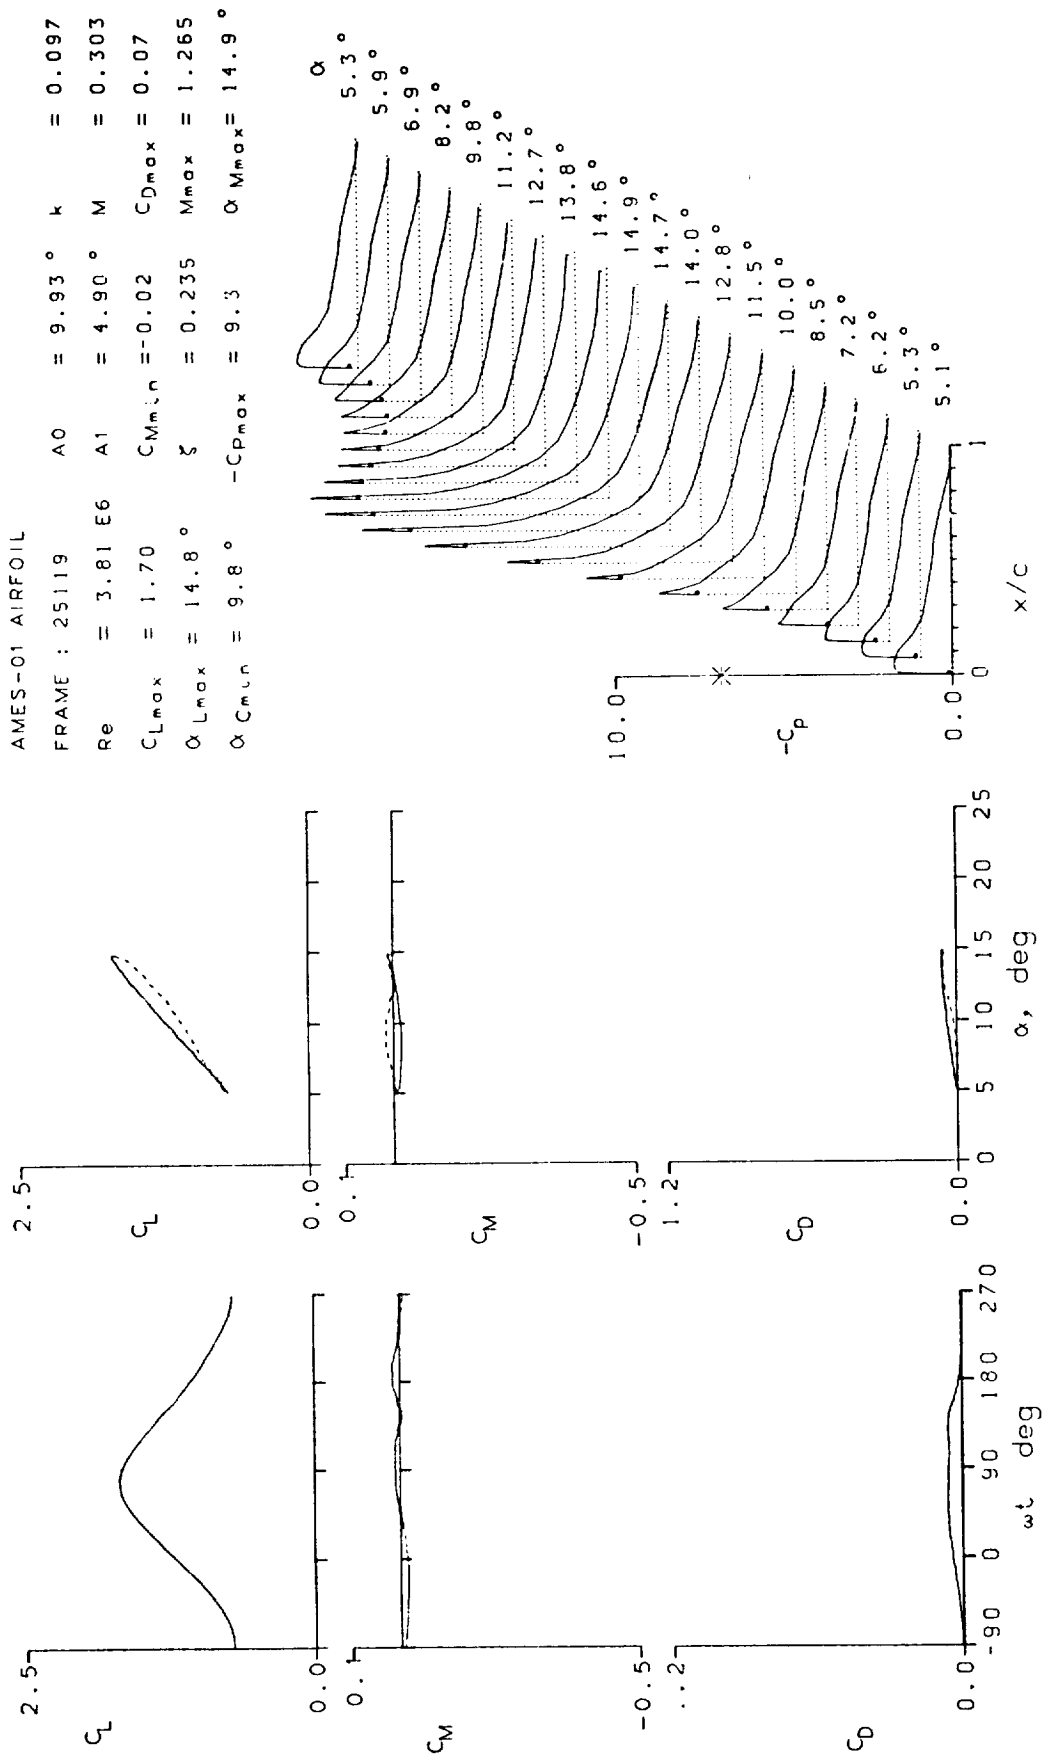


Figure 13.- Continued.

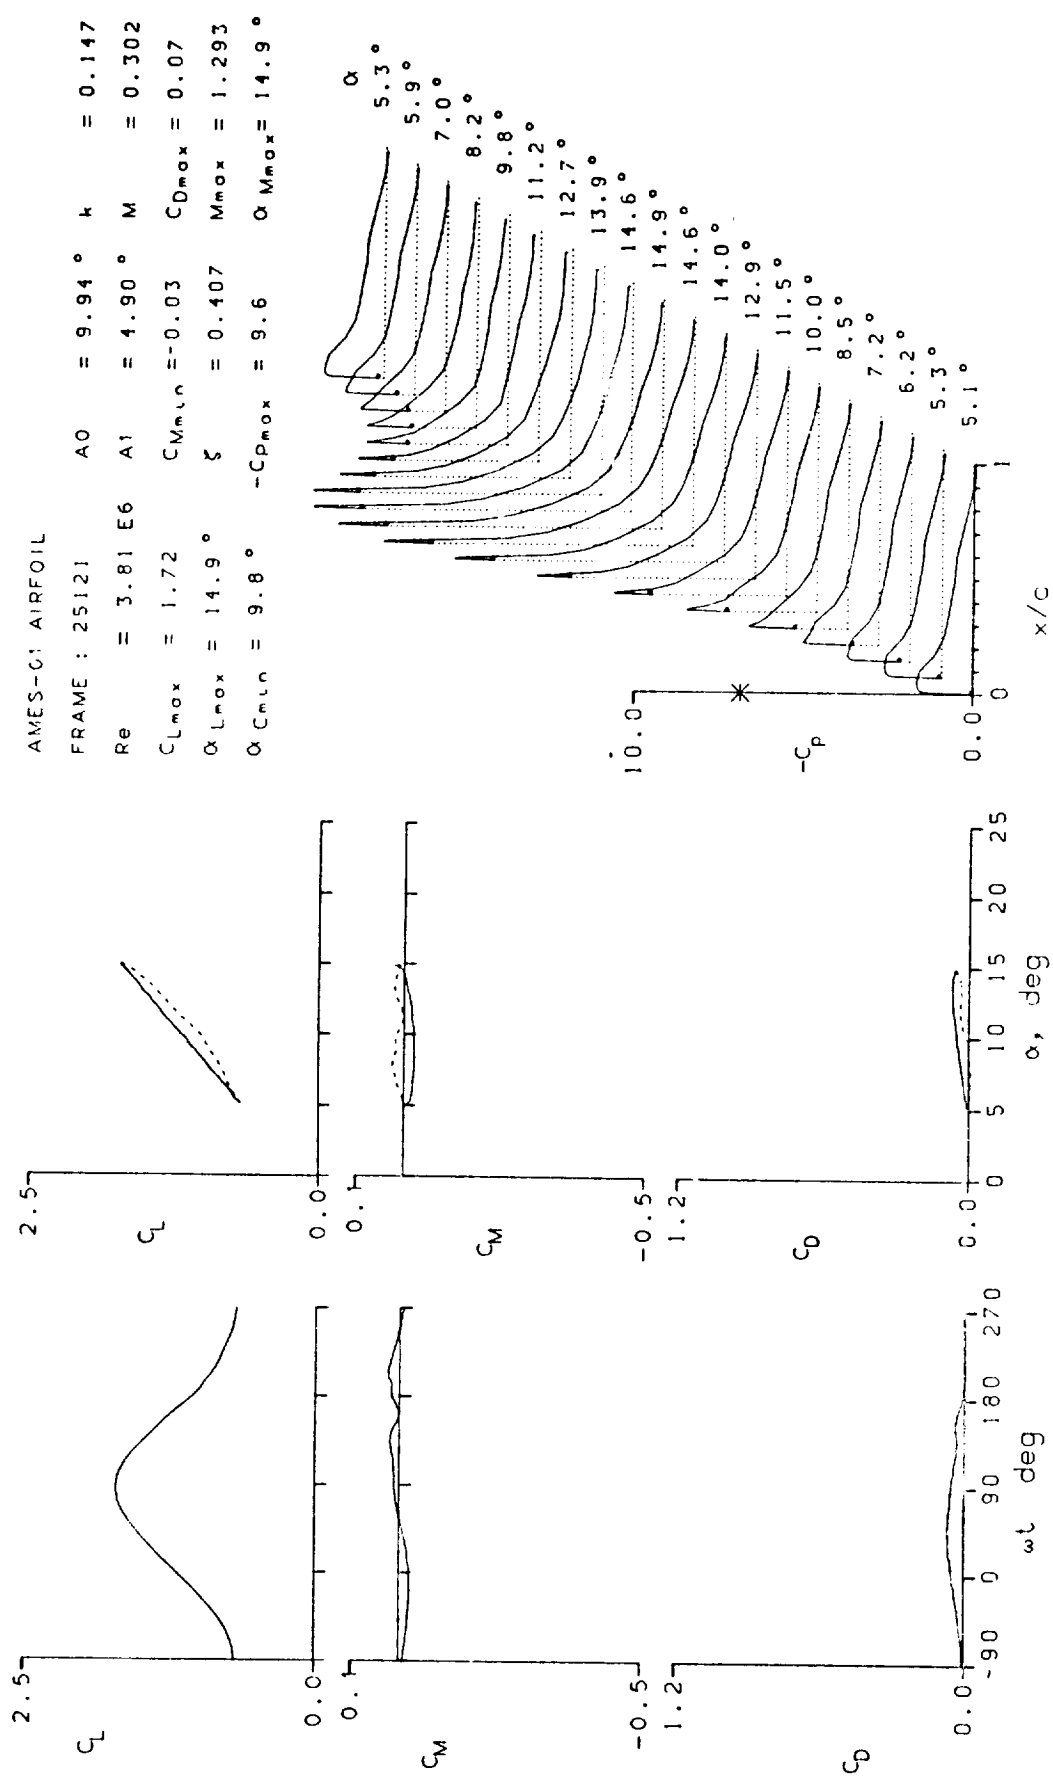


Figure 13.- Continued.

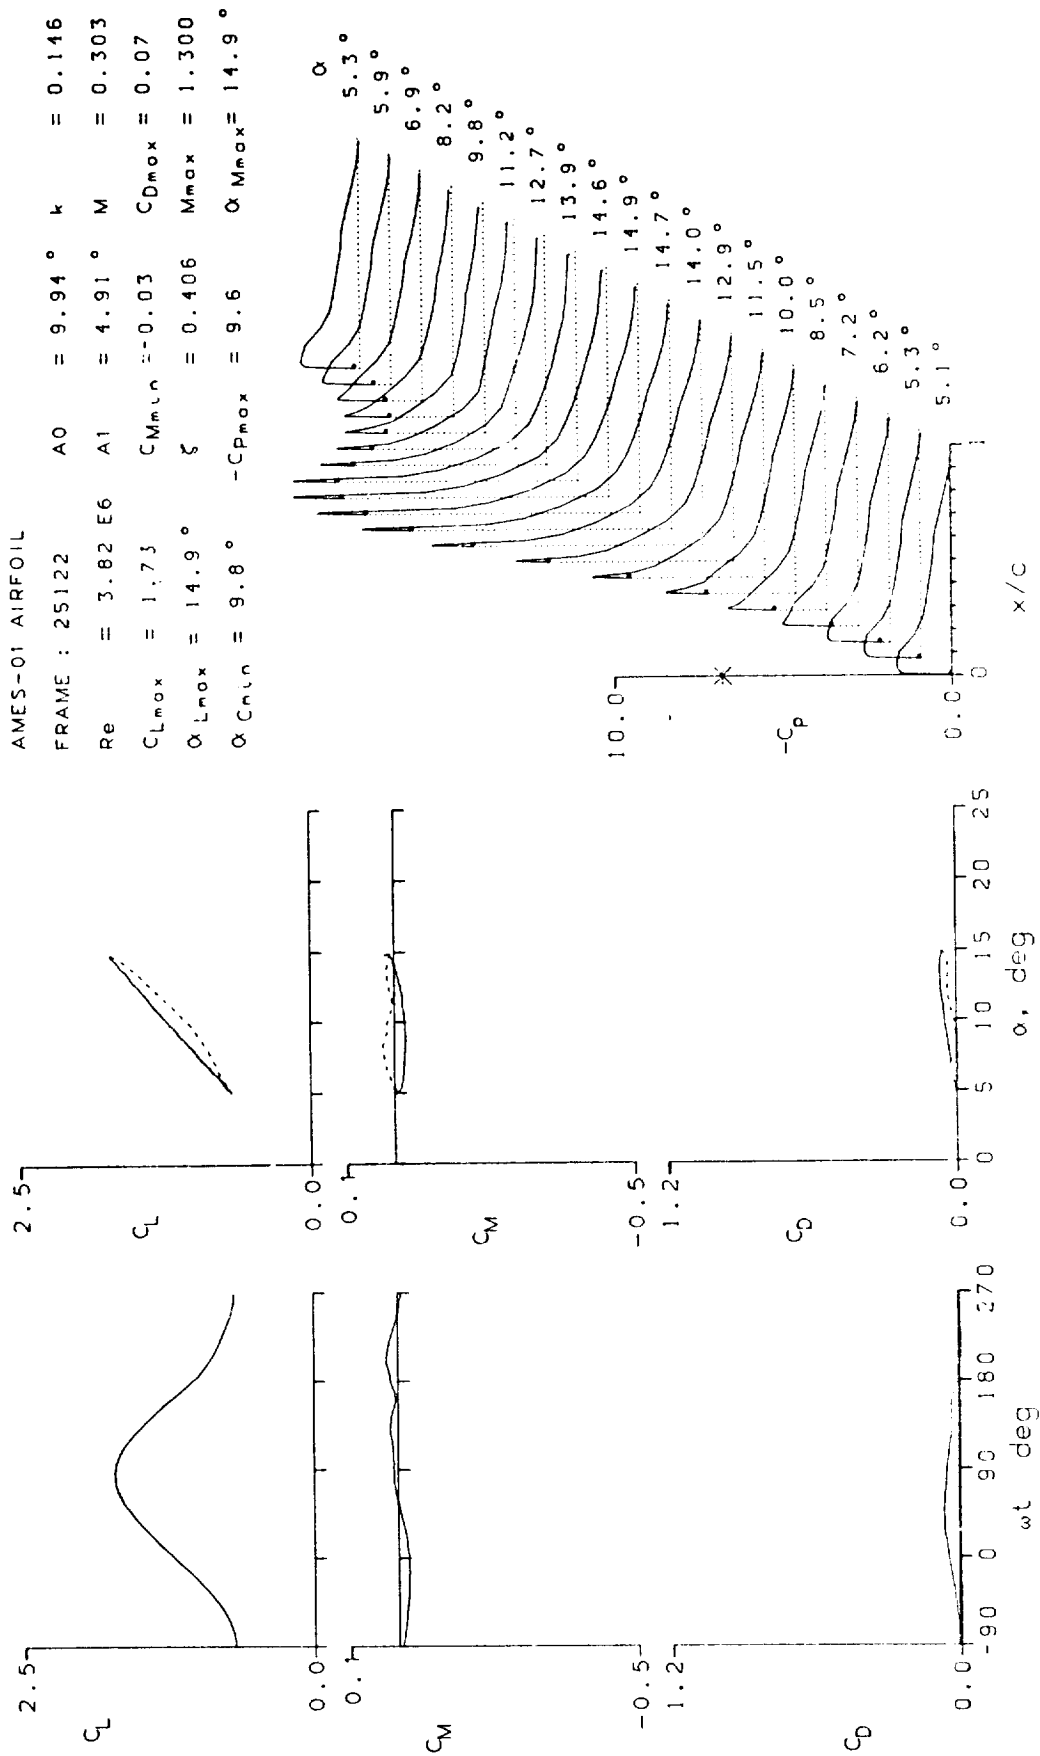


Figure 13.- Continued.

AMES-01: AIRFOIL
 FRAME : 25123 A0 = 9.92 ° k = 0.195
 Re = 3.82 E6 A1 = 4.90 ° M = 0.303
 $C_{Lmax} = 1.77$ $C_{Mmin} = -0.04$ $C_{Dmax} = 0.08$
 $\alpha_{Lmax} = 14.9^\circ$ $\zeta = 0.364$ $M_{max} = 1.326$
 $\alpha_{Cmin} = 9.8^\circ$ $-C_{pmax} = 9.8$ $\alpha_{Mmax} = 14.9^\circ$

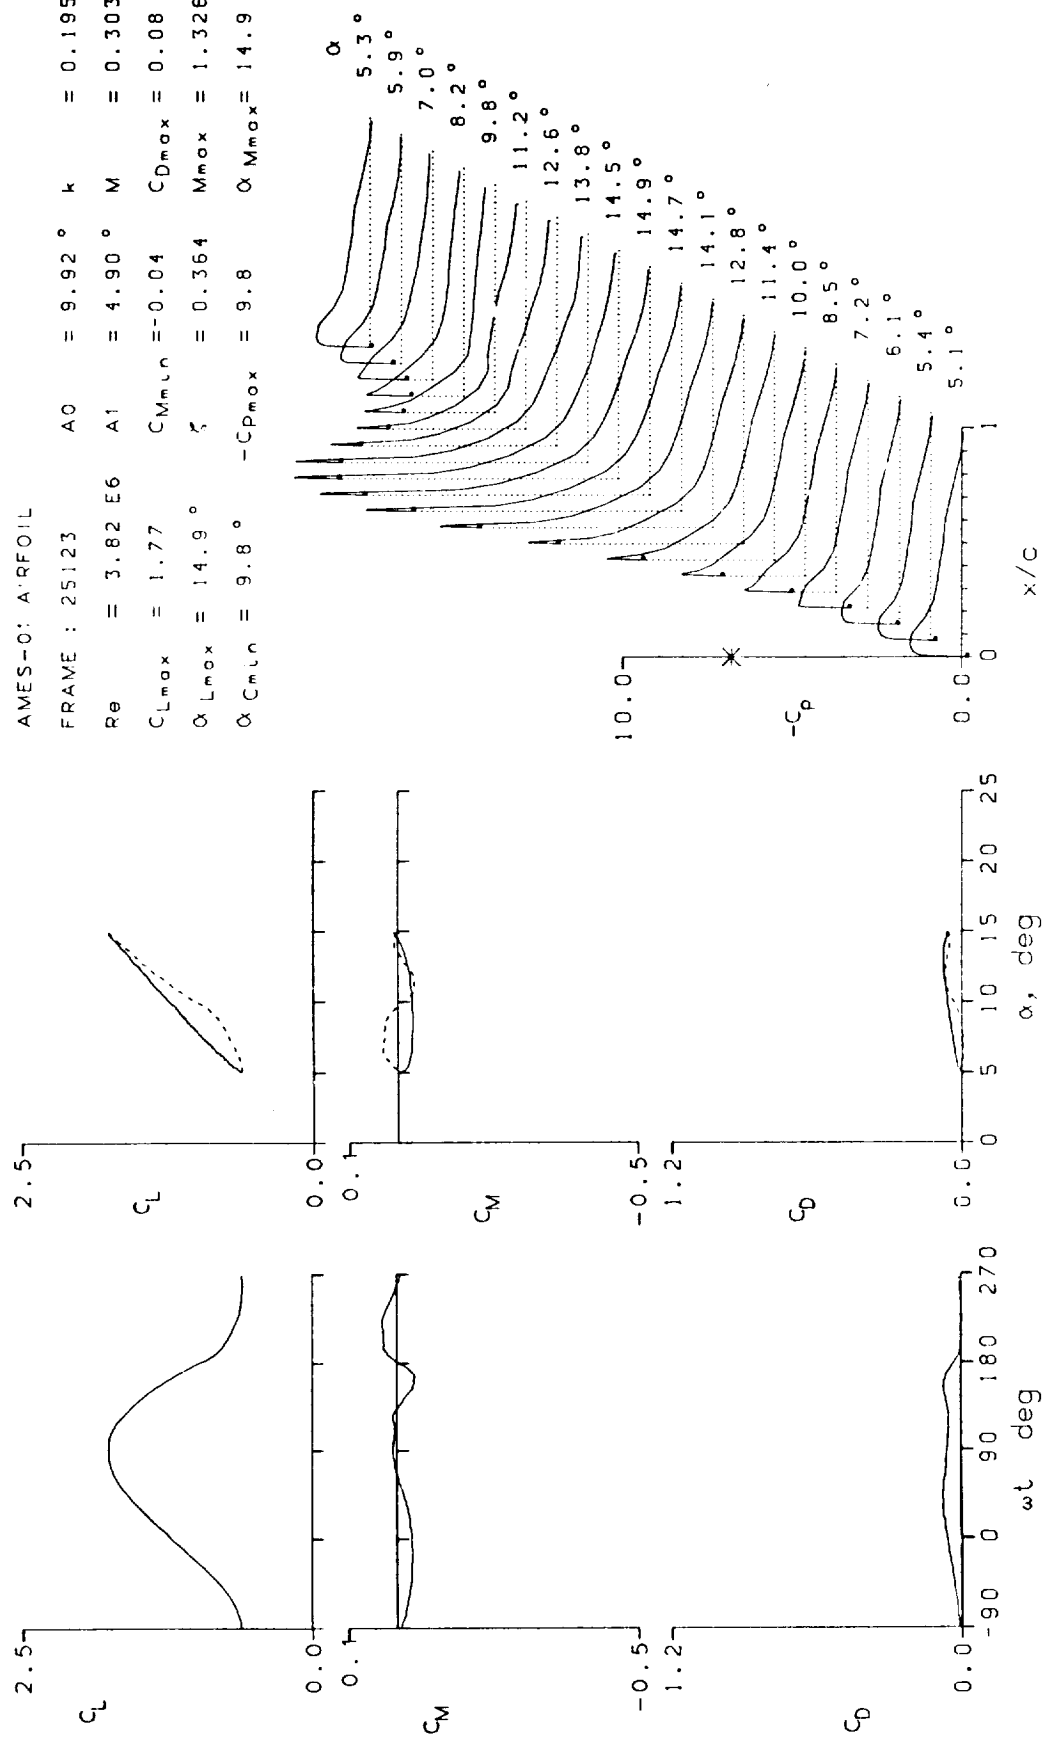


Figure 13.- Continued.

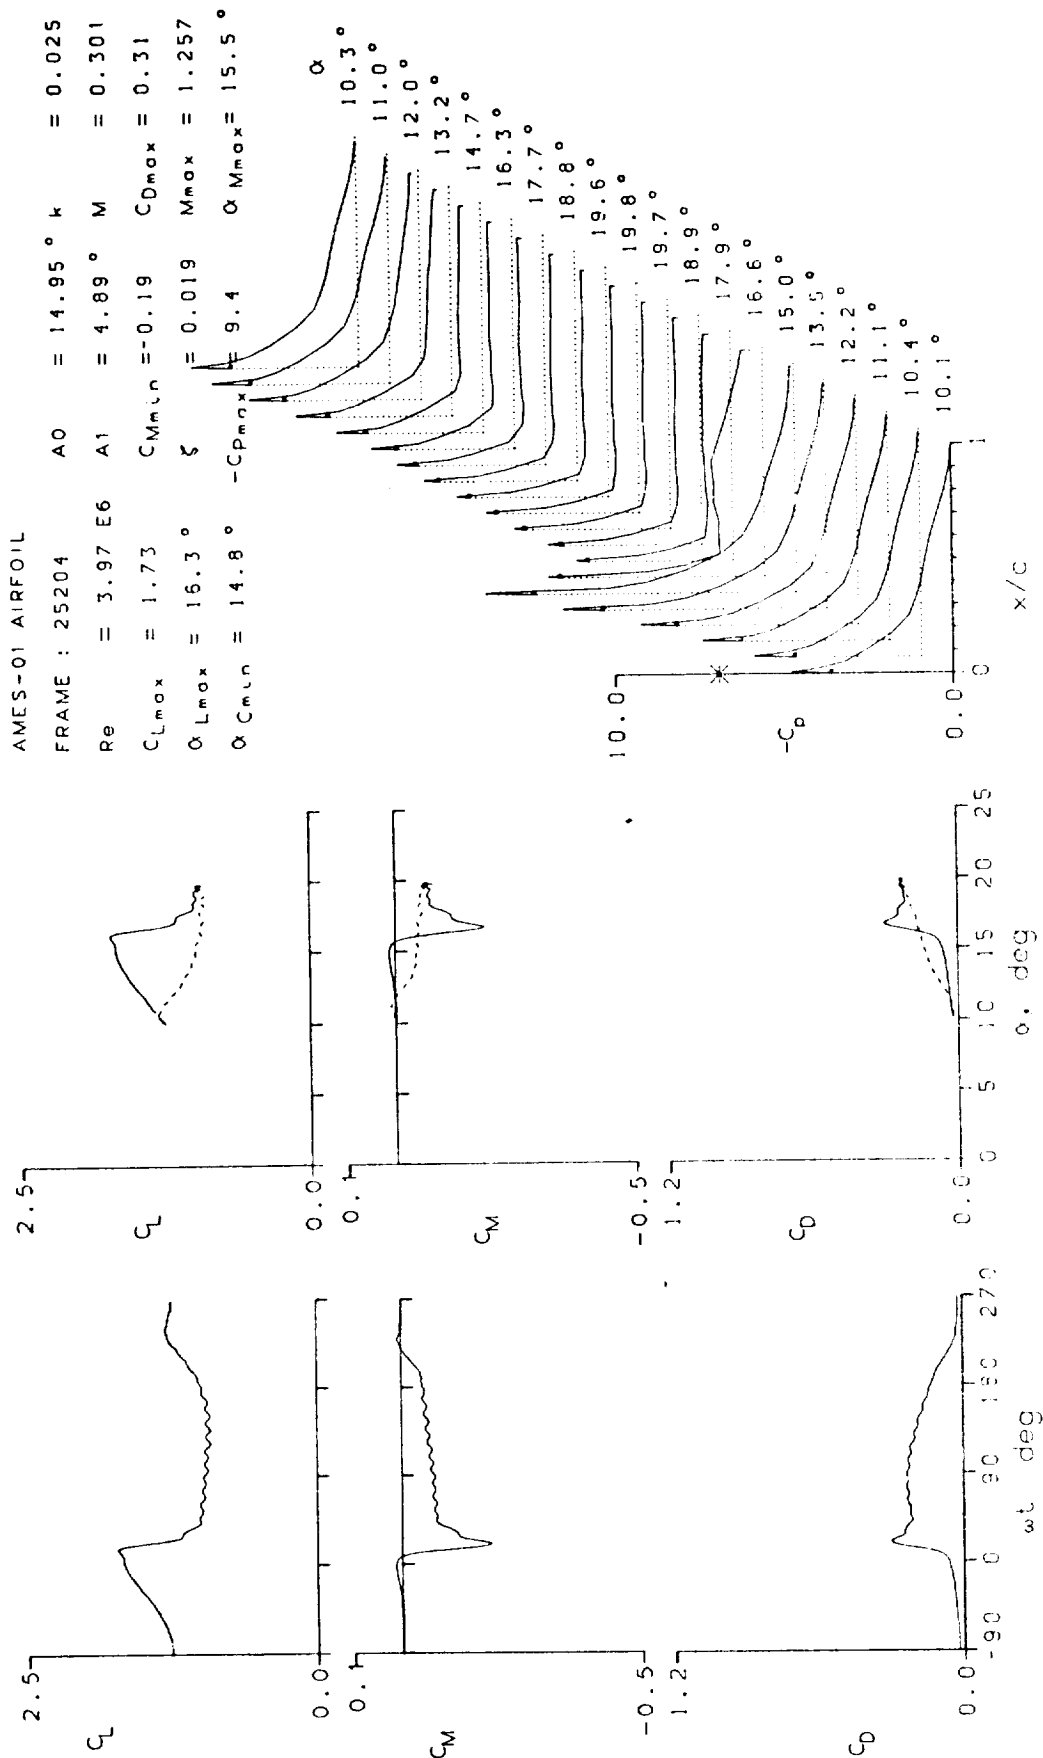


Figure 13.- Continued.

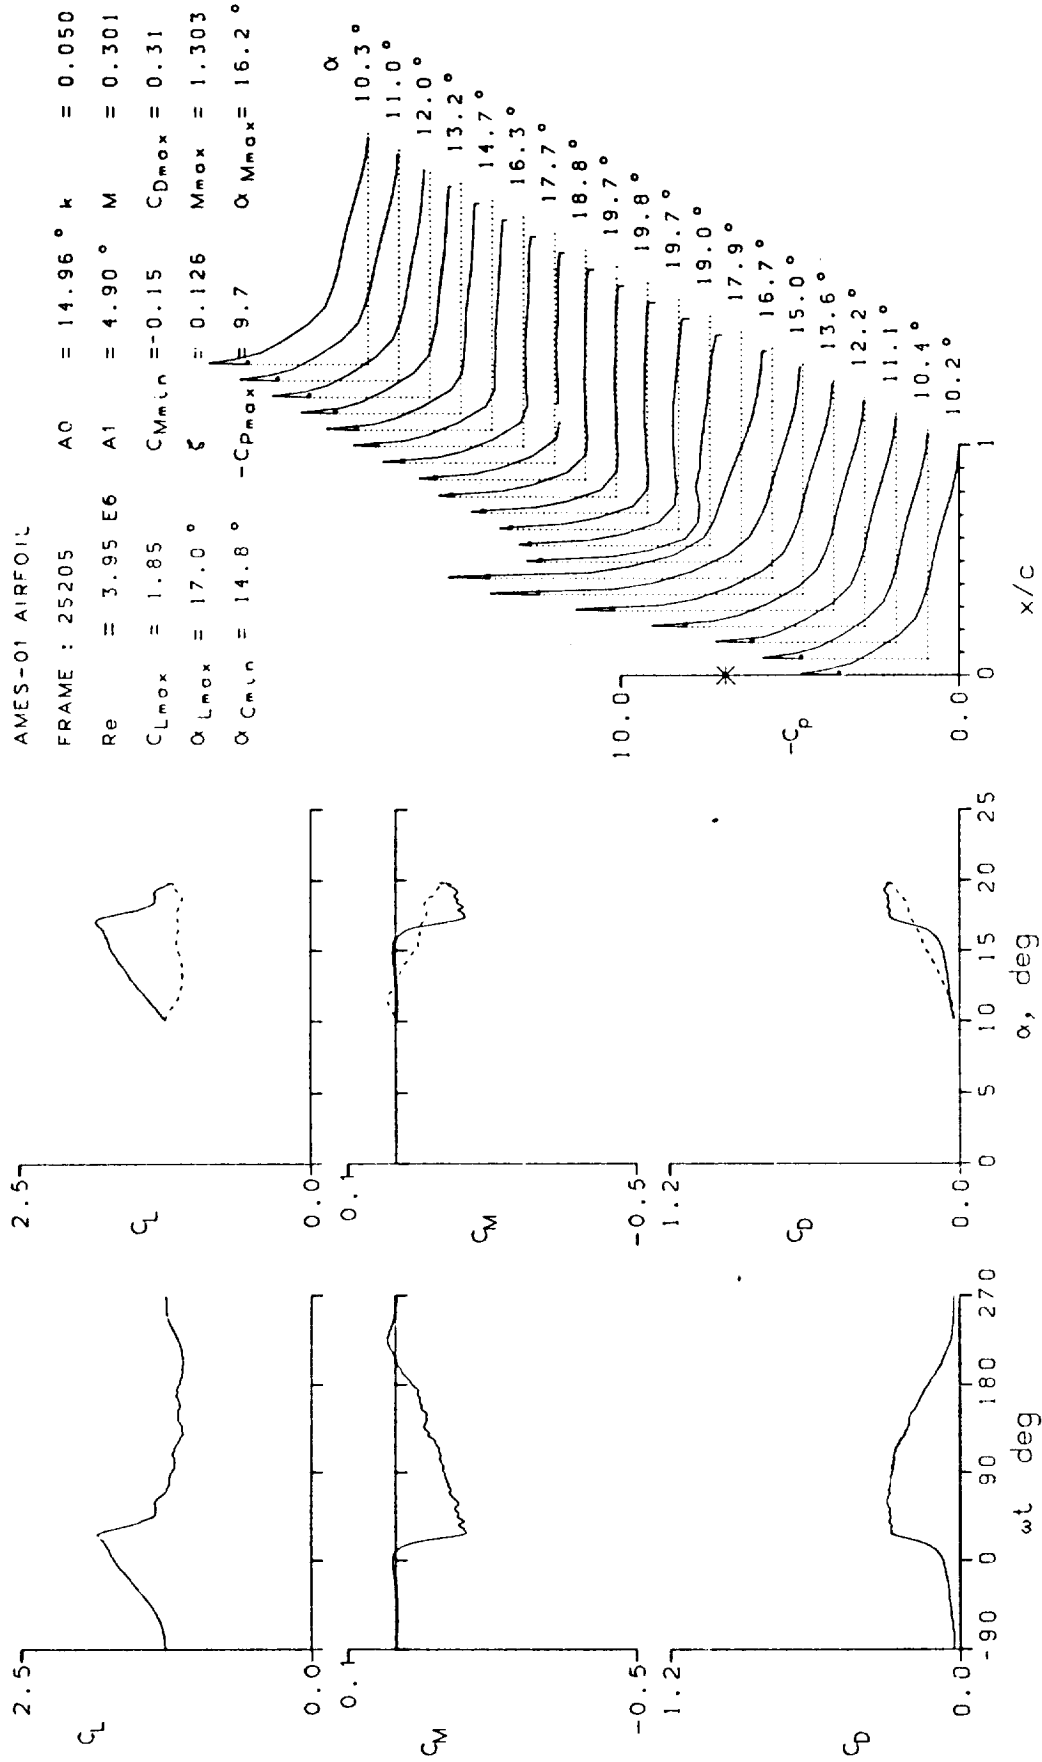


Figure 13.- Continued.

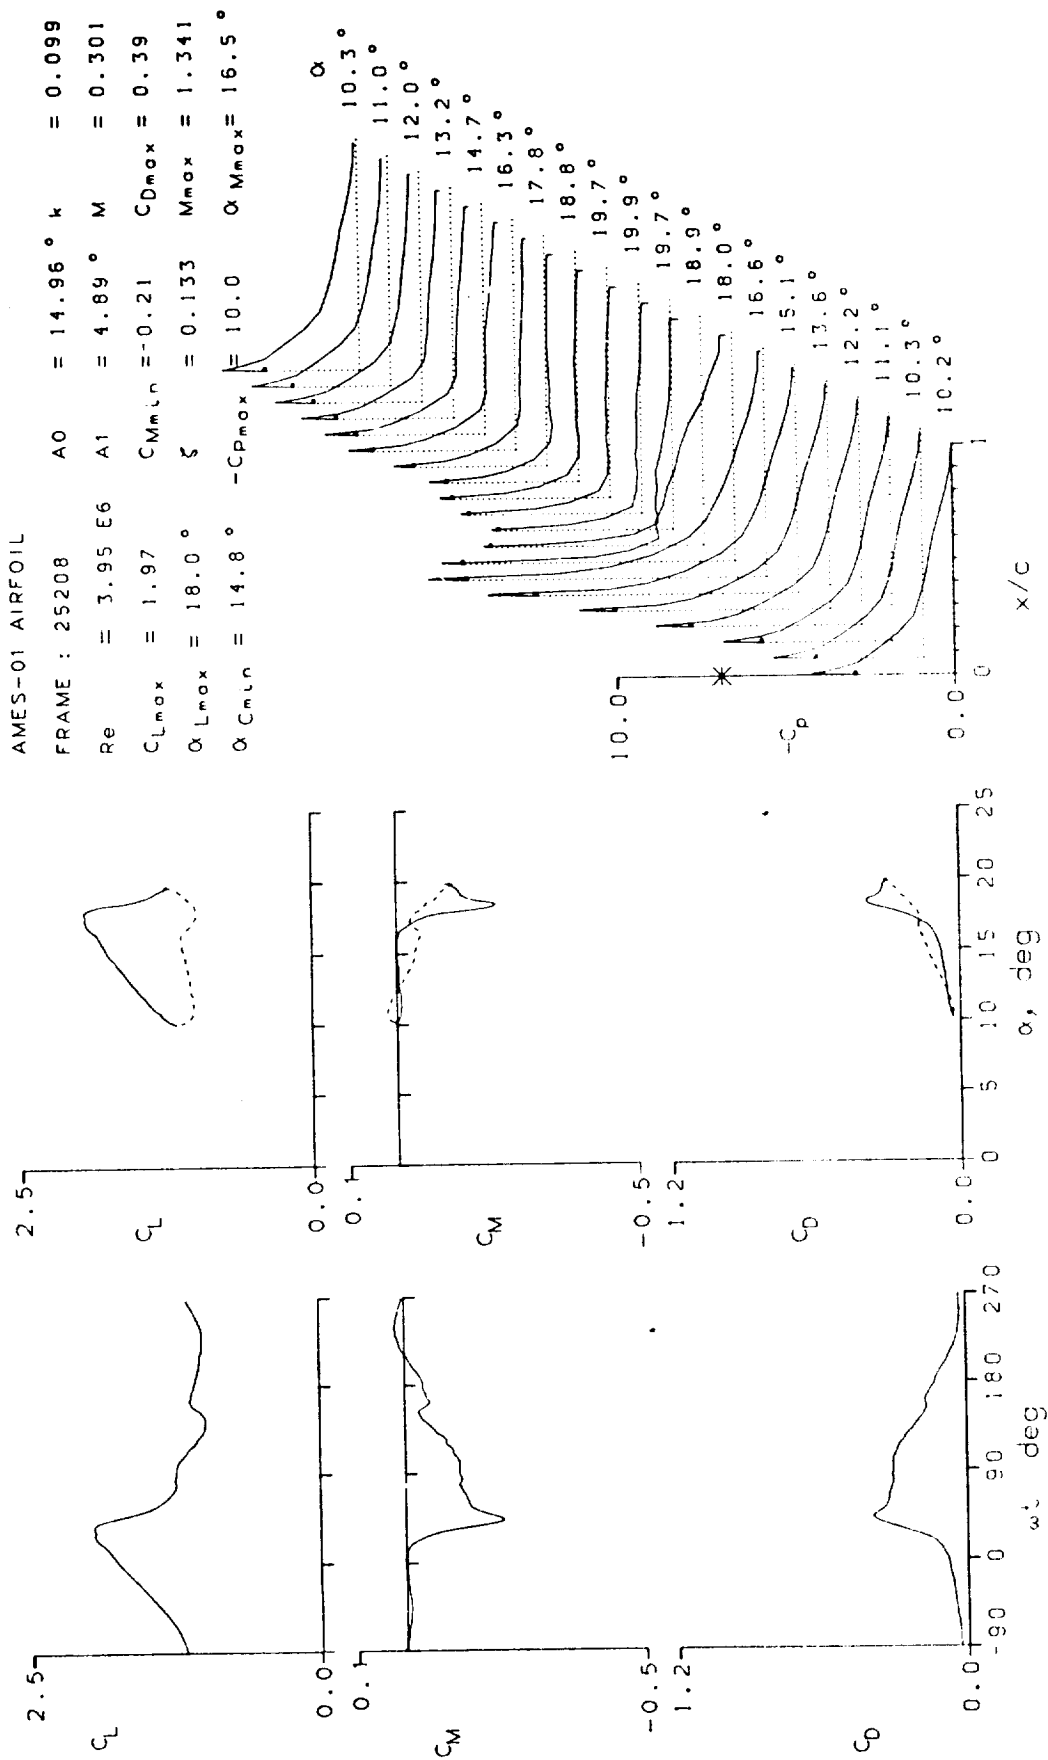


Figure 13.- Continued.

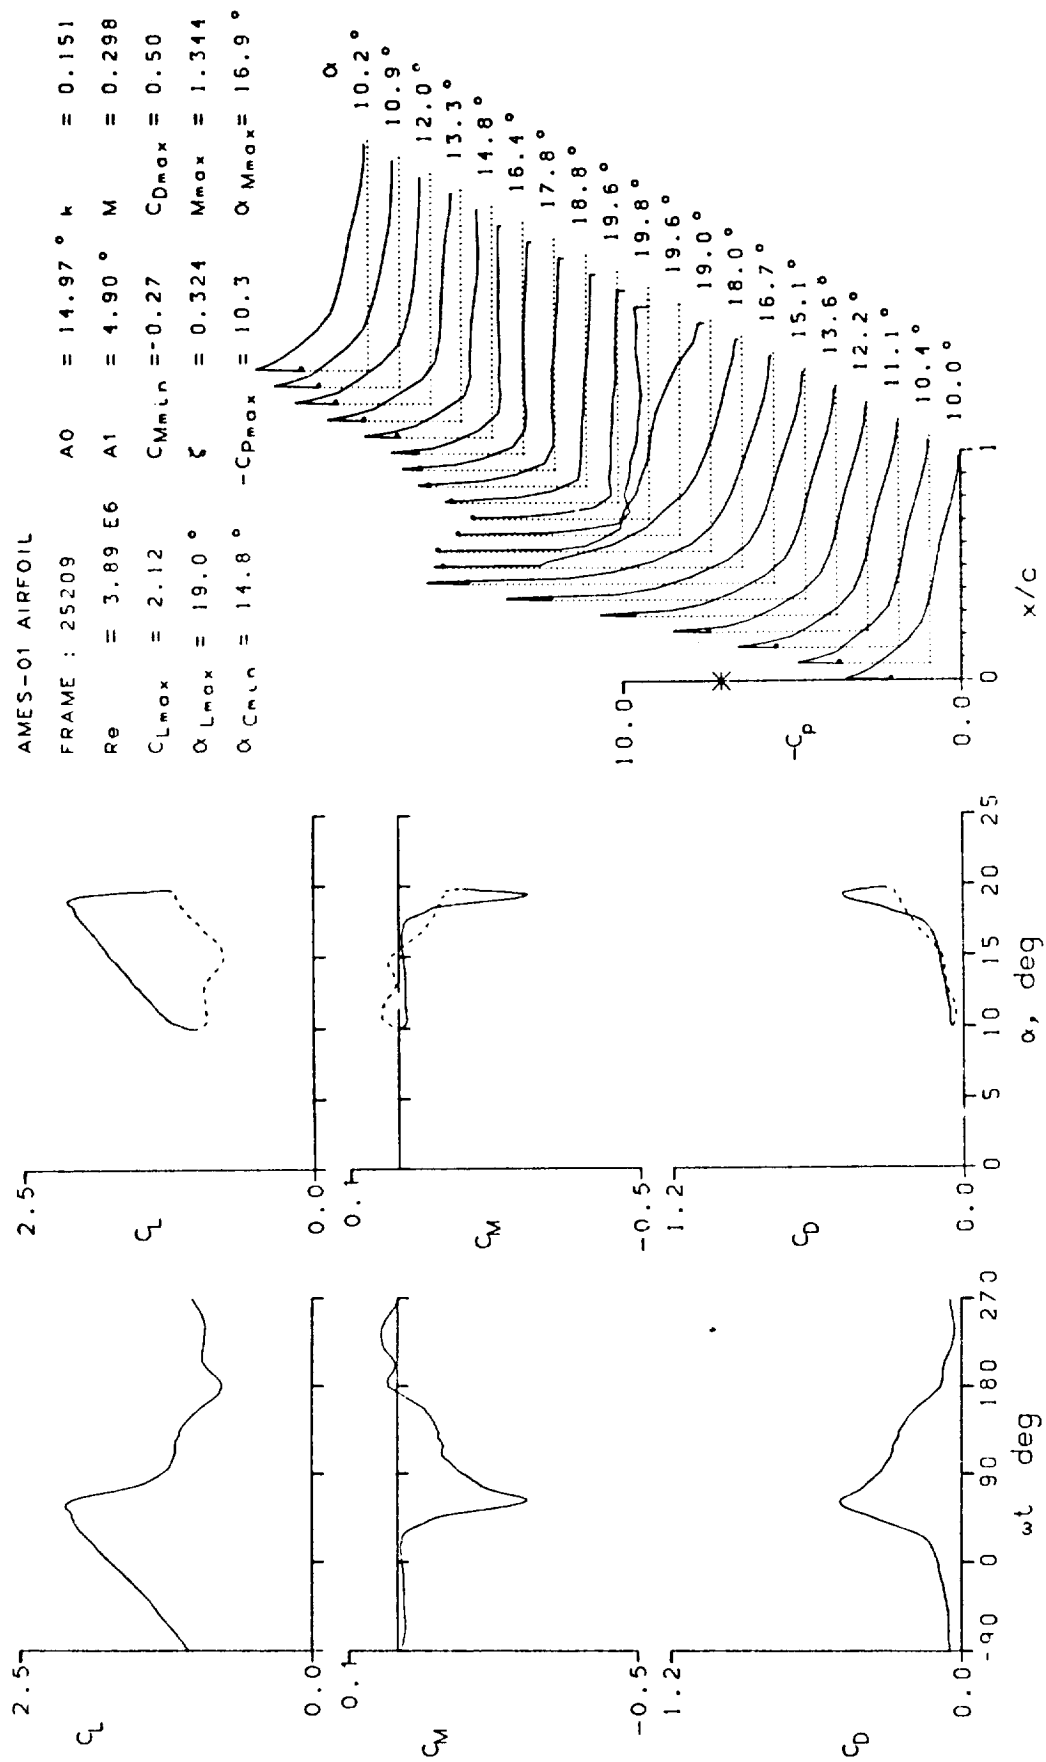


Figure 13.- Continued.

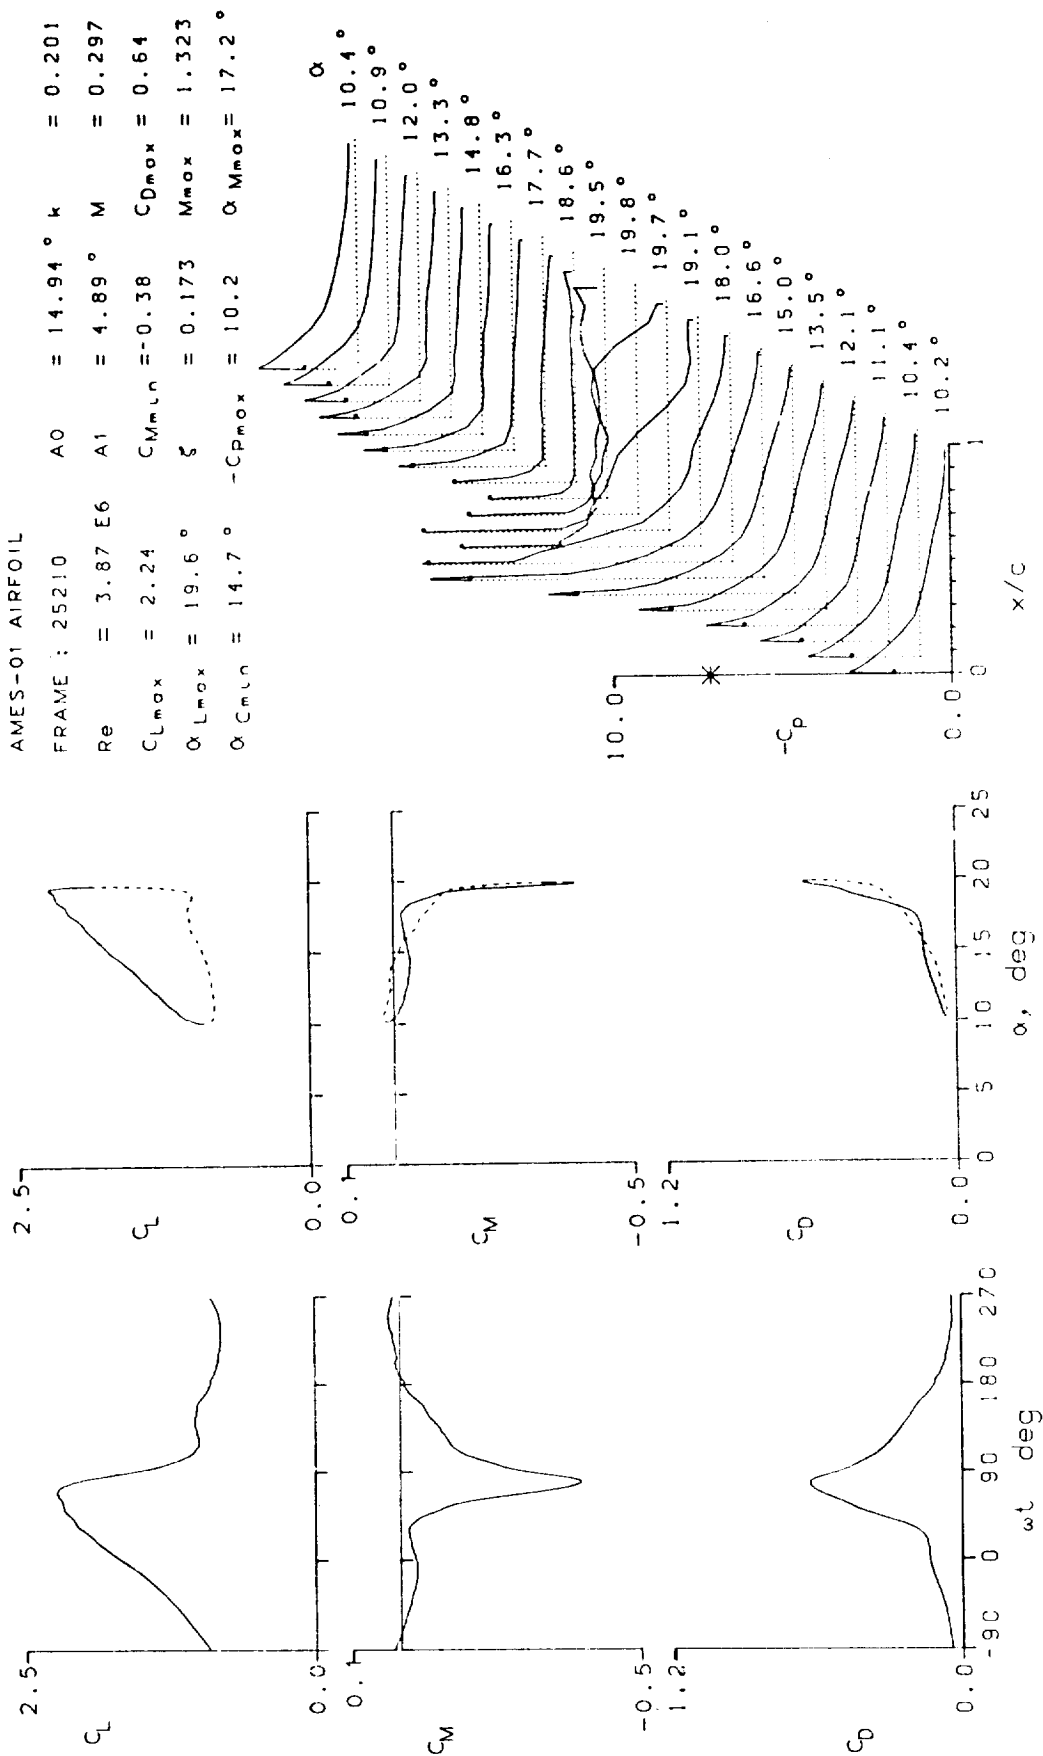


Figure 13.- Continued.

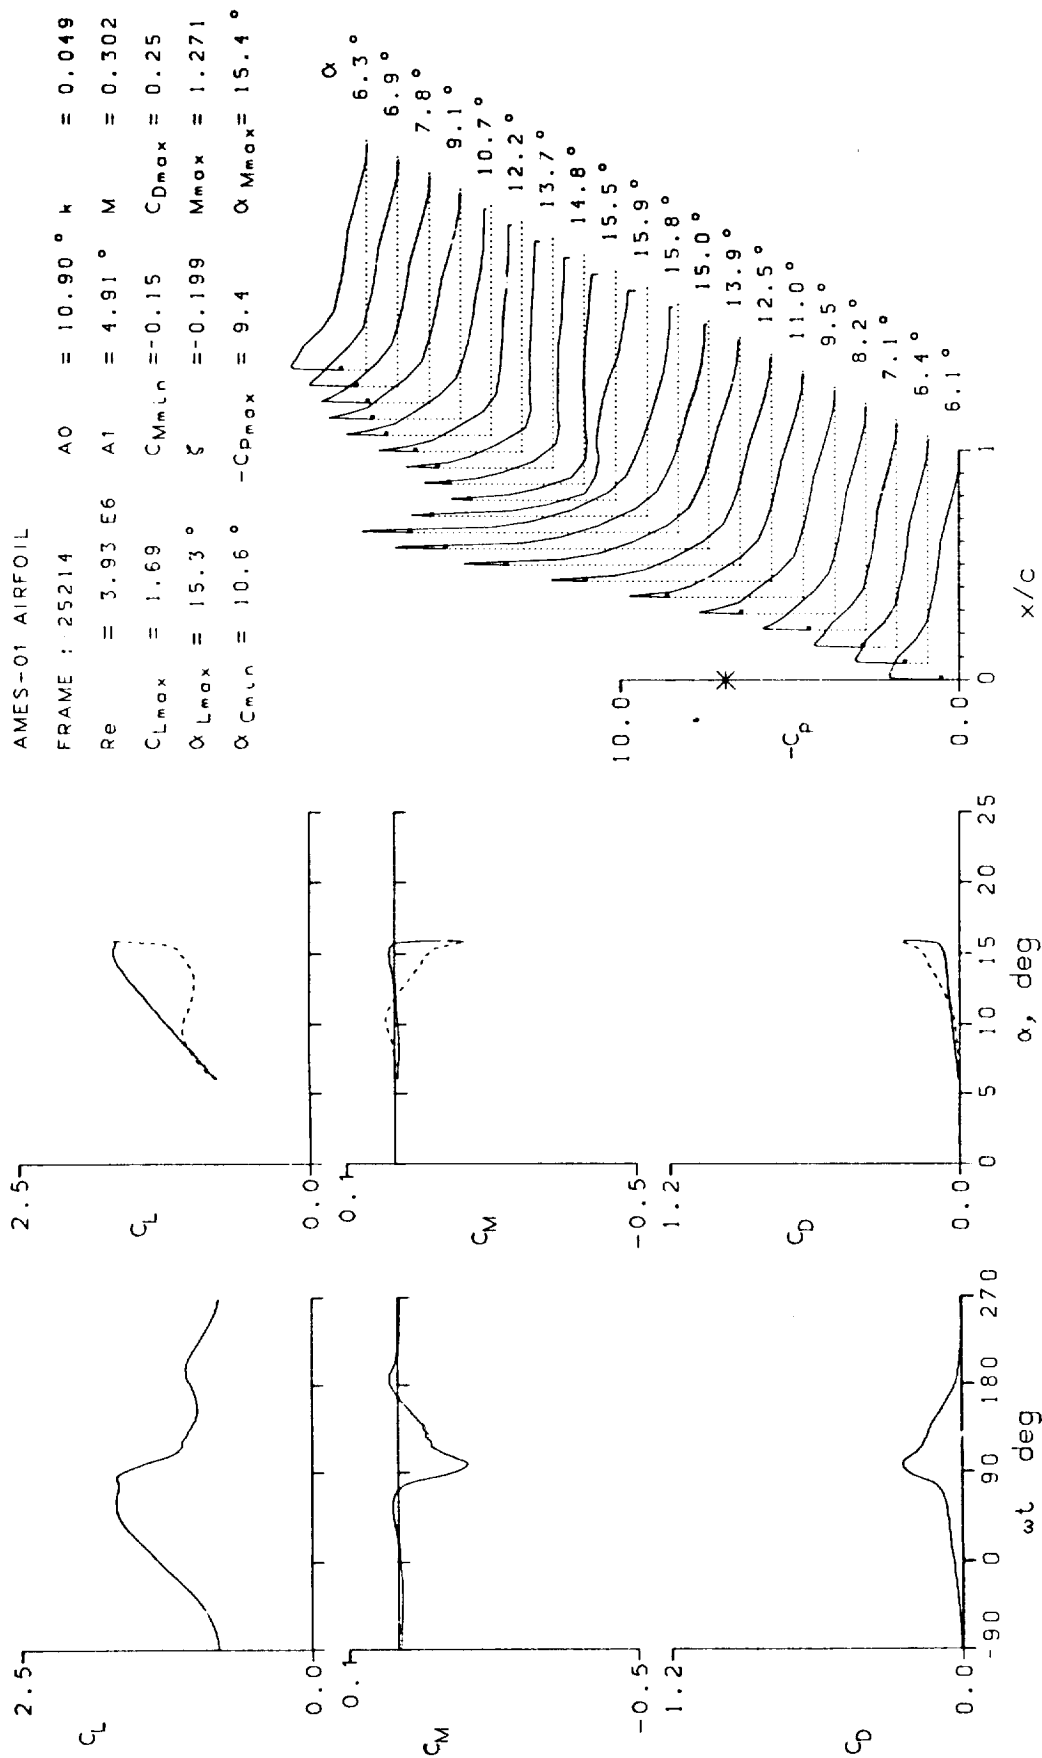


Figure 13.- Continued.

AMES-01 AIRFOIL
 FRAME : 25216 $A0 = 10.91^\circ$ $k = 0.099$
 $Re = 3.91 \text{ E}6$ $A1 = 4.90^\circ$ $M = 0.302$
 $C_{Lmax} = 1.76$ $C_{Mmin} = -0.09$ $C_{Dmax} = 0.19$
 $\alpha_{Lmax} = 15.8^\circ$ $\zeta = -0.007$ $M_{max} = 1.316$
 $\alpha_{Cmin} = 10.6^\circ$ $-C_{Dmax} = 9.8$ $\alpha_{Mmax} = 15.7^\circ$

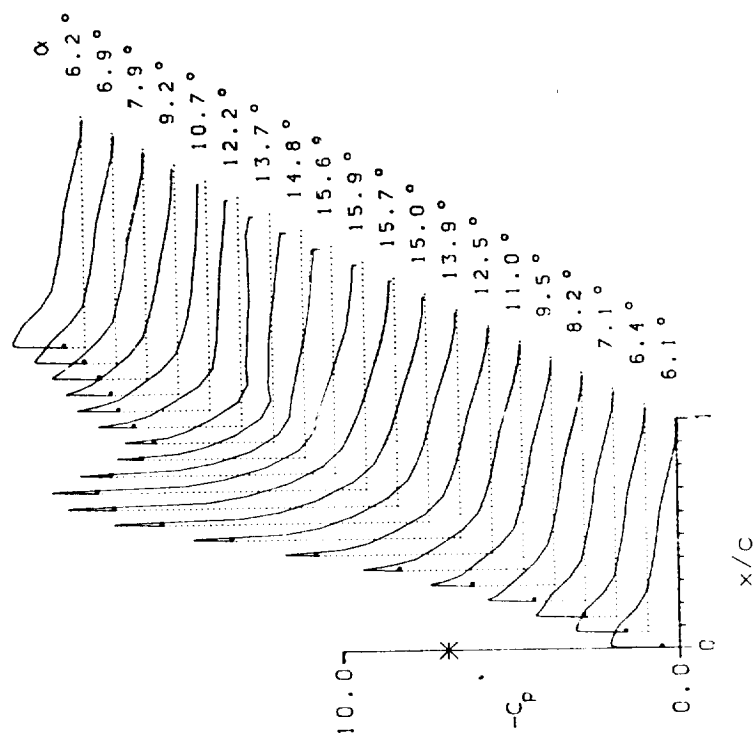
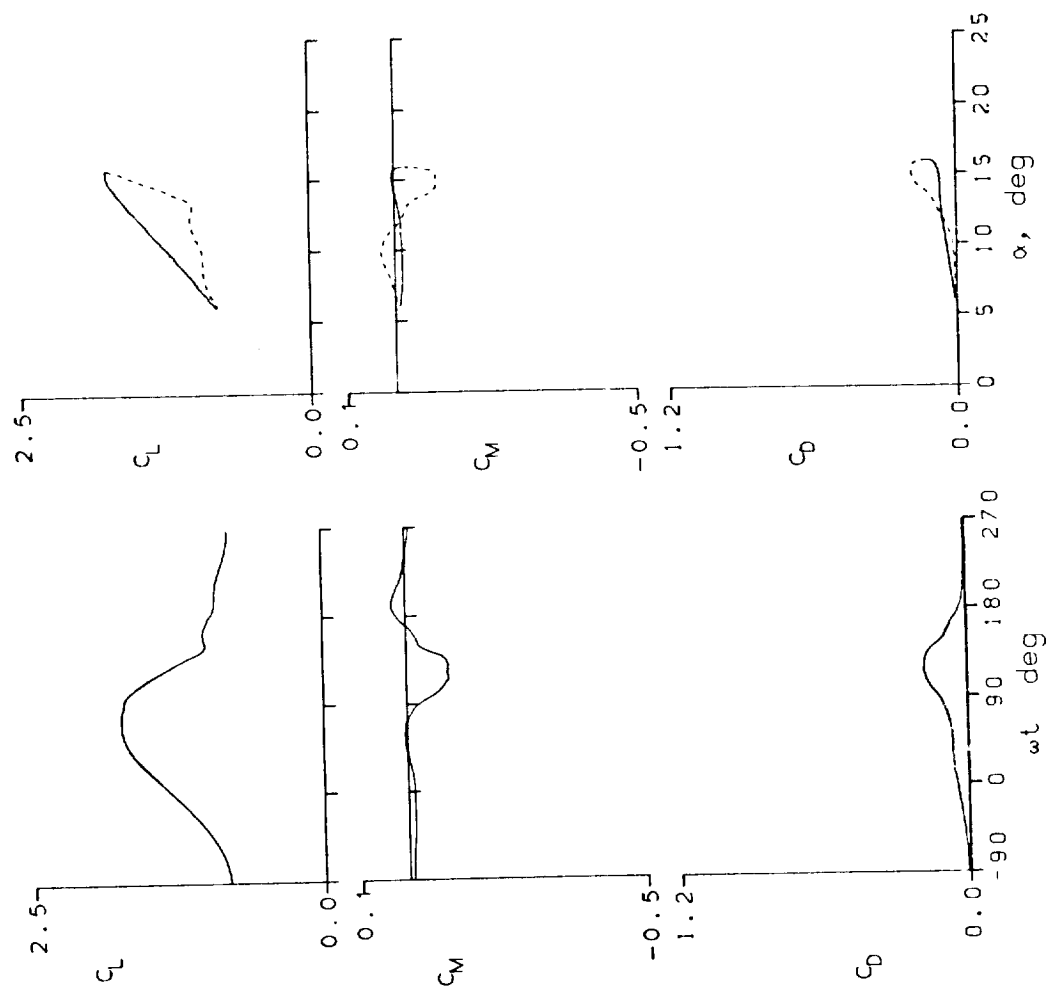


Figure 13.- Continued.

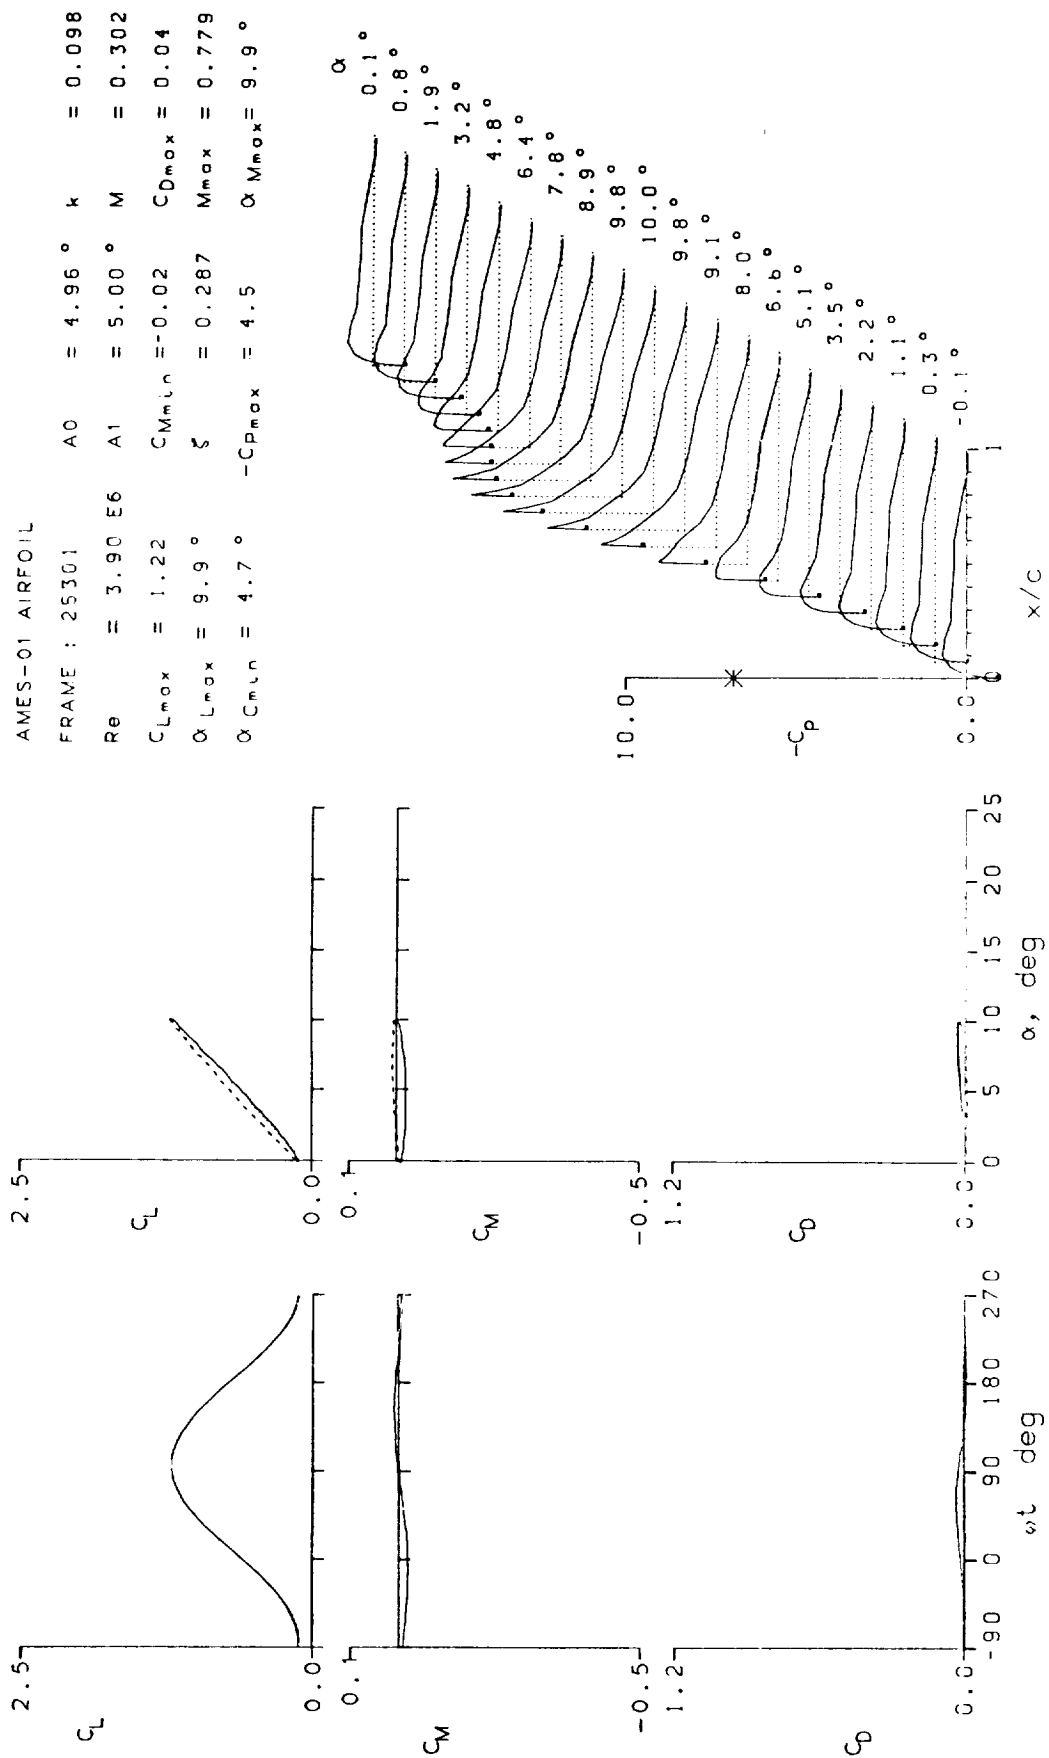


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 25303	A0 = 4.97 °	k = 0.196
R0 = 3.88 E6	A1 = 5.00 °	M = 0.303
C _{Lmax} = 1.25	C _{Mmin} = -0.04	C _{Dmax} = 0.05
α _{Lmax} = 10.0 °	ζ = 0.680	M _{max} = 0.805
α _{Cmin} = 4.8 °	-C _{pmax} = 4.8	α _{Mmax} = 9.9 °

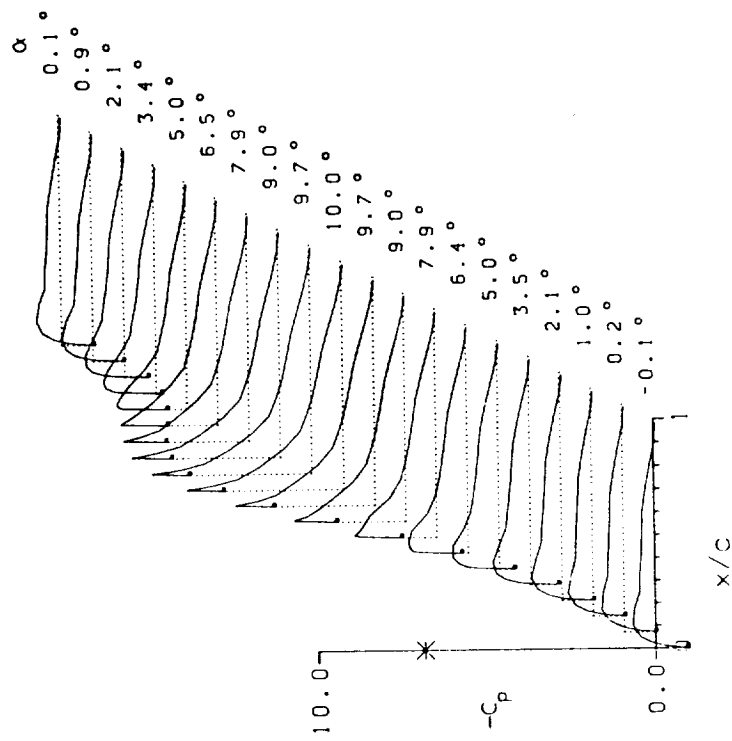
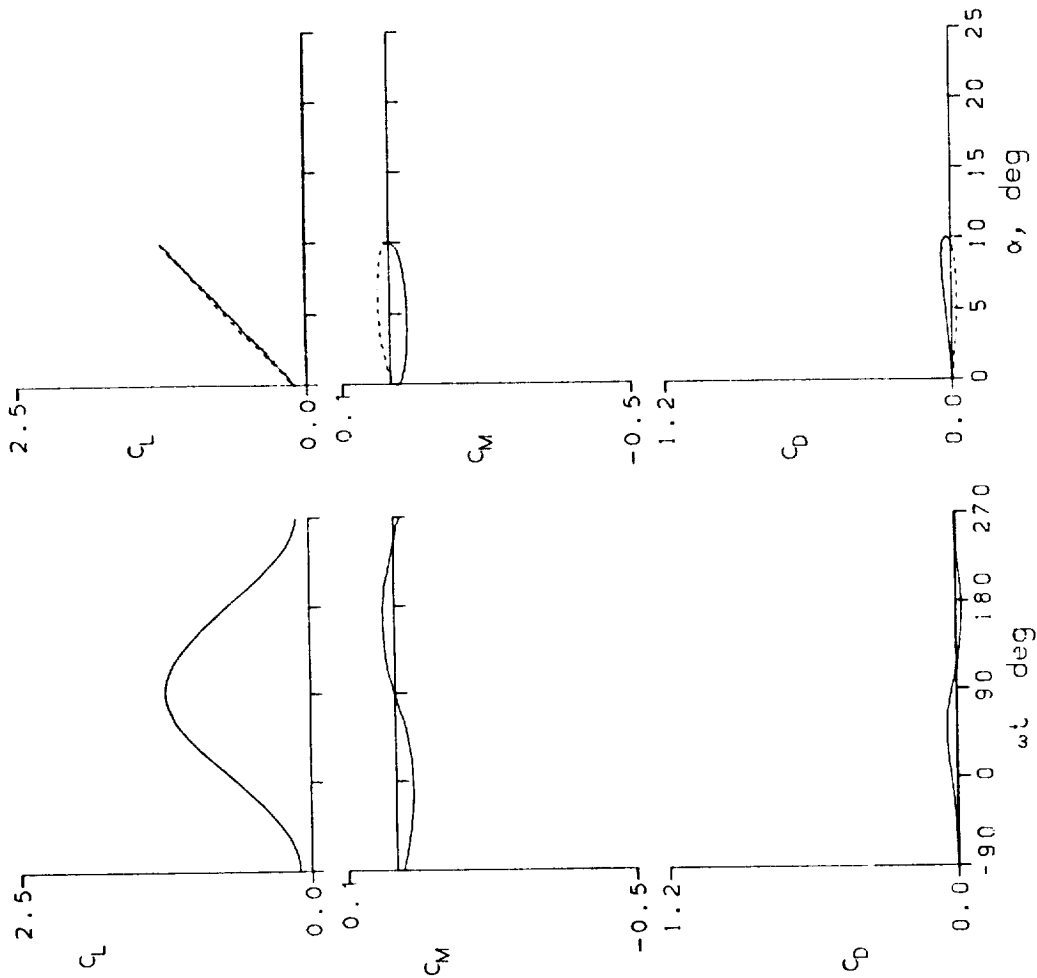


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 25311	A0 = 4.86 °	k = 0.098
Re = 3.85 E6	A1 = 10.11 °	M = 0.302
C _{Lmax} = 1.72	C _{Mmin} = -0.03	C _{Dmax} = 0.08
α _{Lmax} = 15.1 °	ξ = 0.297	M _{max} = 1.291
α _{Cmin} = 4.4 °	-C _{Dmax} = 9.6	α _{Mmax} = 15.0 °

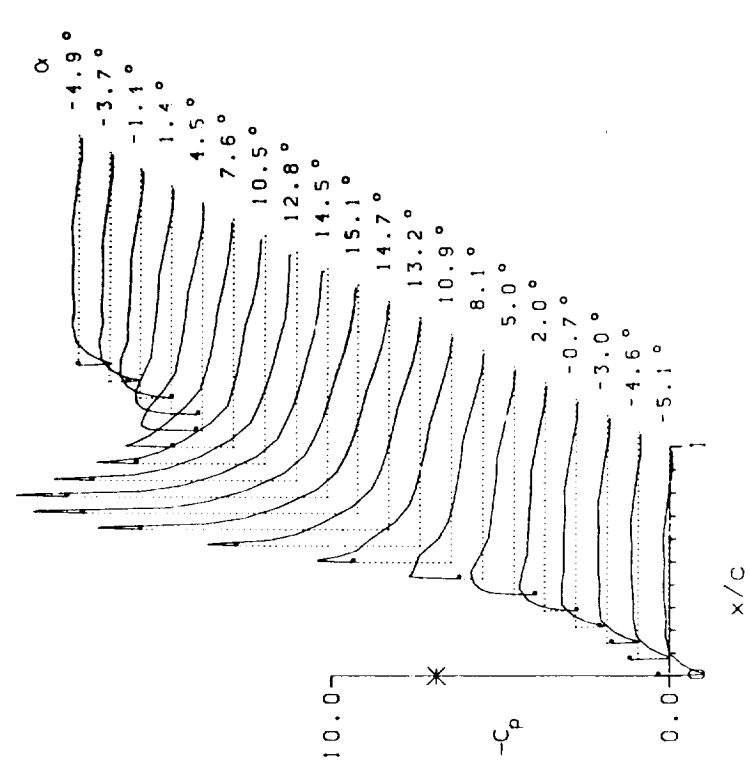
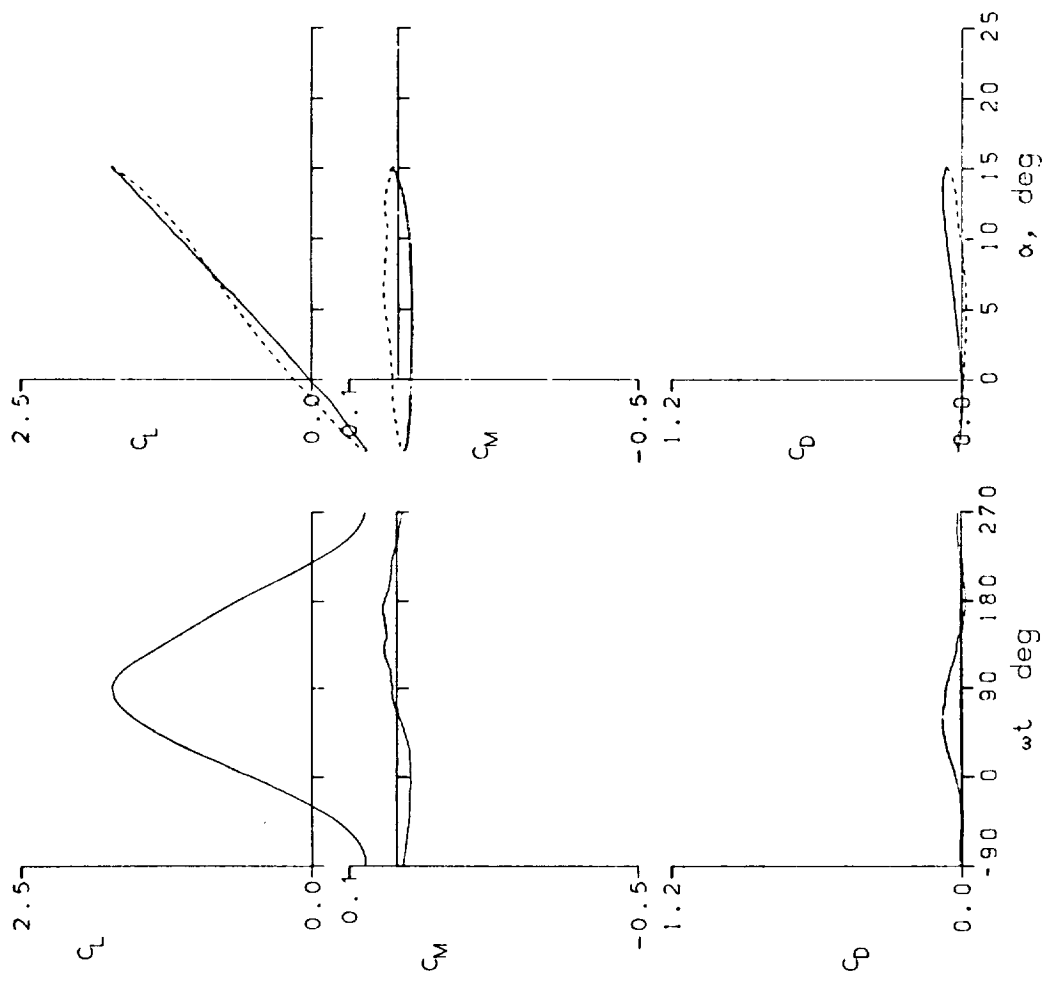


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 25319	A0 = 5.32 °	k = 0.098
Re = 3.83 E6	A1 = 10.07 °	M = 0.302
$C_{Lmax} = 1.74$	$C_{Mmin} = -0.05$	$C_{Dmax} = 0.11$
$\alpha_{Lmax} = 15.6 °$	$\zeta = 0.216$	$M_{max} = 1.303$
$\alpha_{Cmin} = 4.8 °$	$-C_{Pmax} = 9.7$	$\alpha_{Mmax} = 15.6 °$

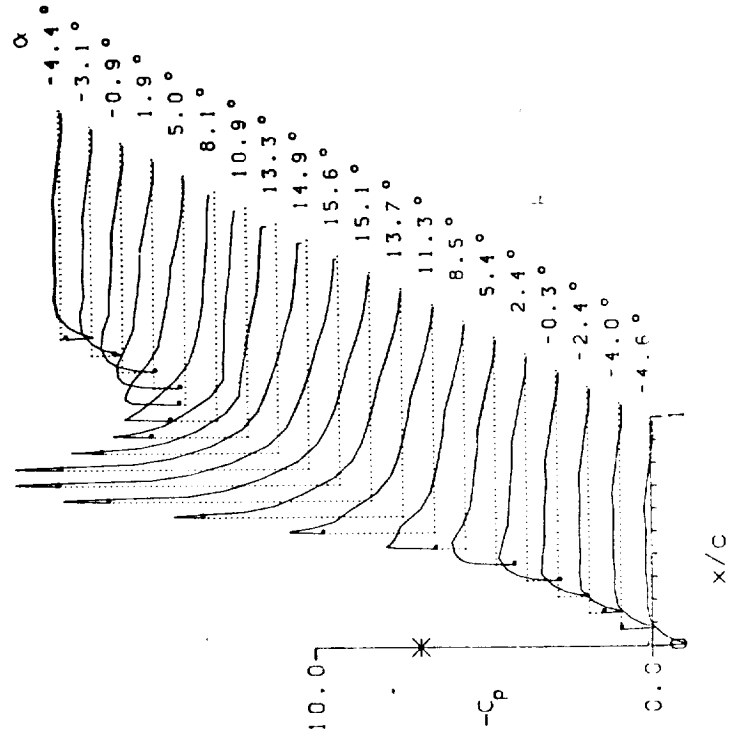
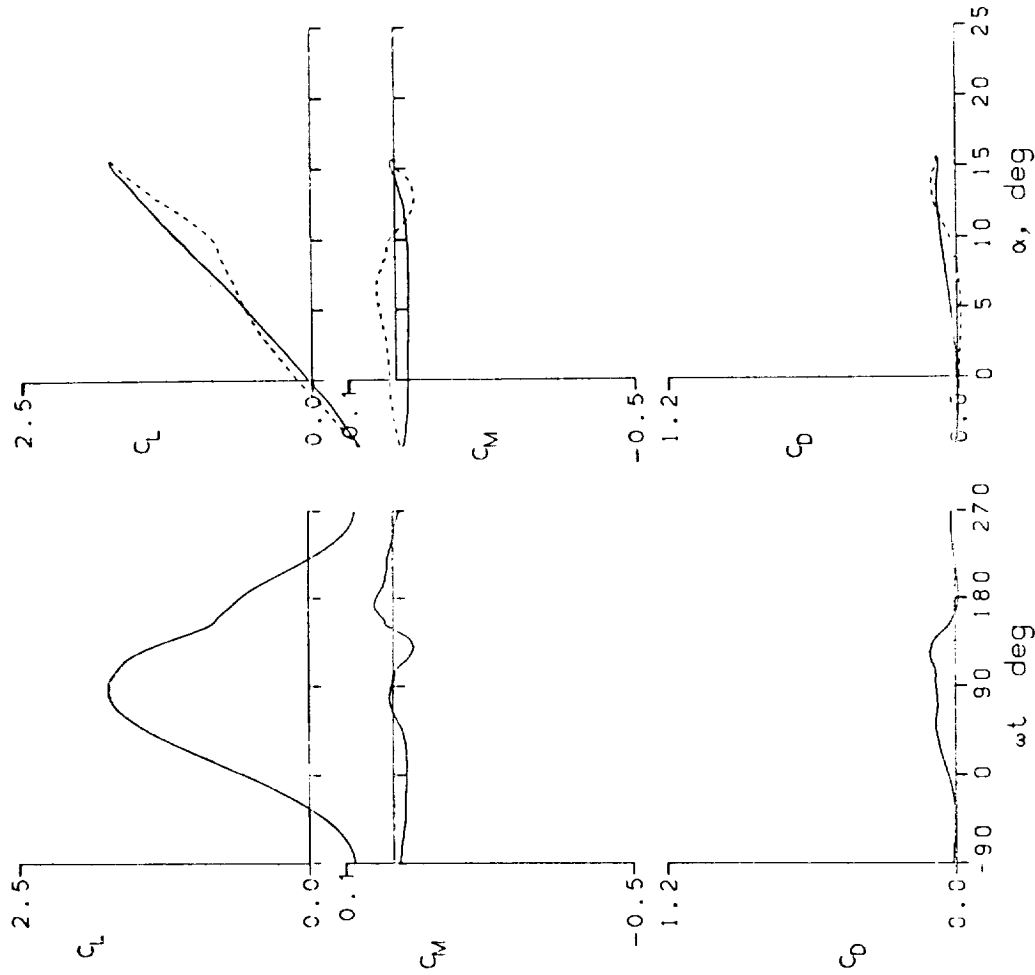


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 29023	A0 = 14.85°	k = 0.025	TRIP
Re = 3.70 E6	A1 = 9.90°	M = 0.291	
CLmax = 1.78	CMmin = -0.23	CDmax = 0.47	
αLmax = 17.6°	ξ = 0.081	Mmax = 1.299	
αCMmin = 14.5°	-CDmax = 10.4	αMmax = 16.6°	

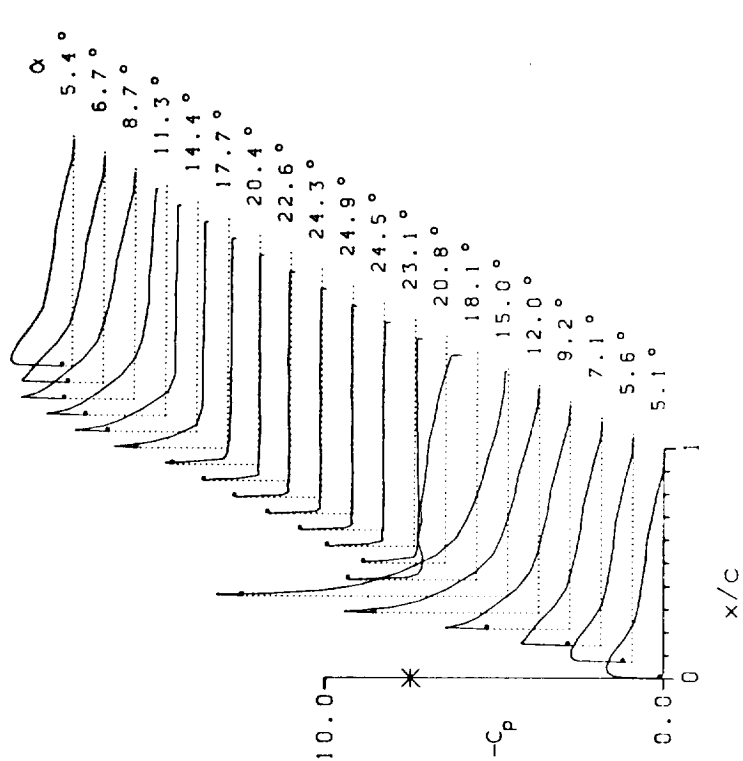
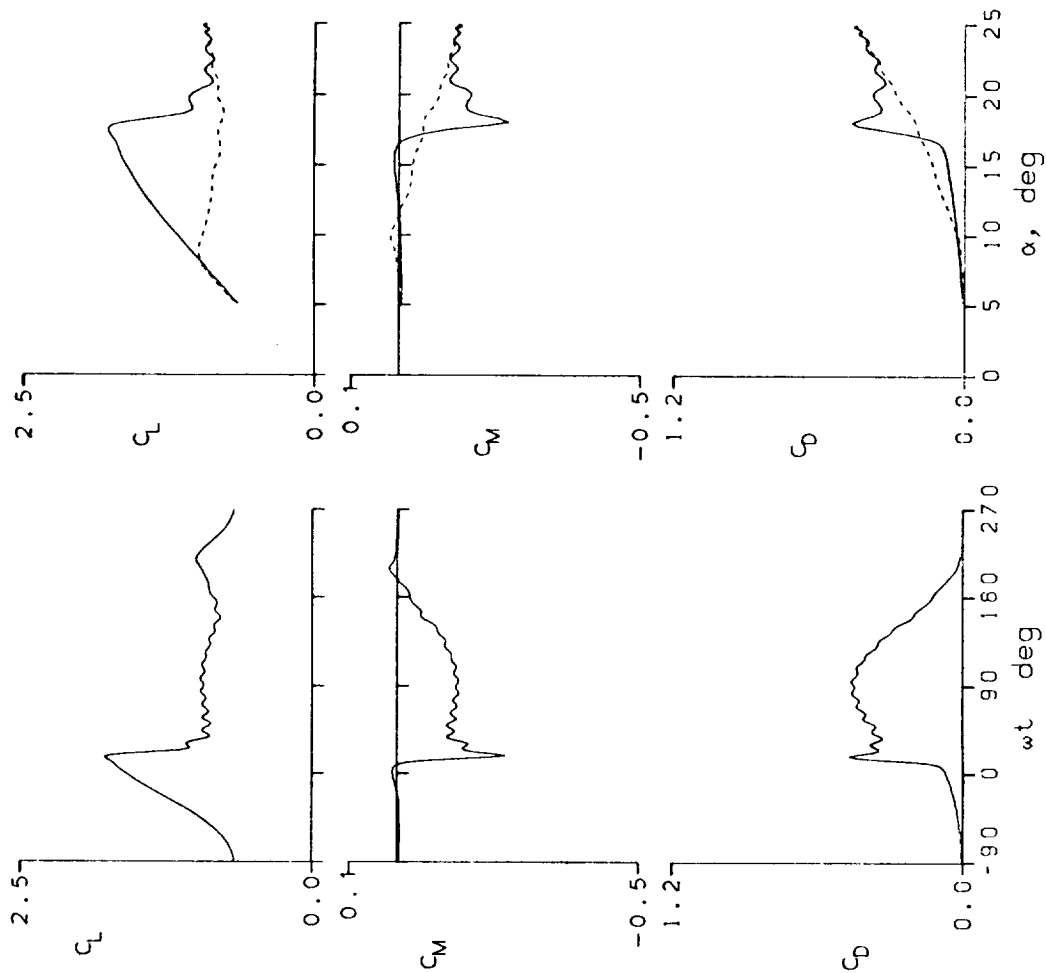


Figure 13.- Continued.

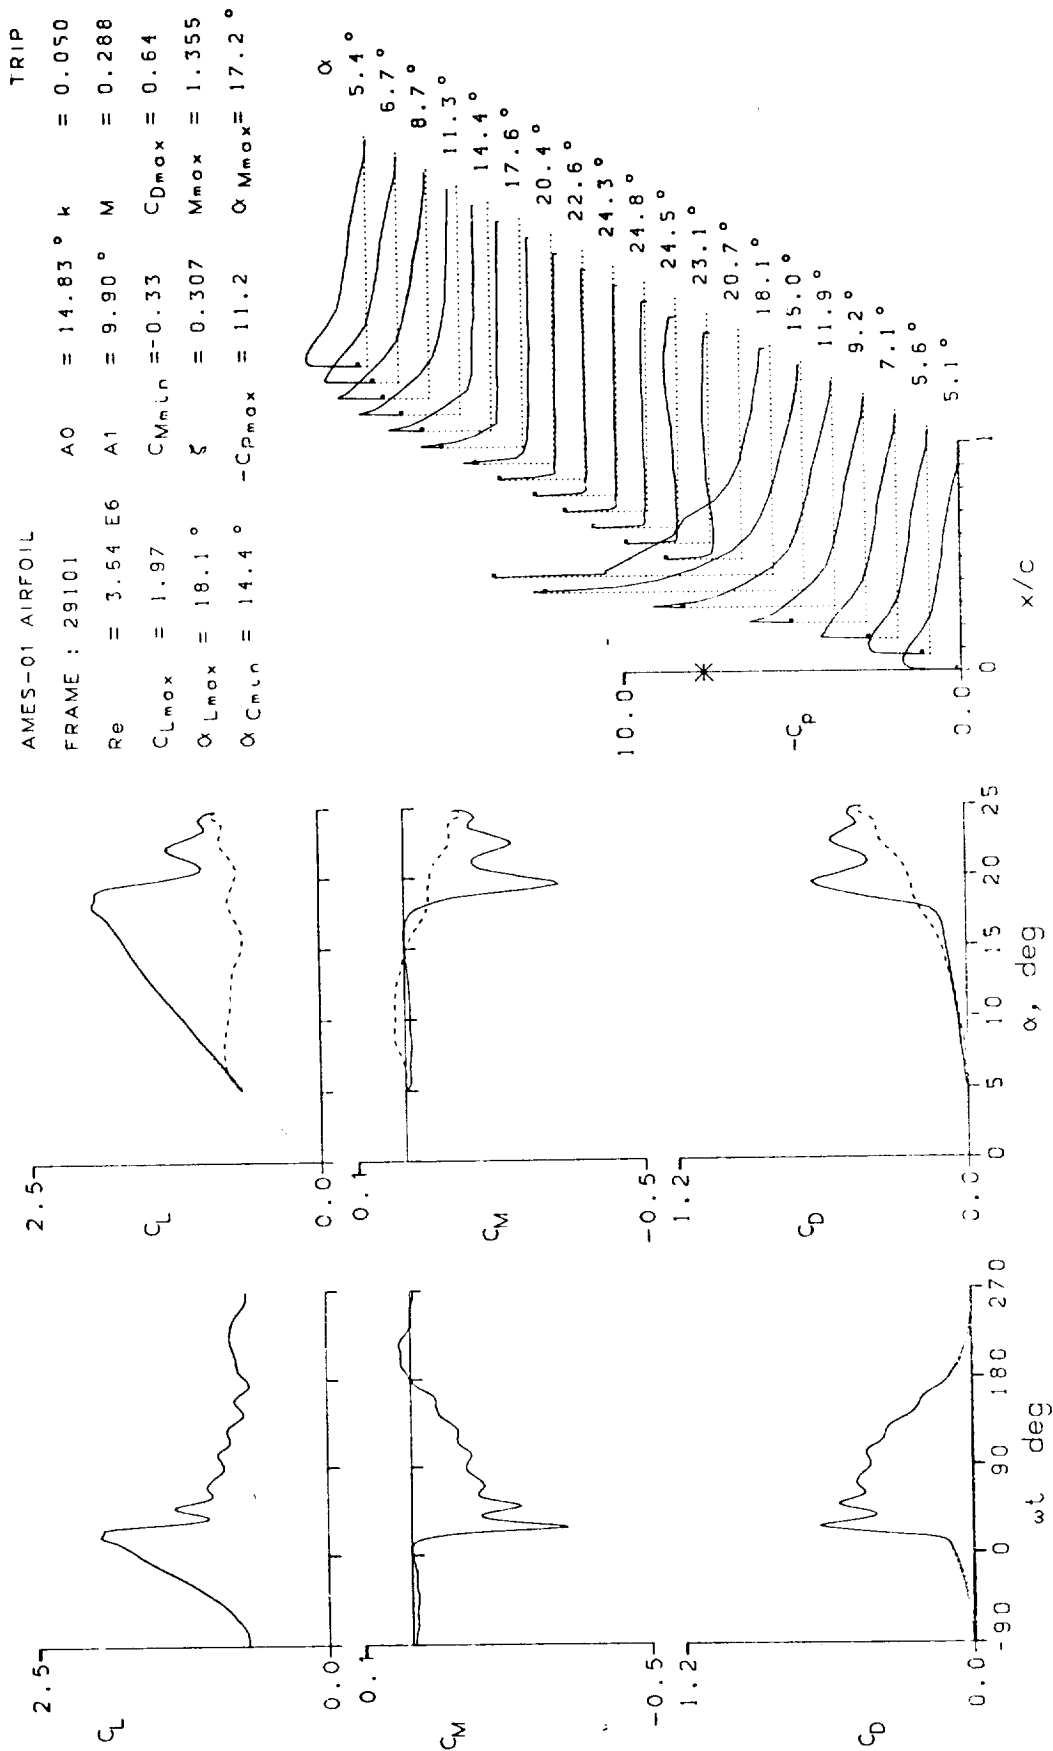


Figure 13.- Continued.

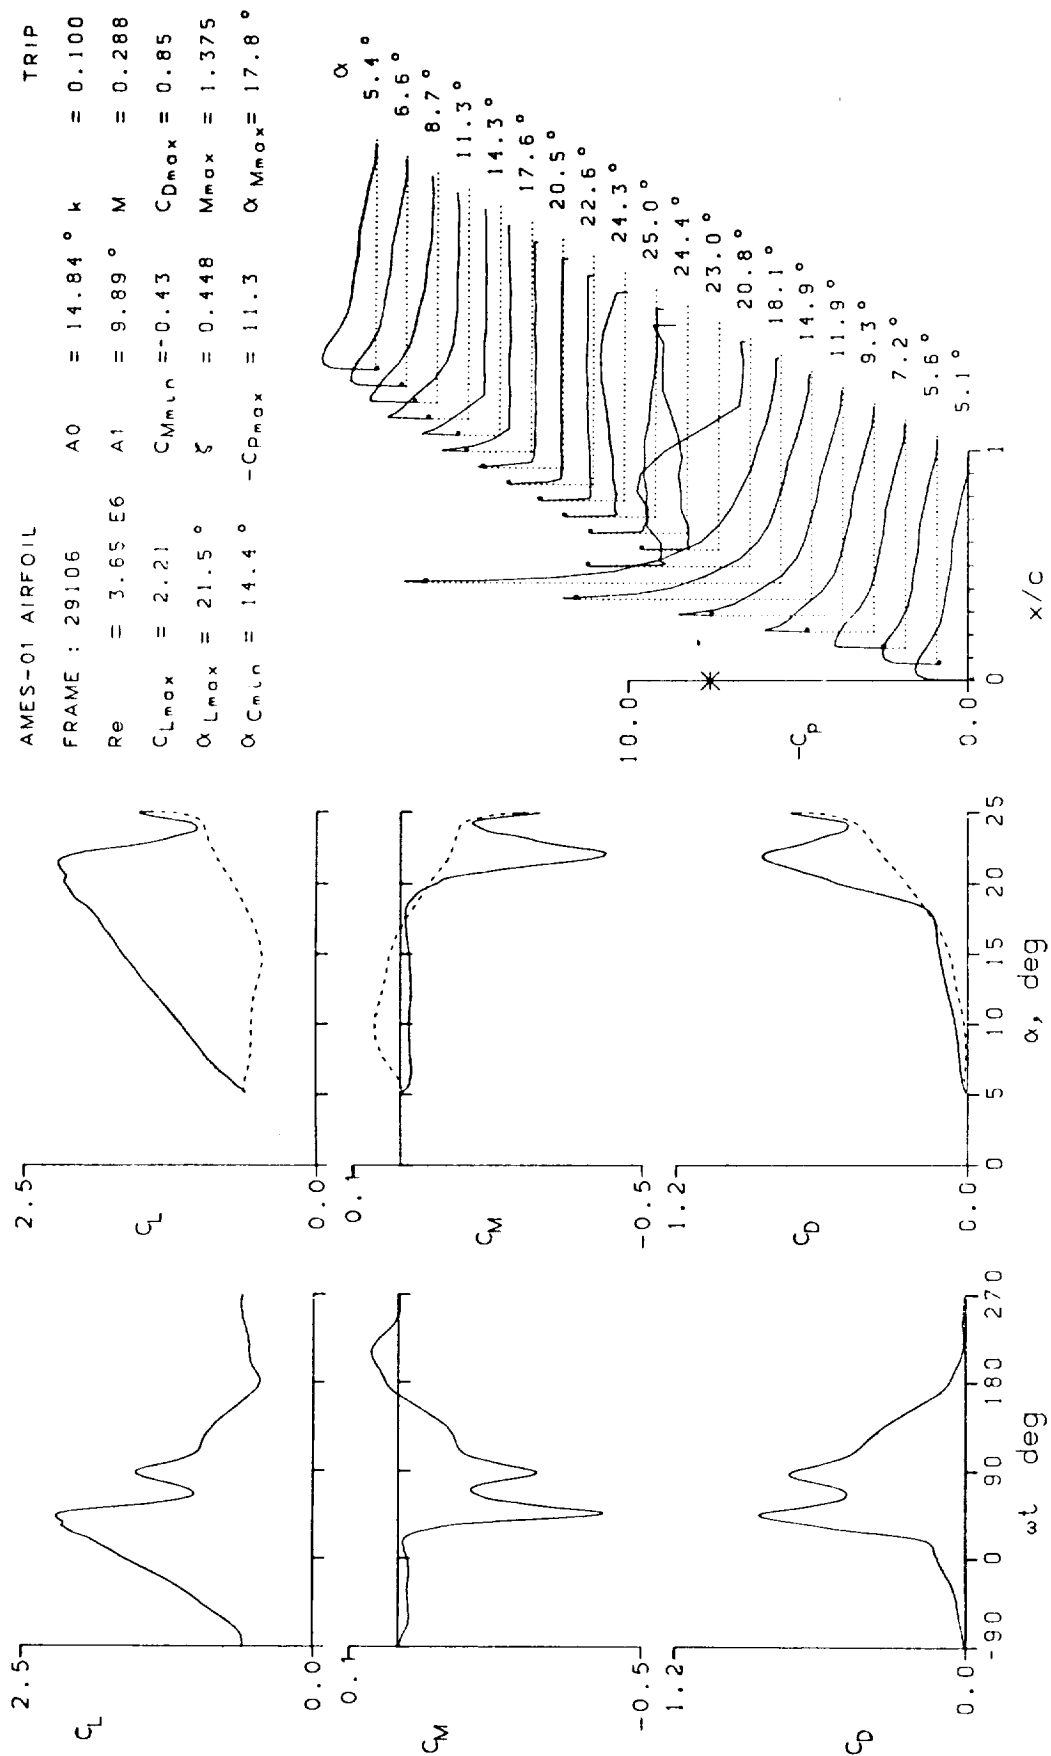


Figure 13.- Continued.

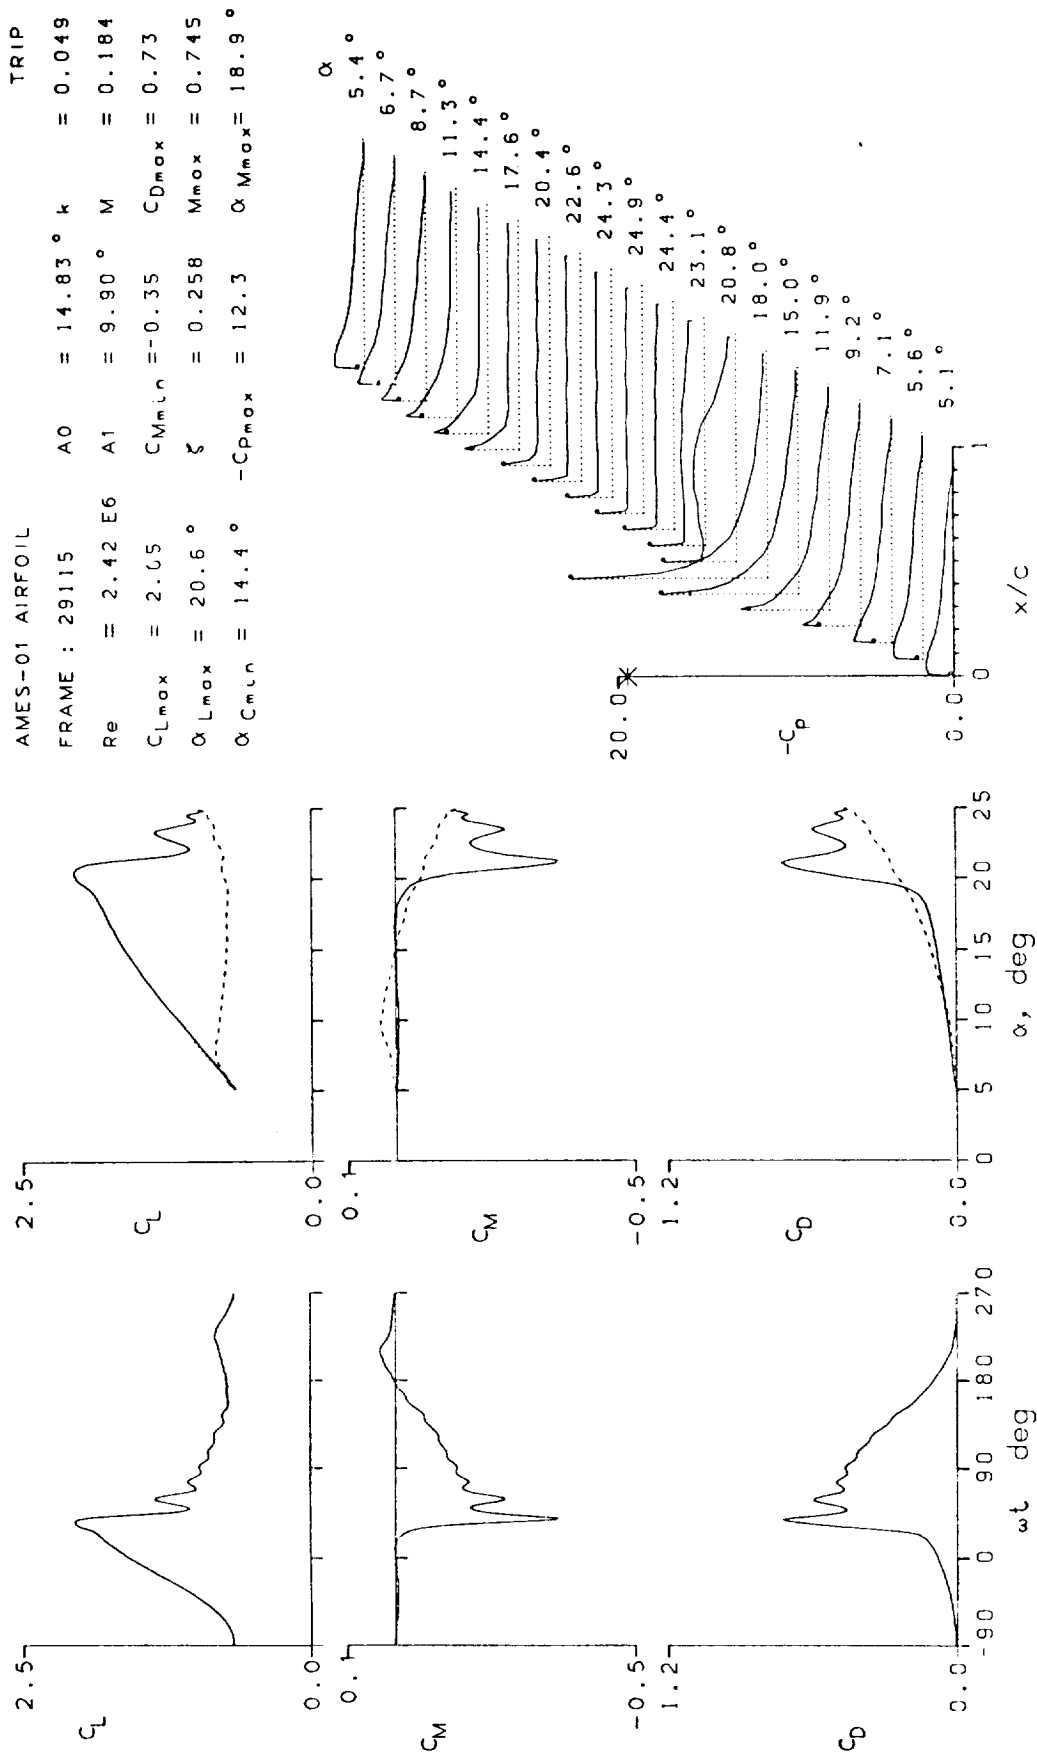


Figure 13.- Continued.

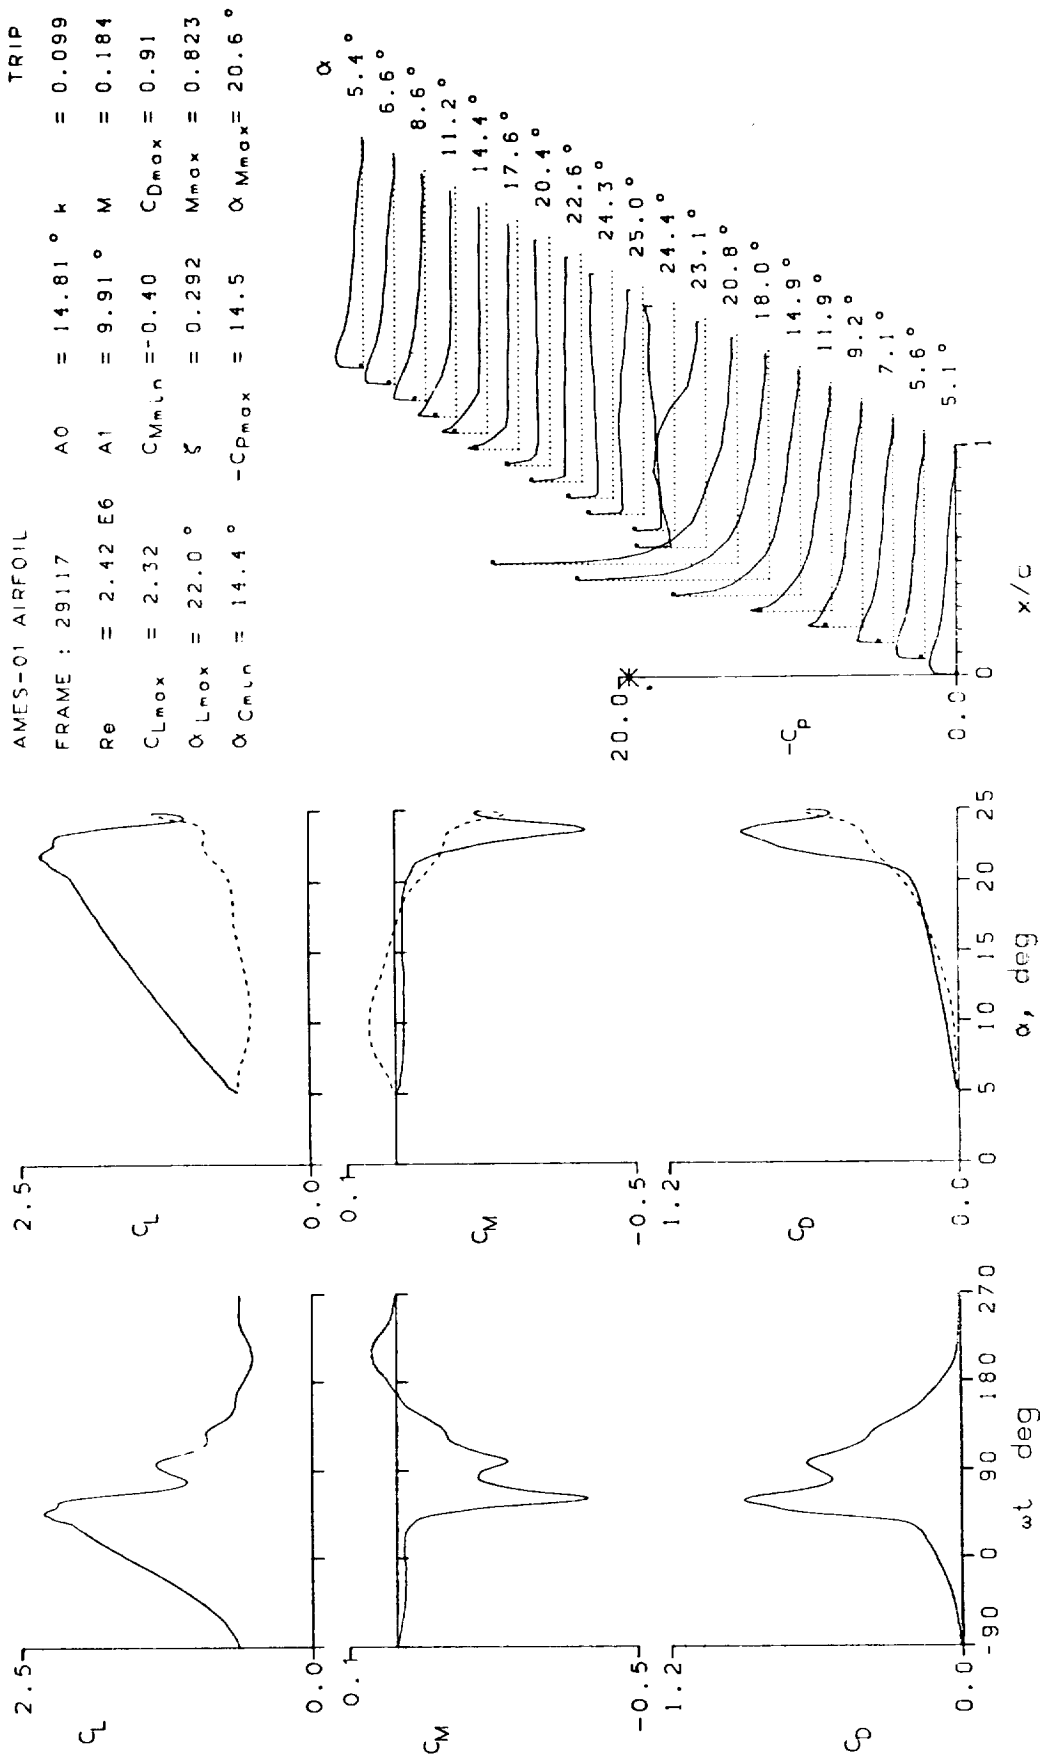


Figure 13.- Continued.

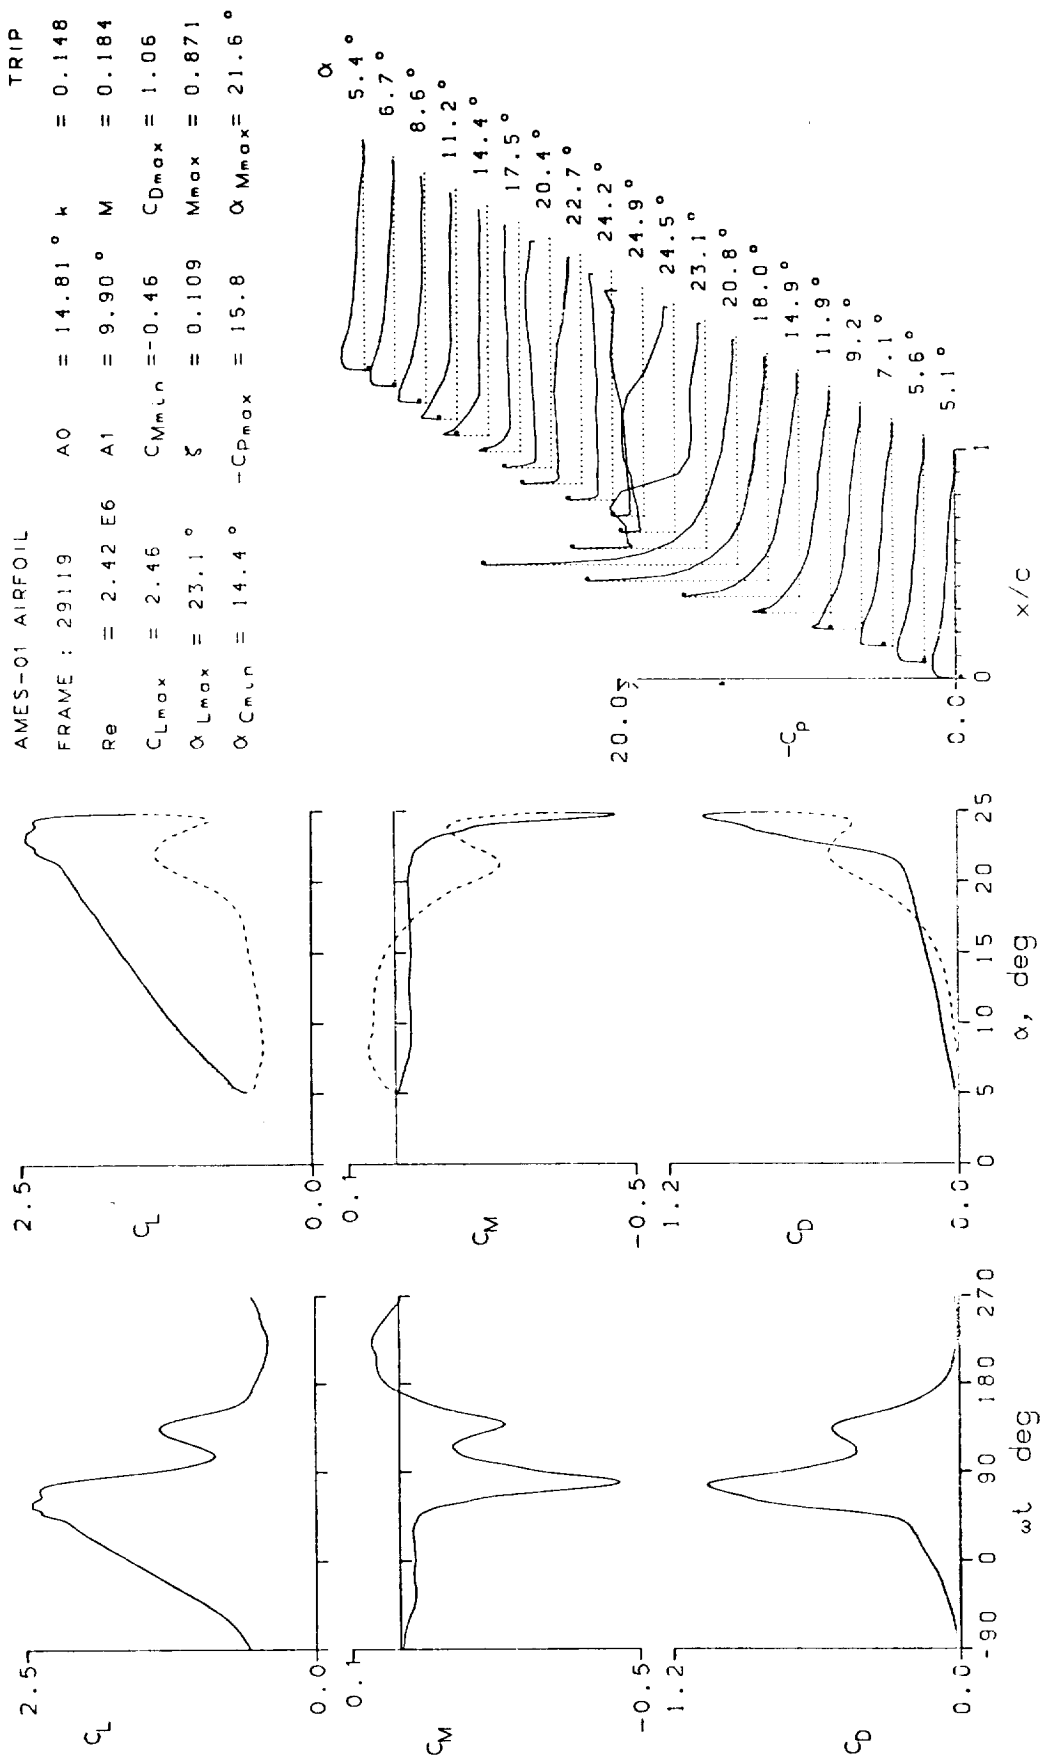


Figure 13.- Continued.

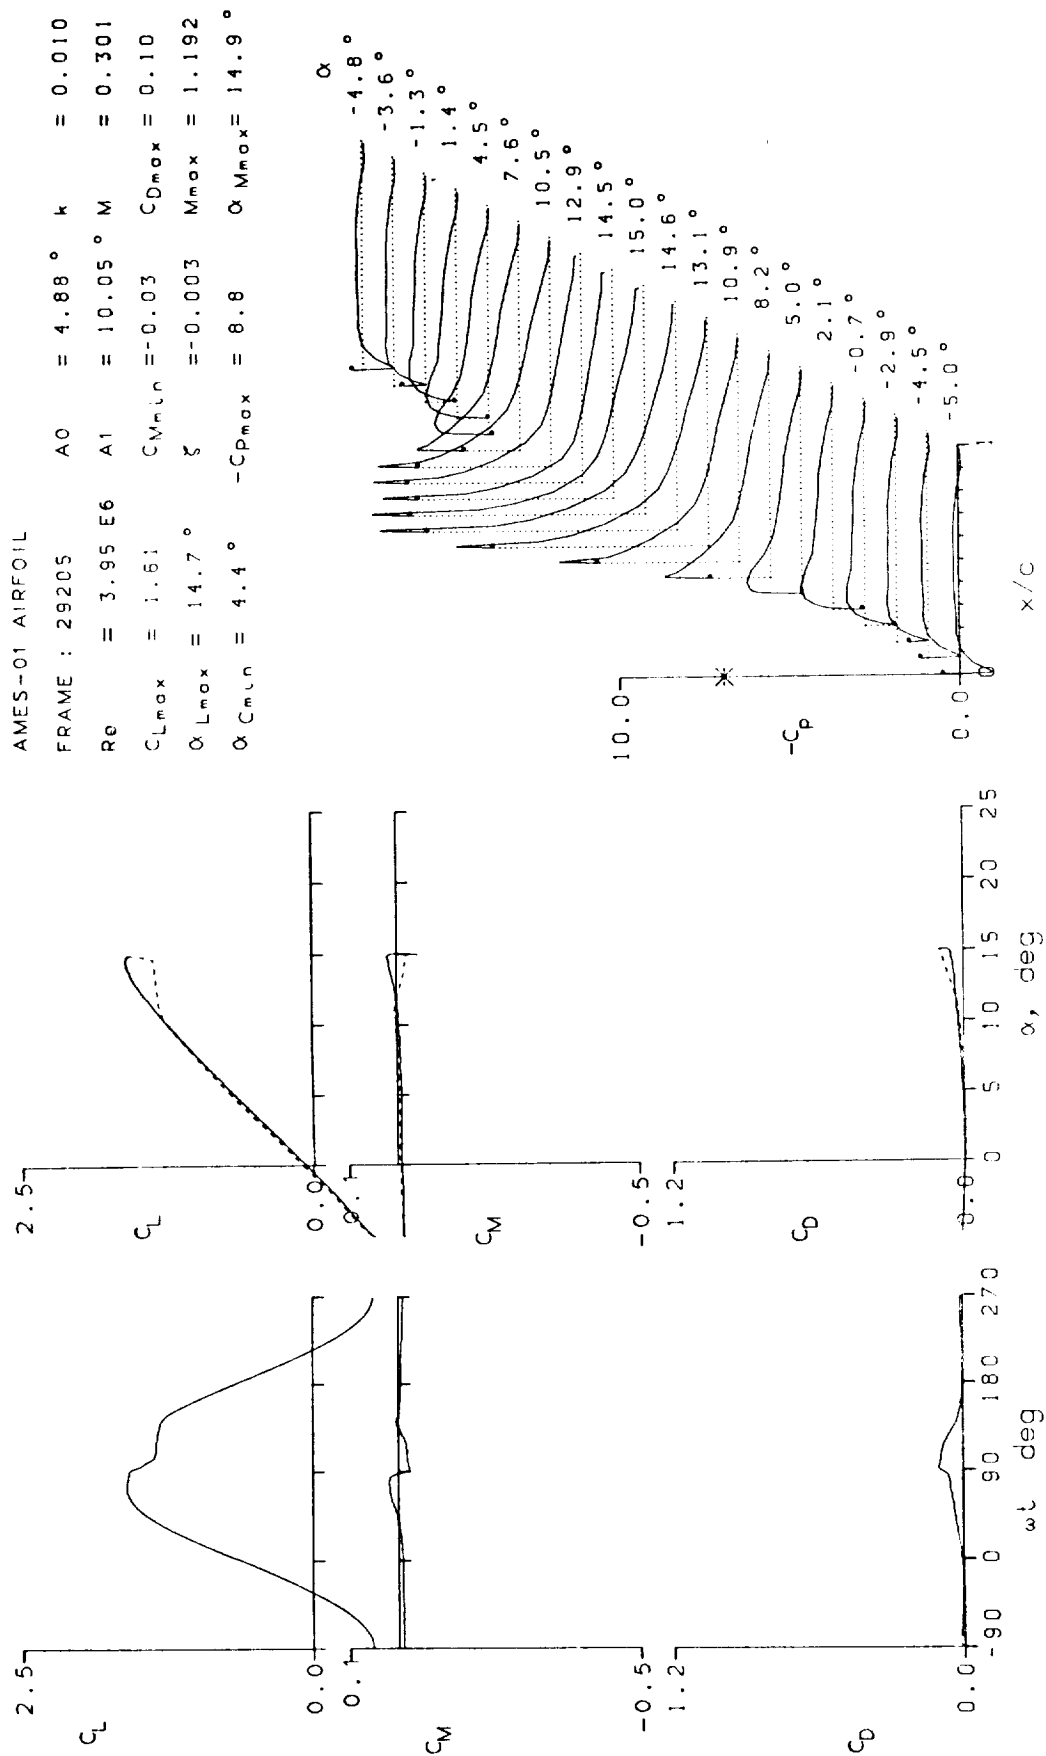


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 29207	A0 = 4.80 °	k = 0.050
Re = 3.92 E6	A1 = 10.08 °	M = 0.301
C _{Lmax} = 1.69	C _{Mmin} = -0.03	C _{Dmax} = 0.09
α _{Lmax} = 14.8 °	ξ = 0.103	M _{max} = 1.252
α _{Cmin} = 4.3 °	-C _{pmax} = 9.3	α _{Mmax} = 14.9 °

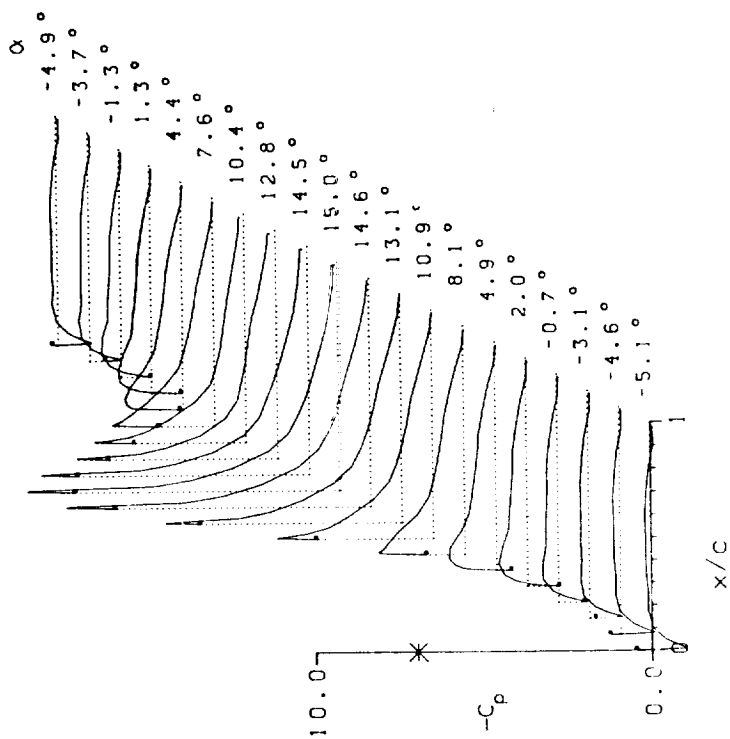
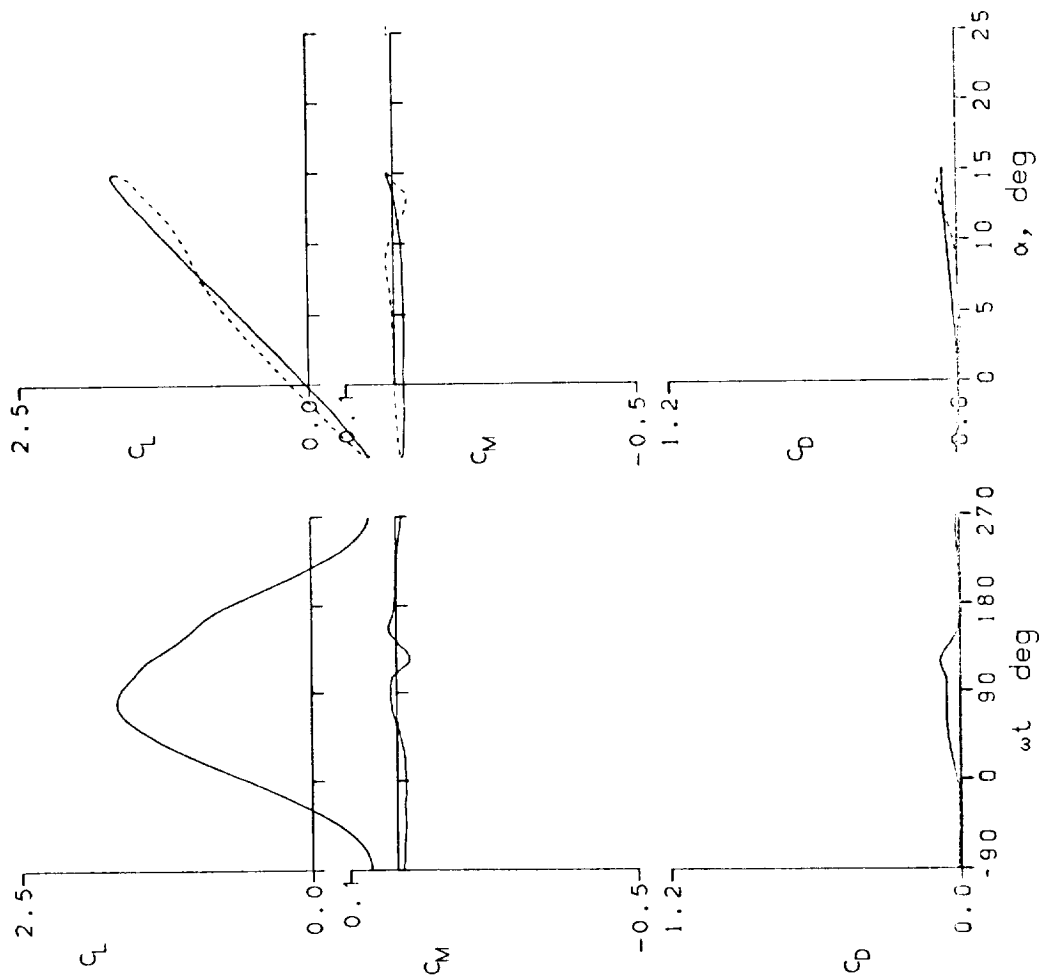


Figure 13.- Continued.

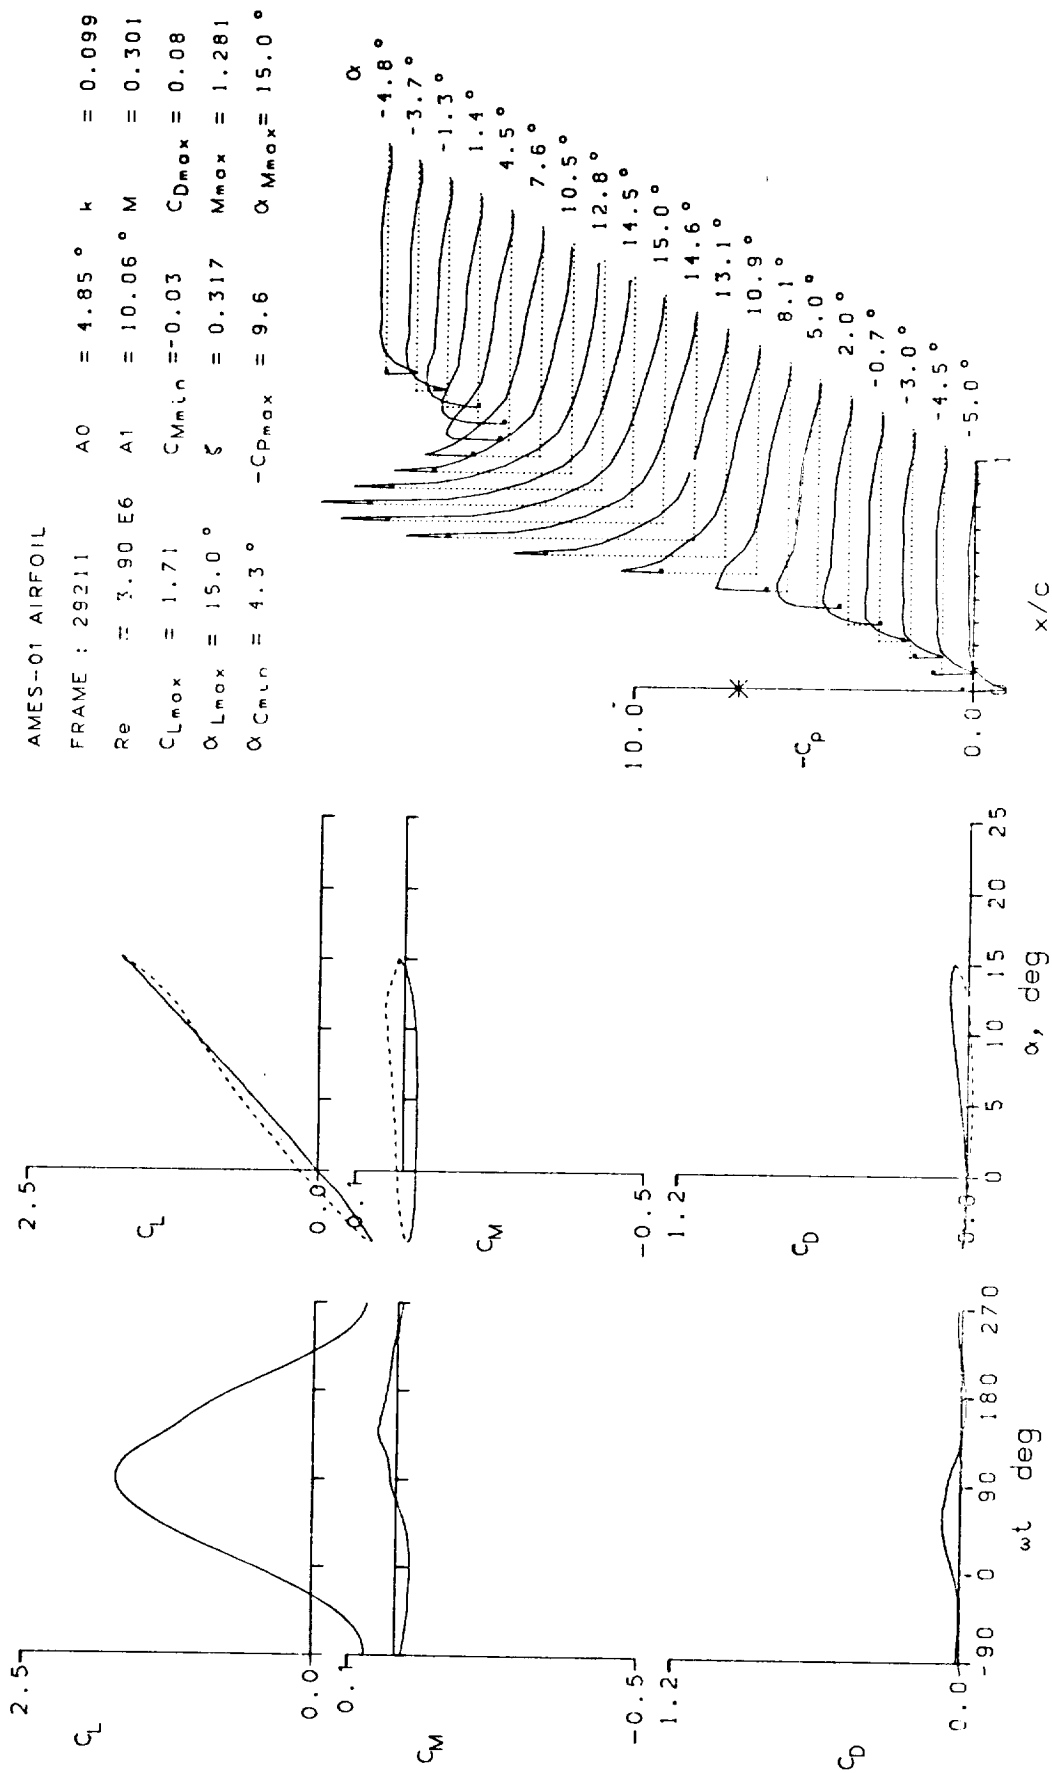


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 29213	A0 = 4.80 °	k = 0.148
Re = 3.90 E6	A1 = 10.06 °	M = 0.301
CLmax = 1.74	CMmin = -0.05	CDmax = 0.10
αLmax = 14.9 °	ξ = 0.473	Mmax = 1.317
αCMmin = 4.4 °	-CPmax = 9.9	αMmax = 14.7 °

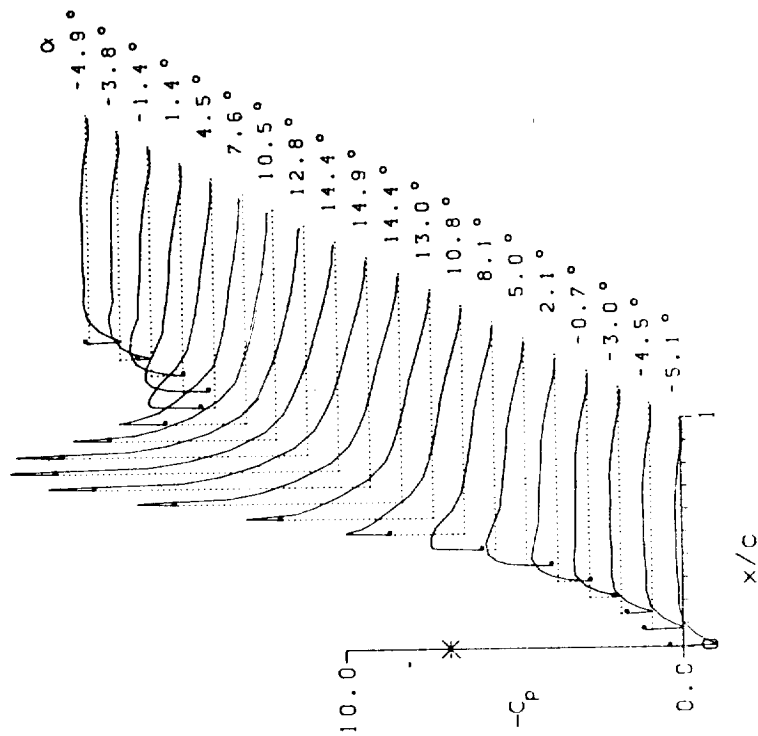
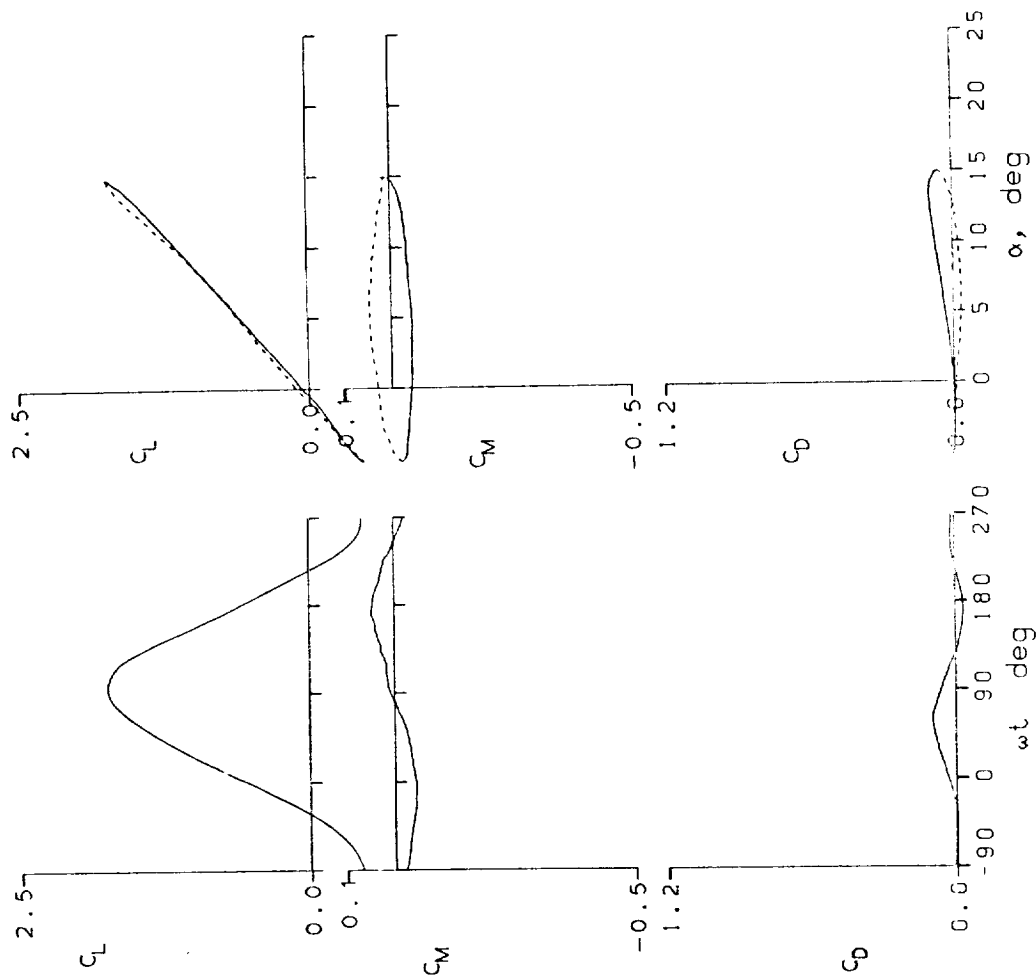


Figure 13.- Continued.

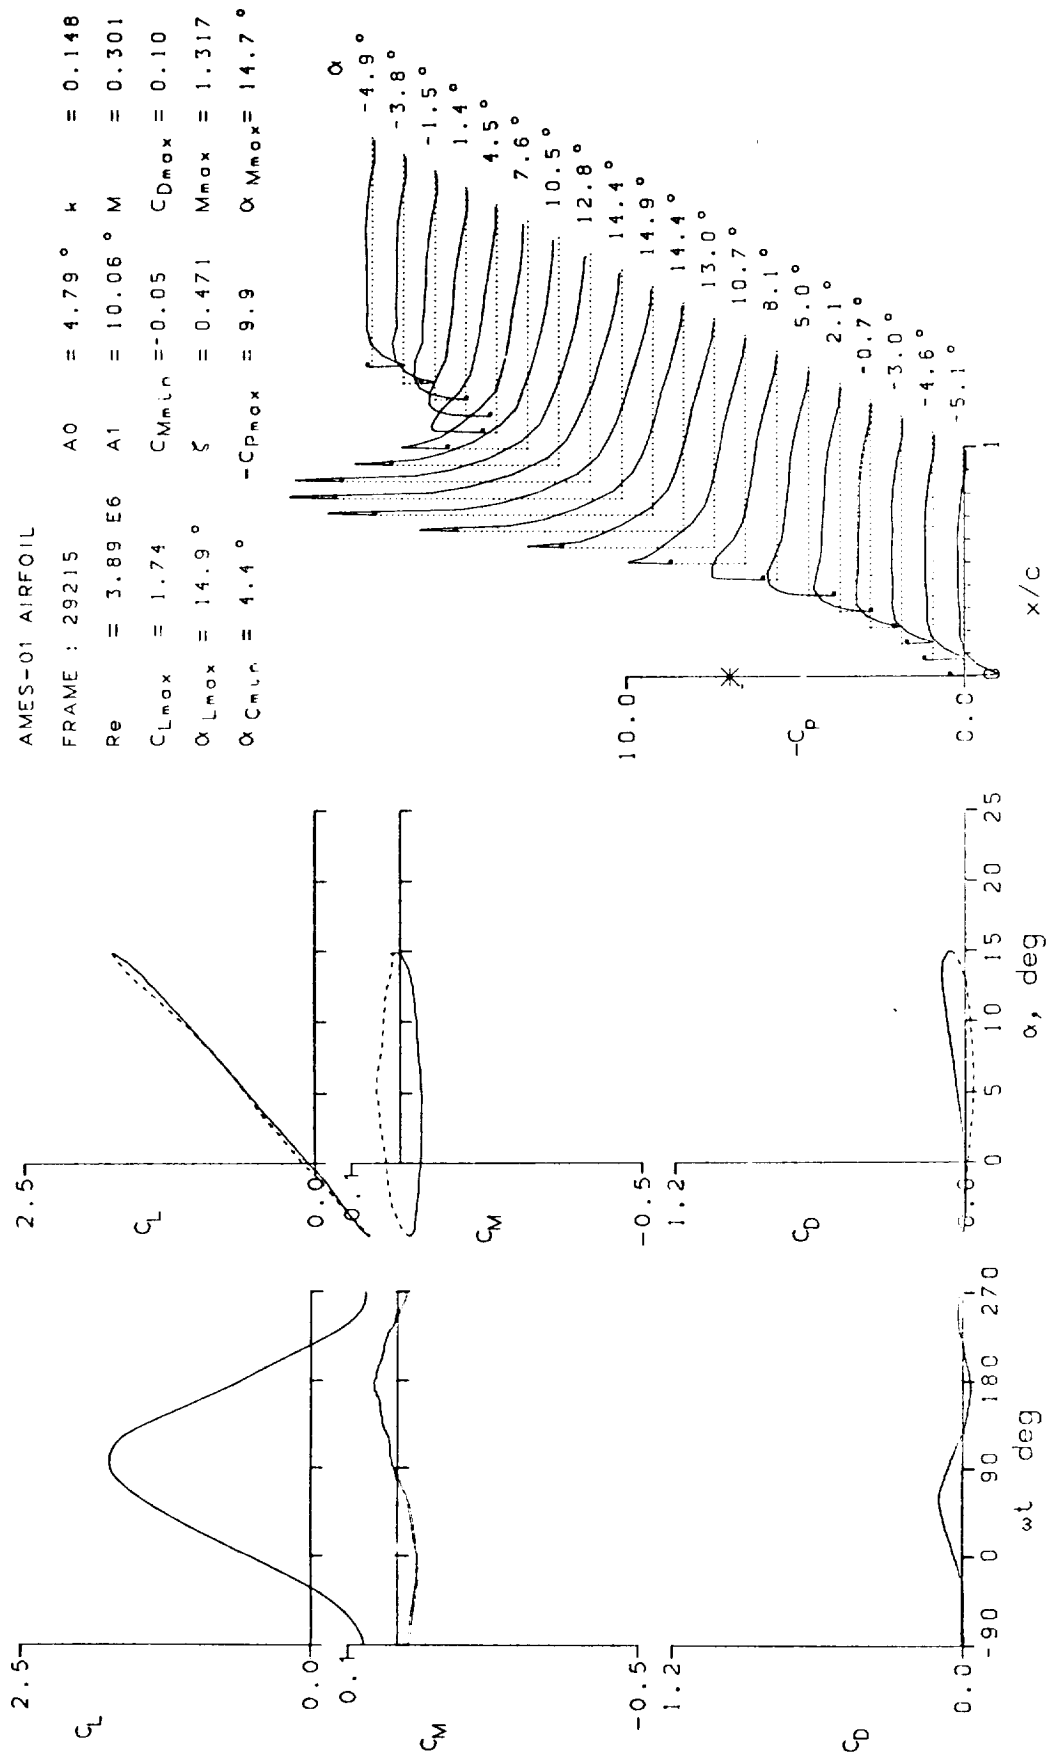


Figure 13.- Continued.


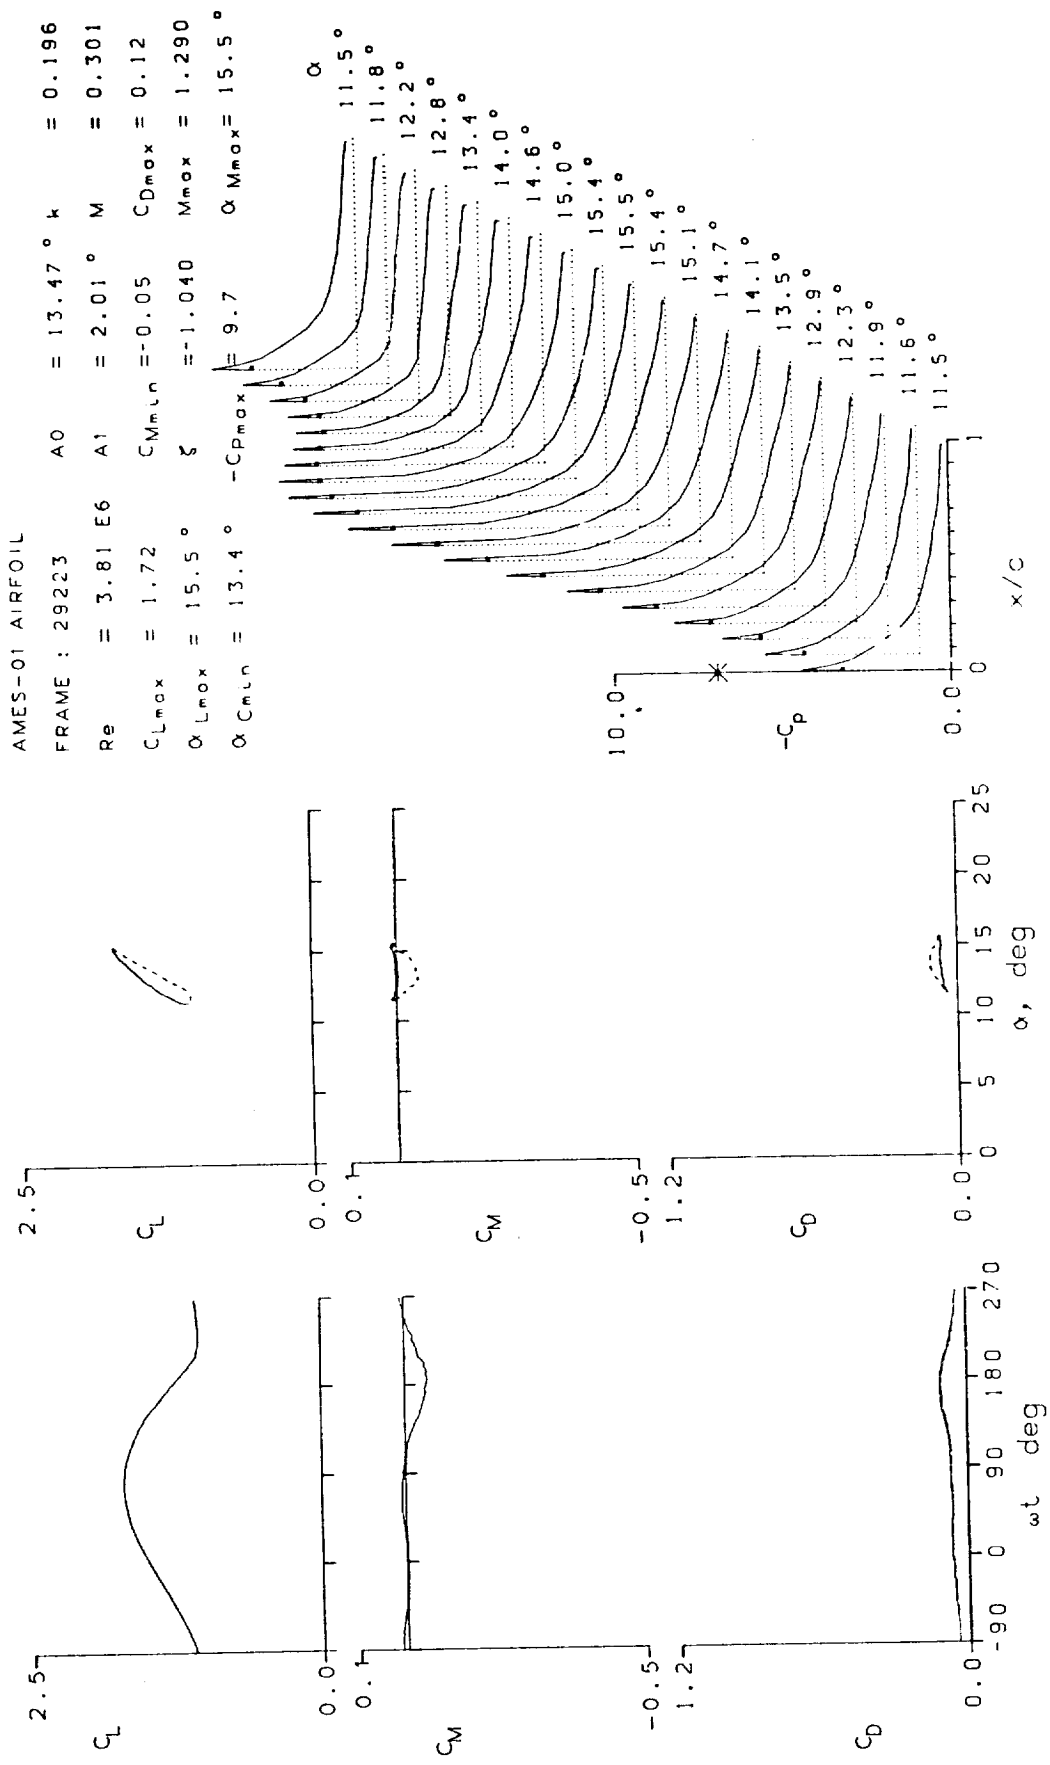


Figure 13.- Continued.

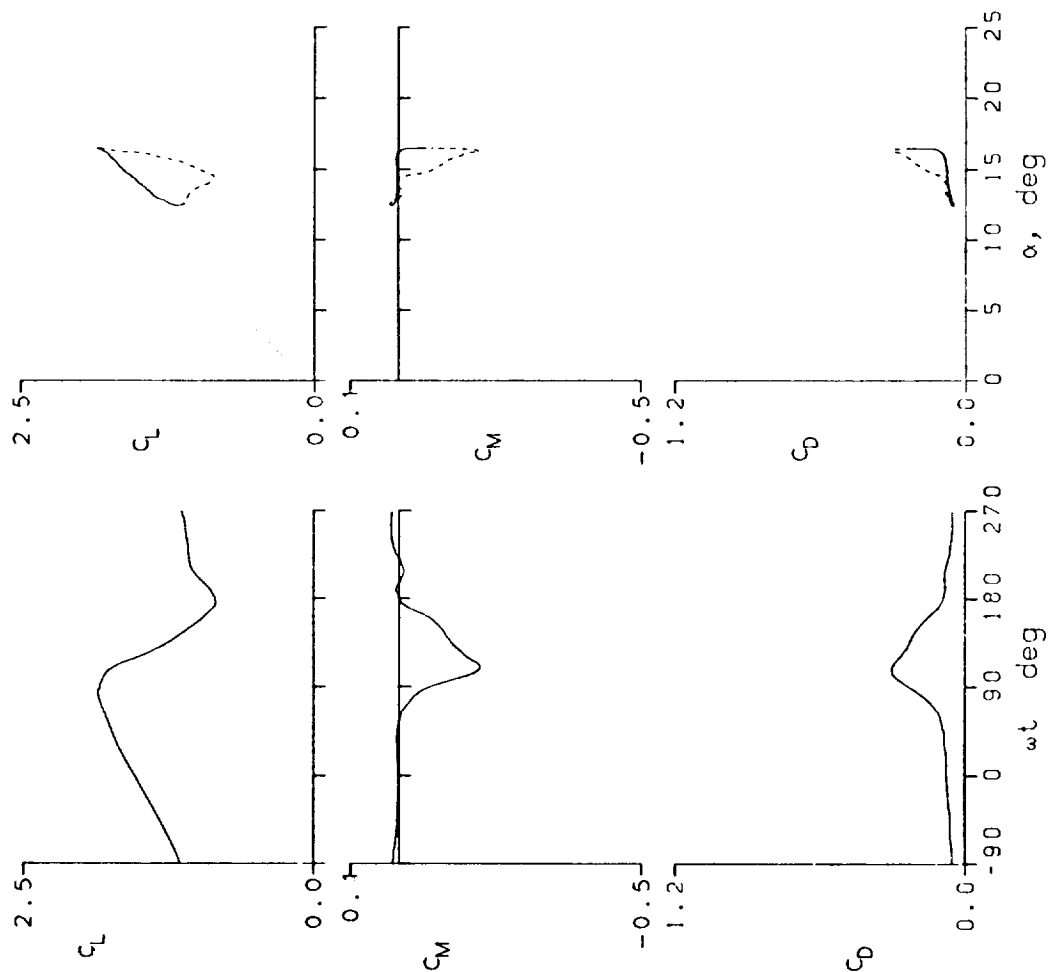

AMES-01 AIRFOIL

FRAME : 29304 $A_0 = 14.41^\circ$ $k = 0.197$
 $Re = 3.78 \text{ E}6$ $A_1 = 2.01^\circ$ $M = 0.300$
 $C_{Lmax} = 1.86$ $C_{Mmin} = -0.17$ $C_{Dmax} = 0.31$
 $\alpha_{Lmax} = 16.5^\circ$ $\xi = -1.836$ $M_{max} = 1.305$
 $\alpha_{Cmin} = 14.3^\circ$ $-C_{pmax} = 9.9$ $\alpha_{Mmax} = 16.2^\circ$

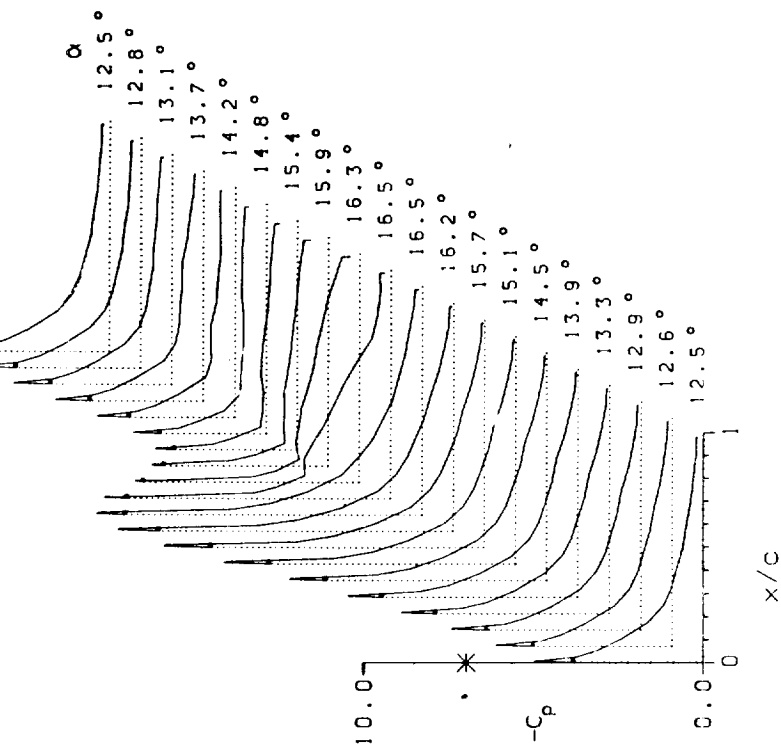


Figure 13.- Continued.

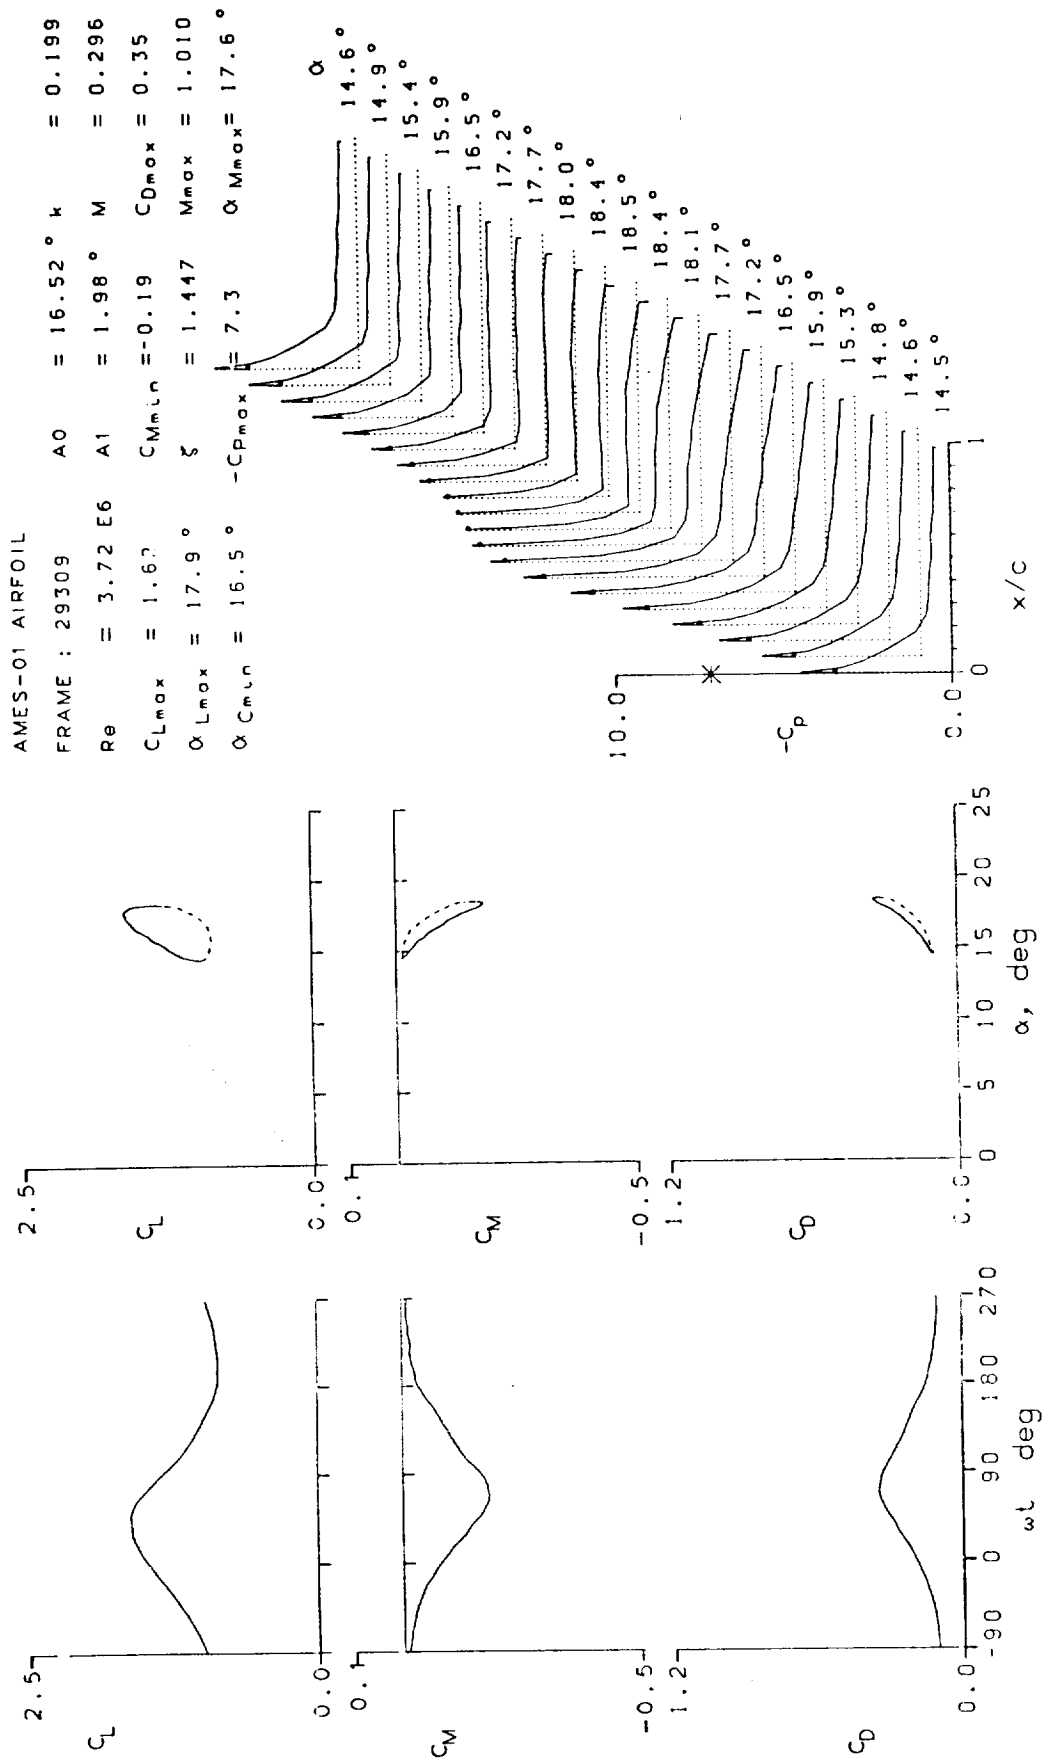


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 29317	A0 = 14.81°	k = 0.102
Re = 0.47 E6	A1 = 9.91°	M = 0.035
C _{Lmax} = 2.34	C _{Mmin} = -0.33	C _{Dmax} = 0.88
α _{Lmax} = 20.5°	ξ = 0.405	M _{max} = 0.120
α _{Cmin} = 14.4°	-C _{Dmax} = 10.7	α _{Mmax} = 17.8°

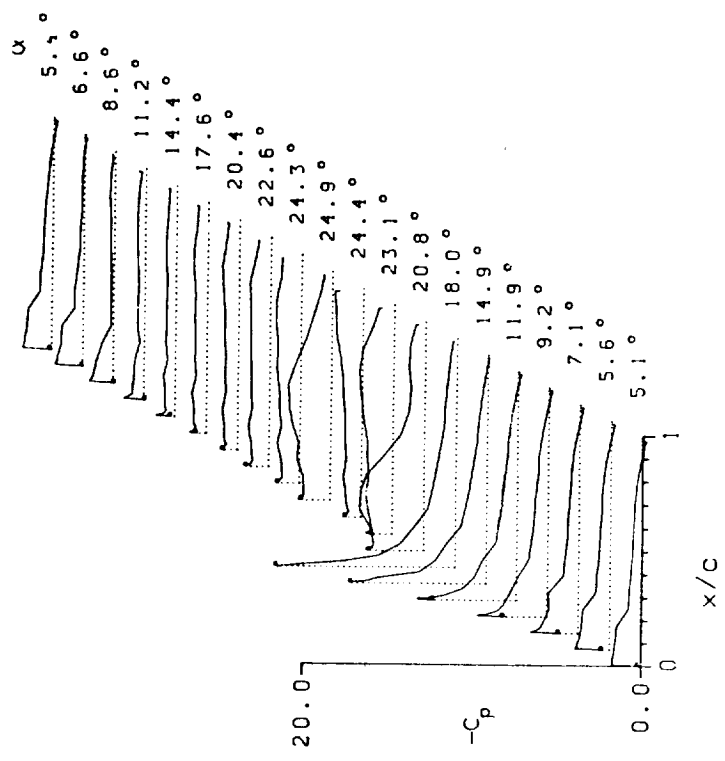
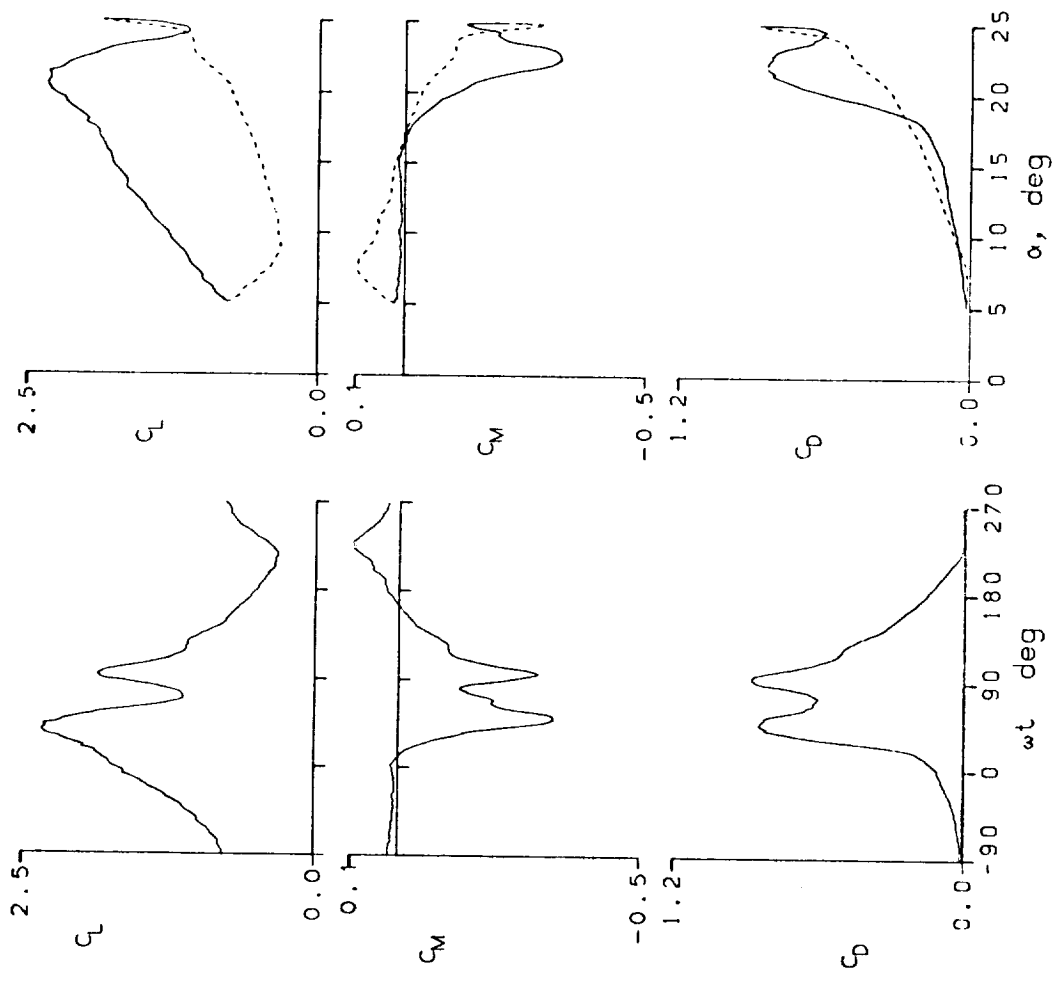


Figure 13.- Continued.


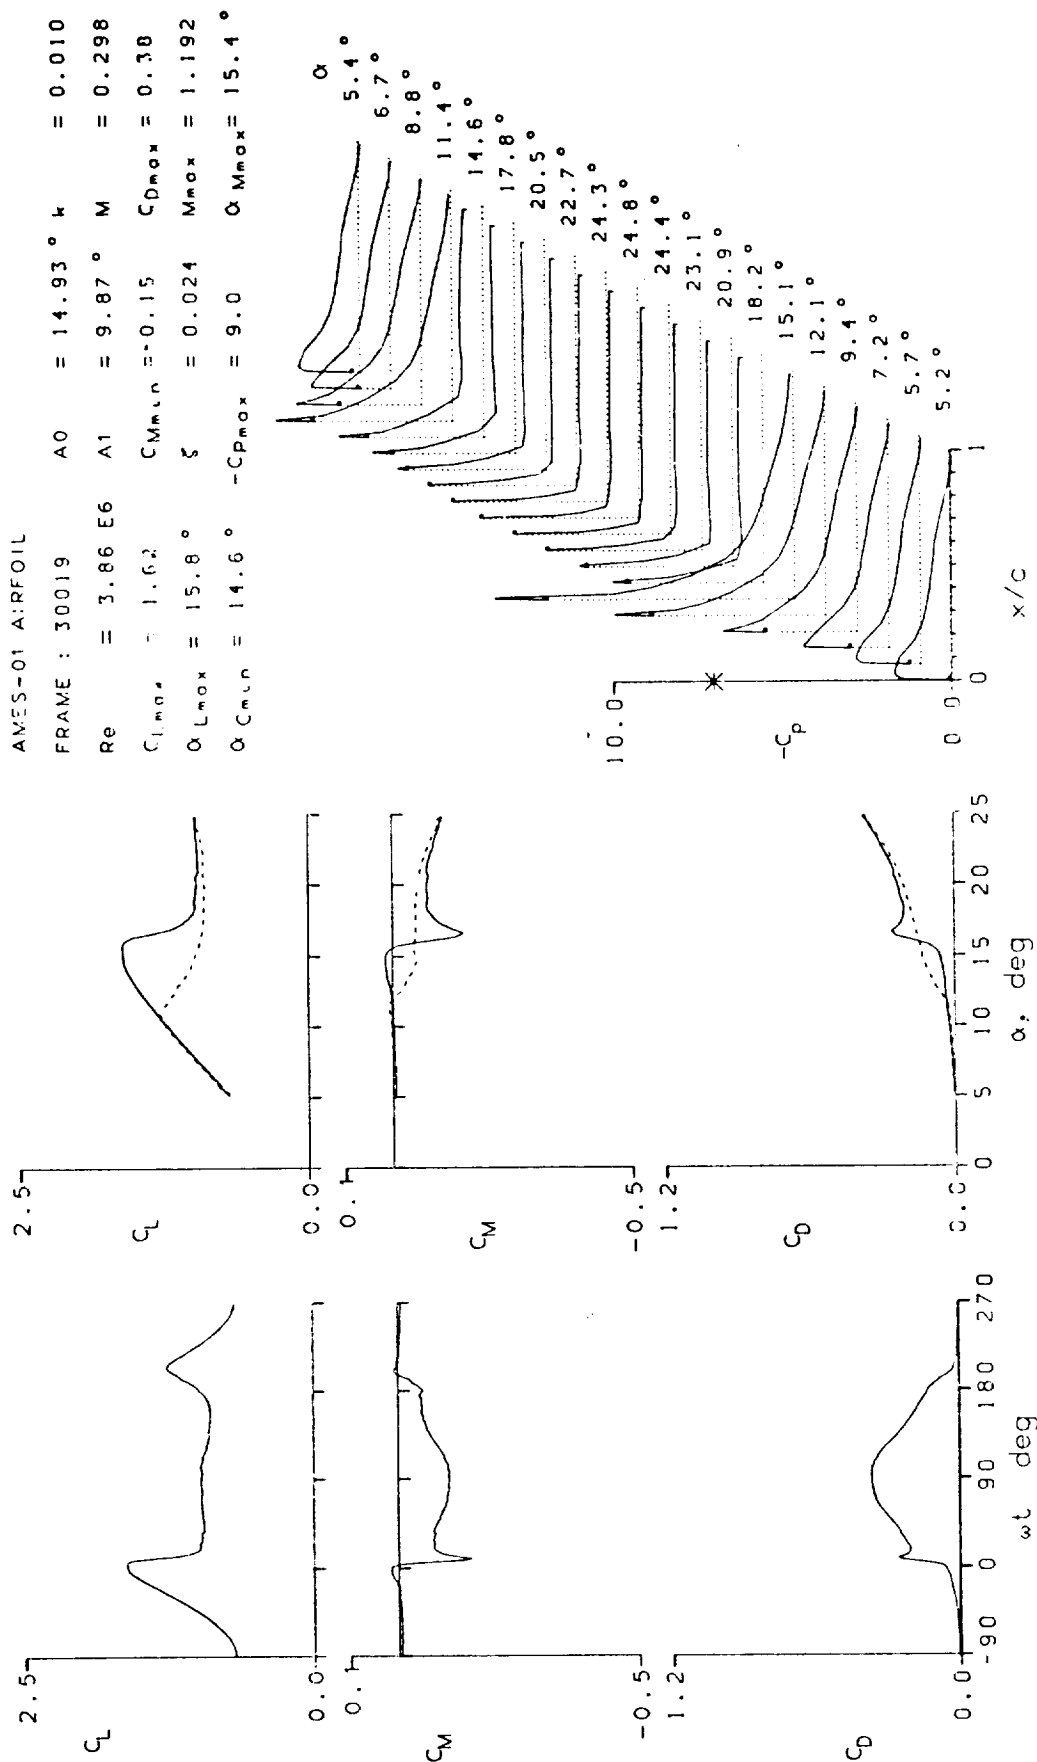


Figure 13.- Continued.

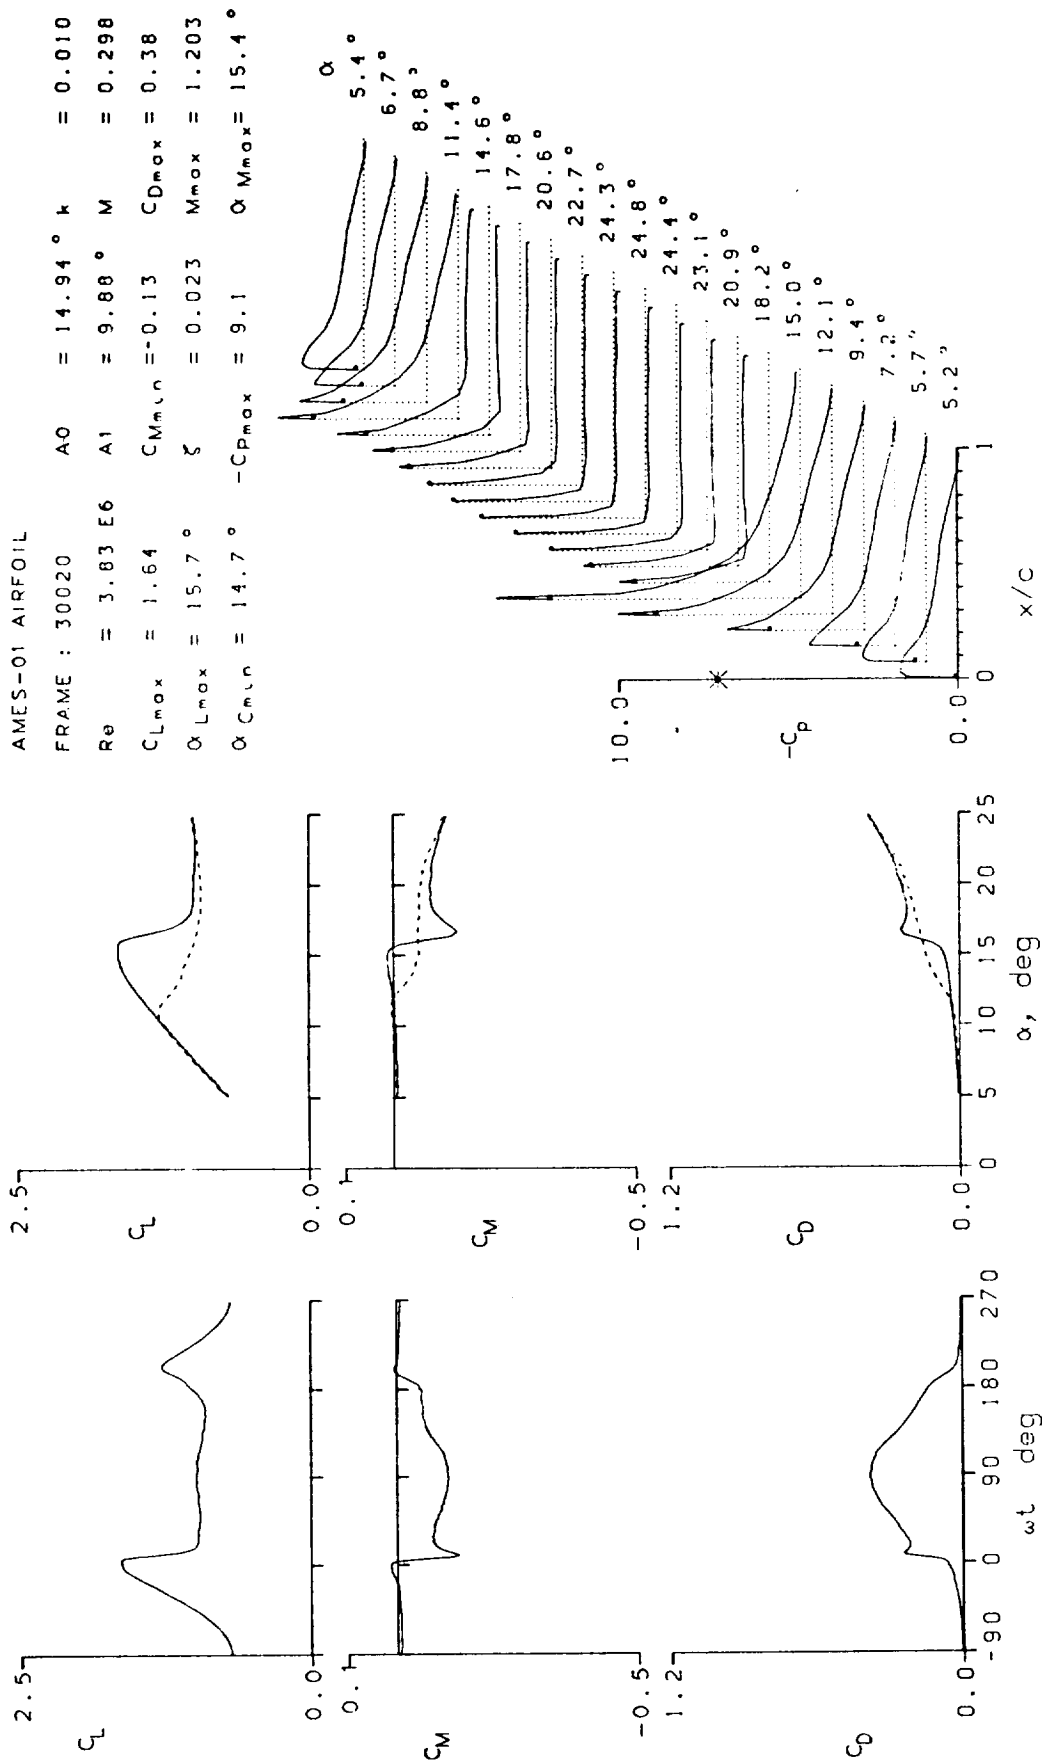

AMES-01 AIRFOIL

FRAME : 30105	A0 = 9.82 °	k = 0.010
Re = 3.84 E6	A1 = 9.91 °	M = 0.301
$C_{Lmax} = 1.61$	$C_{Mmin} = -0.12$	$C_{Dmax} = 0.23$
$\alpha_{Lmax} = 14.5 °$	$\zeta = -0.013$	$M_{max} = 1.195$
$\alpha_{Cmin} = 9.3 °$	$-C_{pmax} = 8.8$	$\alpha_{Mmax} = 15.0 °$

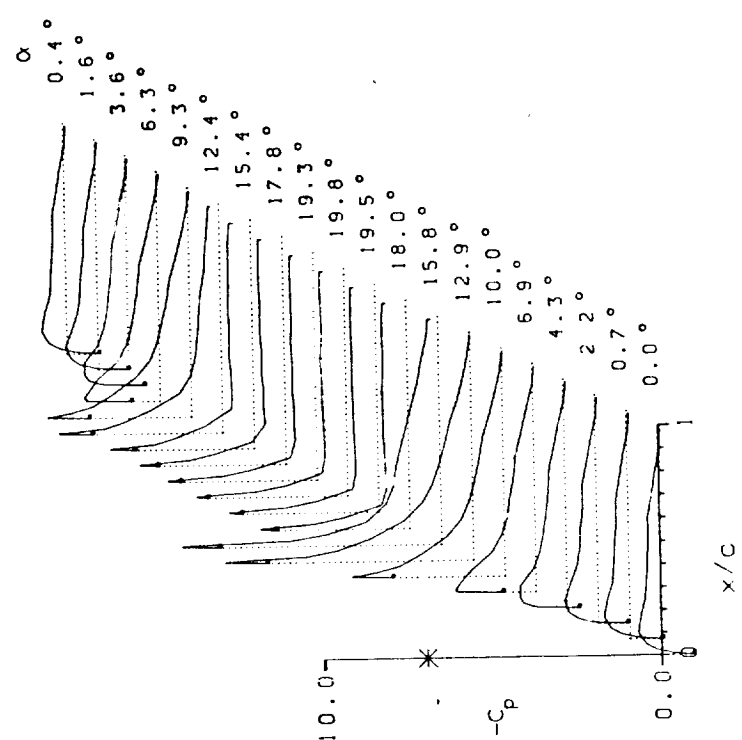
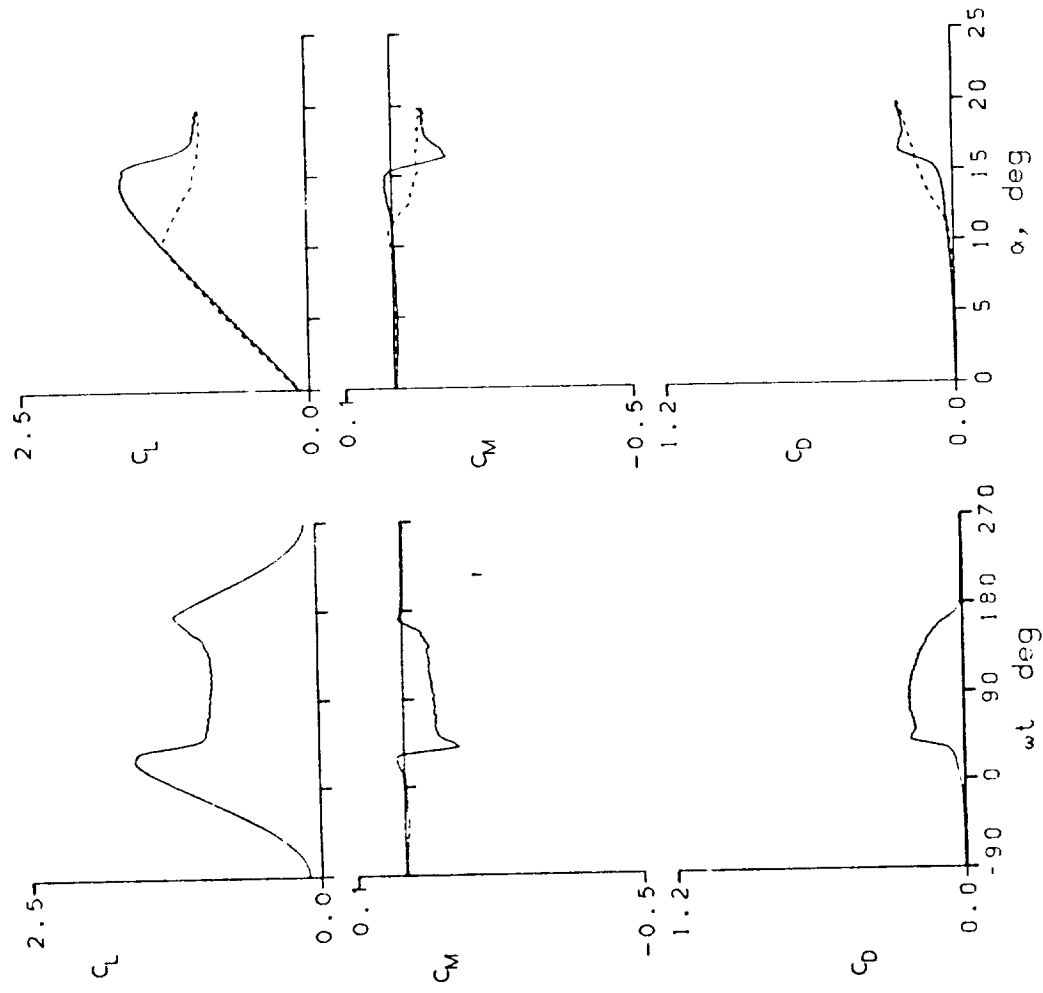


Figure 13.- Continued.

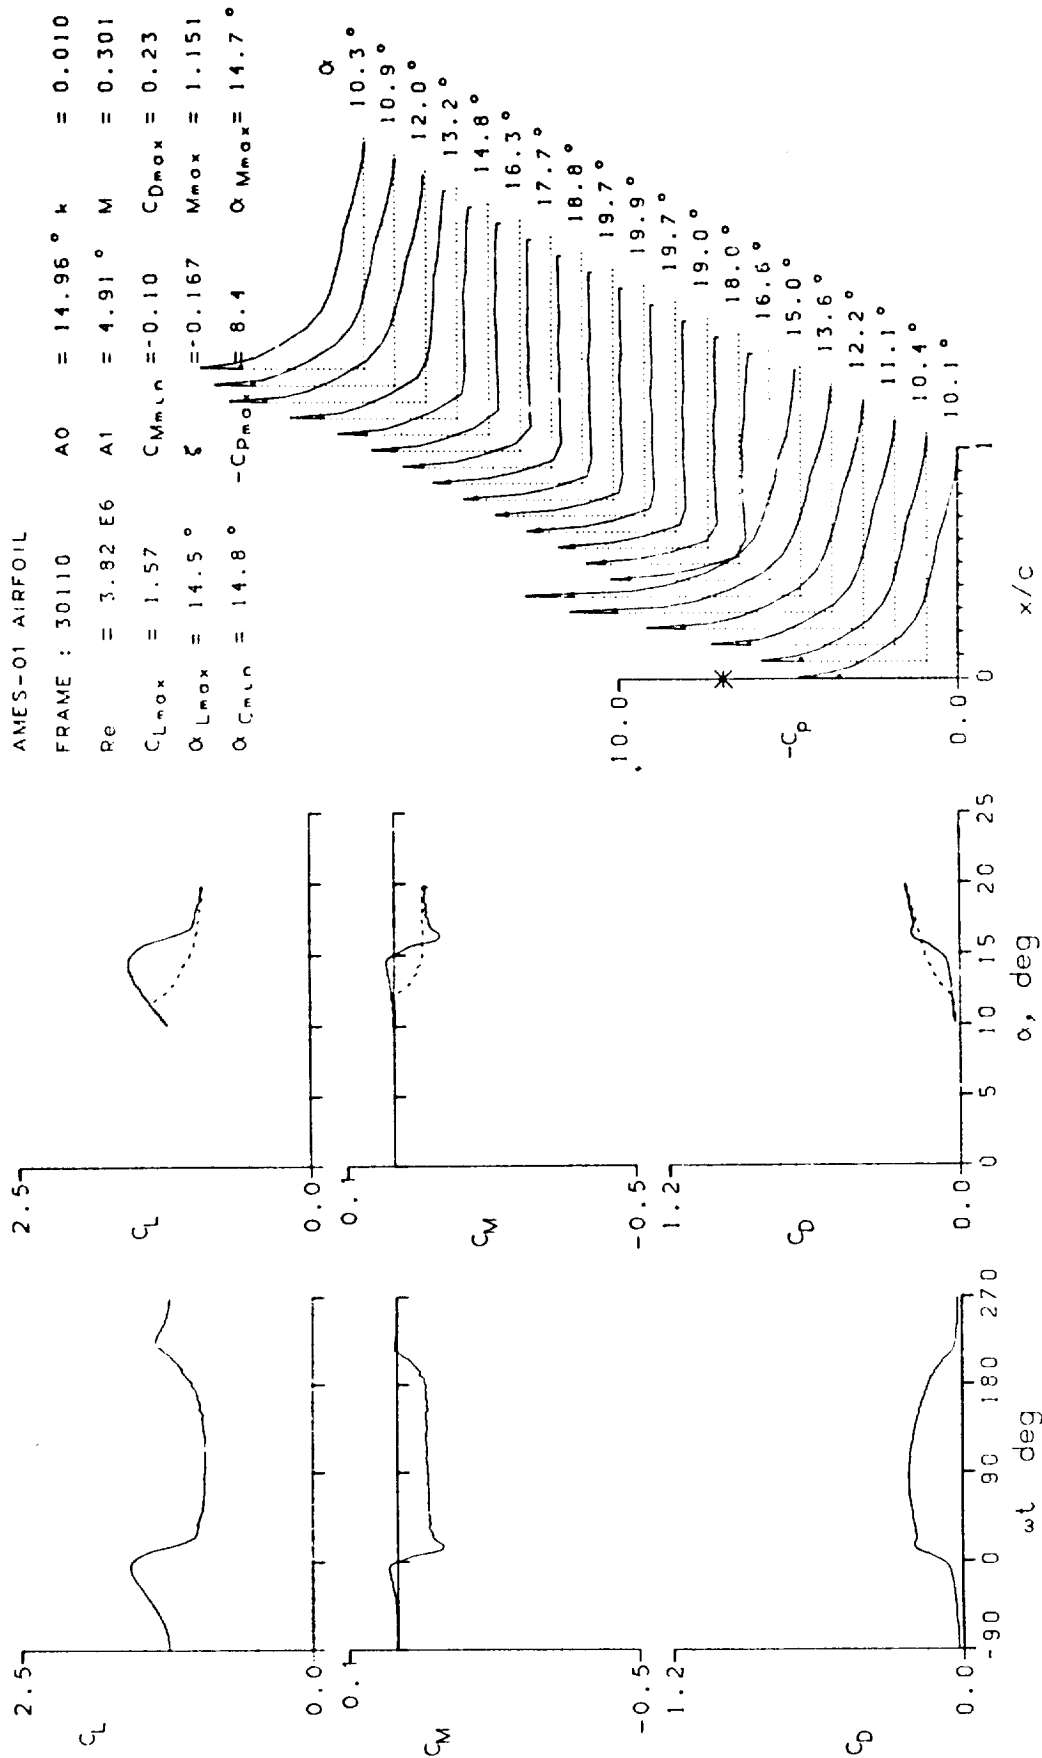


Figure 13.- Continued.

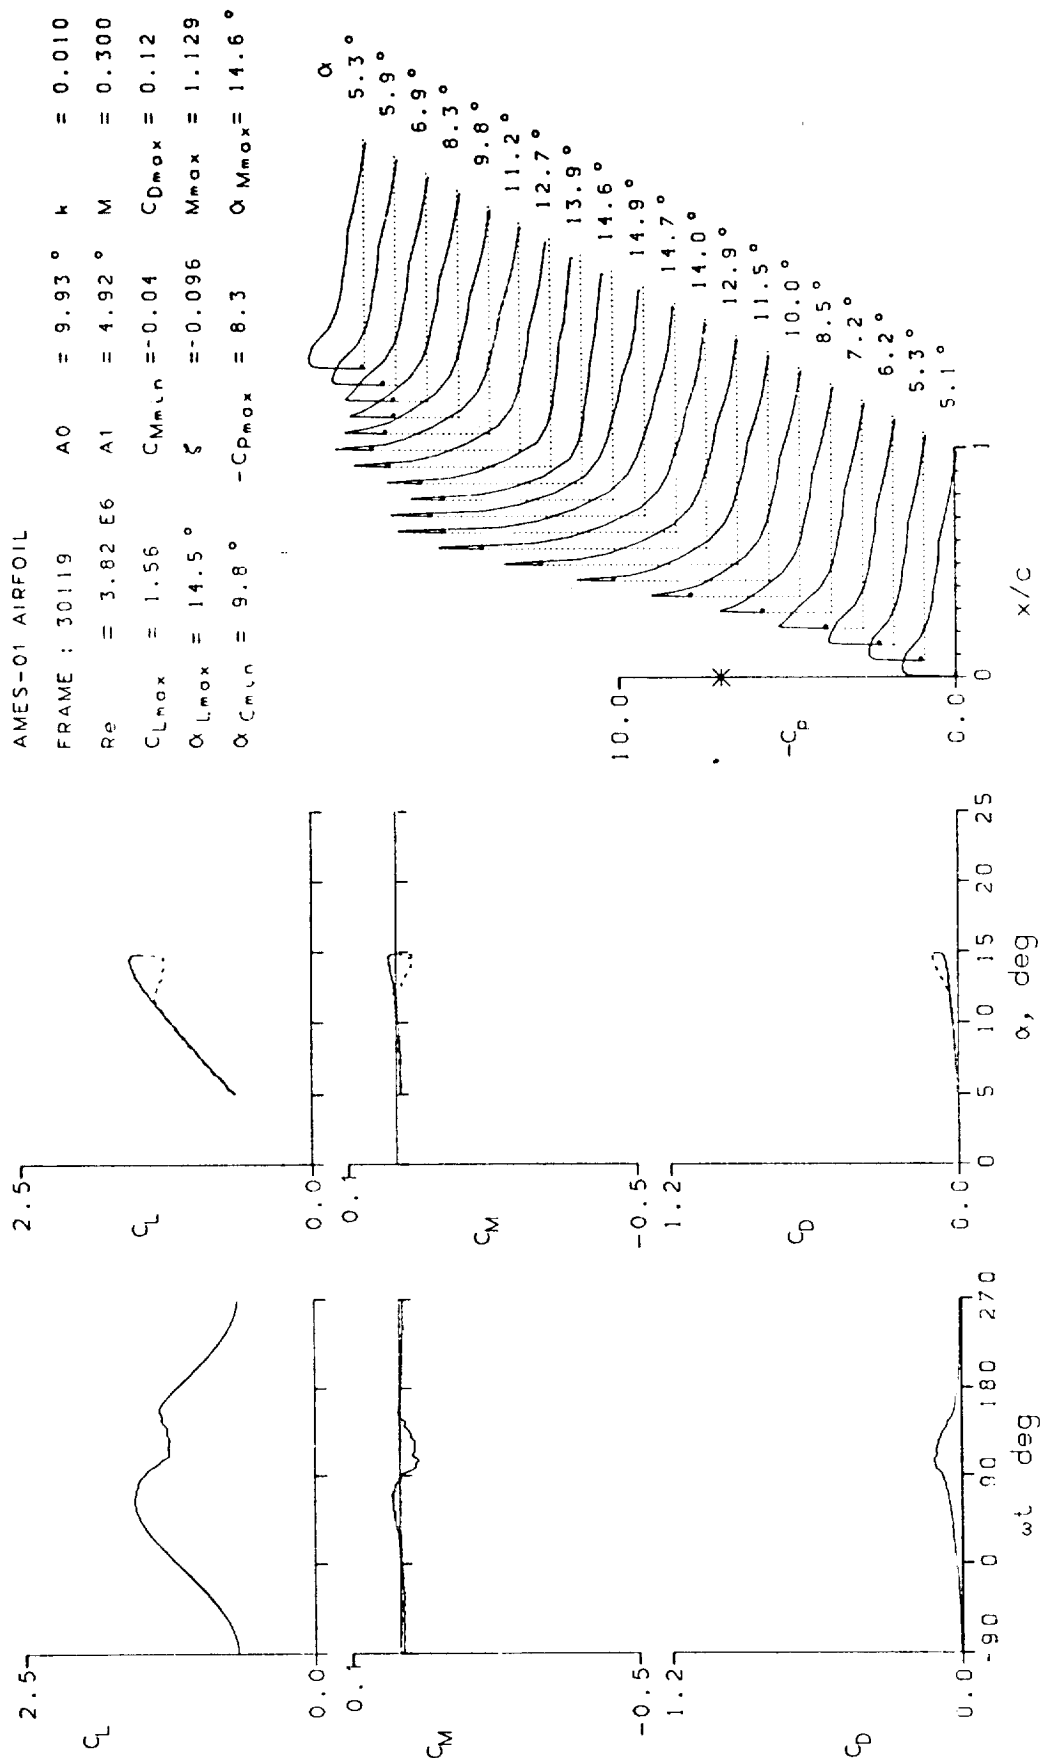


Figure 13.- Continued.

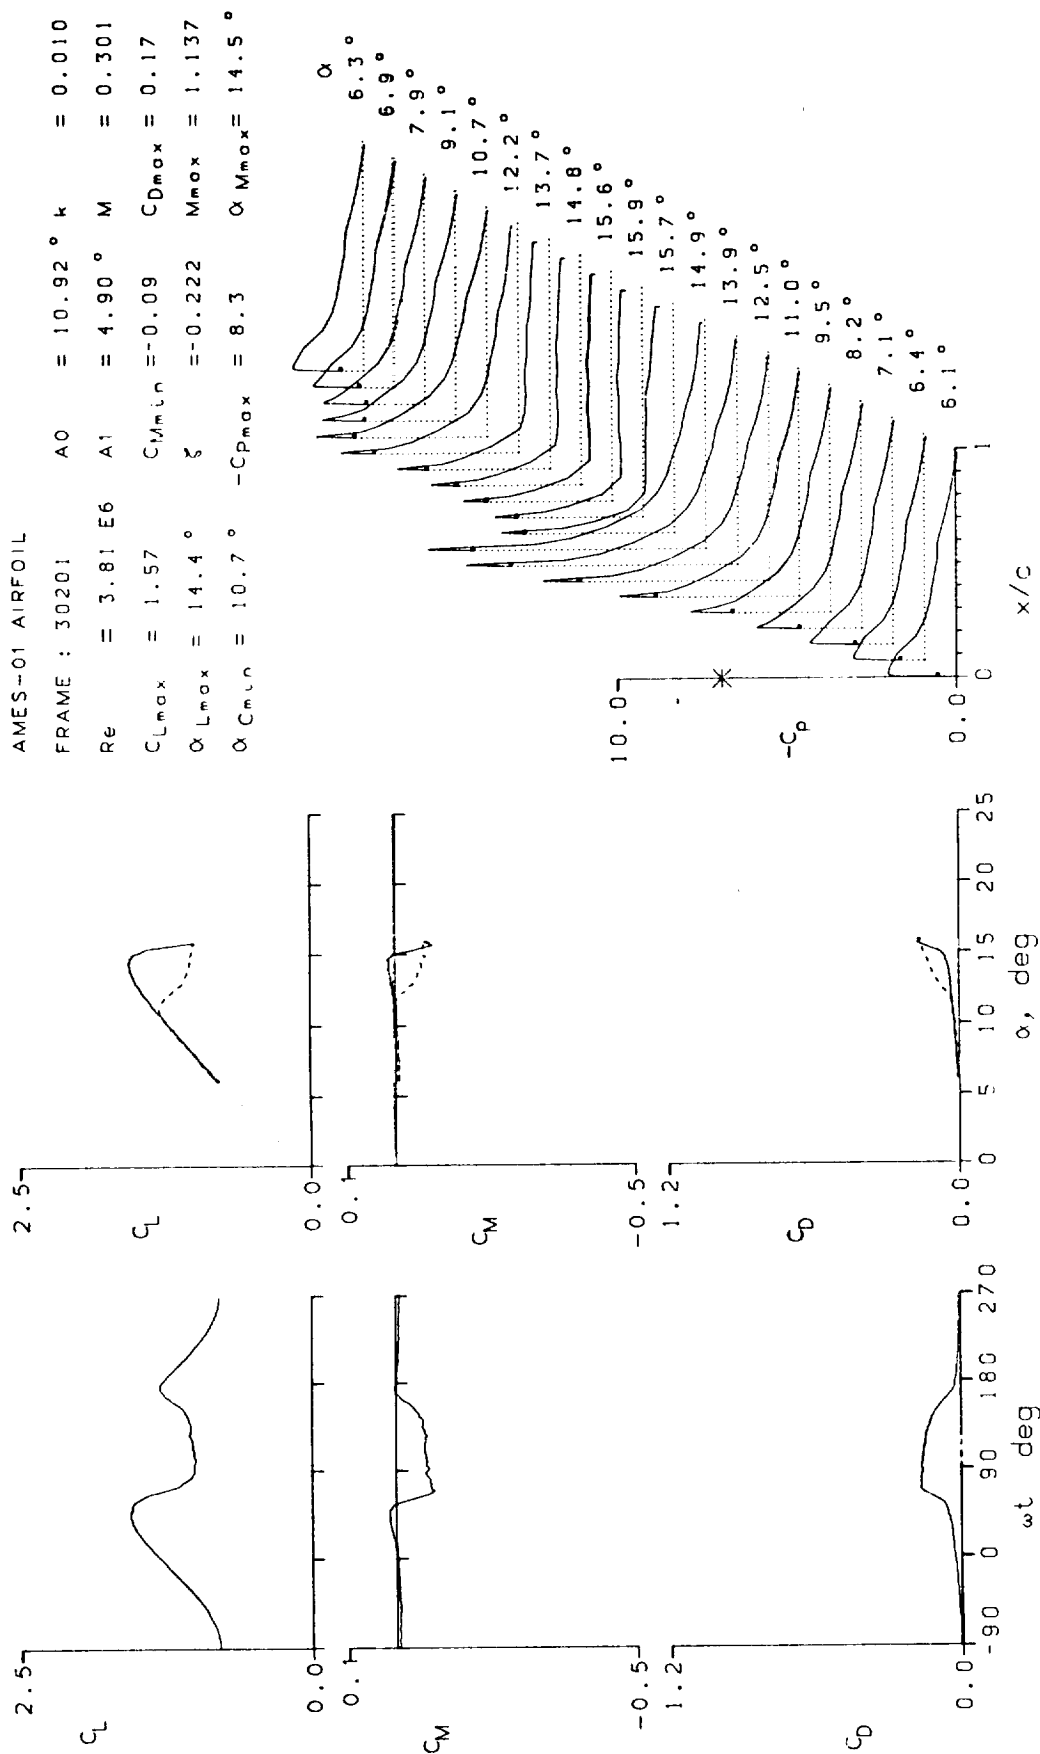


Figure 13.- Continued.

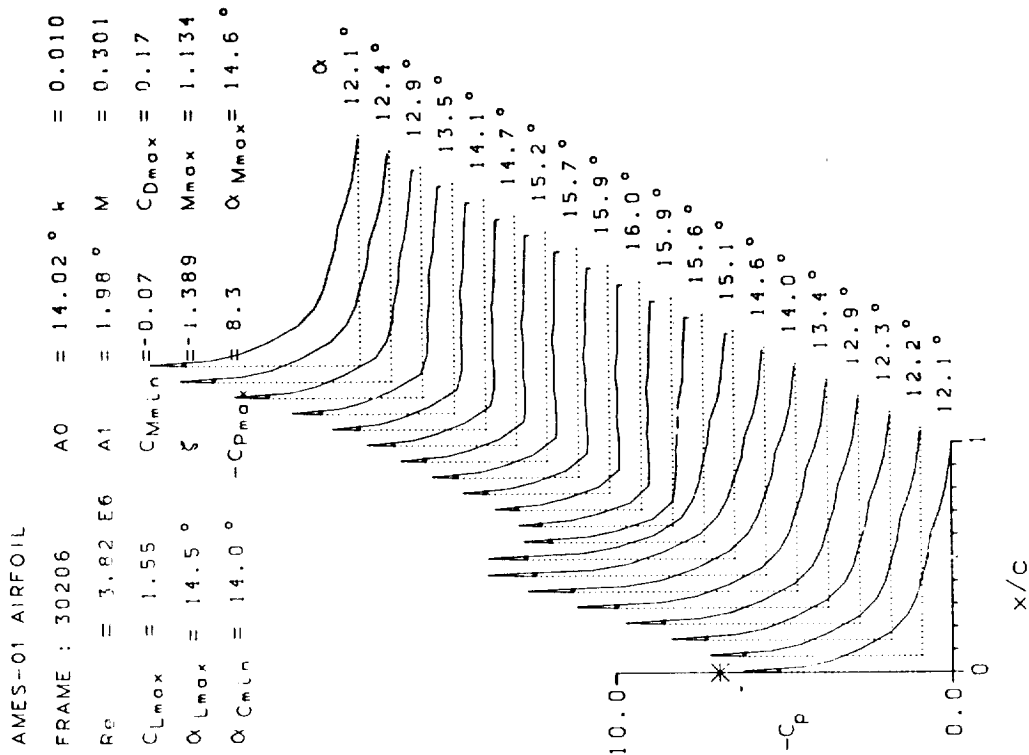
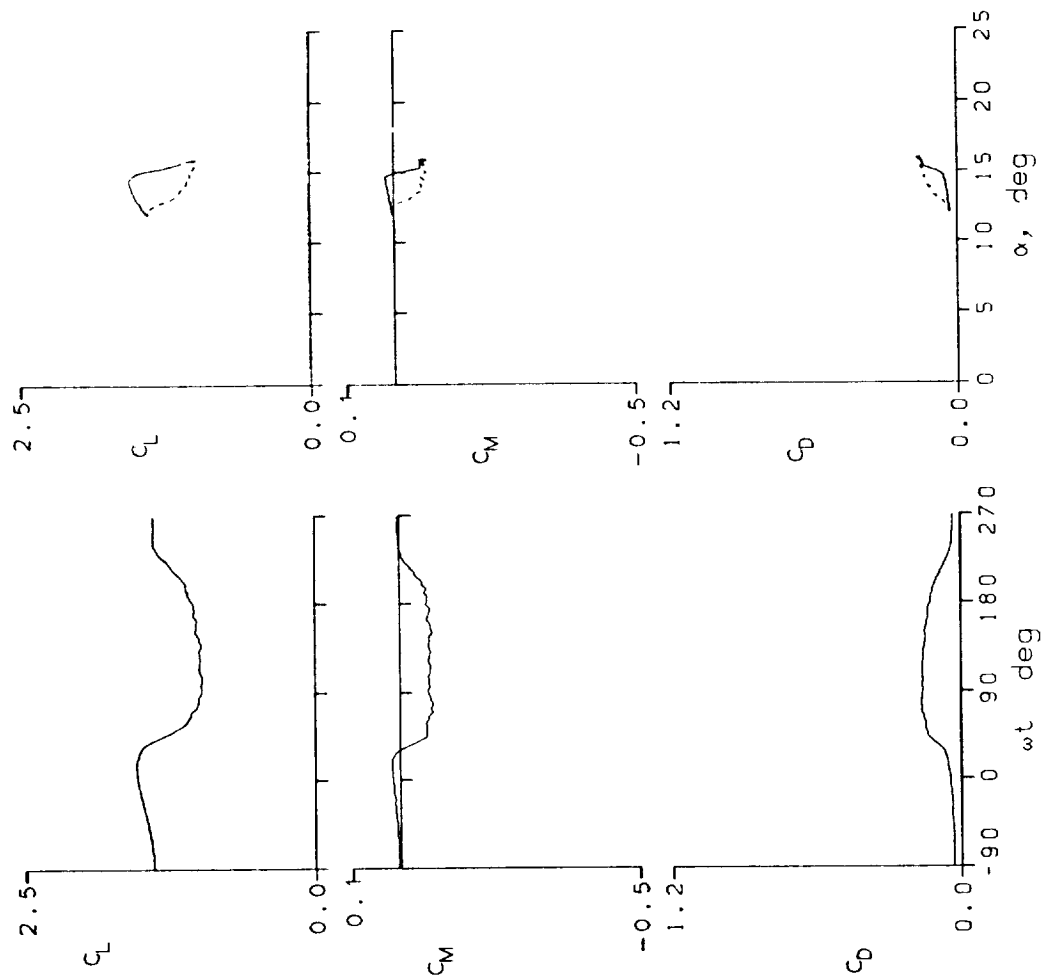


Figure 13.- Continued.

AMES-01 AIRFOIL
 FRAME : 30215 A0 = 7.30° k = 0.010
 Re = 2.42 E6 A1 = 10.00° M = 0.183
 $C_{Lmax} = 1.66$ $C_{Mmin} = -0.09$ $C_{Dmax} = 0.20$
 $\alpha_{Lmax} = 16.5^\circ$ $\zeta = -0.068$ $M_{max} = 0.654$
 $\alpha_{Cmin} = 6.8^\circ$ $-C_{Dmax} = 9.9$ $\alpha_{Mmax} = 16.5^\circ$

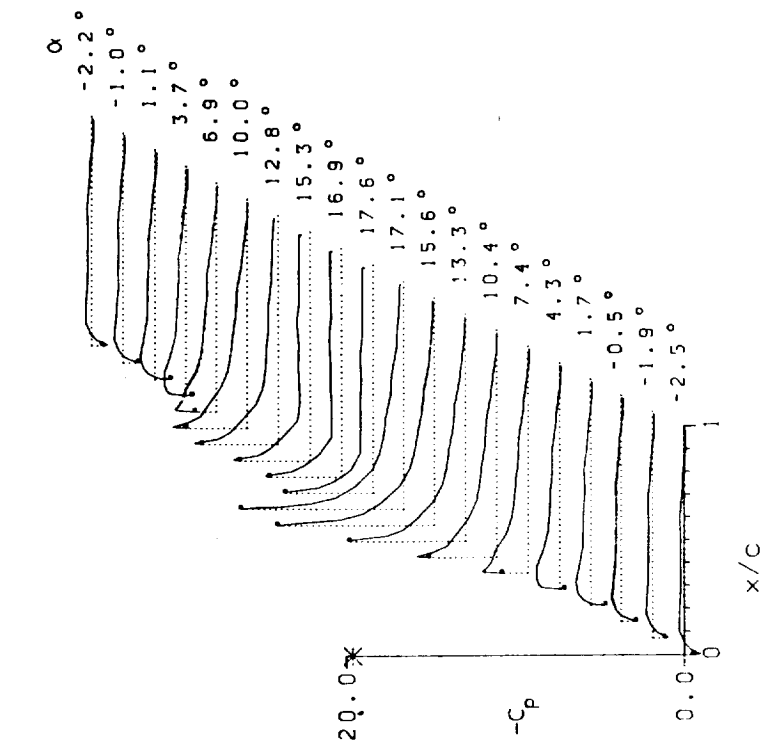
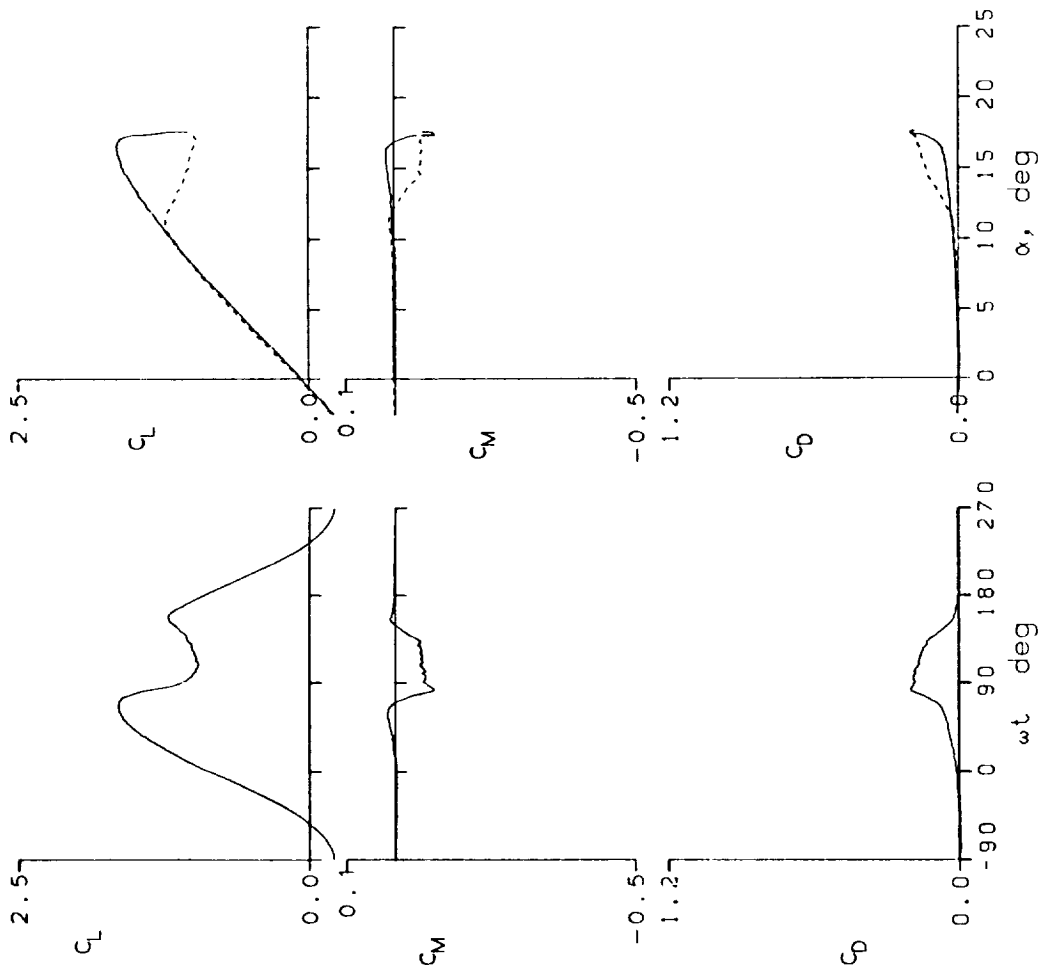


Figure 13.- Continued.

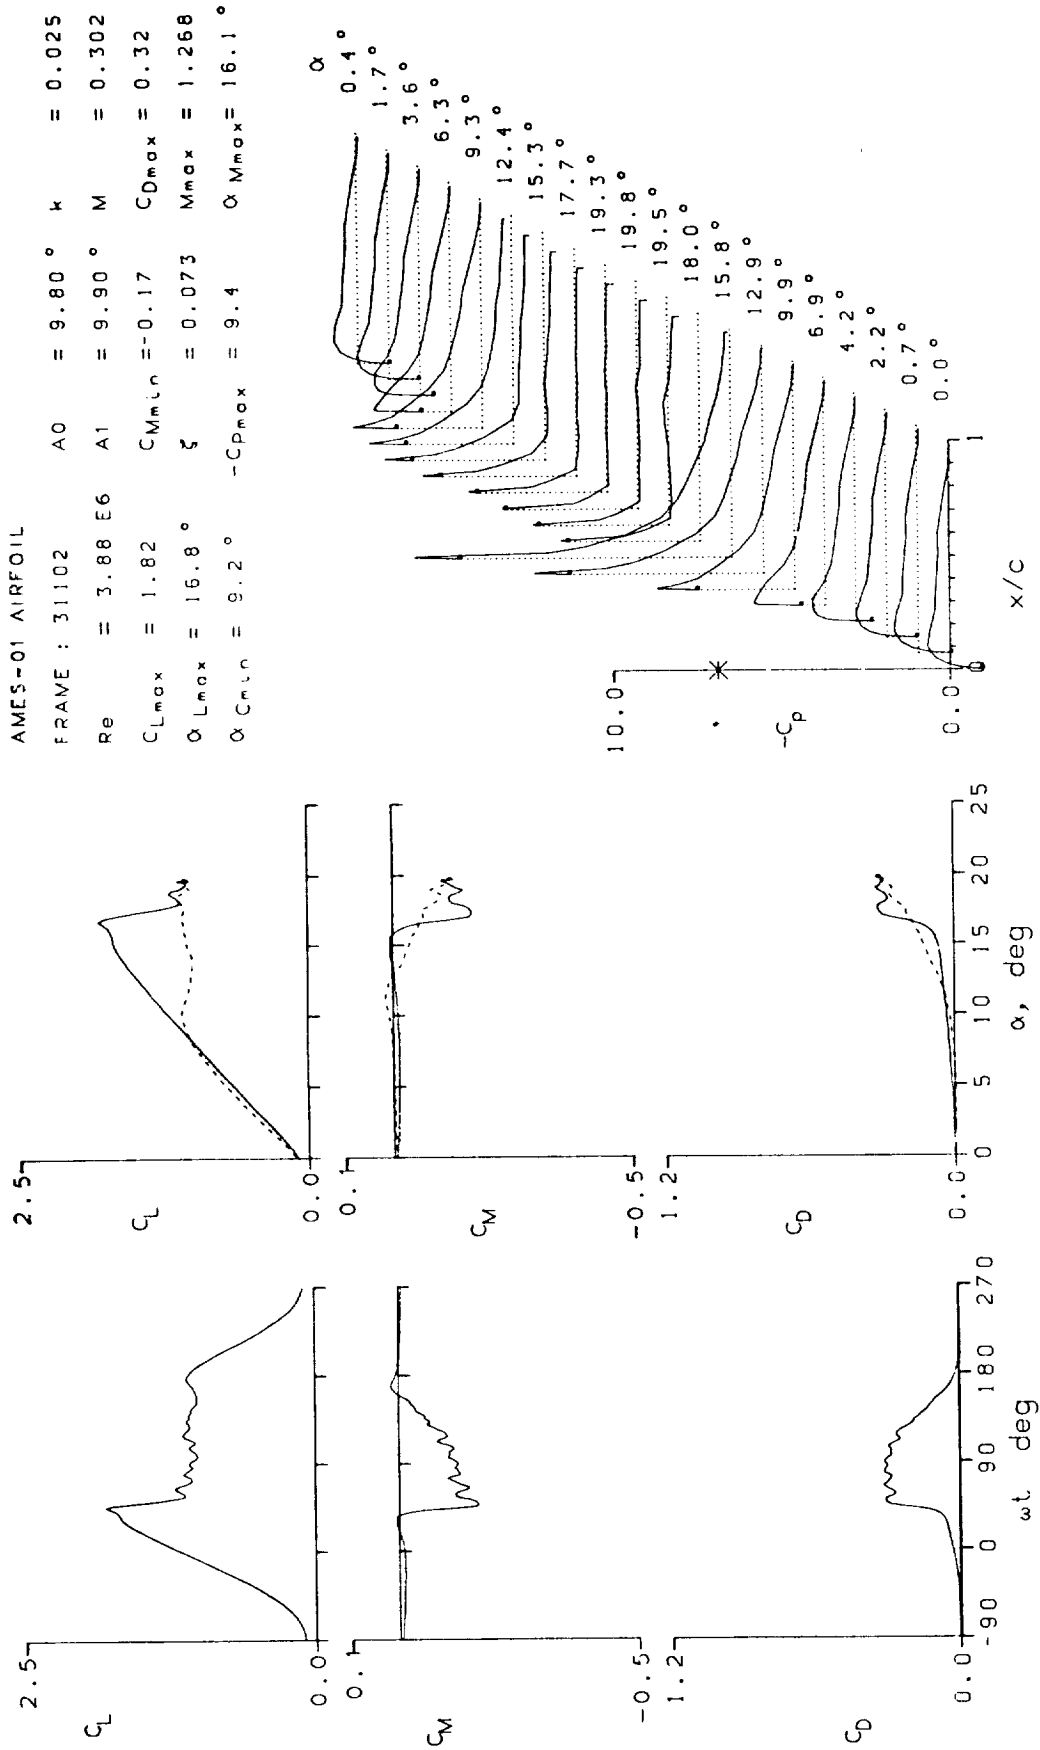


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 31104	A0 = 9.78 °	k = 0.049
Re = 3.86 E6	A1 = 9.91 °	M = 0.302
C _{Lmax} = 1.96	C _{Mmin} = -0.20	C _{Dmax} = 0.37
α _{Lmax} = 17.7 °	ξ = 0.091	M _{max} = 1.305
α _{Cmin} = 9.2 °	-C _{Dmax} = 9.7	α _{Mmax} = 16.4 °

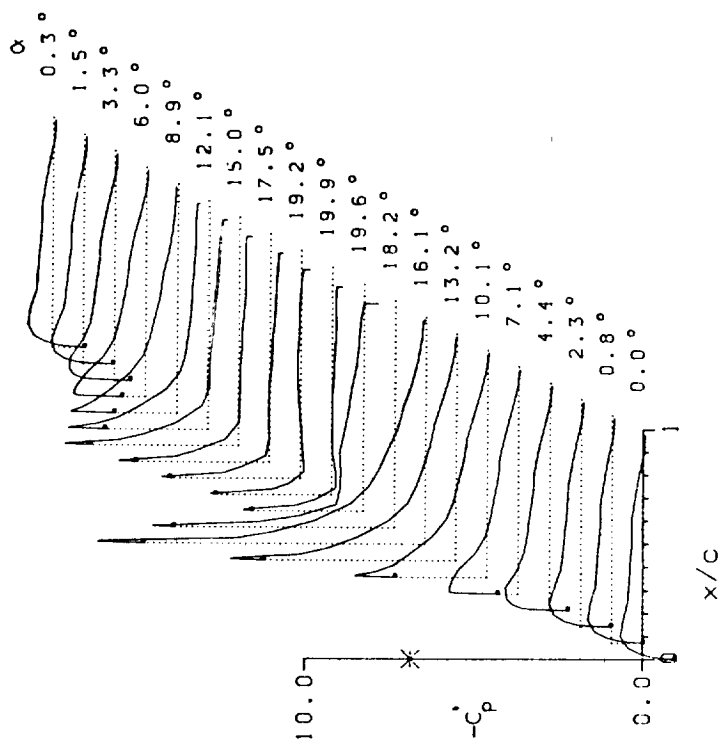
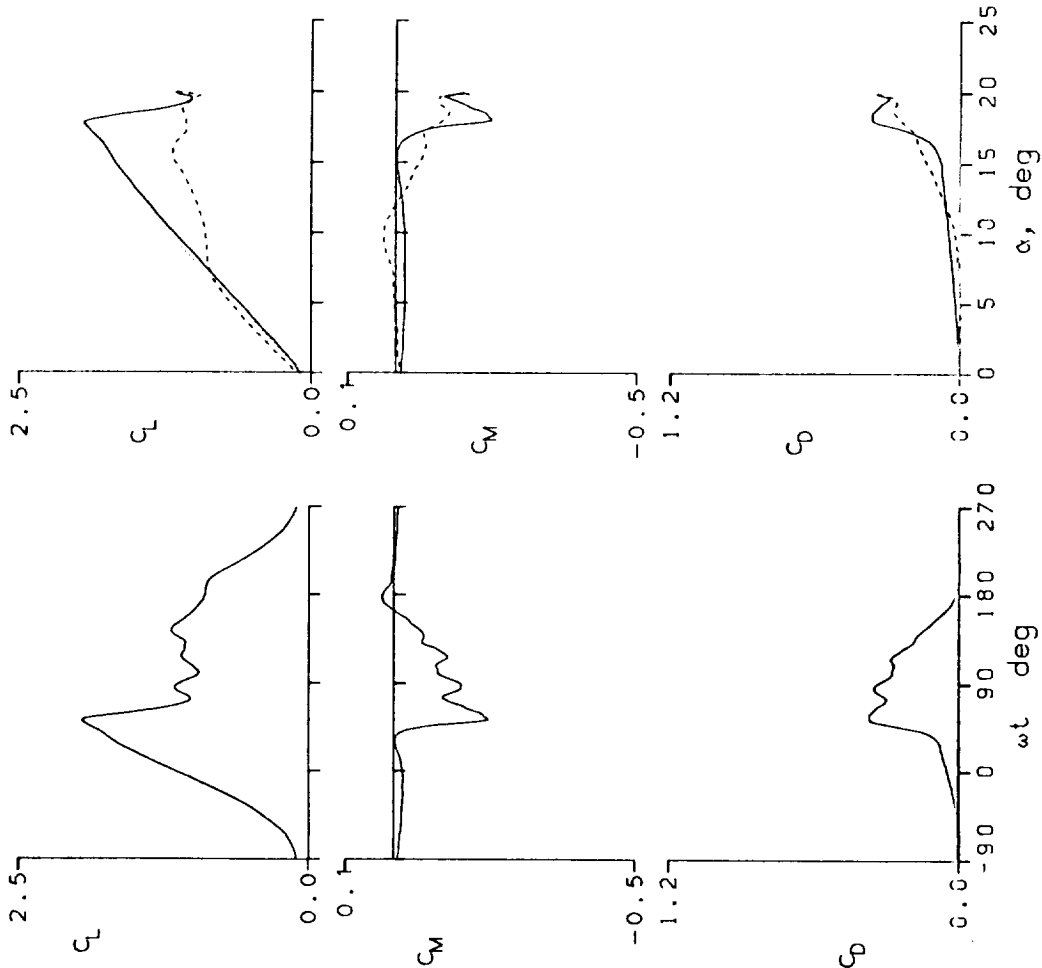


Figure 13.- Continued.

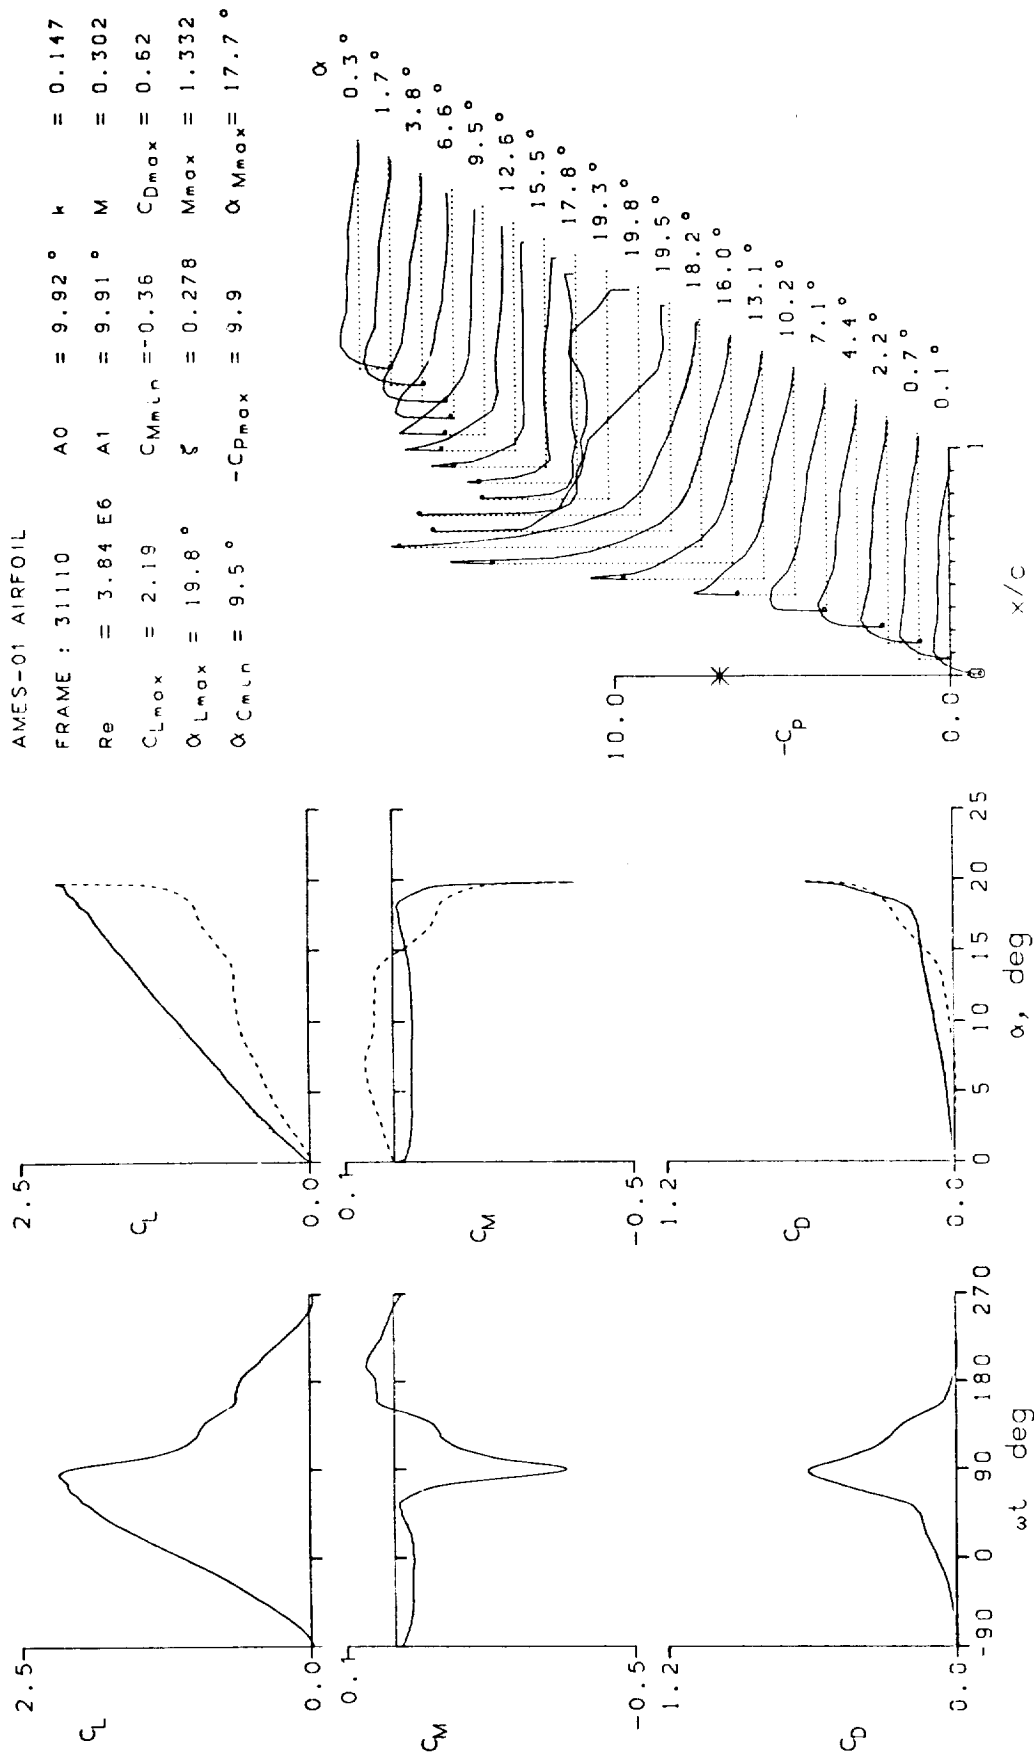


Figure 13.- Continued.

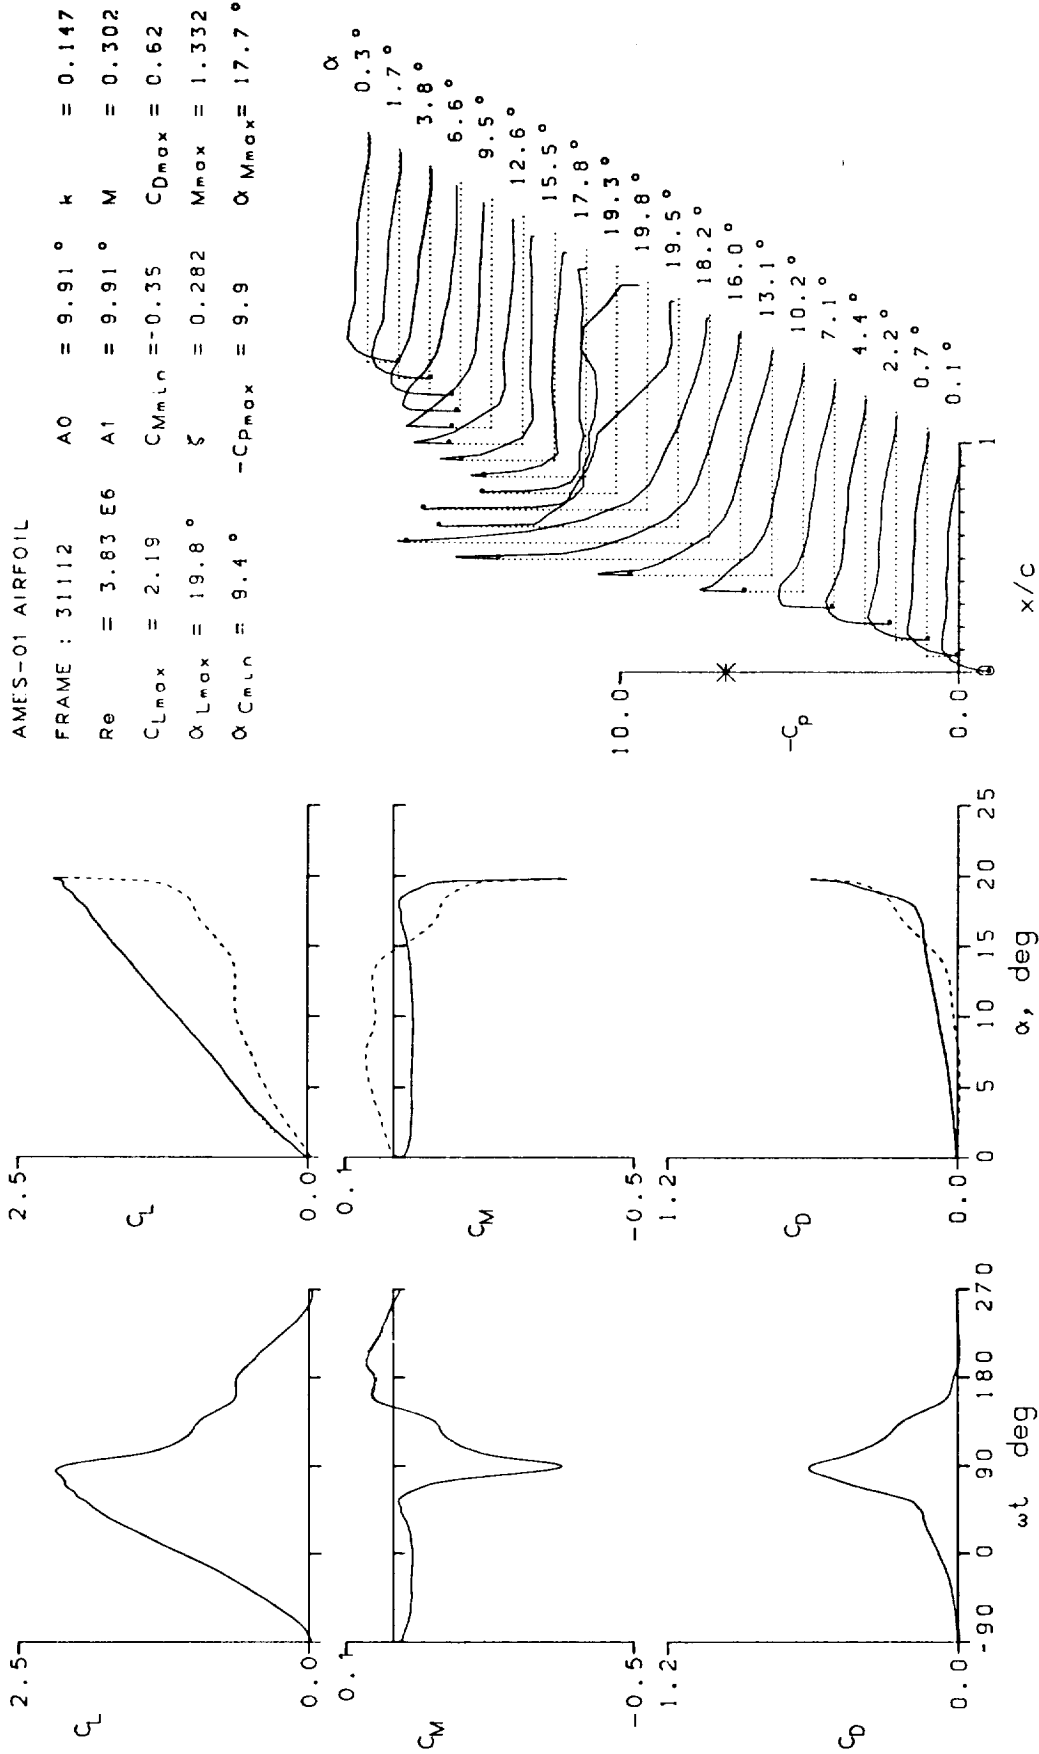


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 31119	A0 = 4.90 °	k = 0.024
Re = 3.86 E6	A1 = 10.02 °	M = 0.303
C _{Lmax} = 1.61	C _{Mmin} = -0.04	C _{Dmax} = 0.11
α _{Lmax} = 14.6 °	ξ = 0.047	M _{max} = 1.206
α _{Cmin} = 4.4 °	-C _{pmax} = 8.8	α _{Mmax} = 14.8 °

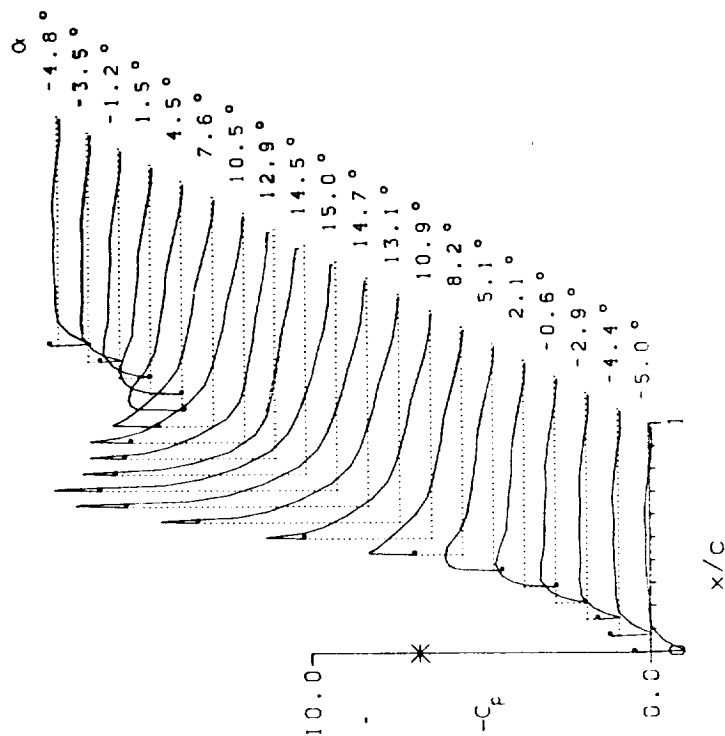
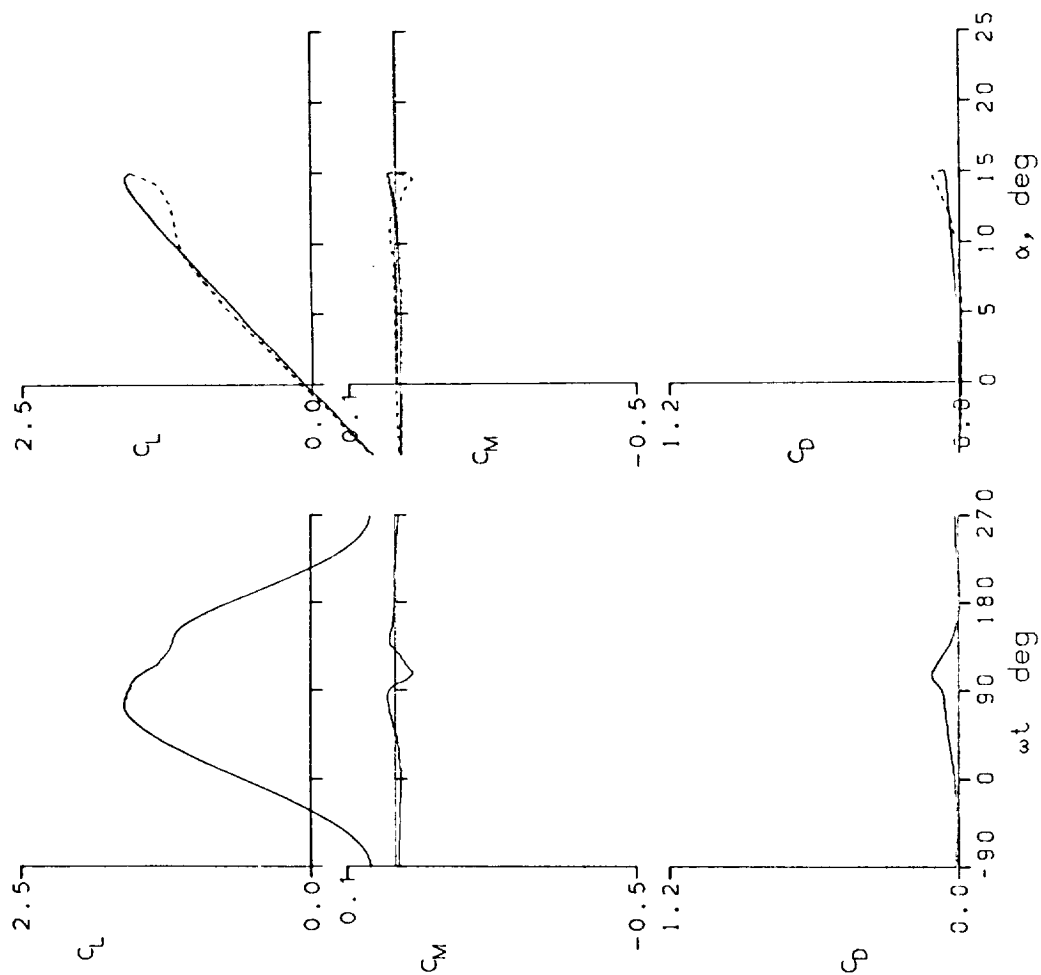


Figure 13.- Continued.

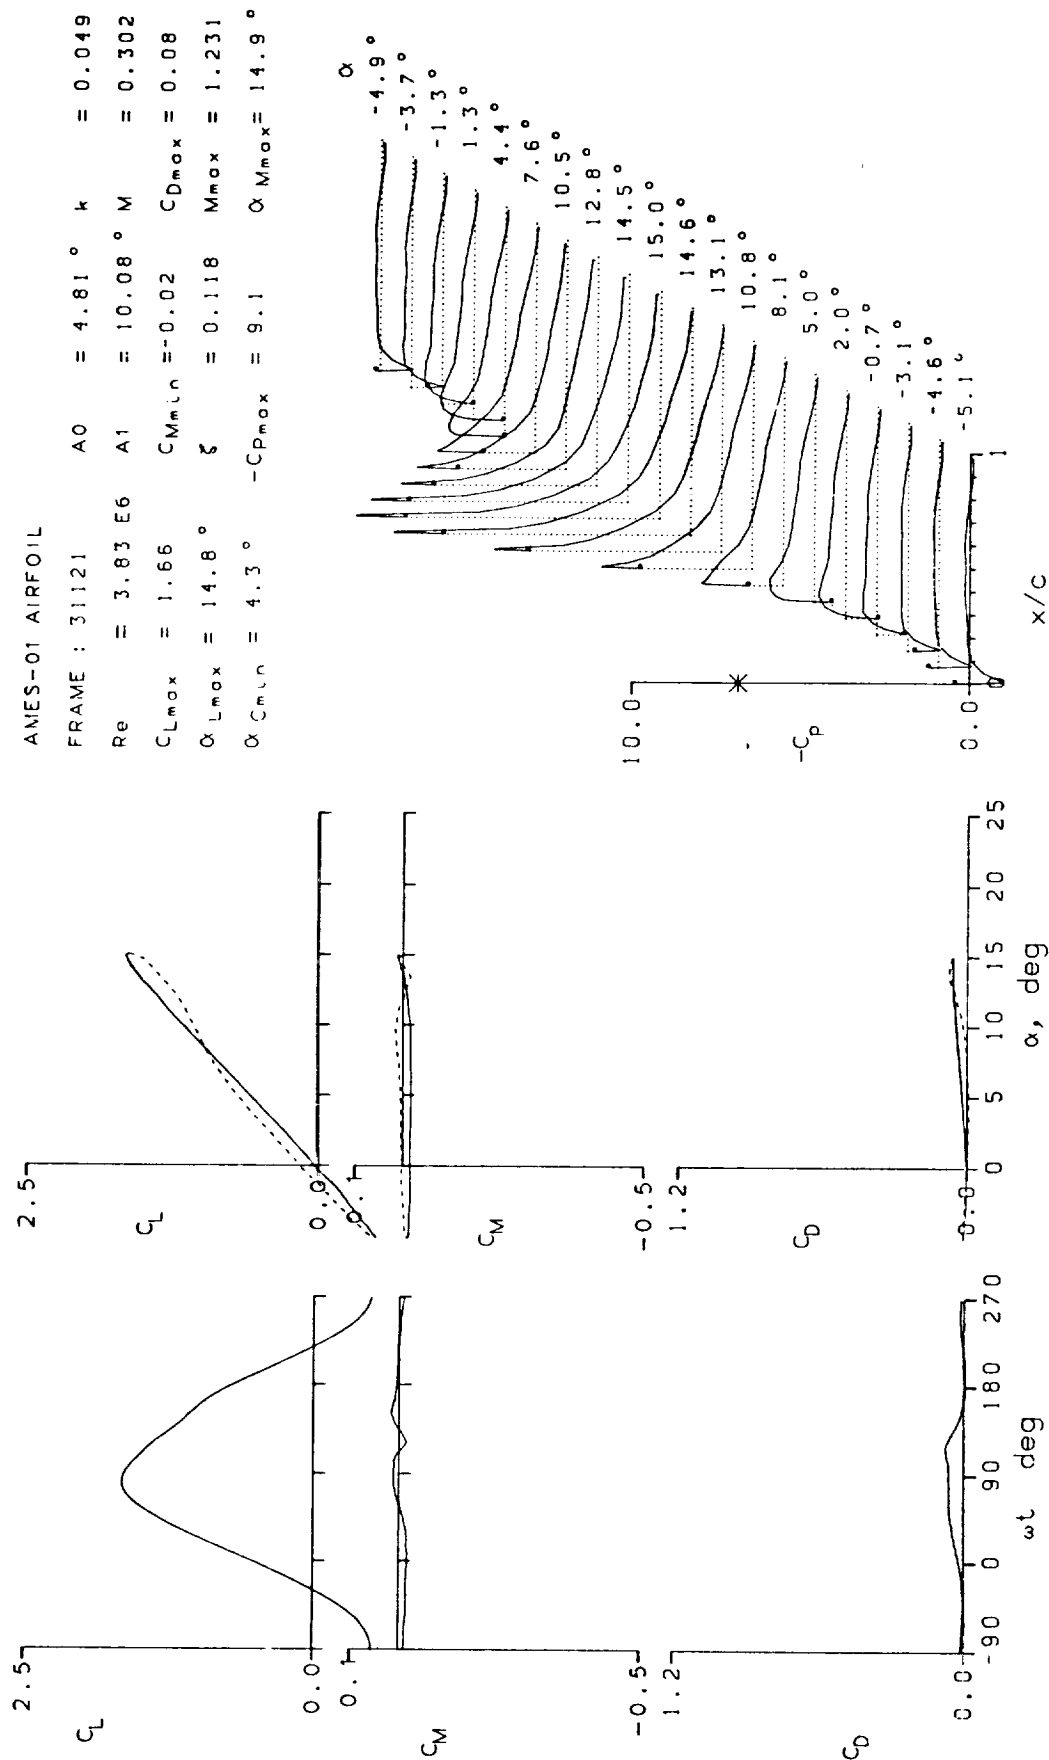


Figure 13.- Continued.

AVES-01 AIRFOIL

FRAME : 31123	A0 = 4.84 °	k = 0.098
Re = 3.82 E6	A1 = 10.06 °	M = 0.303
C _{Lmax} = 1.70	C _{Mmin} = -0.03	C _{Dmax} = 0.09
α _{Lmax} = 15.1 °	ξ = 0.288	M _{max} = 1.272
α _{Cmin} = 4.3 °	-C _{pmax} = 9.4	α _{Mmax} = 15.0 °

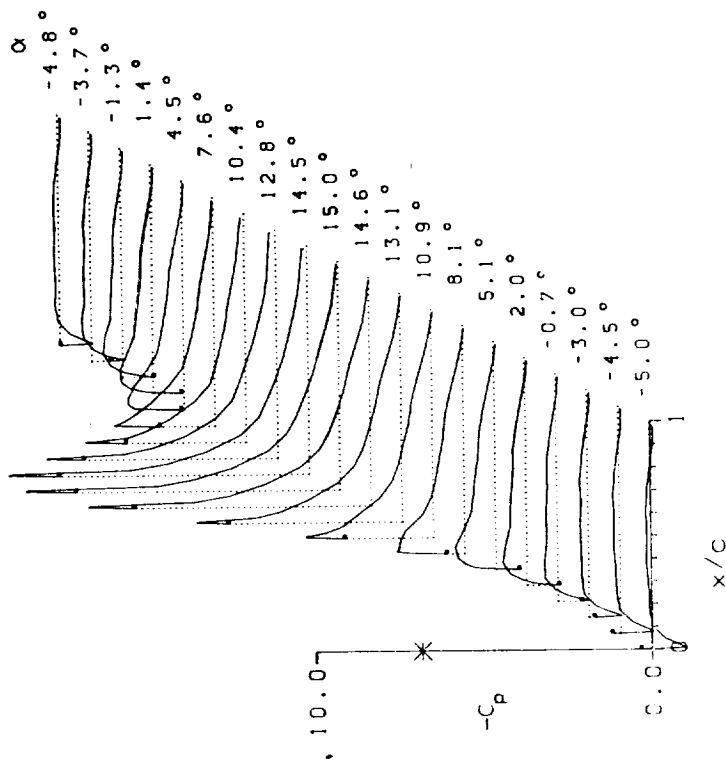
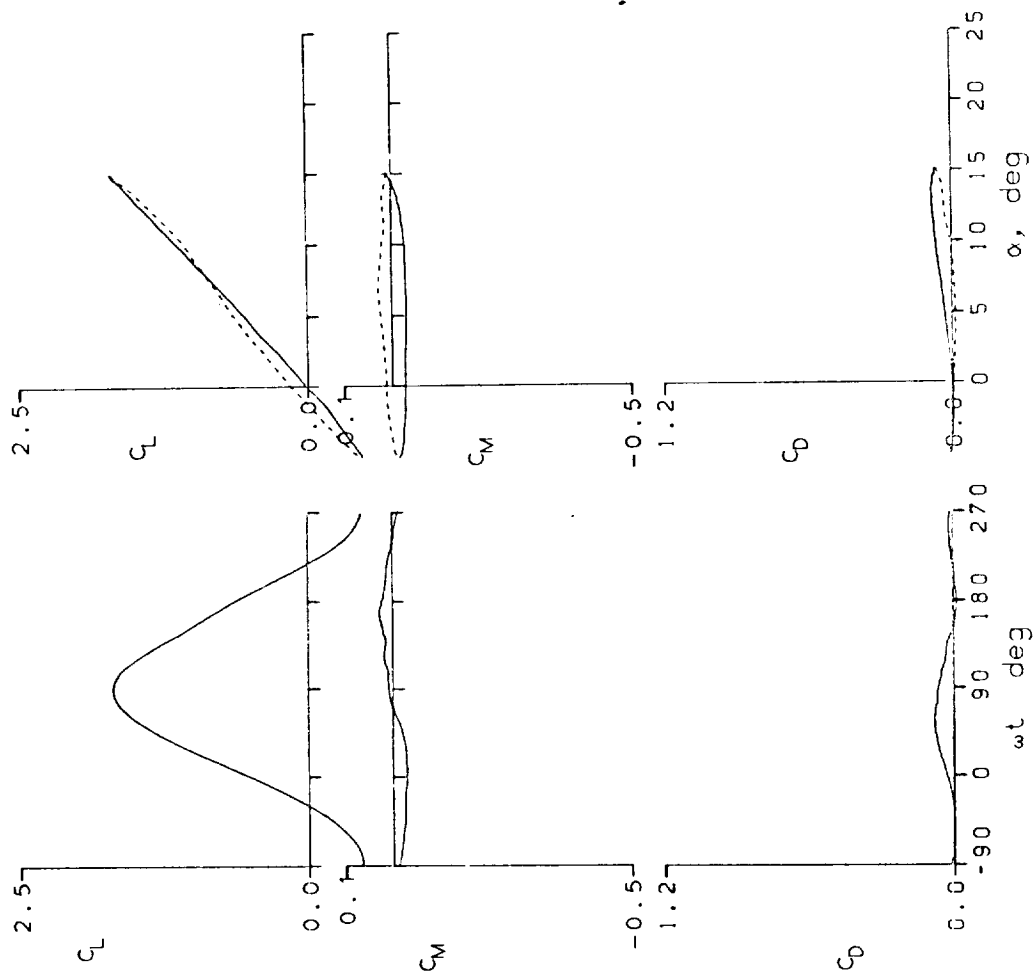


Figure 13.- Continued.

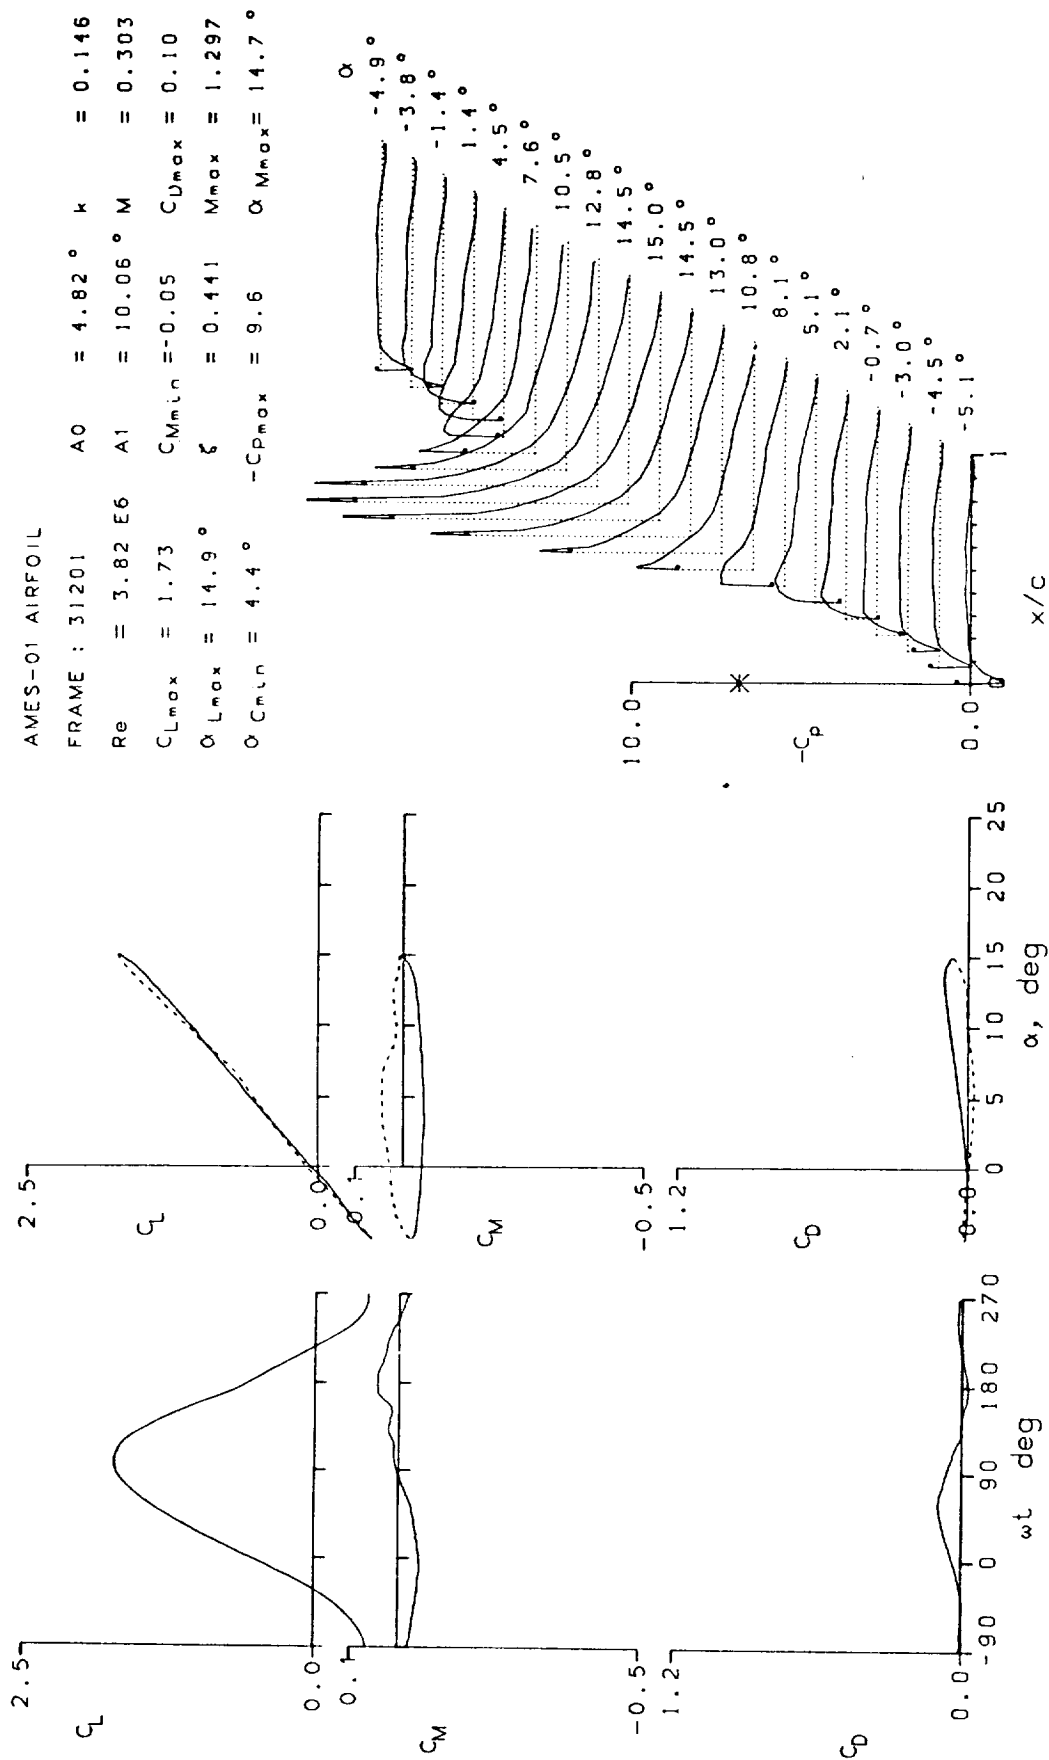


Figure 13.- Continued.

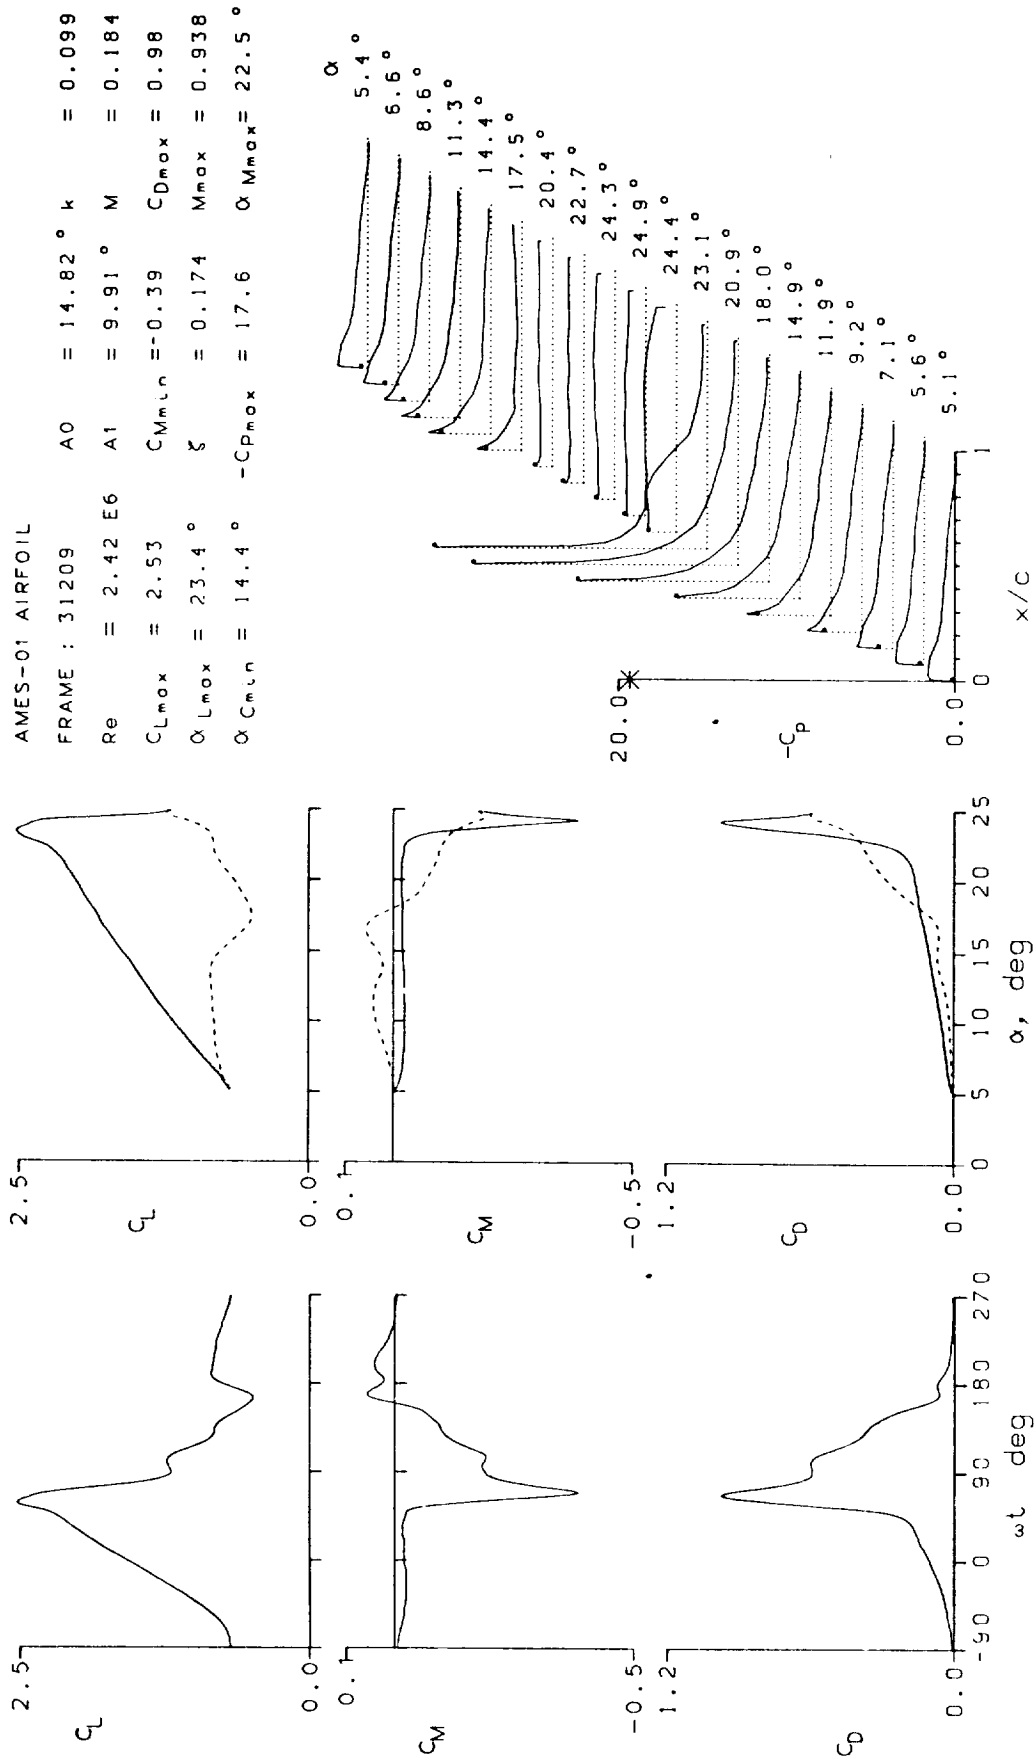


Figure 13.- Continued.

AMES-01 AIRFOIL

FRAME : 31215	A0 = 7.26°	k = 0.049
Re = 2.43 E6	A1 = 10.02°	M = 0.184
CLmax = 1.76	CMmin = -0.04	CDmax = 0.12
αLmax = 17.3°	ξ = 0.073	Mmax = 0.712
αCMln = 6.7°	-CPmax = 11.3	αMmax = 17.5°



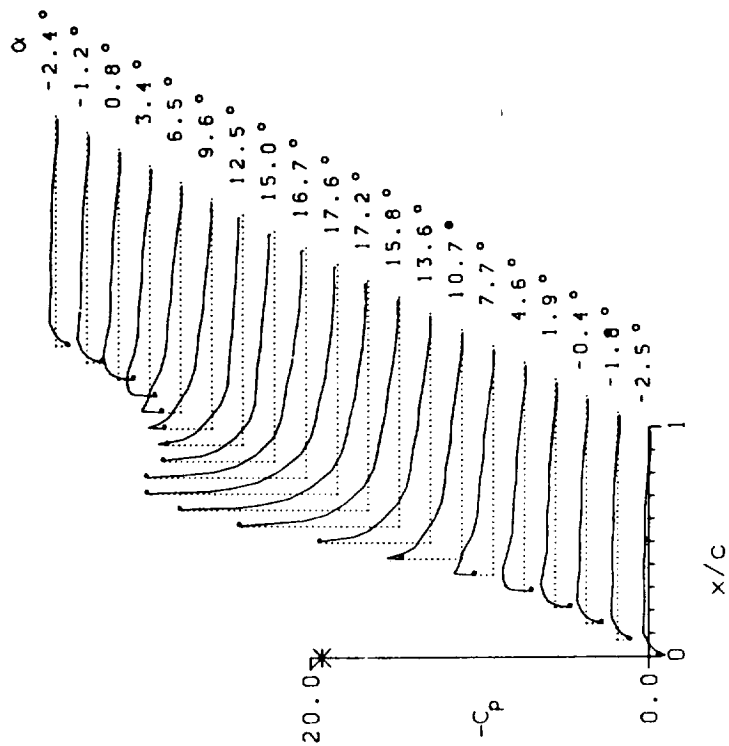


Figure 13.- Continued.

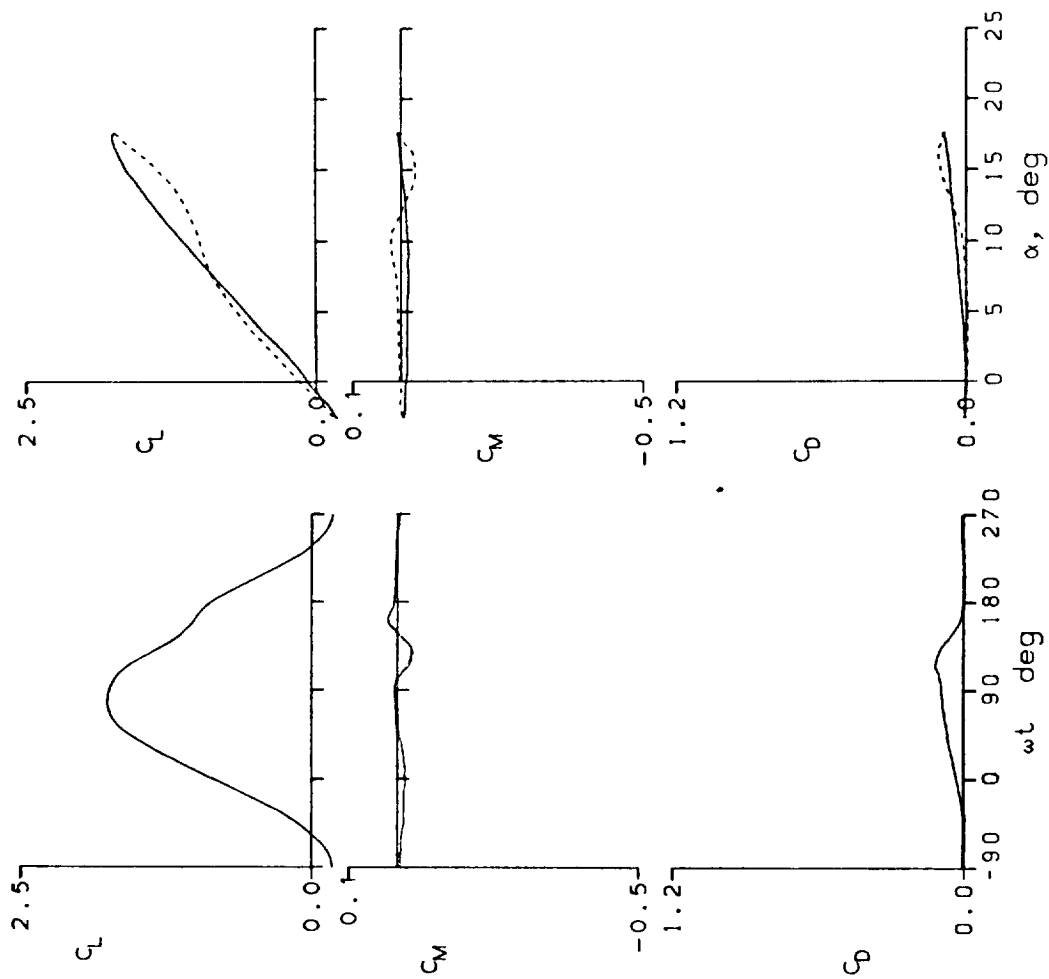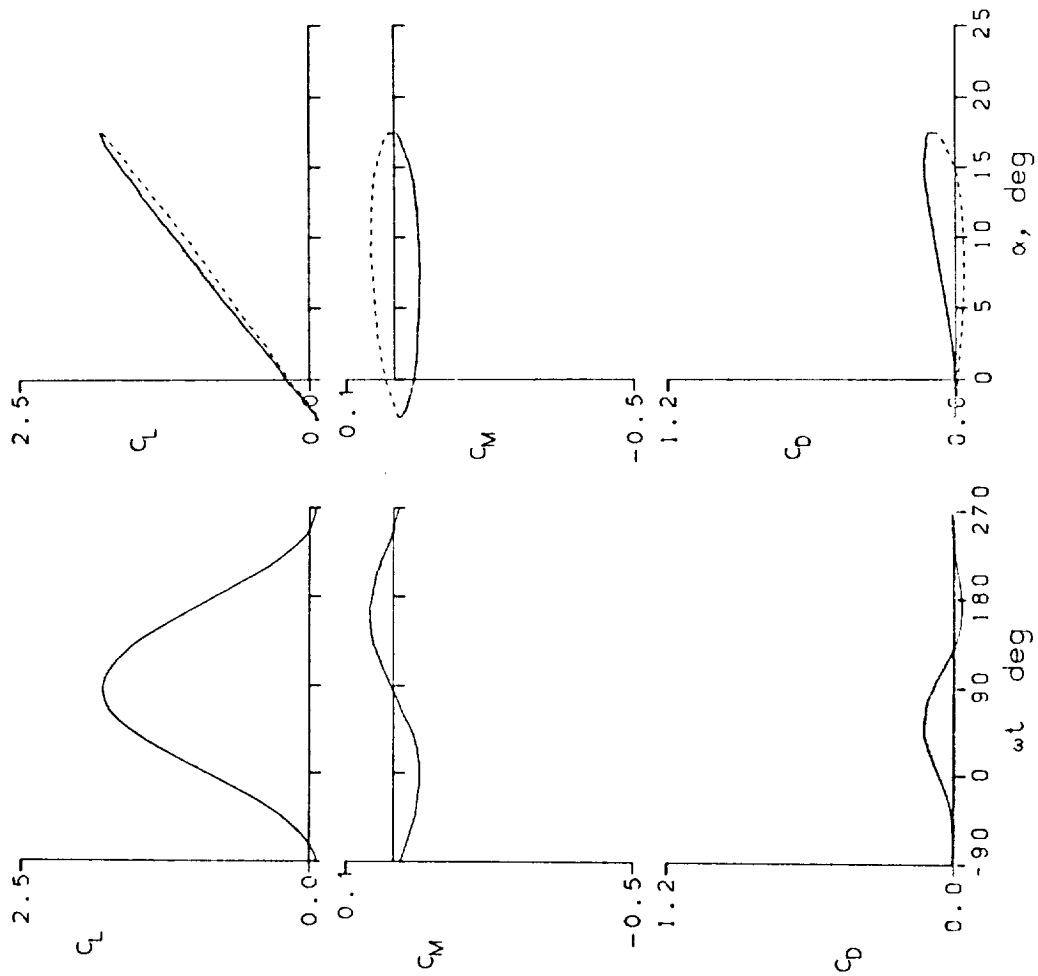

AMES-01 AIRFOIL

FRAME : 31217	$A_0 = 7.27^\circ$	$k = 0.197$
$Re = 2.42 \times 10^6$	$A_1 = 10.01^\circ$	$M = 0.185$
$C_{Lmax} = 1.80$	$C_{Mmin} = -0.06$	$C_{Dmax} = 0.13$
$\alpha_{Lmax} = 17.5^\circ$	$\xi = 0.574$	$M_{max} = 0.727$
$\alpha_{Cmin} = 6.6^\circ$	$-C_{pmax} = 11.7$	$\alpha_{Mmax} = 17.5^\circ$

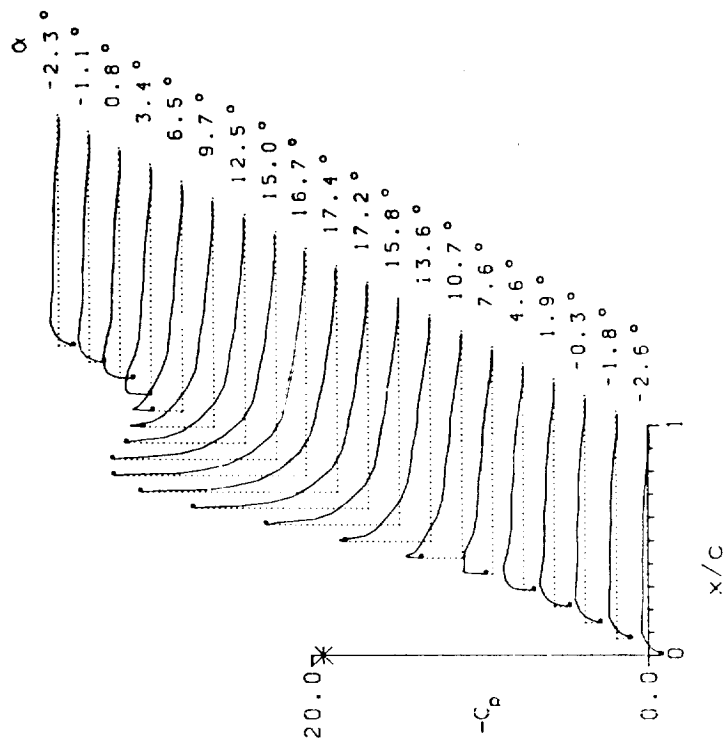


Figure 13.- Continued.

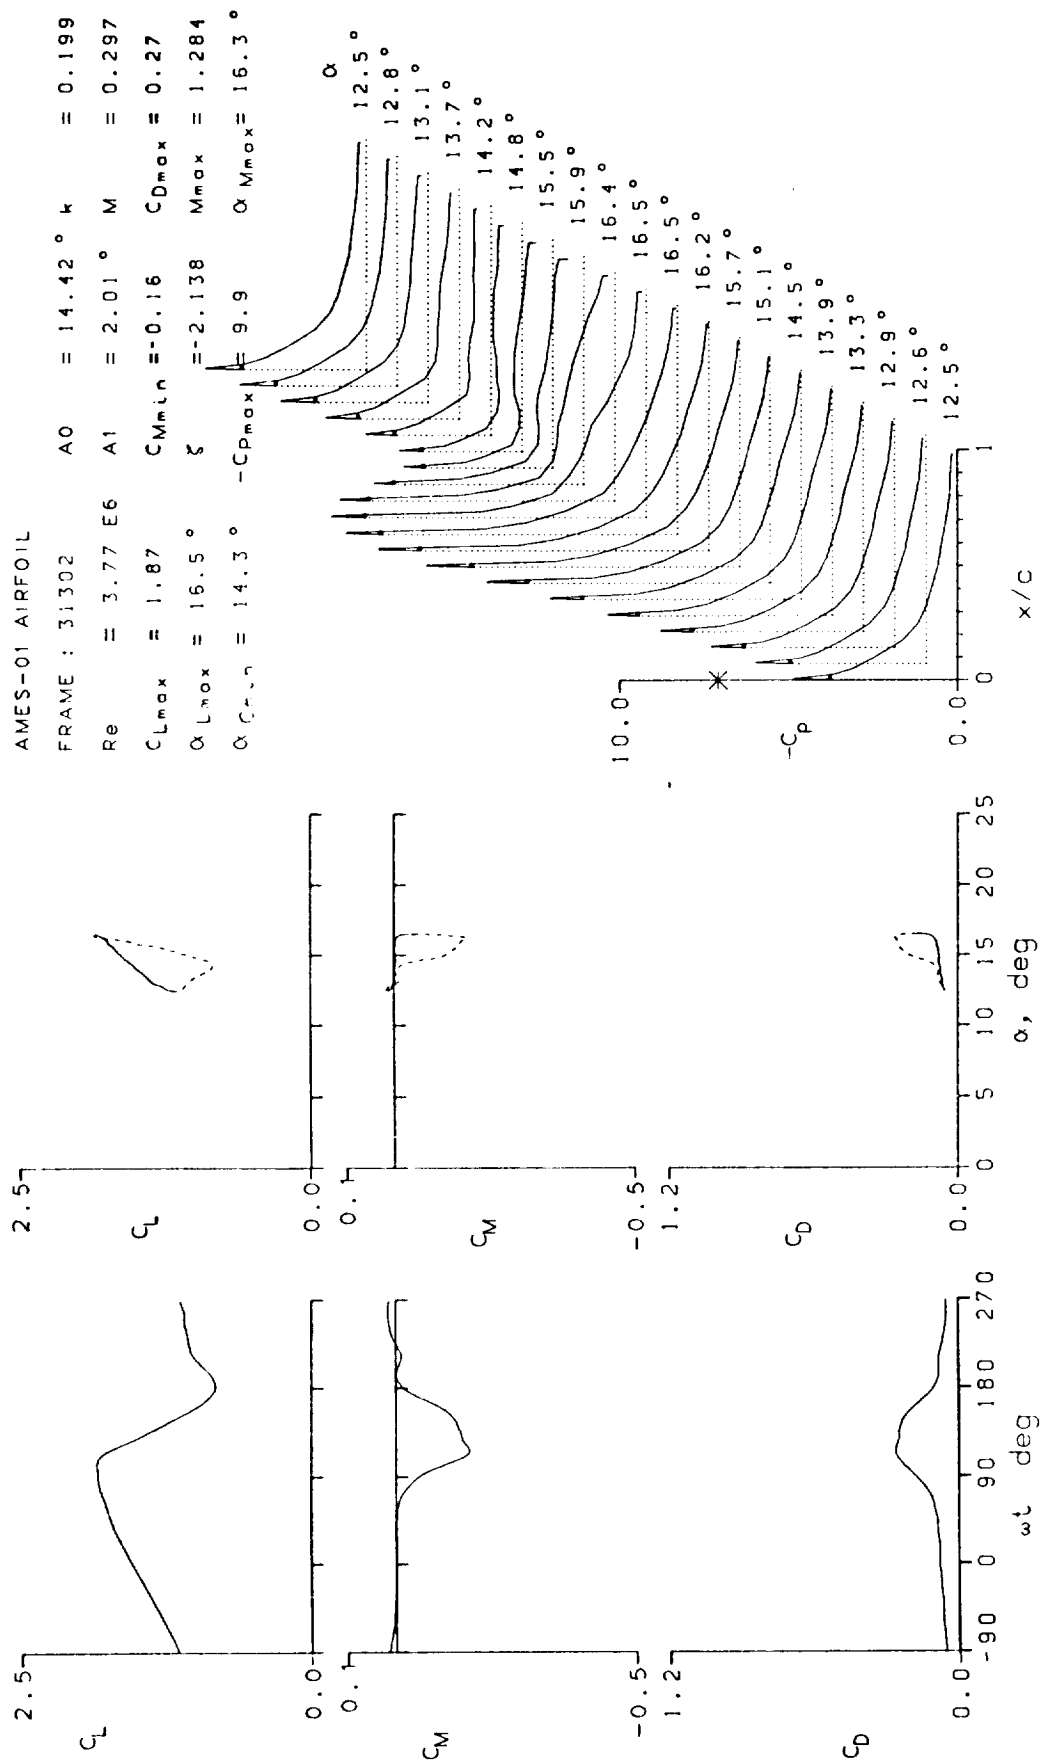


Figure 13.- Continued.

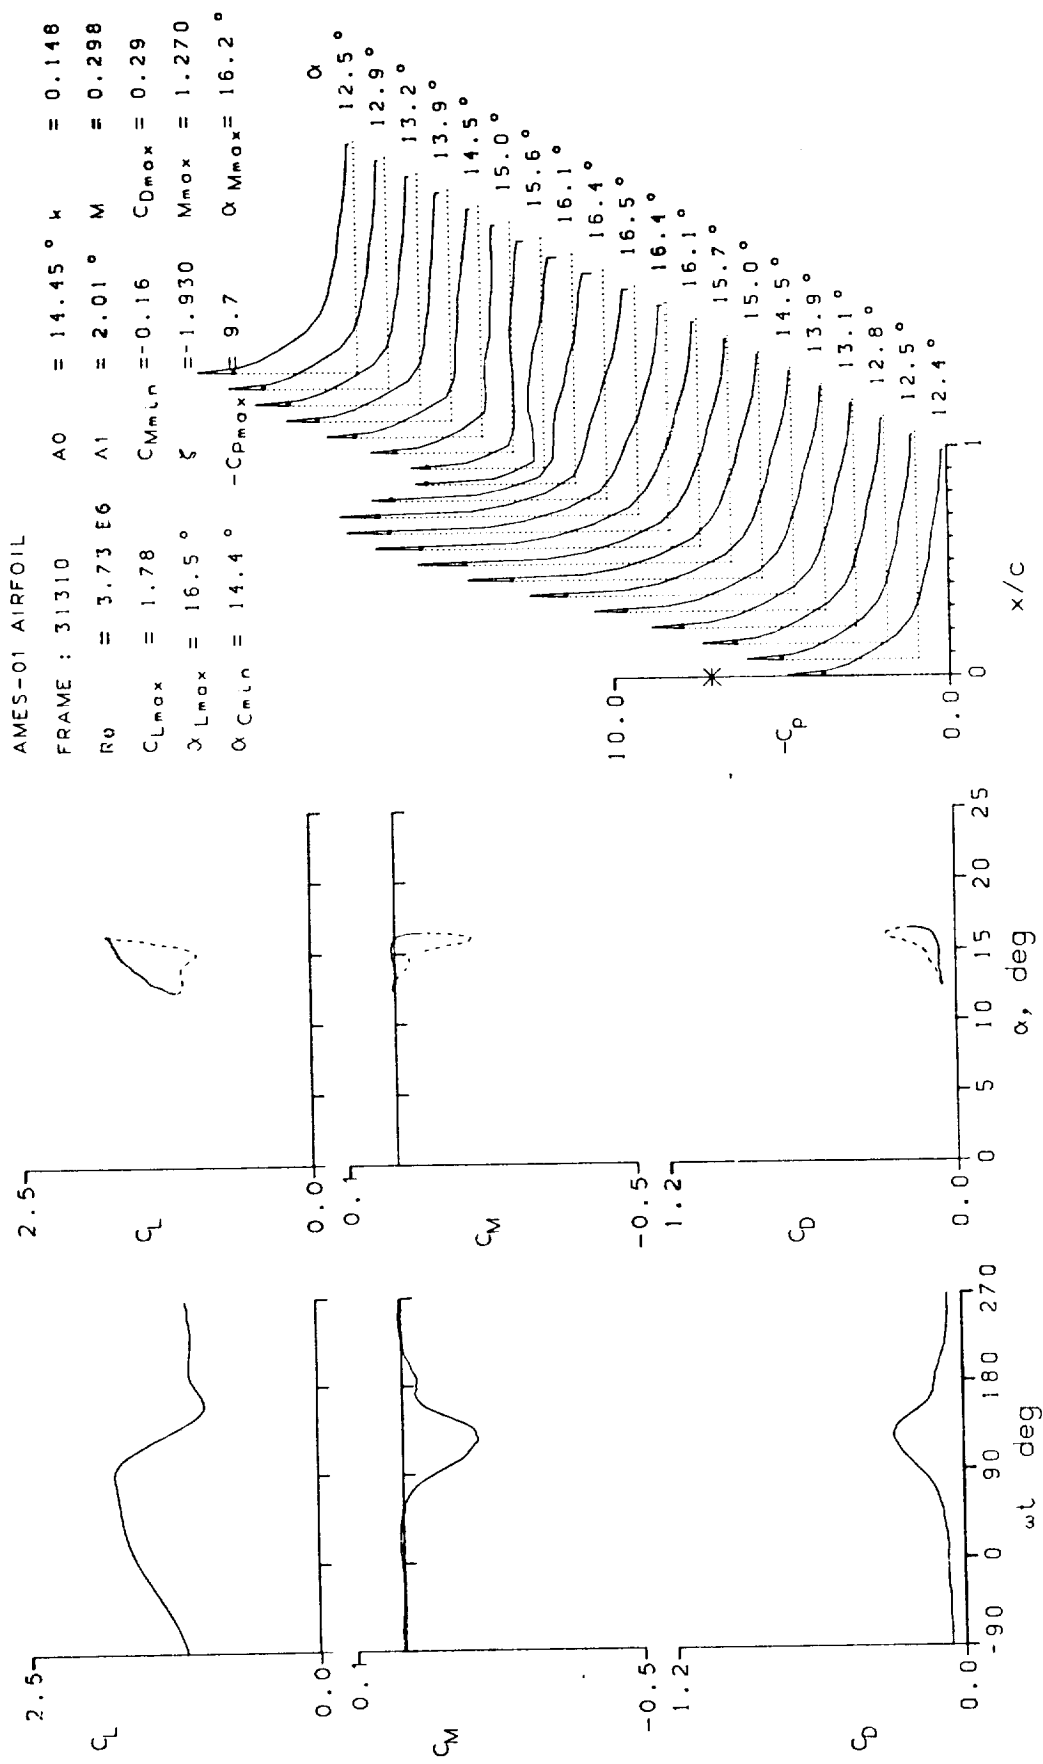


Figure 13.- Concluded.

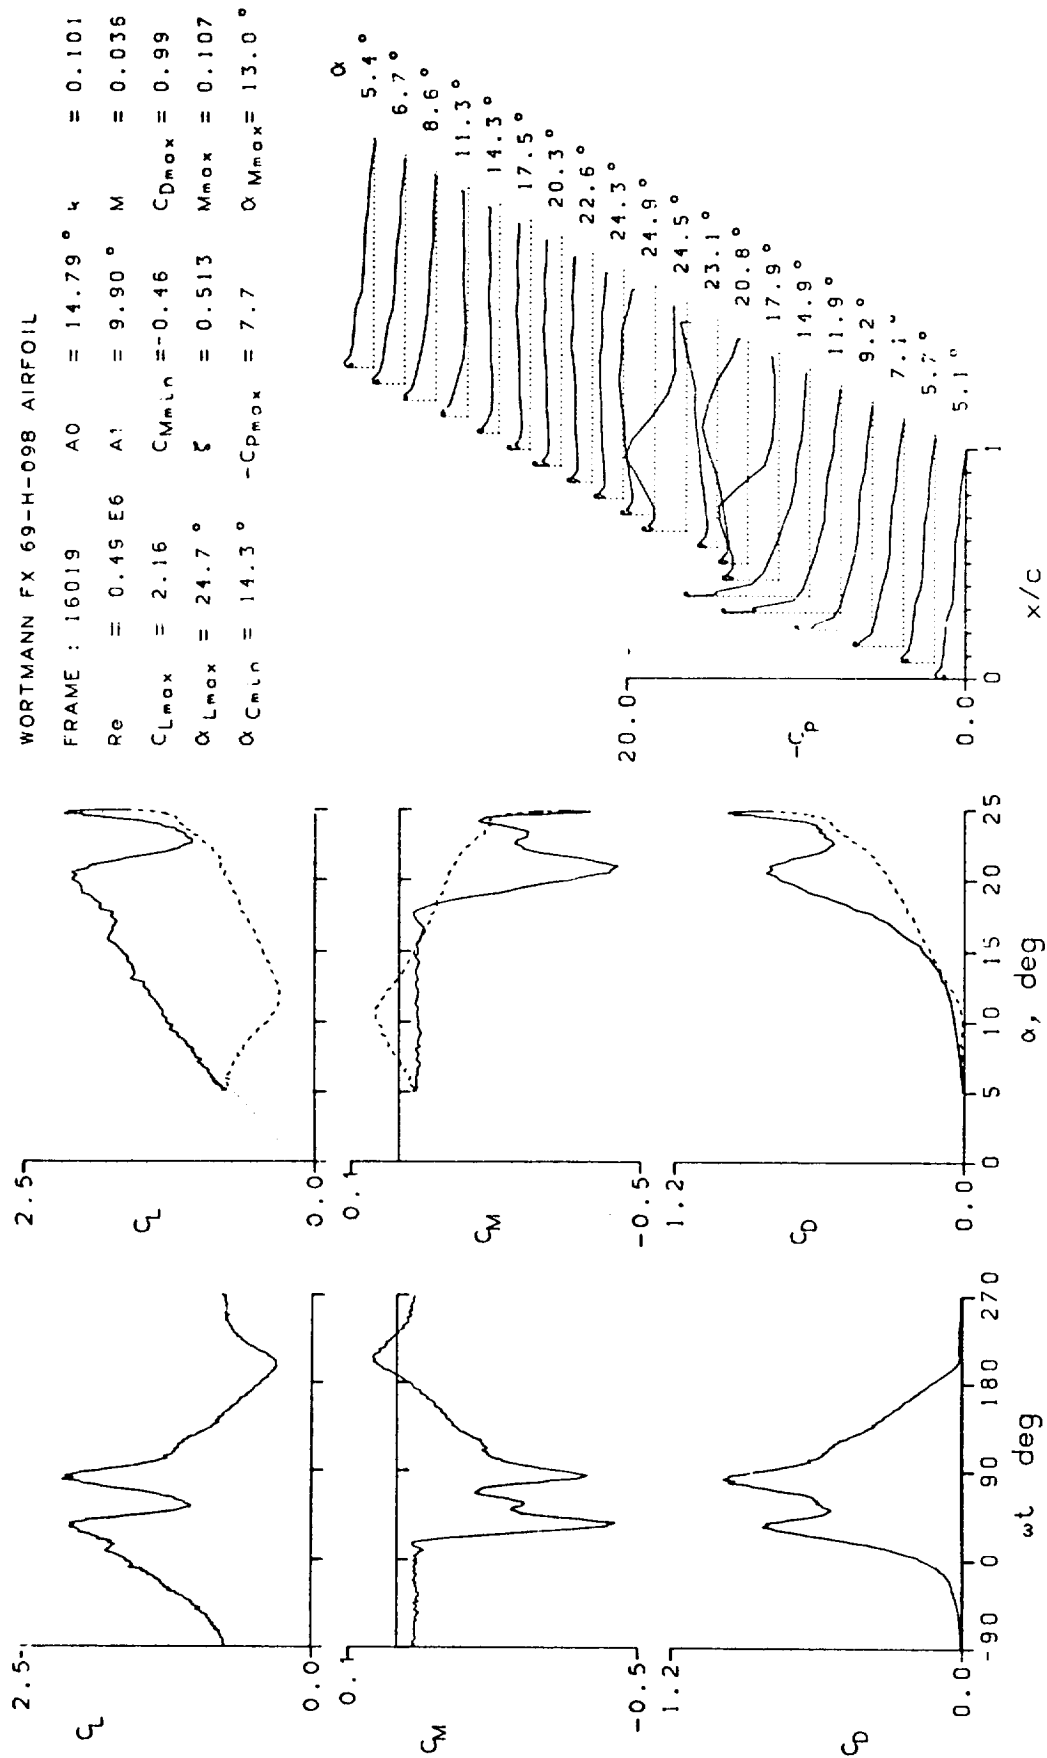


Figure 14.- Dynamic data for Wortmann FX-098 airfoil.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 16105	A0 = 14.80°	k = 0.097
Re = 0.99 E6	A1 = 9.90°	M = 0.074
CLmax = 2.37	CMmin = -0.43	CDmax = 0.98
α Lmax = 21.1°	ξ = 0.407	Mmax = 0.325
α Cmin = 14.3°	-Cpmax = 17.5	α Mmax = 19.7°

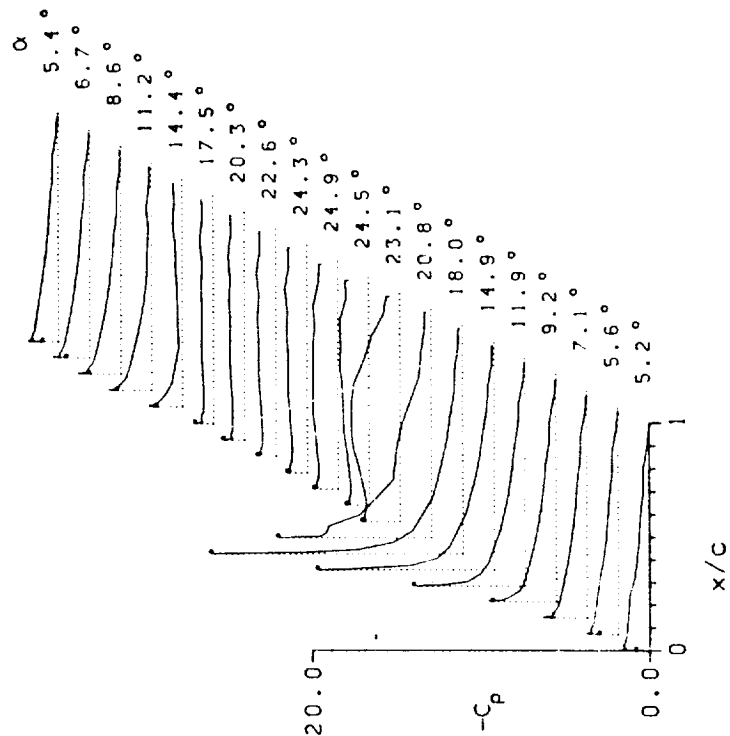
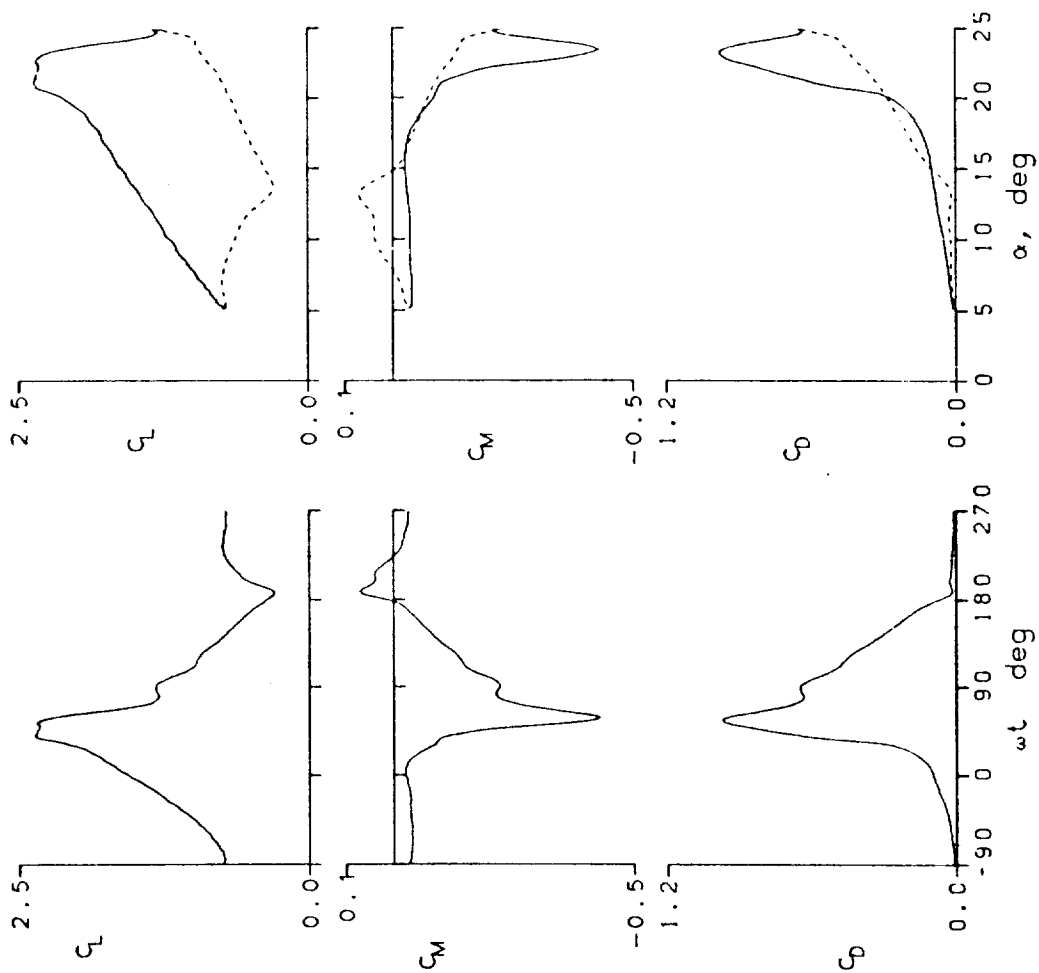


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 16114	A0 = 14.80 °	k = 0.098
Re = 1.46 E6	A1 = 9.90 °	M = 0.110
$C_{Lmax} = 2.48$	$C_{Mmin} = -0.44$	$C_{Dmax} = 1.02$
$\alpha_{Lmax} = 22.8 °$	$\xi = 0.294$	$M_{max} = 0.539$
$\alpha_{Cmin} = 14.3 °$	$-C_{Dmax} = 20.3$	$\alpha_{Mmax} = 20.8 °$

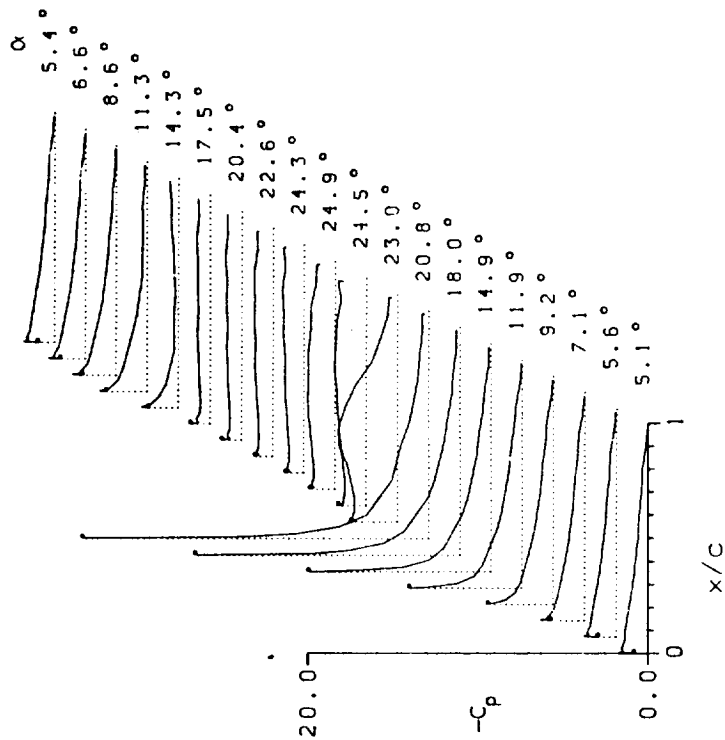
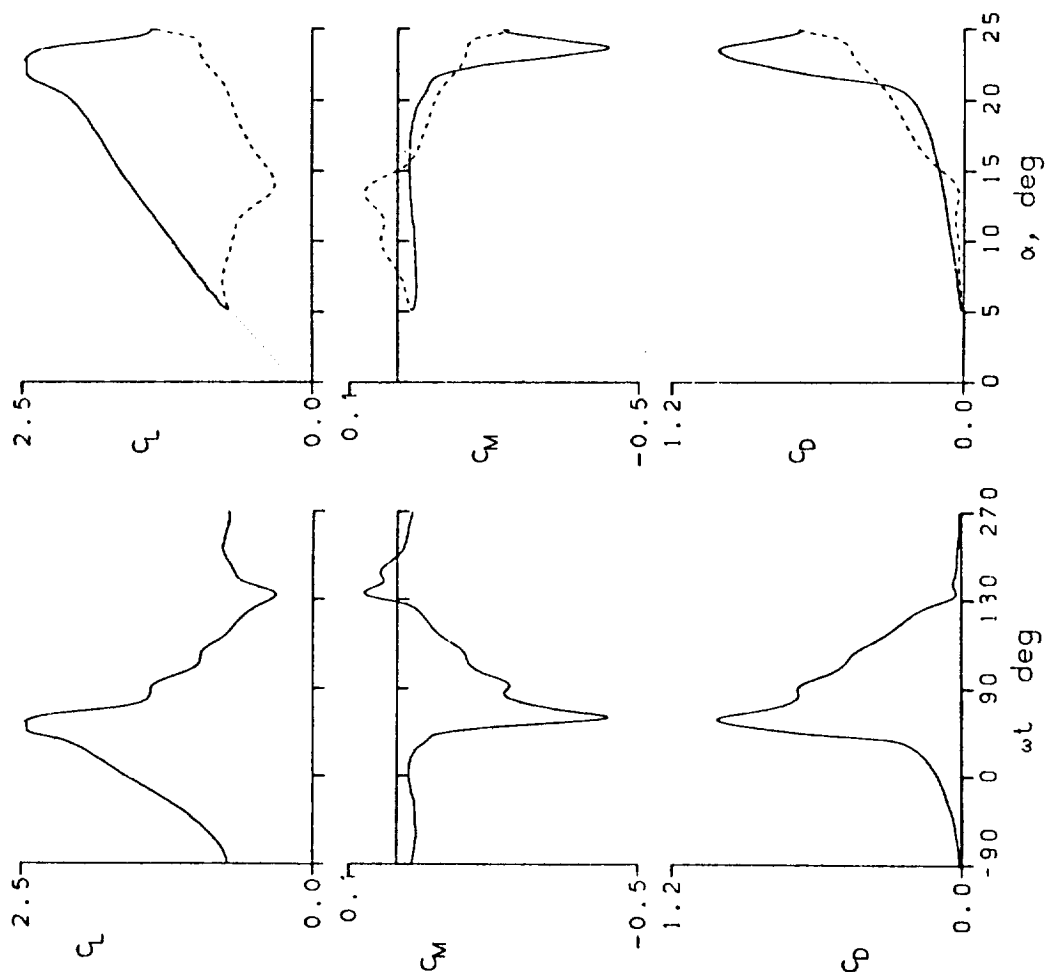


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 16200 $A_0 = 14.80^\circ$ $k = 0.098$
 $Re = 2.43 \text{ E}6$ $A_1 = 9.90^\circ$ $M = 0.185$
 $C_{Lmax} = 2.43$ $C_{Mmin} = -0.40$ $C_{Dmax} = 0.93$
 $\alpha_{Lmax} = 21.8^\circ$ $\xi = 0.310$ $M_{max} = 1.071$
 $\alpha_{Cmin} = 14.3^\circ$ $-C_{Pmax} = 21.0$ $\alpha_{Mmax} = 20.3^\circ$

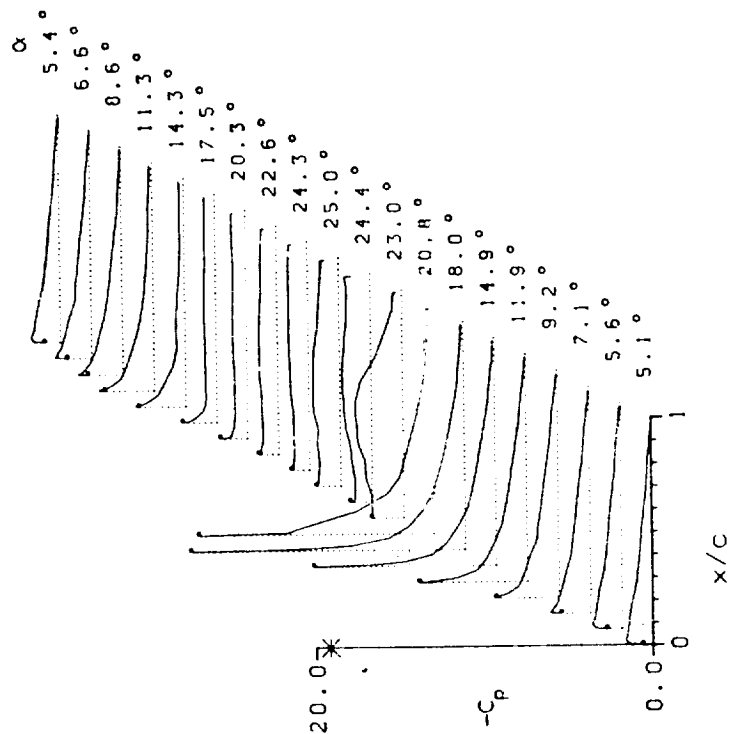
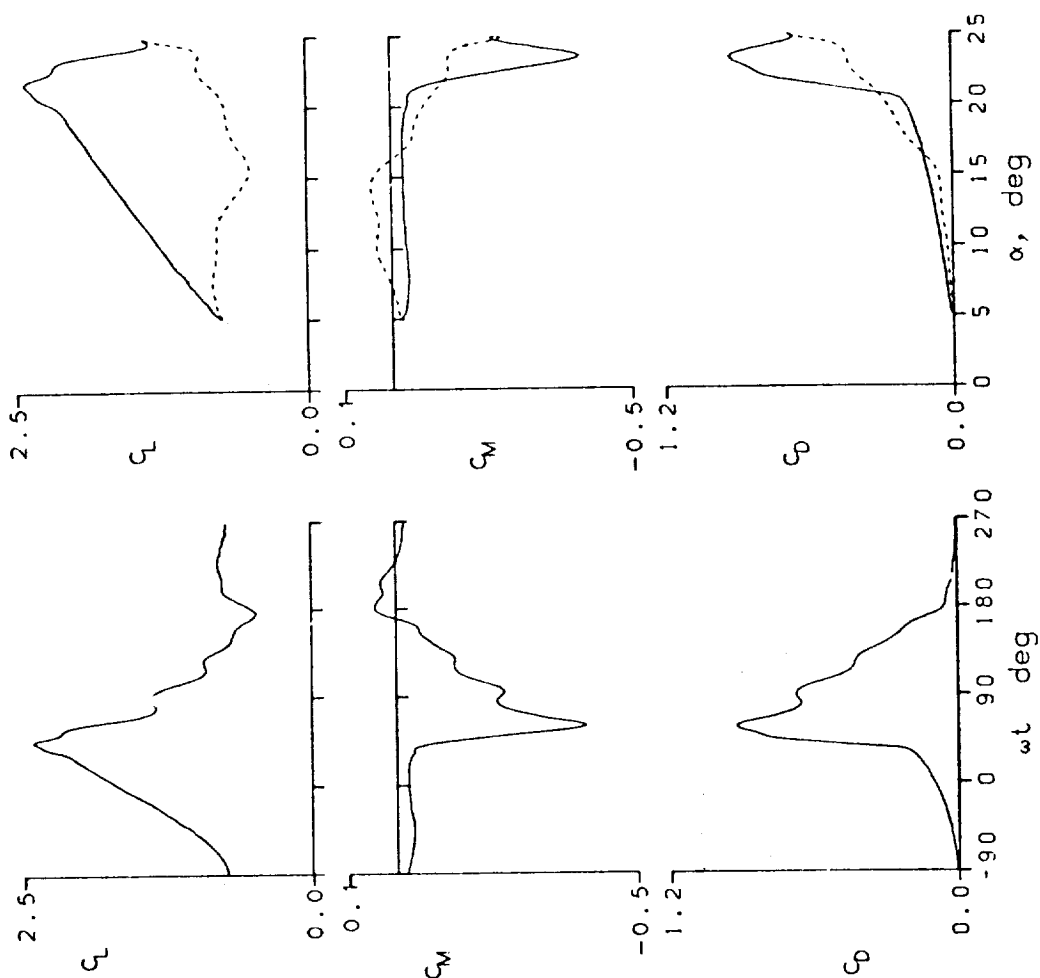


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 16213	A0 = 6.34°	k = 0.050
Re = 2.50 E6	A1 = 10.01°	M = 0.184
$C_{Lmax} = 1.78$	$C_{Mmin} = -0.04$	$C_{Dmax} = 0.12$
$\alpha_{Lmax} = 16.3°$	$\xi = 0.107$	$M_{max} = 0.824$
$\alpha_{Cmin} = 5.8°$	$-C_{Pmax} = 14.5$	$\alpha_{Mmax} = 16.4°$



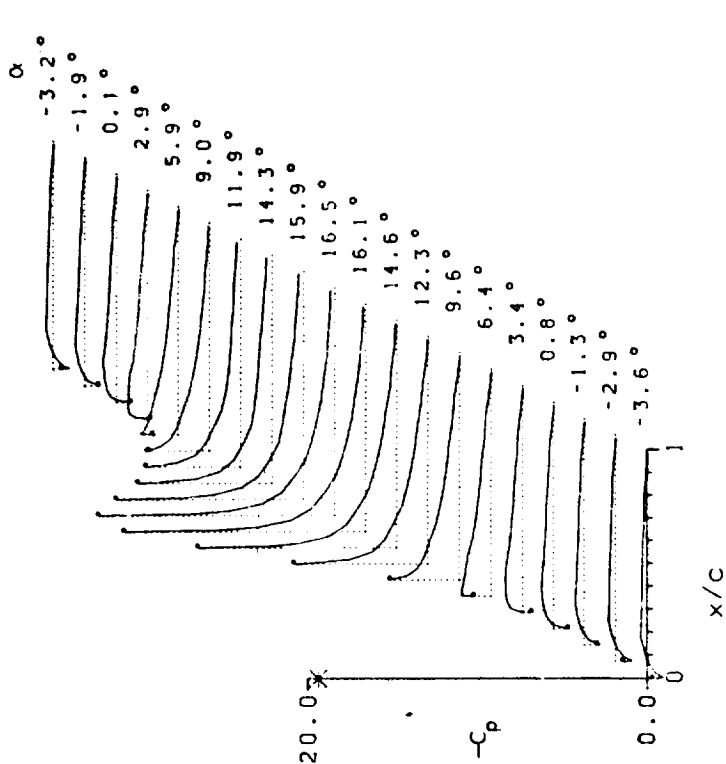


Figure 14.- Continued.

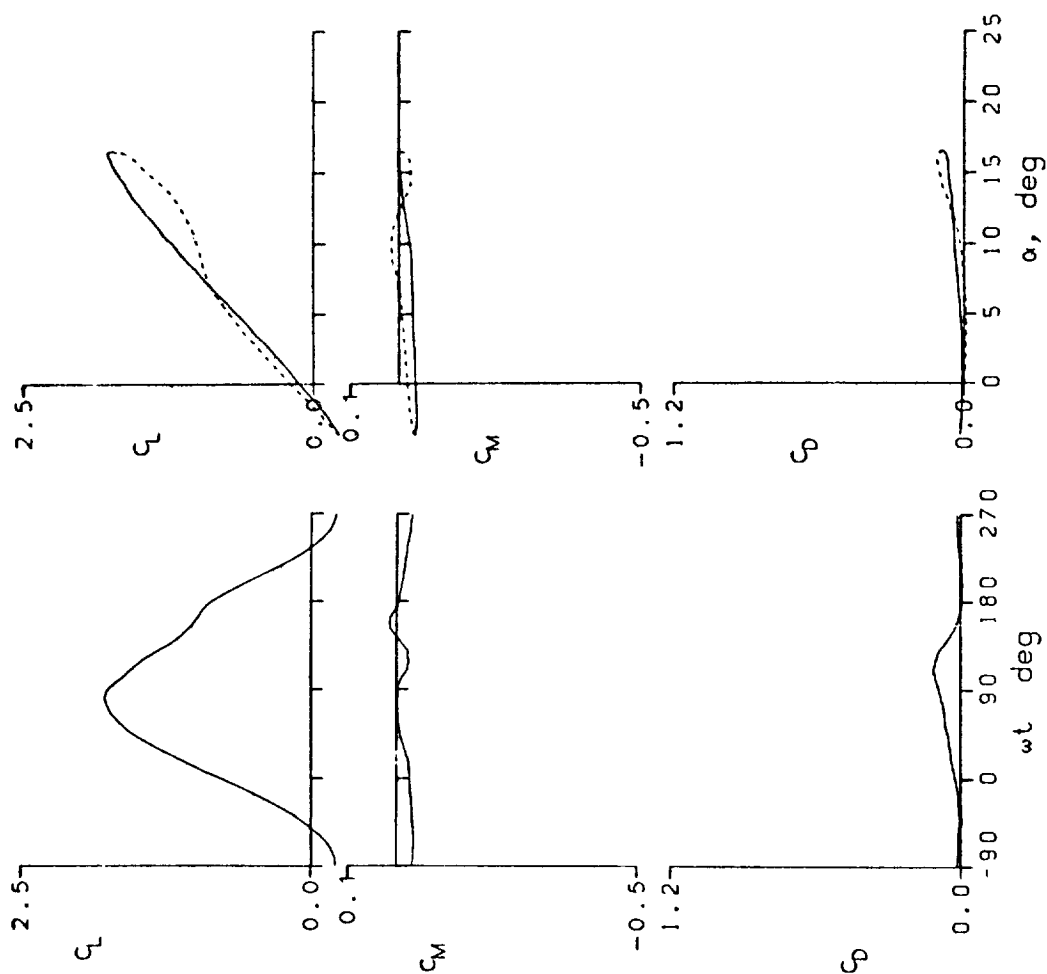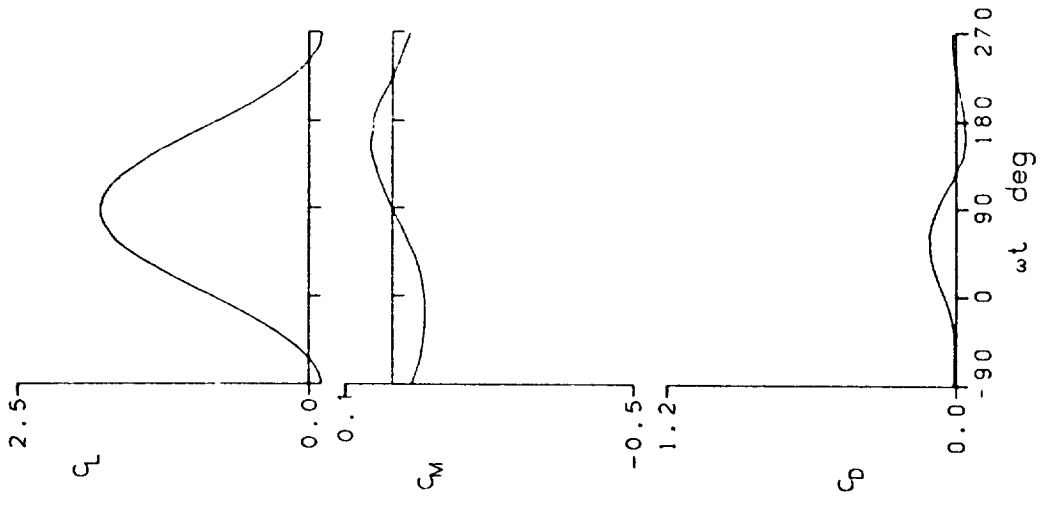

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 16215 $\alpha_0 = 6.33^\circ$ $k = 0.200$

$Re = 2.49 \text{ E}6$ $A1 = 10.01^\circ$ $M = 0.184$

$C_{L_{max}} = 1.79$ $C_{M_{min}} = -0.07$ $C_{D_{max}} = 0.12$

$\alpha_{L_{max}} = 16.5^\circ$ $\zeta = 0.600$ $M_{max} = 0.842$

$\alpha_{C_{M_{min}}} = 5.8^\circ$ $-C_{D_{max}} = 15.0$ $\alpha_{M_{max}} = 16.3^\circ$

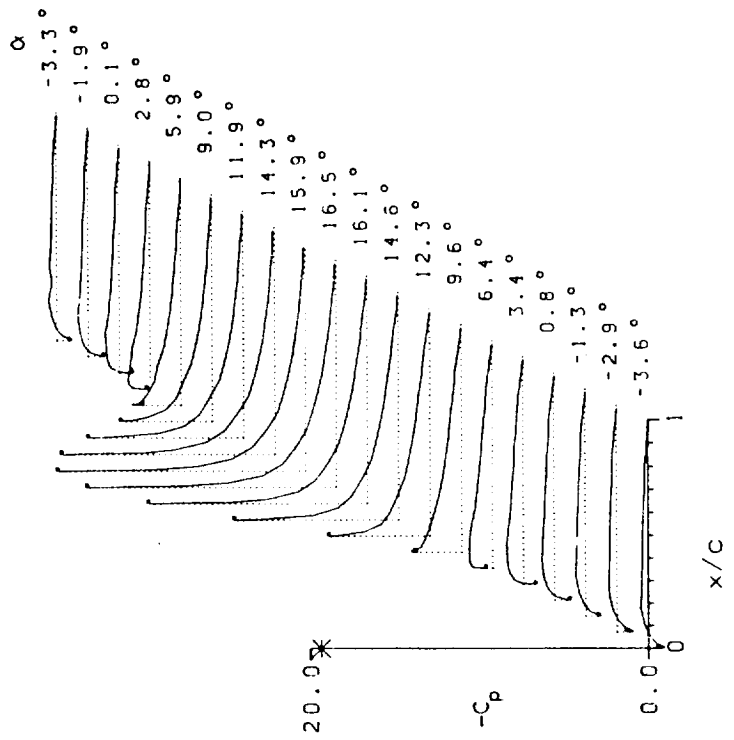


Figure 14.- Continued.

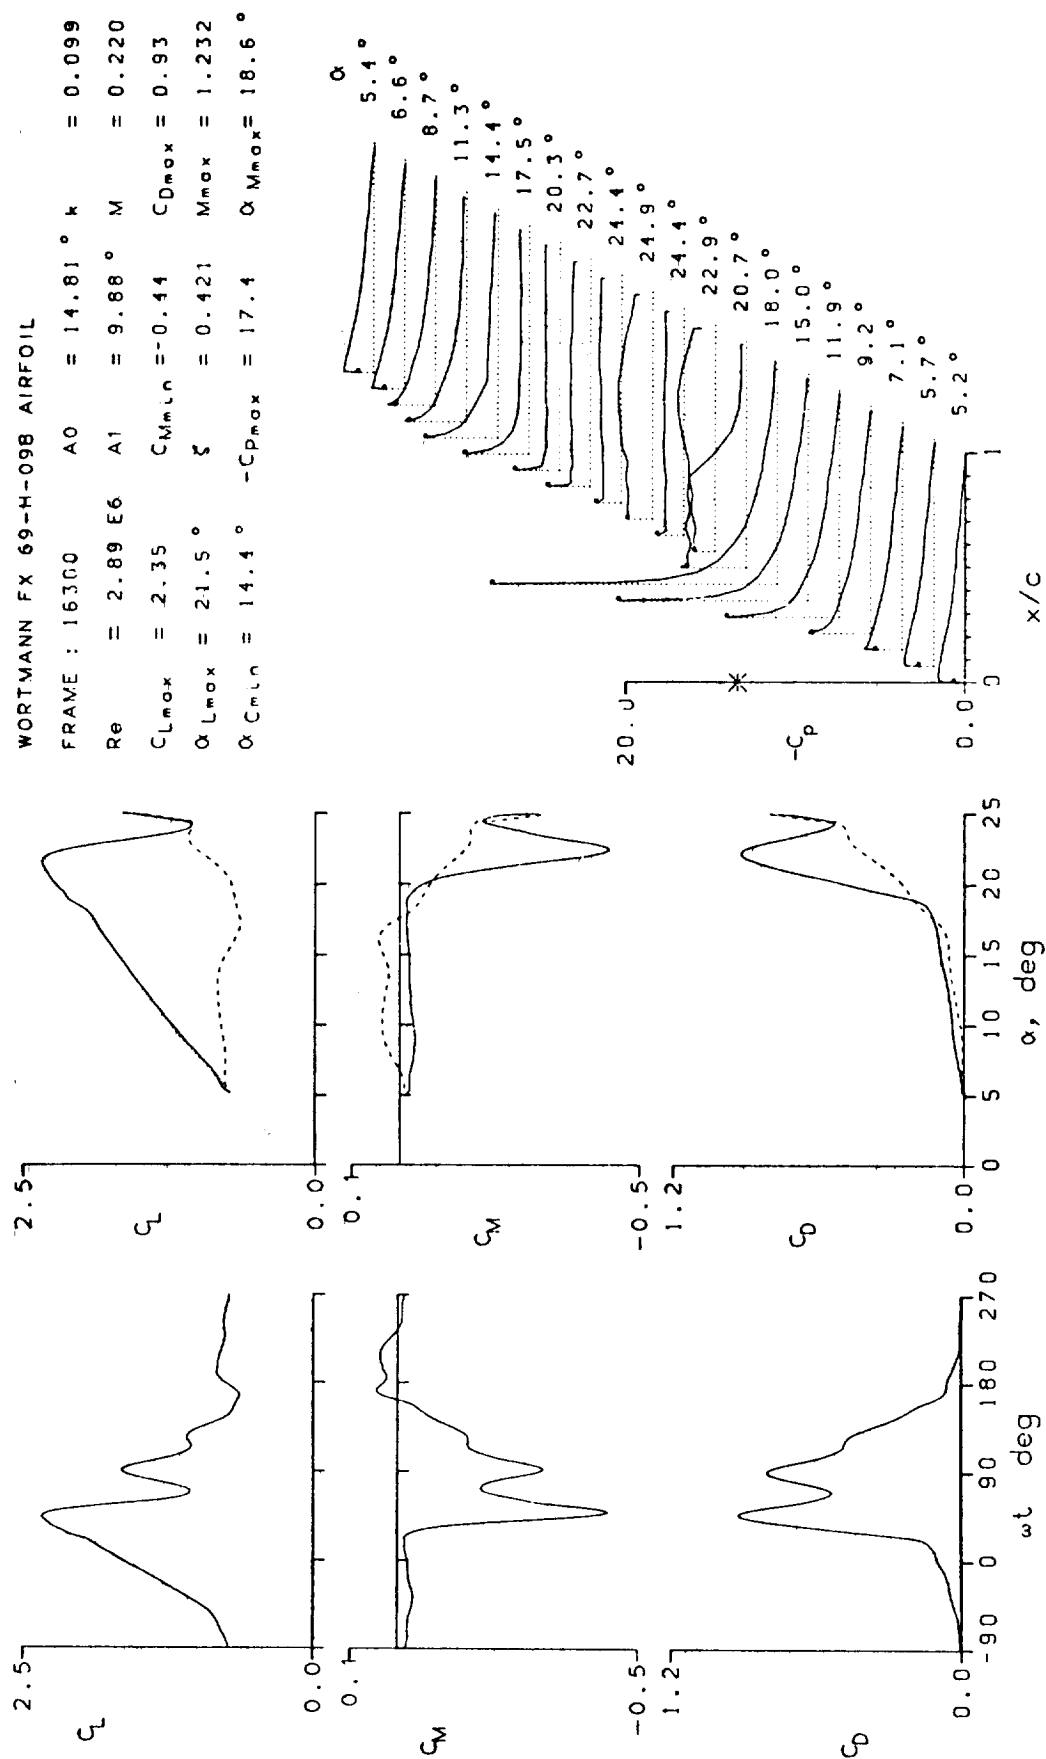


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 16308 A0 = 14.83° k = 0.099
 Re = 3.23 E6 A1 = 9.88° M = 0.249
 $C_{Lmax} = 2.32$ $C_{Dmin} = -0.44$ $C_{Dmax} = 0.88$
 $\alpha_{Lmax} = 20.8^\circ$ $\xi = 0.543$ $M_{max} = 1.273$
 $\alpha_{Cmin} = 14.4^\circ$ $-C_{pmax} = 14.0$ $\alpha_{Mmax} = 16.8^\circ$

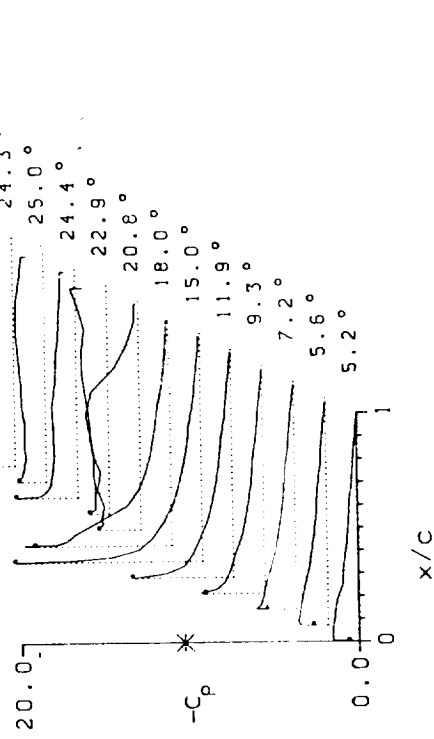
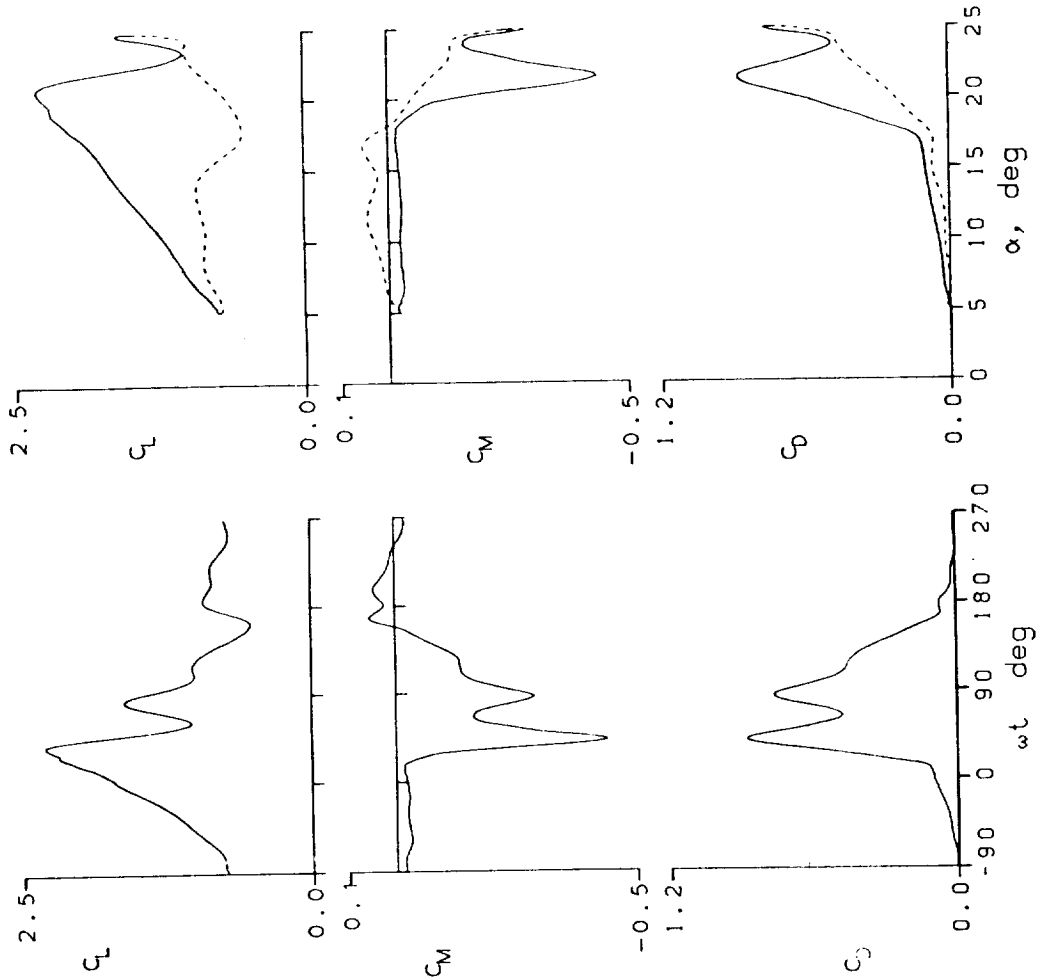


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL TRIP

FRAME : 17100 $A_0 = 14.81^\circ$ $k = 0.050$

$Re = 2.46 \cdot 10^6$ $A_1 = 9.88^\circ$ $M = 0.184$

$C_{Lmax} = 1.88$ $C_{Mmin} = -0.32$ $C_{Dmax} = 0.61$

$\alpha_{Lmax} = 18.9^\circ$ $\xi = 0.306$ $M_{max} = 0.762$

$\alpha_{Cmin} = 14.3^\circ$ $-C_{pmax} = 12.8$ $\alpha_{Mmax} = 16.4^\circ$

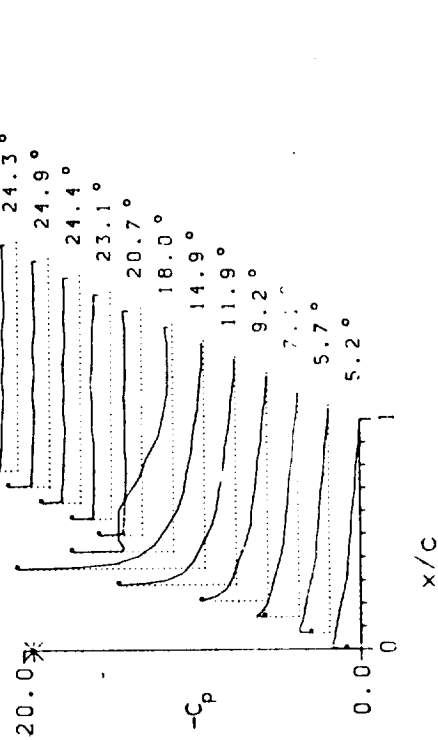
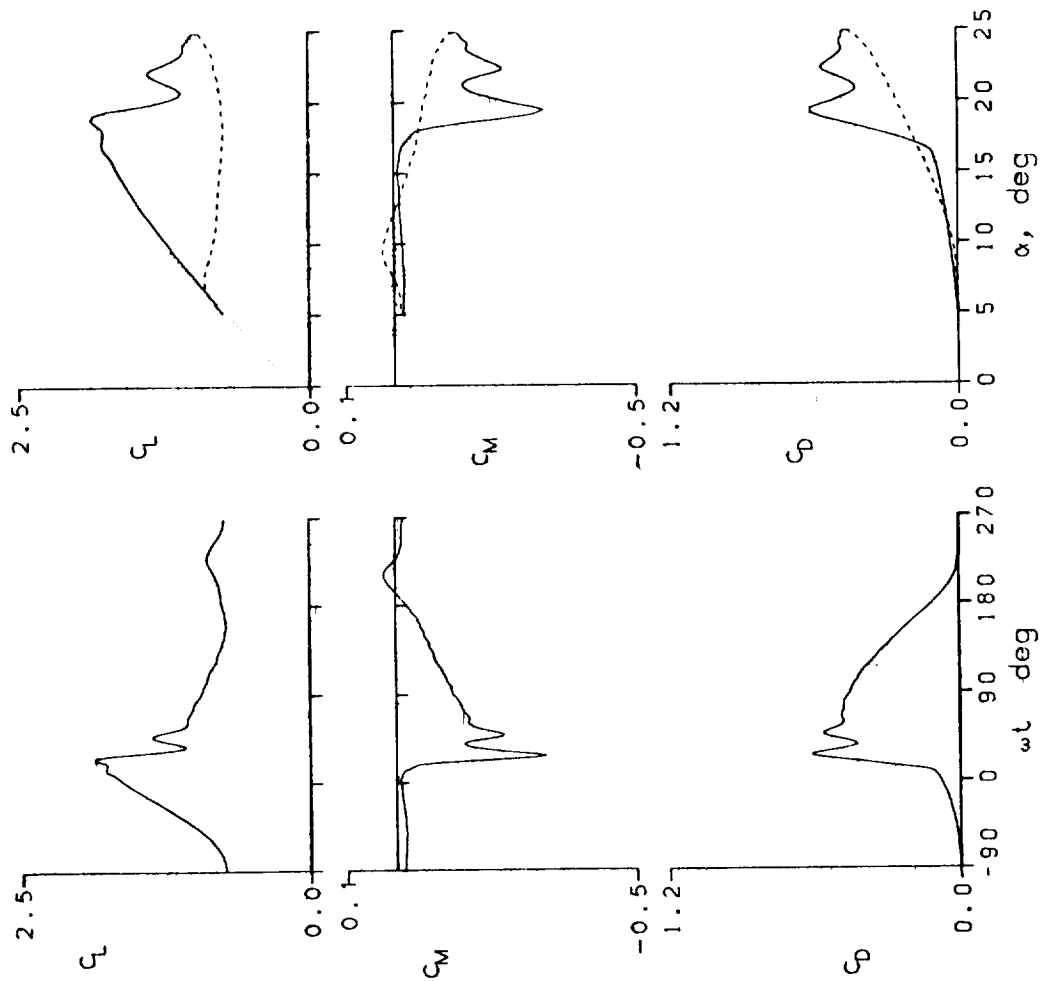


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL TRIP

FRAME : 17103 $A_0 = 14.81^\circ$ $k = 0.099$

$Re = 2.45 \times 10^6$ $A_1 = 9.90^\circ$ $M = 0.184$

$C_{Lmax} = 2.23$ $C_{Mmin} = -0.47$ $C_{Dmax} = 0.91$

$\alpha_{Lmax} = 21.5^\circ$ $\xi = 0.420$ $M_{max} = 0.794$

$\alpha_{Cmin} = 14.3^\circ$ $-C_{Pmax} = 13.7$ $\alpha_{Mmax} = 17.1^\circ$

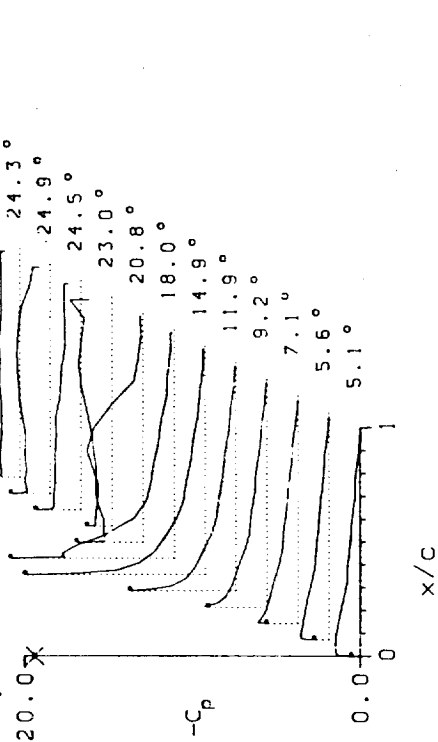
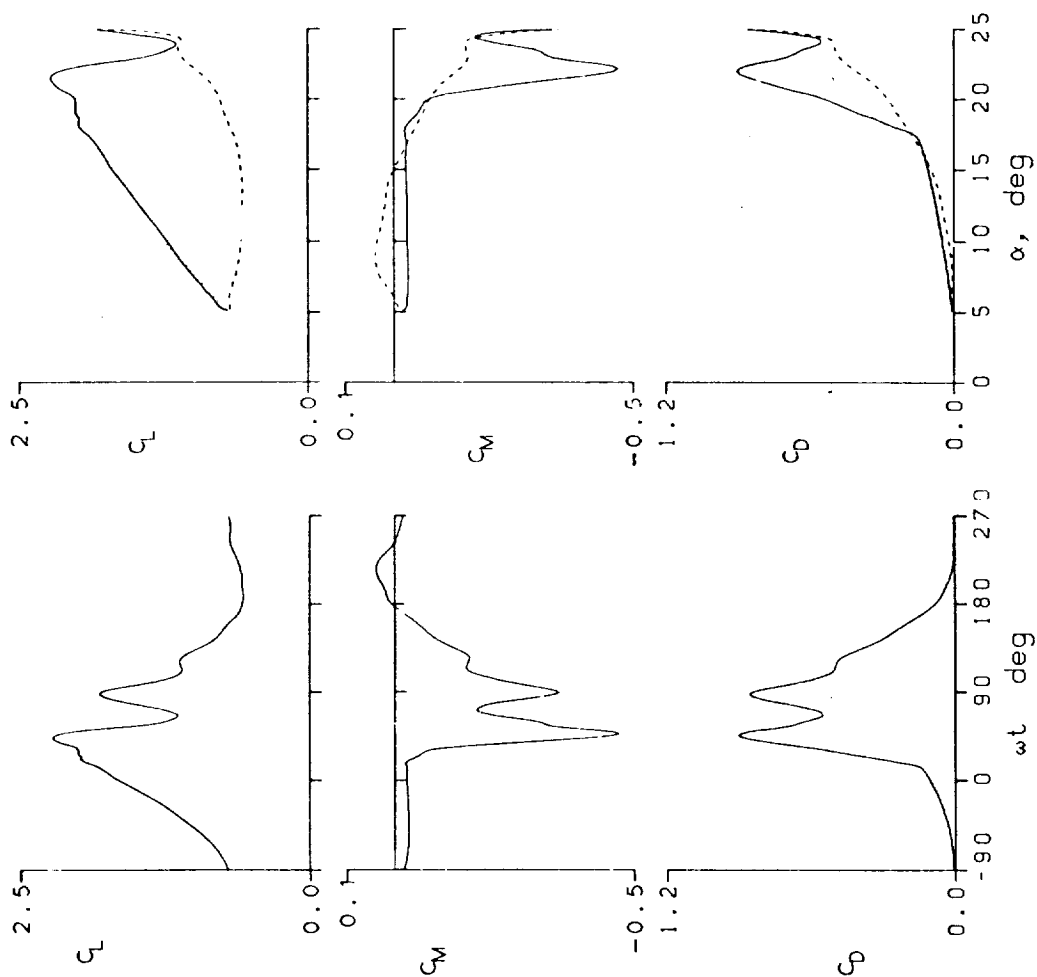


Figure 14.- Continued.

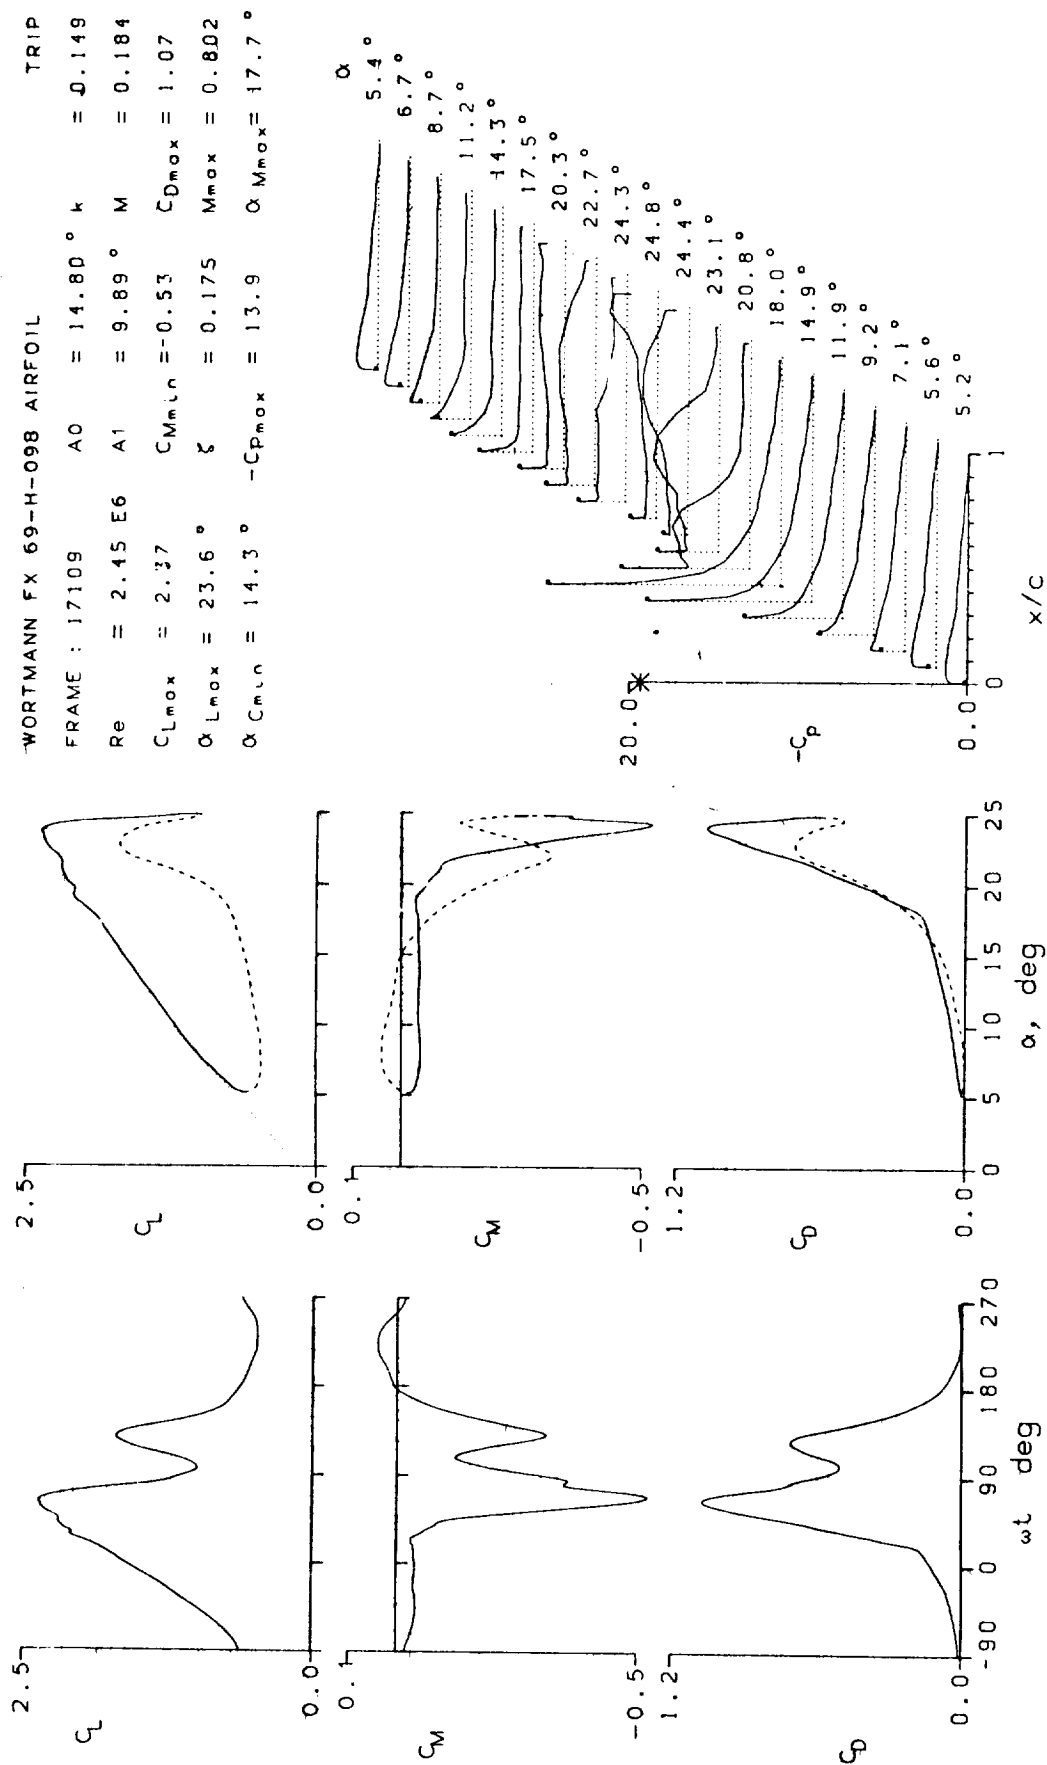


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL TRIP

FRAME : 17117 A0 = 14.84° k = 0.025

Re = 3.77 E6 A1 = 9.89° M = 0.293

C_{Lmax} = 1.57 C_{Mmin} = -0.17 C_{Dmax} = 0.47

α_{Lmax} = 14.4° ξ = 0.174 M_{max} = 1.212

α_{Cmin} = 14.4° $-C_{Dmax}$ = 9.5 α_{Mmax} = 13.5°

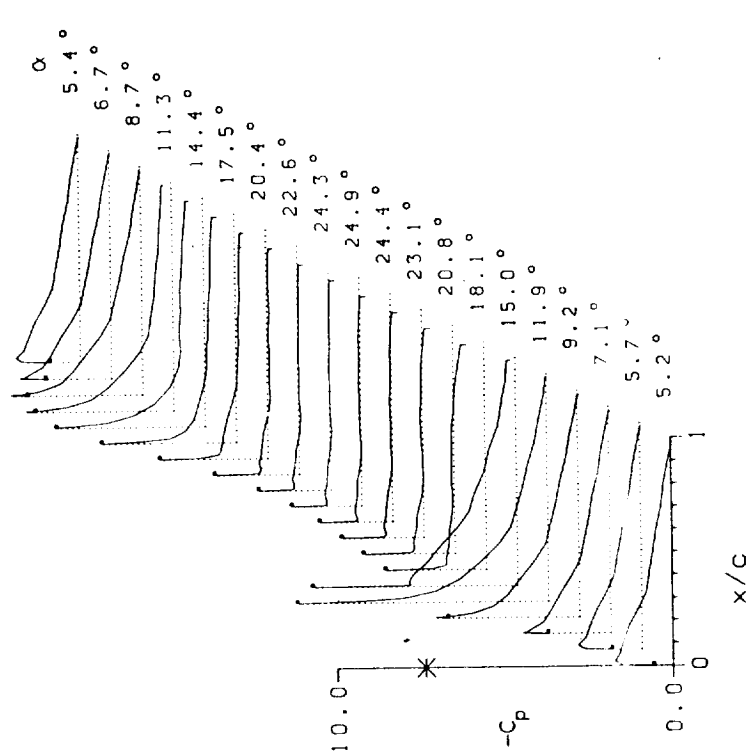
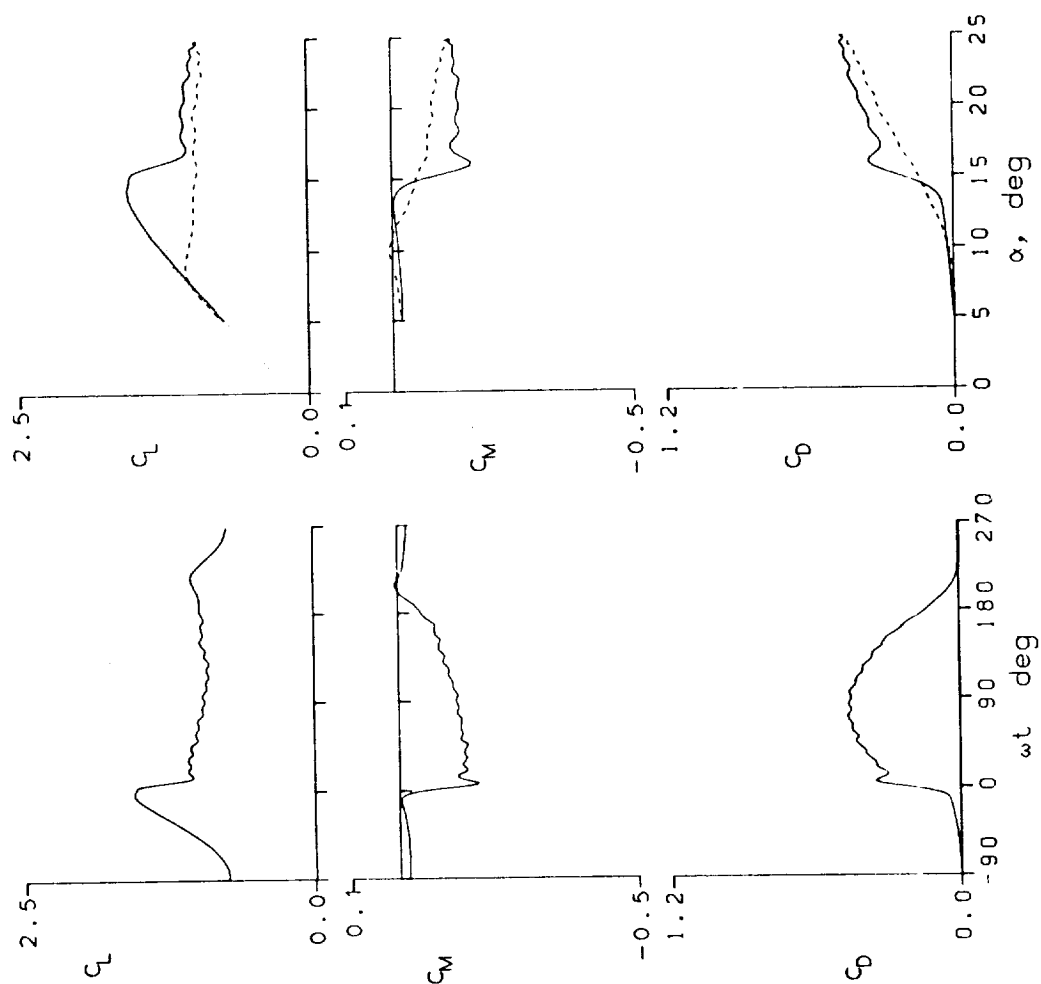


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL TRIP

FRAME : 17119 $A_0 = 14.81^\circ$ $k = 0.050$

$Re = 3.72 \text{ E}6$ $A_1 = 9.89^\circ$ $M = 0.291$

$C_{Lmax} = 1.84$ $C_{Mmin} = -0.29$ $C_{Dmax} = 0.54$

$\alpha_{Lmax} = 17.1^\circ$ $\xi = 0.333$ $M_{max} = 1.278$

$\alpha_{Cmin} = 14.3^\circ$ $-C_{Dmax} = 10.2$ $\alpha_{Mmax} = 14.3^\circ$

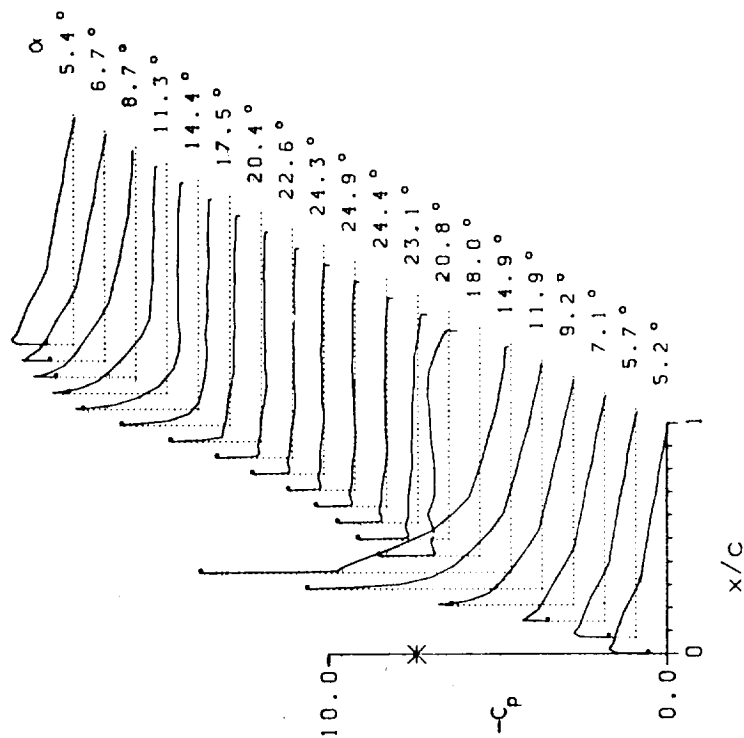
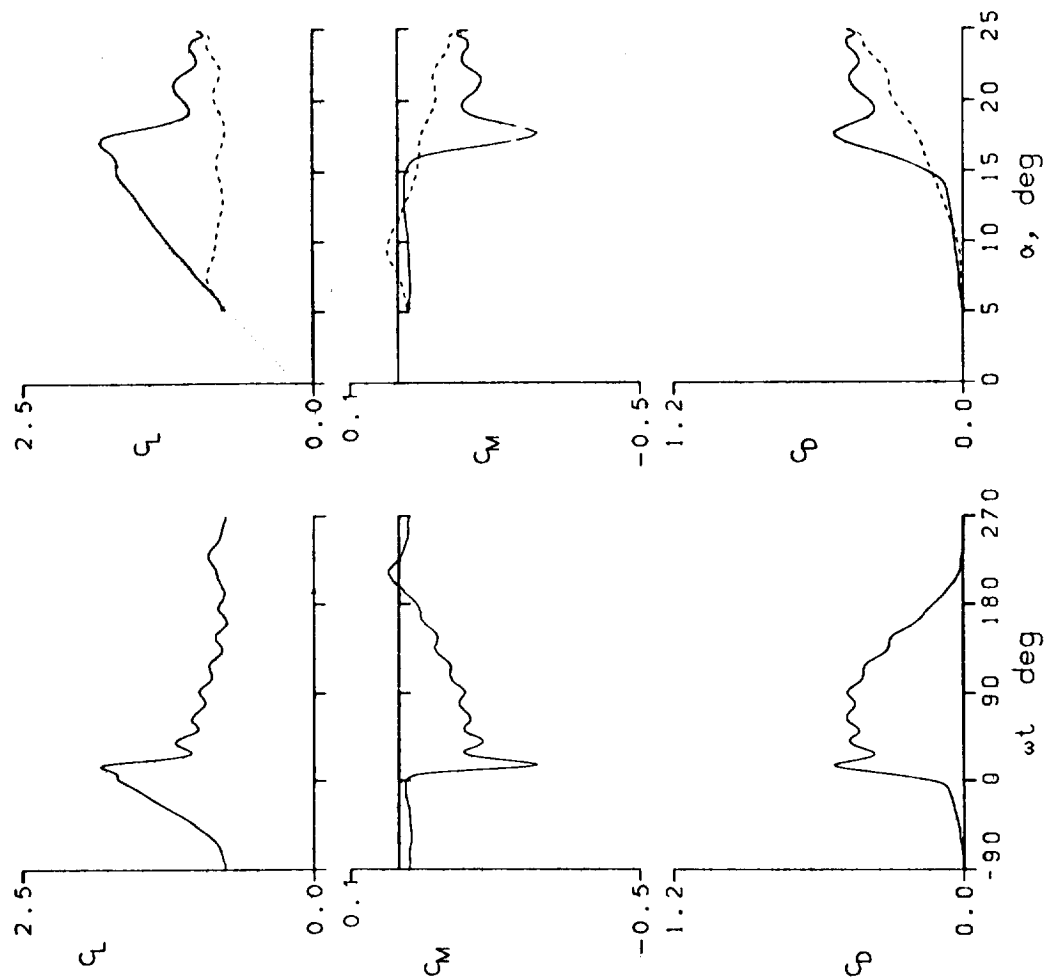


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 17200	$A_0 = 14.81^\circ$	$k = 0.100$	TRIP
$Re = 3.70 \text{ E}6$	$A_1 = 9.88^\circ$	$M = 0.290$	
$C_{Lmax} = 2.16$	$C_{Mmin} = -0.45$	$C_{Dmax} = 0.82$	
$\alpha_{Lmax} = 20.0^\circ$	$\xi = 0.676$	$M_{max} = 1.316$	
$\alpha_{Cmin} = 14.4^\circ$	$-C_{Pmax} = 10.7$	$\alpha_{Mmax} = 14.6^\circ$	



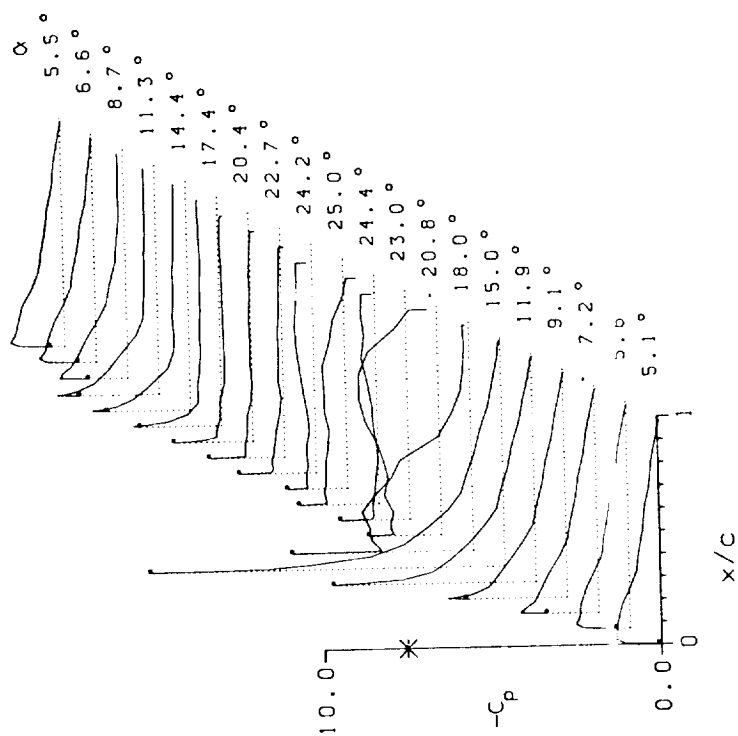


Figure 14.- Continued.

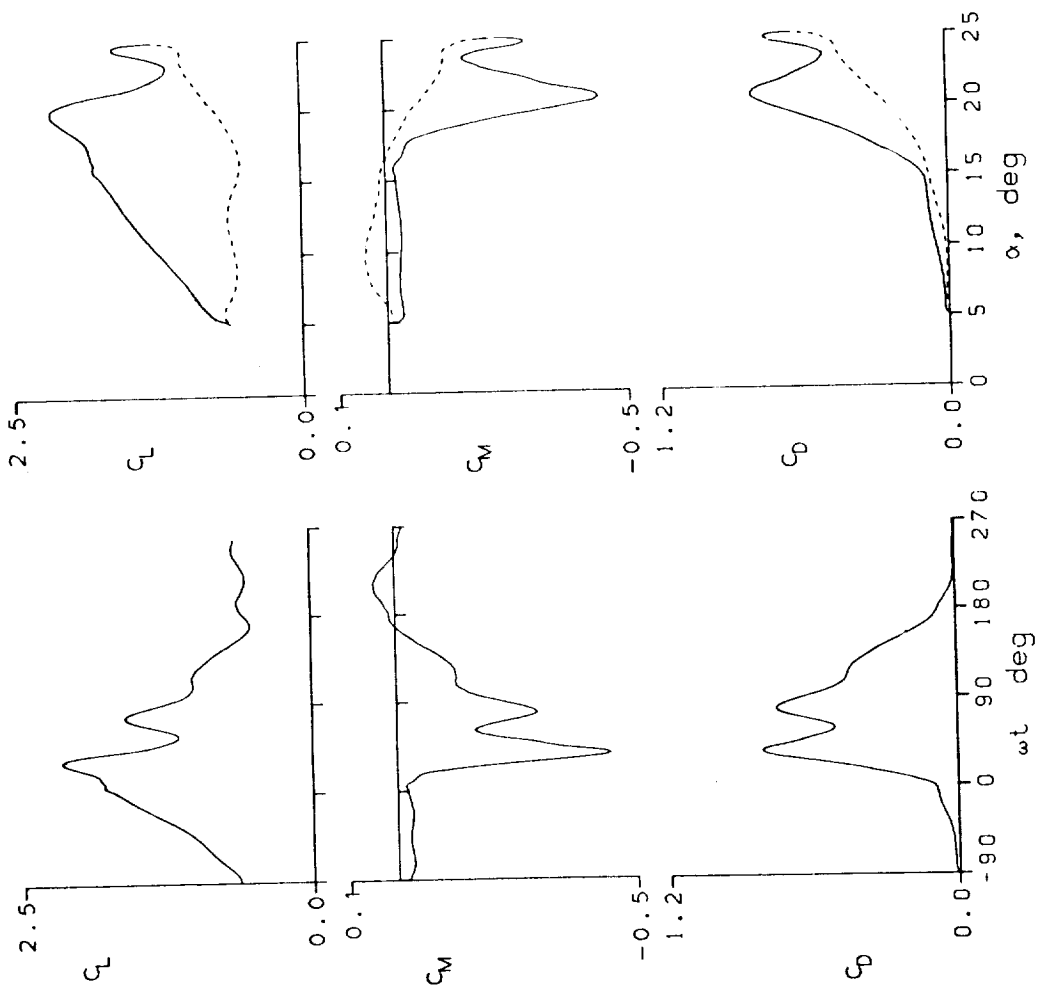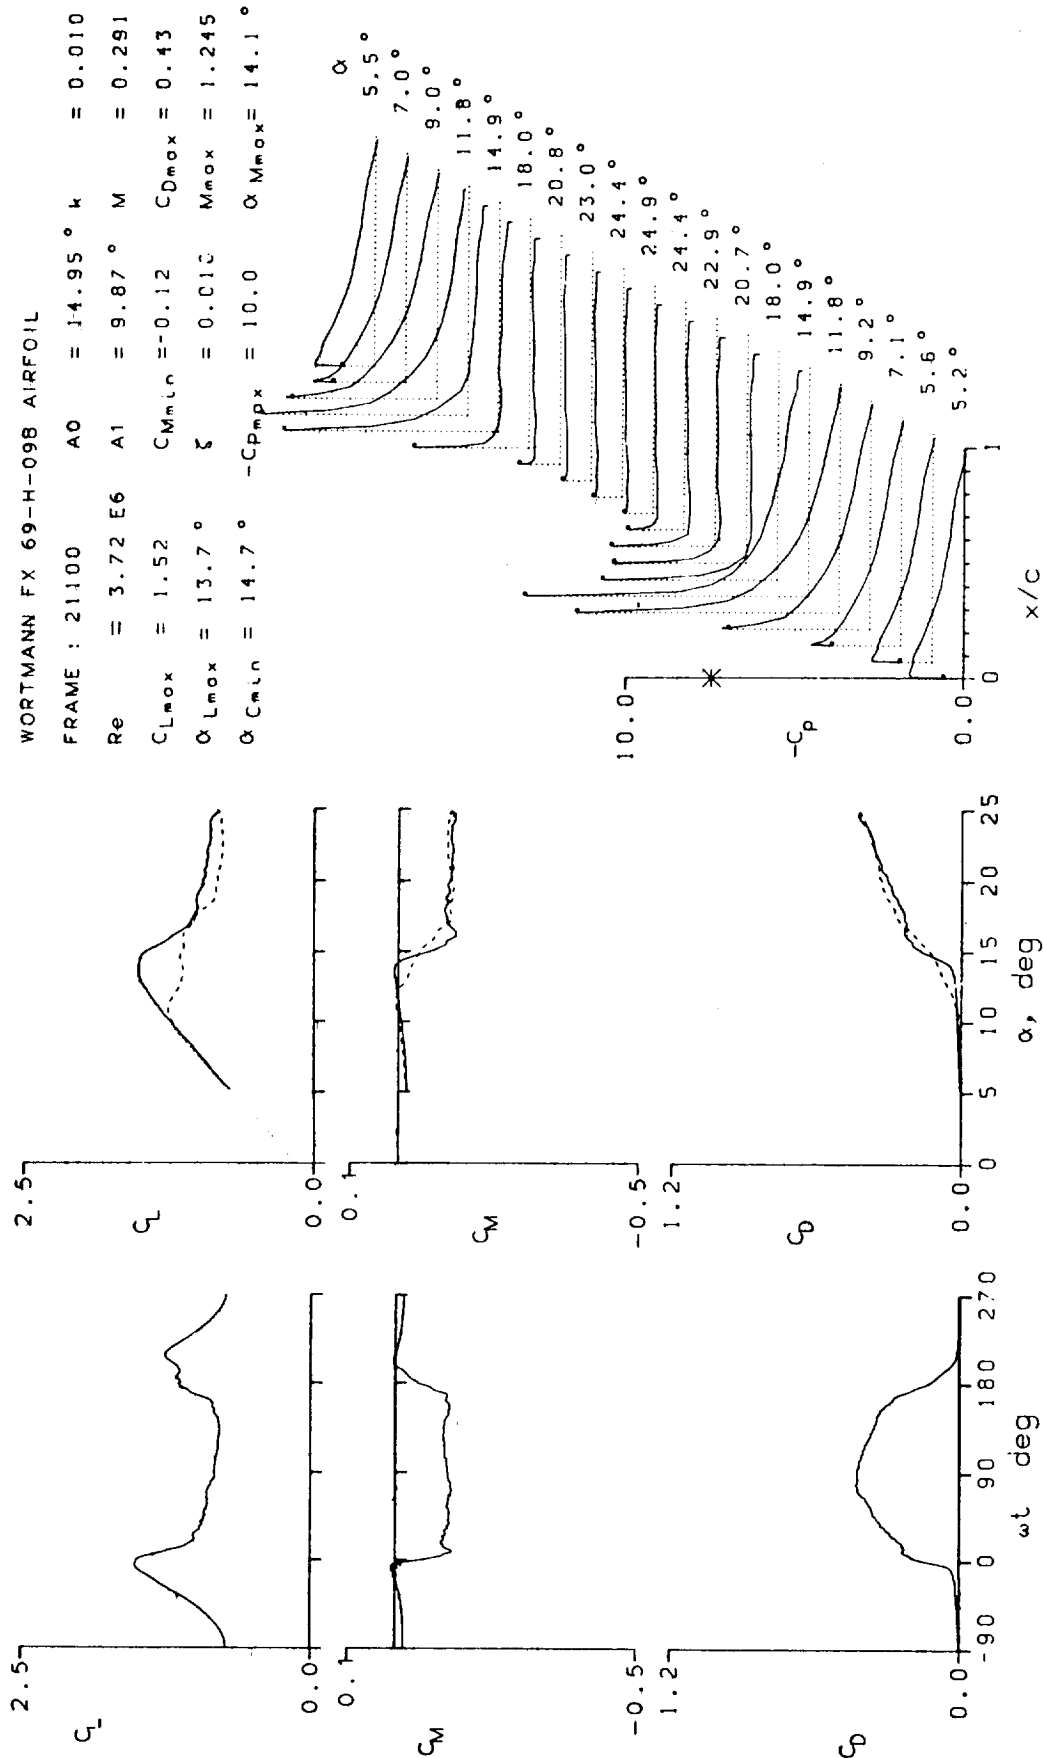

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 21107 $A_0 = 9.78^\circ$ $k = 0.010$
 $Re = 3.79 \text{ E}6$ $A_1 = 9.94^\circ$ $M = 0.299$
 $C_{Lmax} = 1.50$ $C_{Mmin} = -0.11$ $C_{Dmax} = 0.28$
 $\alpha_{Lmax} = 13.3^\circ$ $\xi = 0.026$ $M_{max} = 1.262$
 $\alpha_{Cmin} = 9.3^\circ$ $-C_{Pmax} = 9.5$ $\alpha_{Mmax} = 13.6^\circ$

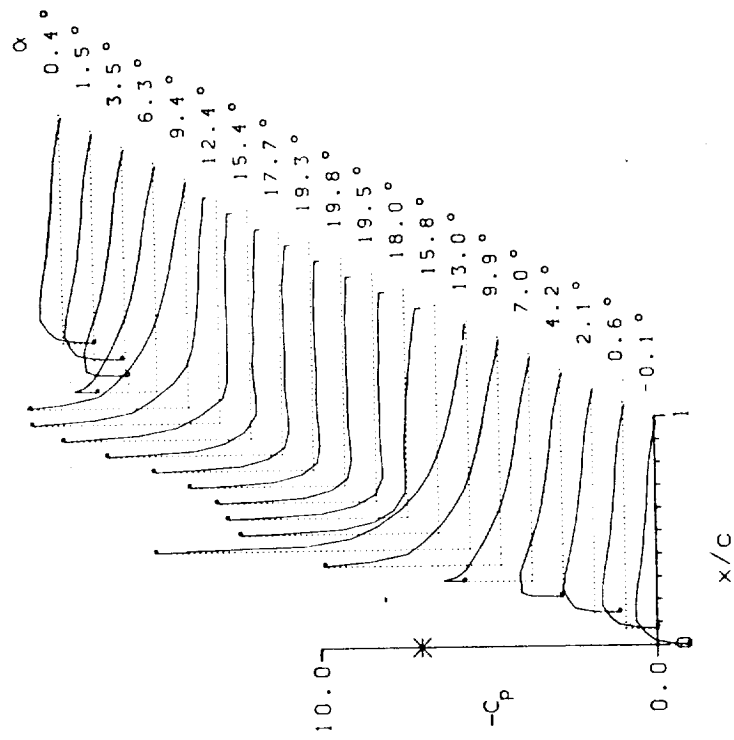
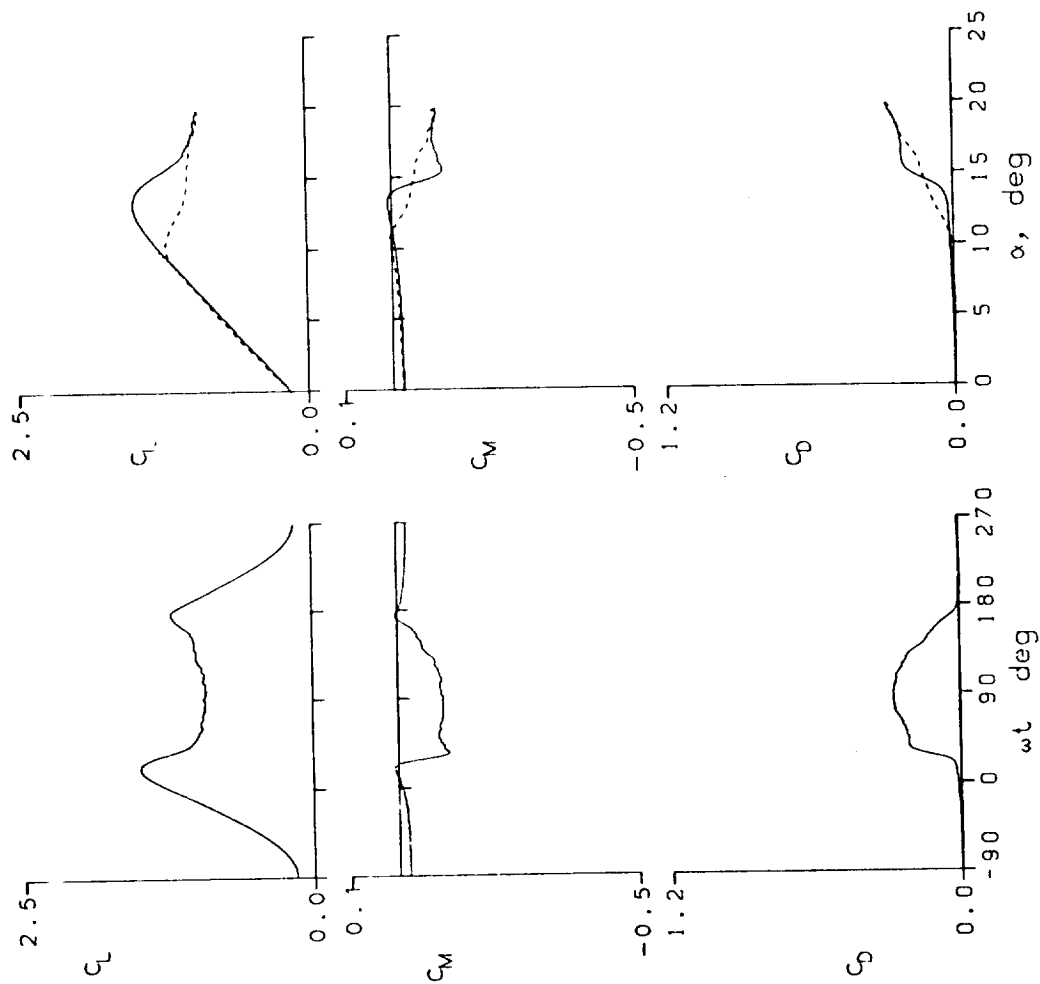


Figure 14.- Continued.

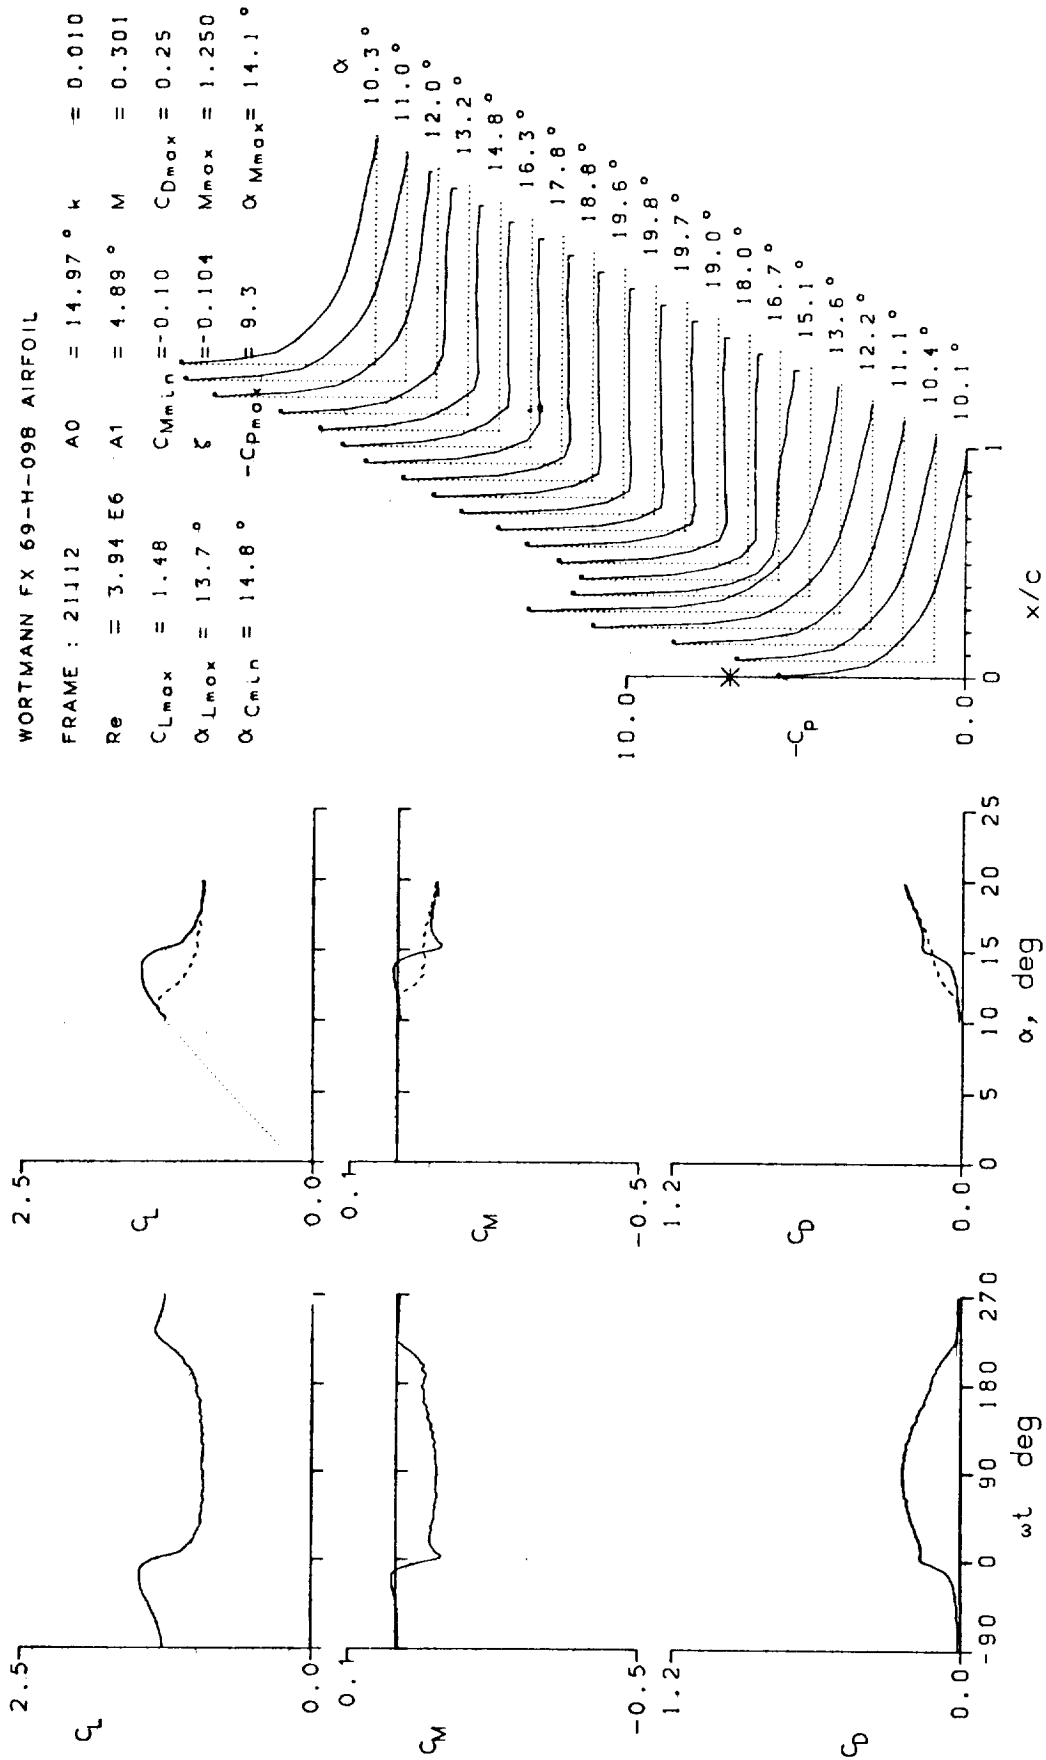


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 21200 A0 = 9.94° k = 0.010
 Re = 3.93 E6 A1 = 4.89° M = 0.301
 $C_{Lmax} = 1.49$ $C_{Mmin} = -0.07$ $C_{Dmax} = 0.14$
 $\alpha_{C_{Lmax}} = 14.0^\circ$ $\xi = -0.136$ $M_{max} = 1.258$
 $\alpha_{C_{Lmin}} = 9.8^\circ$ $-C_{Dmax} = 9.4$ $\alpha_{M_{max}} = 14.0^\circ$

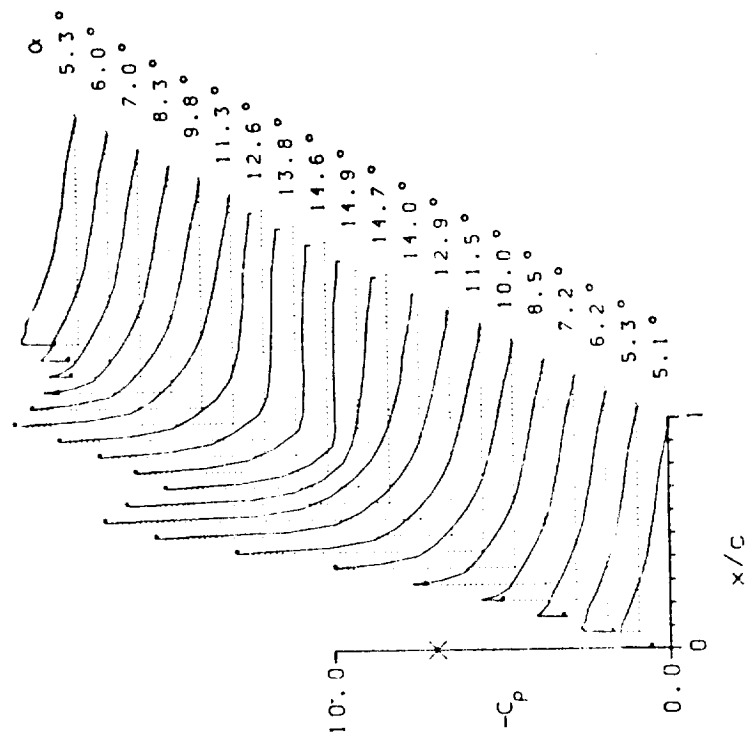
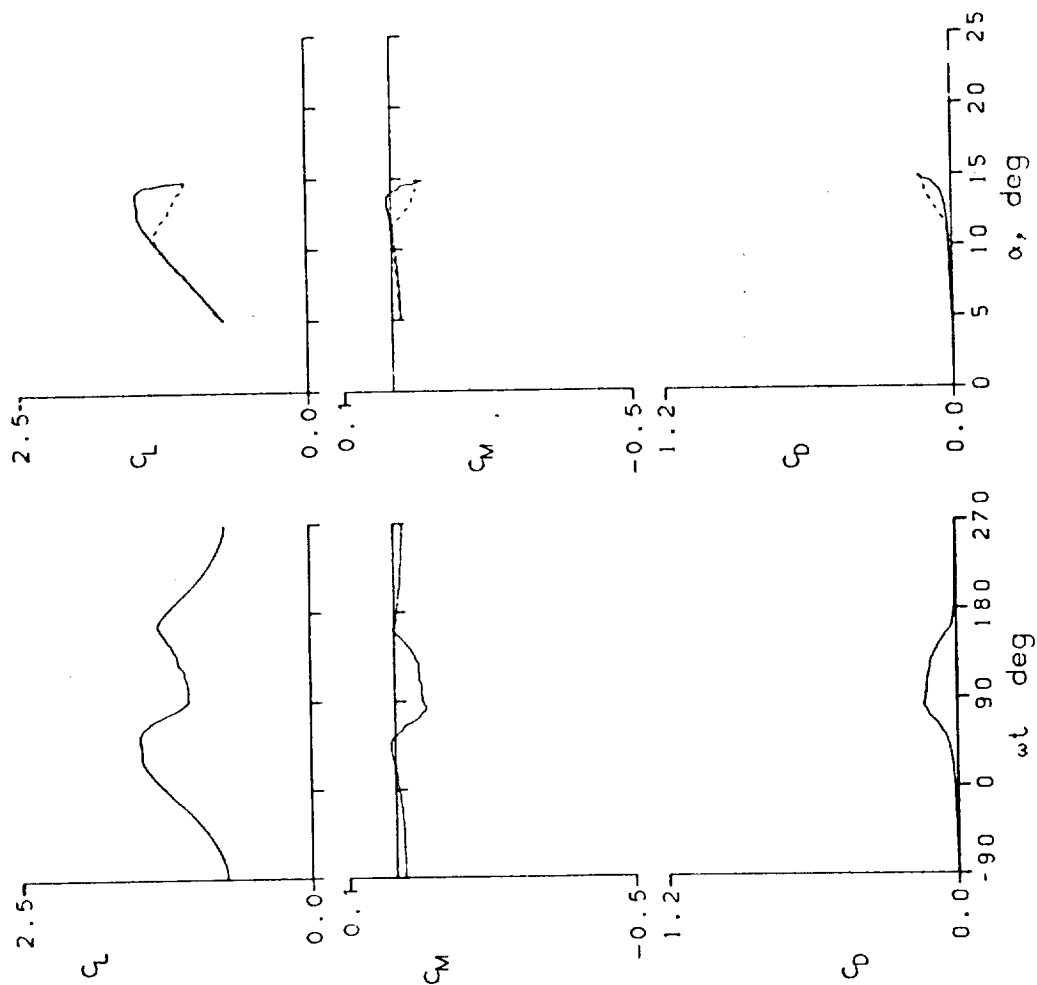


Figure 14.- Continued.

WORTMANN FX 69-M-09B AIRFOIL

FRAME : 21208	A0 = 3.16°	k = 0.010
Re = 3.90 E6	A1 = 10.16°	M = 0.302
CLmax = 1.50	CMmin = -0.04	CDmax = 0.06
αLmax = 12.8°	ξ = 0.022	Mmax = 1.224
αCMmin = 2.8°	-CDmax = 9.0	αMmax = 13.4°

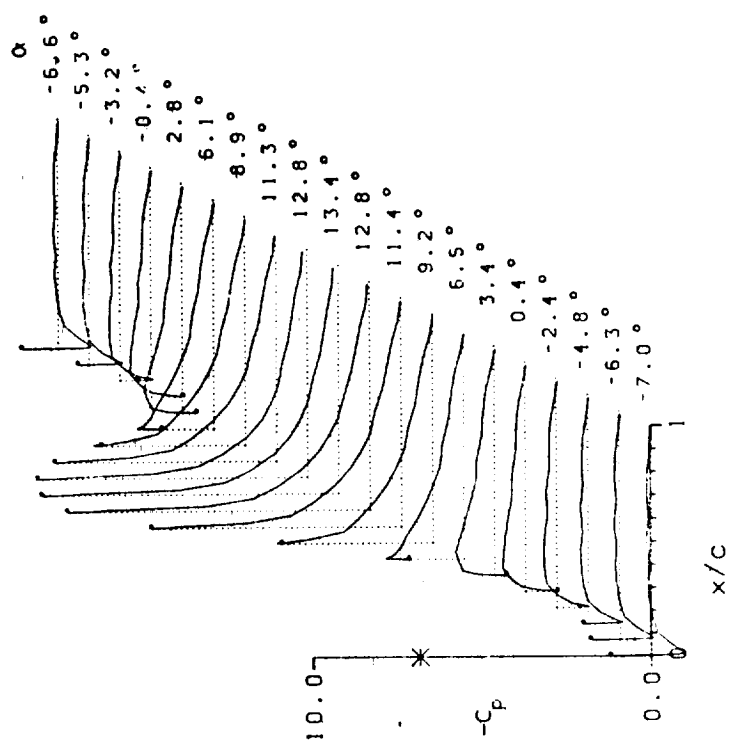
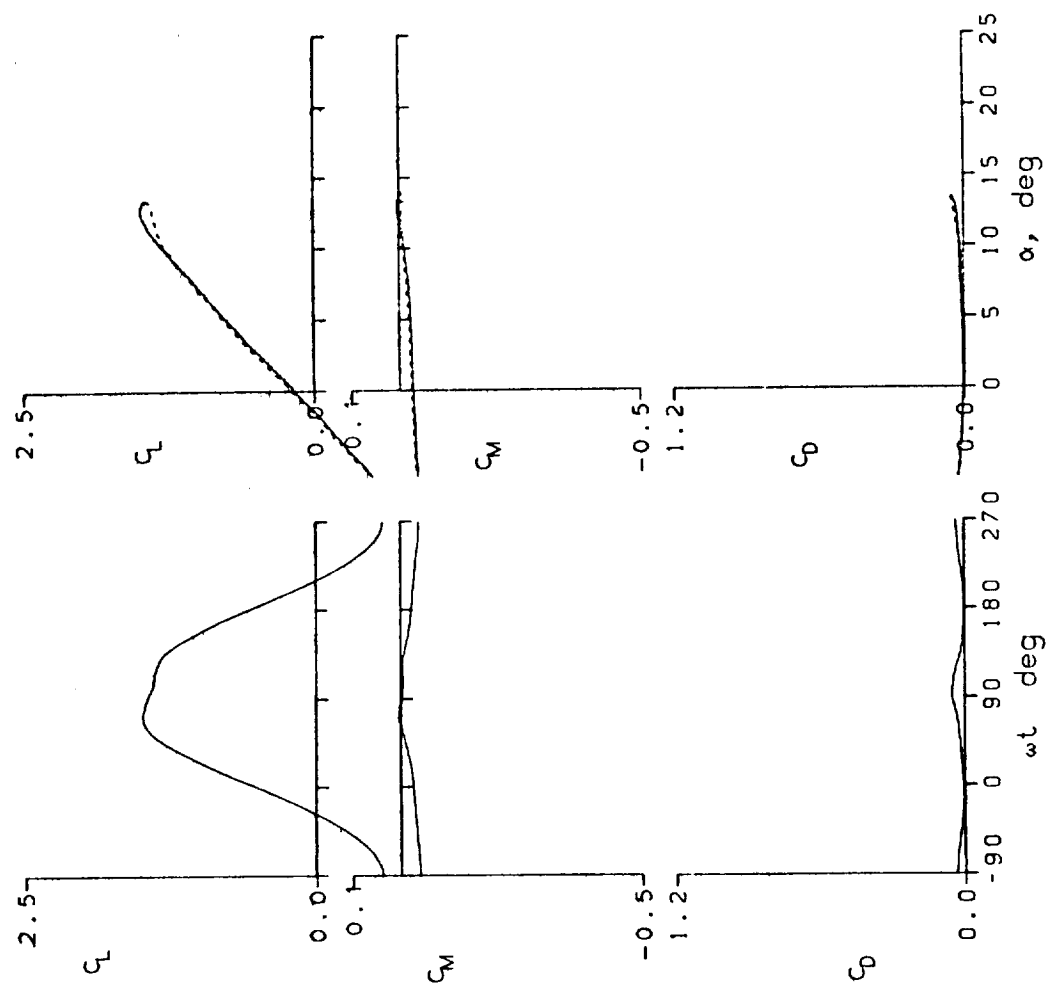


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 21219 $A_0 = 6.38^\circ$ $k = 0.010$
 $R_n = 2.46 \text{ EG}$ $A_1 = 10.00^\circ$ $M = 0.184$
 $C_{L_{\max}} = 1.54$ $C_{M_{\min}} = -0.09$ $C_{D_{\max}} = 0.19$
 $\alpha_{L_{\max}} = 14.8^\circ$ $\xi = -0.018$ $M_{\max} = 0.398$
 $\alpha_{C_{M_{\min}}} = 5.9^\circ$ $-C_{p_{\max}} = 11.0$ $\alpha_{M_{\max}} = 15.1^\circ$

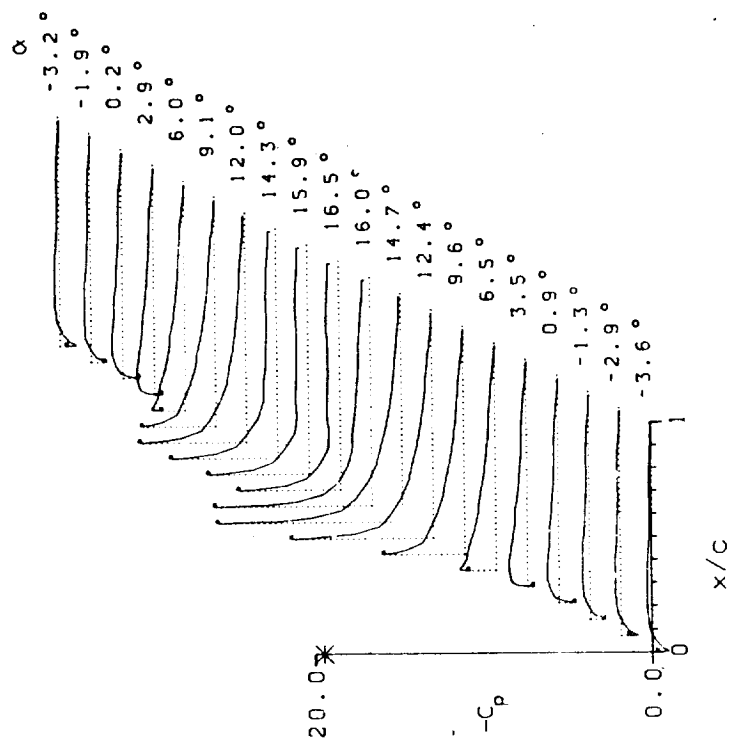
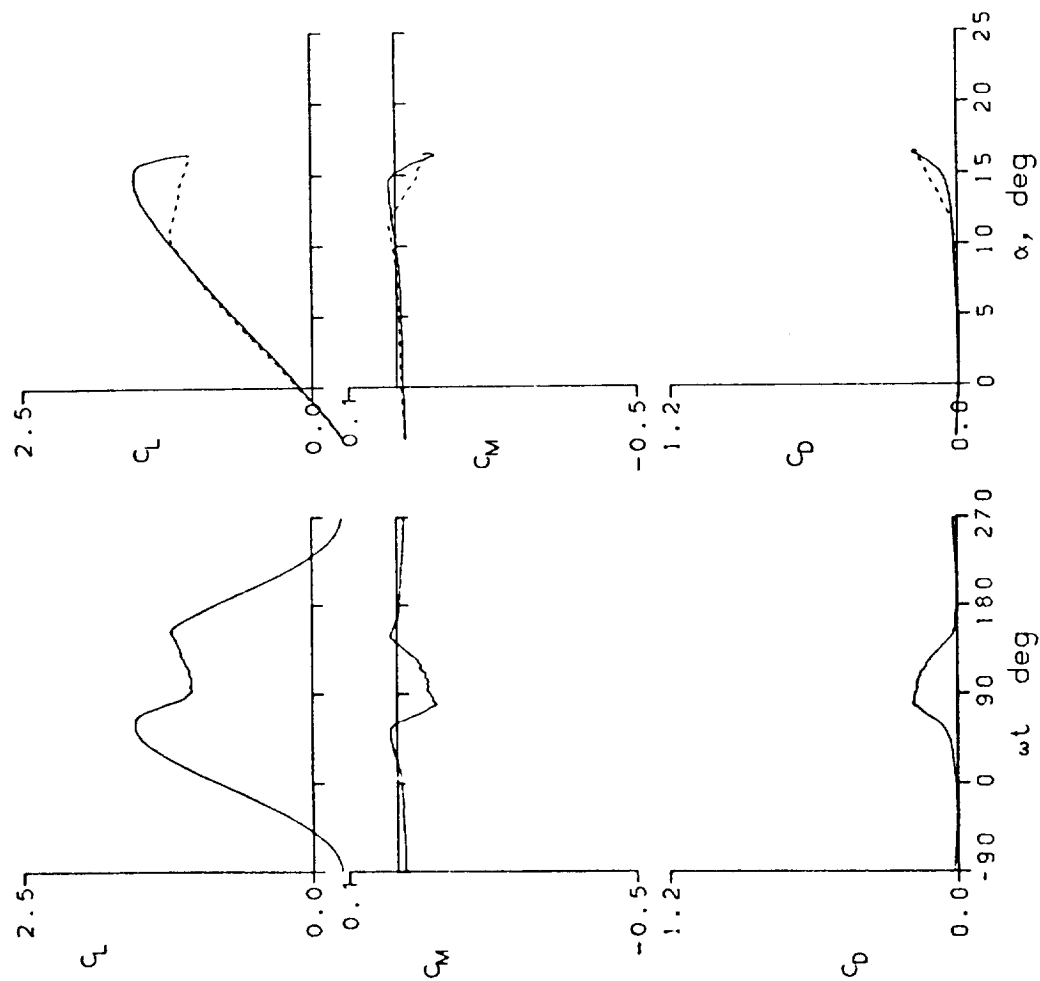


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22023	A0 = 14.84°	k = 0.025
Re = 3.73 E6	A1 = 9.90°	M = 0.293
CLmax = 1.58	CMmin = -0.17	CDmax = 0.47
αLmax = 14.4°	ξ = 0.202	Mmax = 1.224
αCmin = 14.4°	-CPmax = 9.6	αMmax = 13.8°

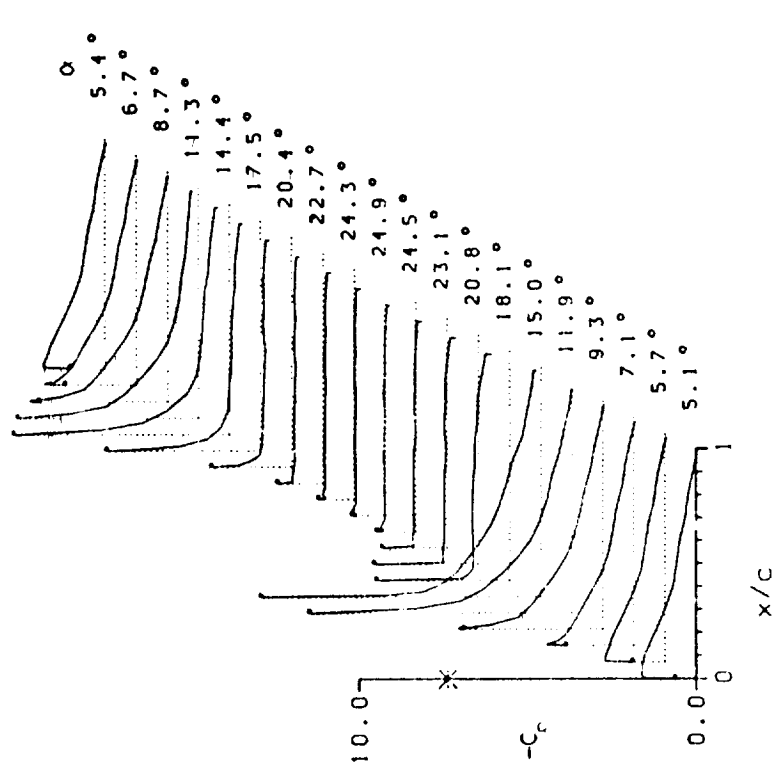
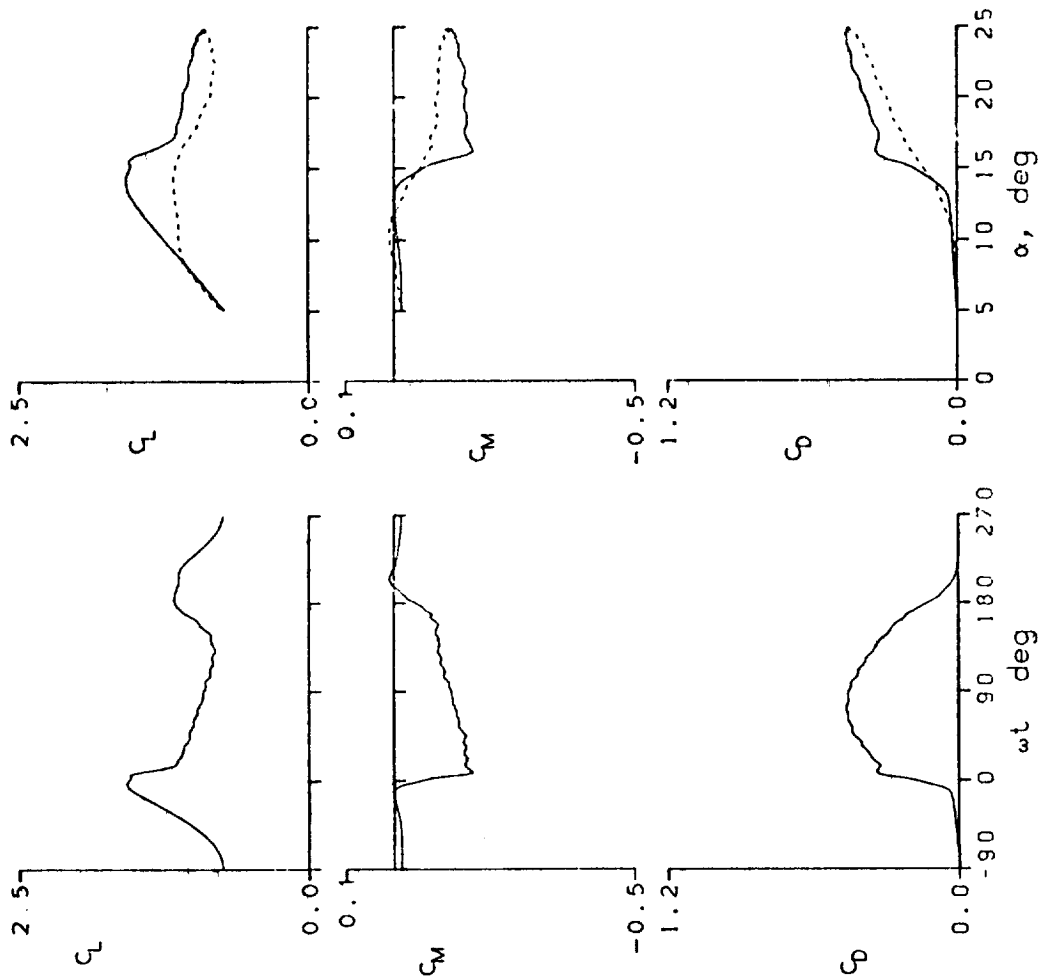


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22103 $A_0 = 14.82^\circ$ $k = 0.049$
 $Re = 3.75 \text{ E}6$ $A_1 = 9.90^\circ$ $M = 0.294$
 $C_{Lmax} = 1.82$ $C_{Mmin} = -0.28$ $C_{Dmax} = 0.53$
 $\alpha_{Lmax} = 17.1^\circ$ $\xi = 0.368$ $M_{max} = 1.348$
 $\alpha_{Cmin} = 14.3^\circ$ $-C_{Pmax} = 10.6$ $\alpha_{Mmax} = 14.6^\circ$

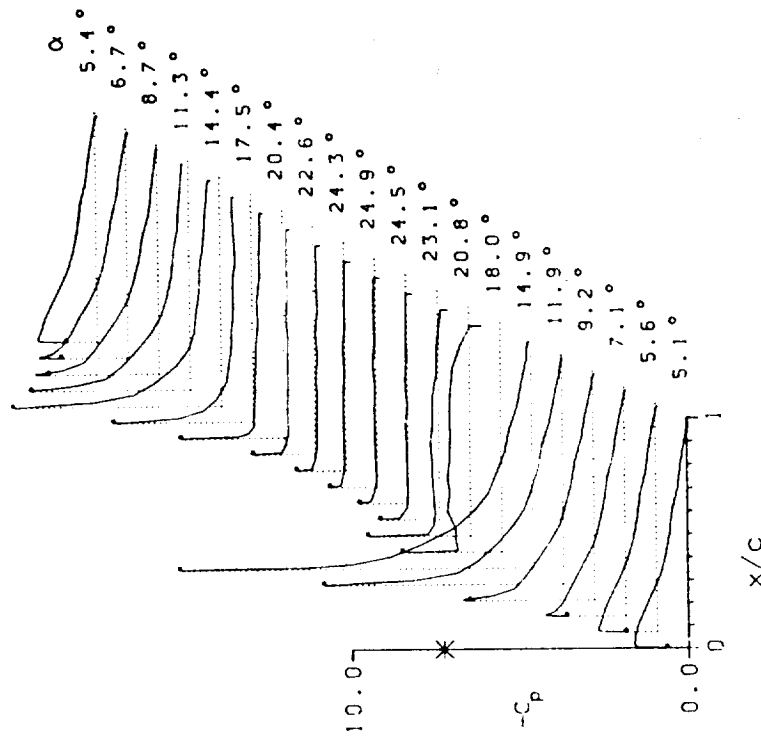
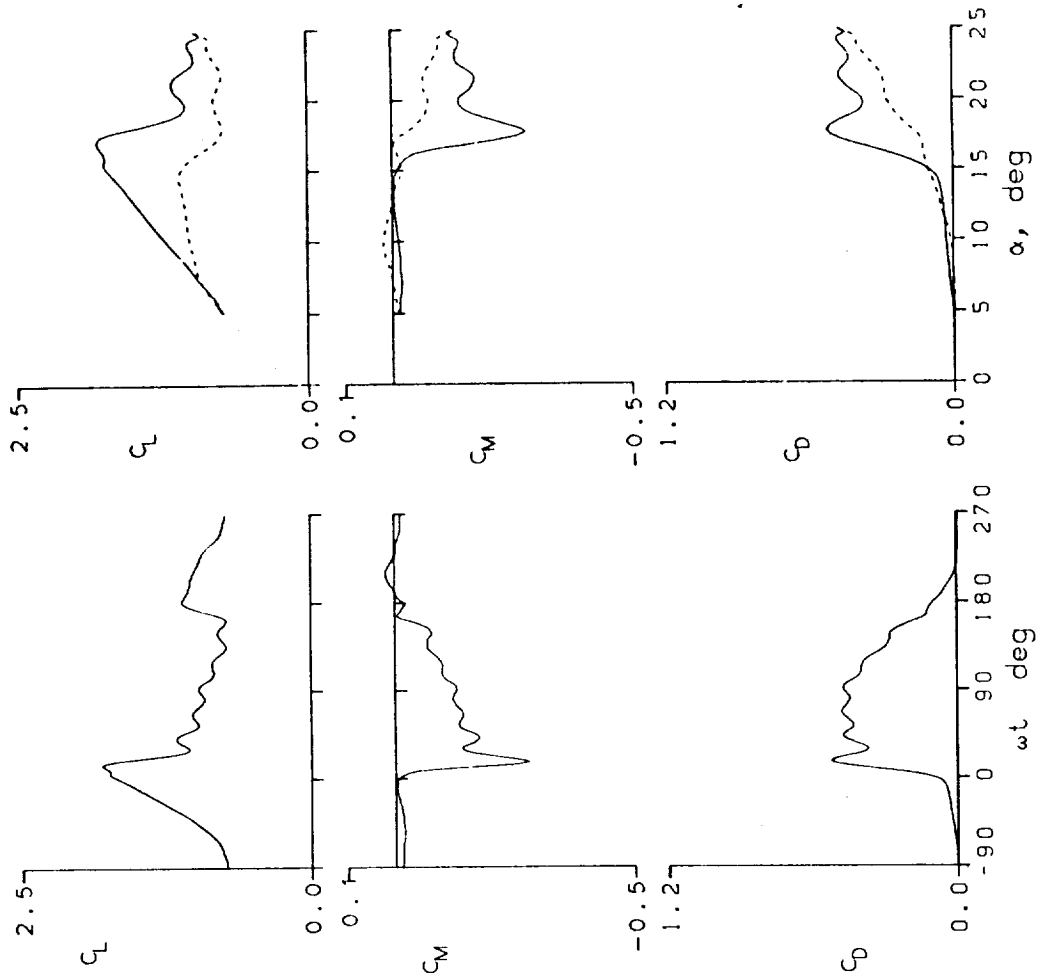


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22201	A0 = 14.79 °	k = 0.101
Re = 3.55 E6	A1 = 9.91 °	M = 0.285
C _{Lmax} = 2.15	C _{Mmin} = -0.42	C _{Dmax} = 0.81
α _{Lmax} = 20.3 °	ξ = 0.650	M _{max} = 1.354
α _{Cmin} = 14.3 °	-C _{pmax} = 11.4	α _{Mmax} = 15.5 °

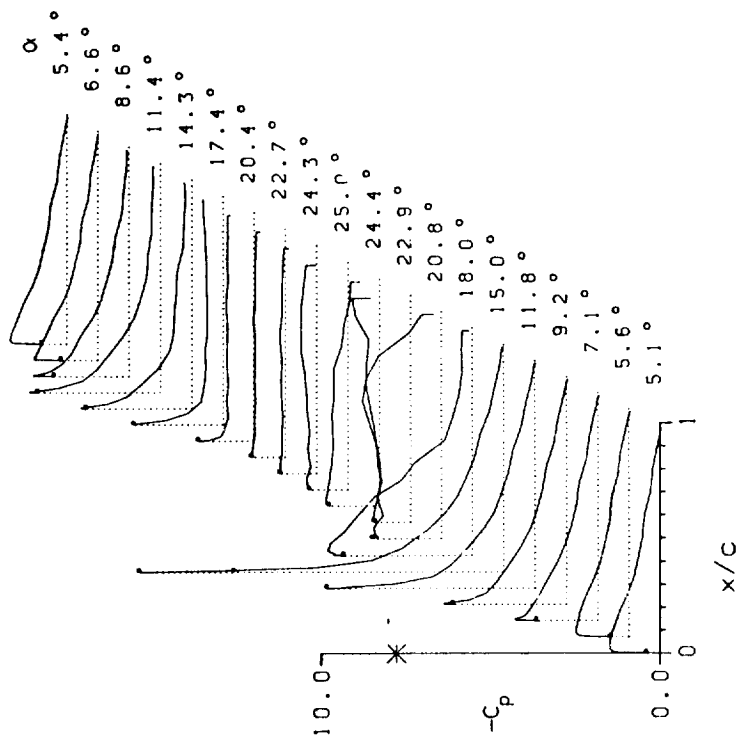
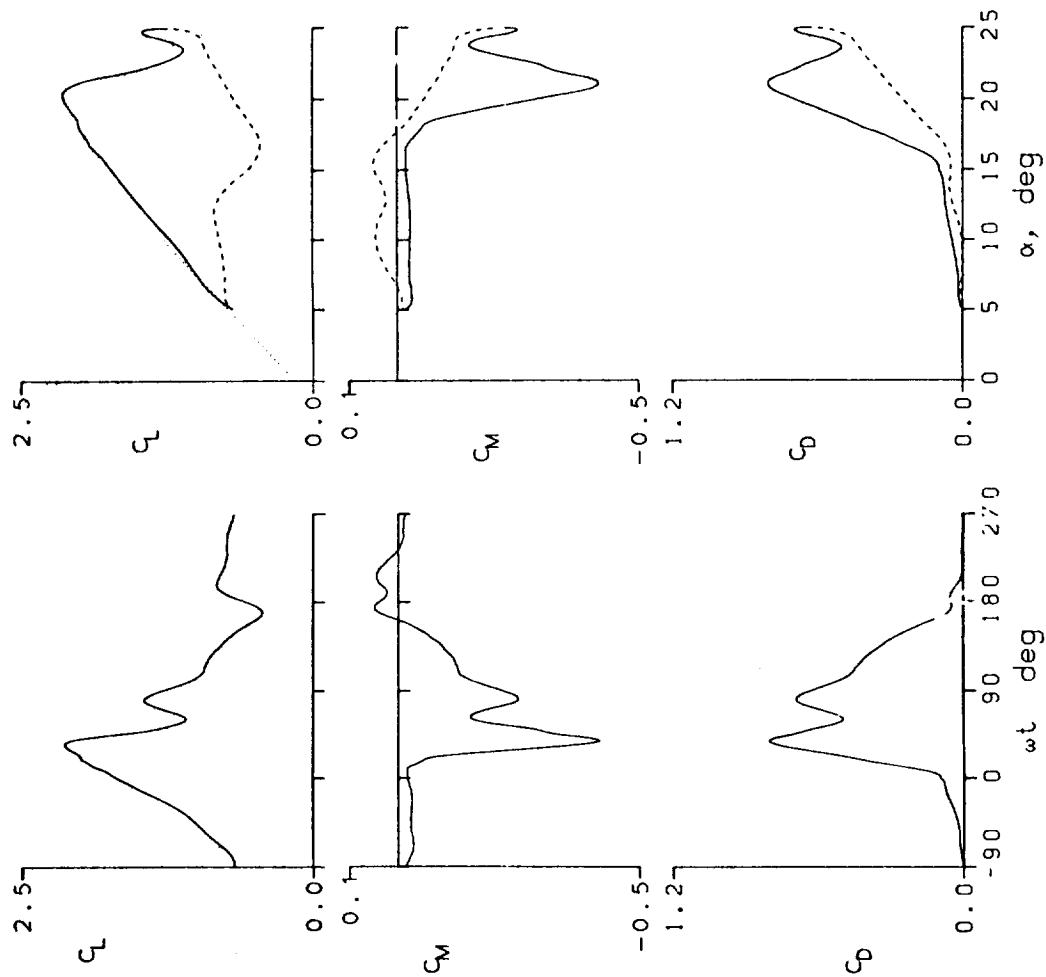


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22206 $A_0 = 14.87^\circ$ $k = 0.154$
 $Re = 3.48 \text{ E}6$ $A_1 = 9.88^\circ$ $M = 0.279$
 $C_{Lmax} = 2.23$ $C_{Mmin} = -0.49$ $C_{Dmax} = 1.00$
 $\alpha_{Lmax} = 22.6^\circ$ $\xi = 0.431$ $M_{max} = 1.348$
 $\alpha_{Cmin} = 14.5^\circ$ $-C_{Pmax} = 11.8$ $\alpha_{Mmax} = 16.5^\circ$

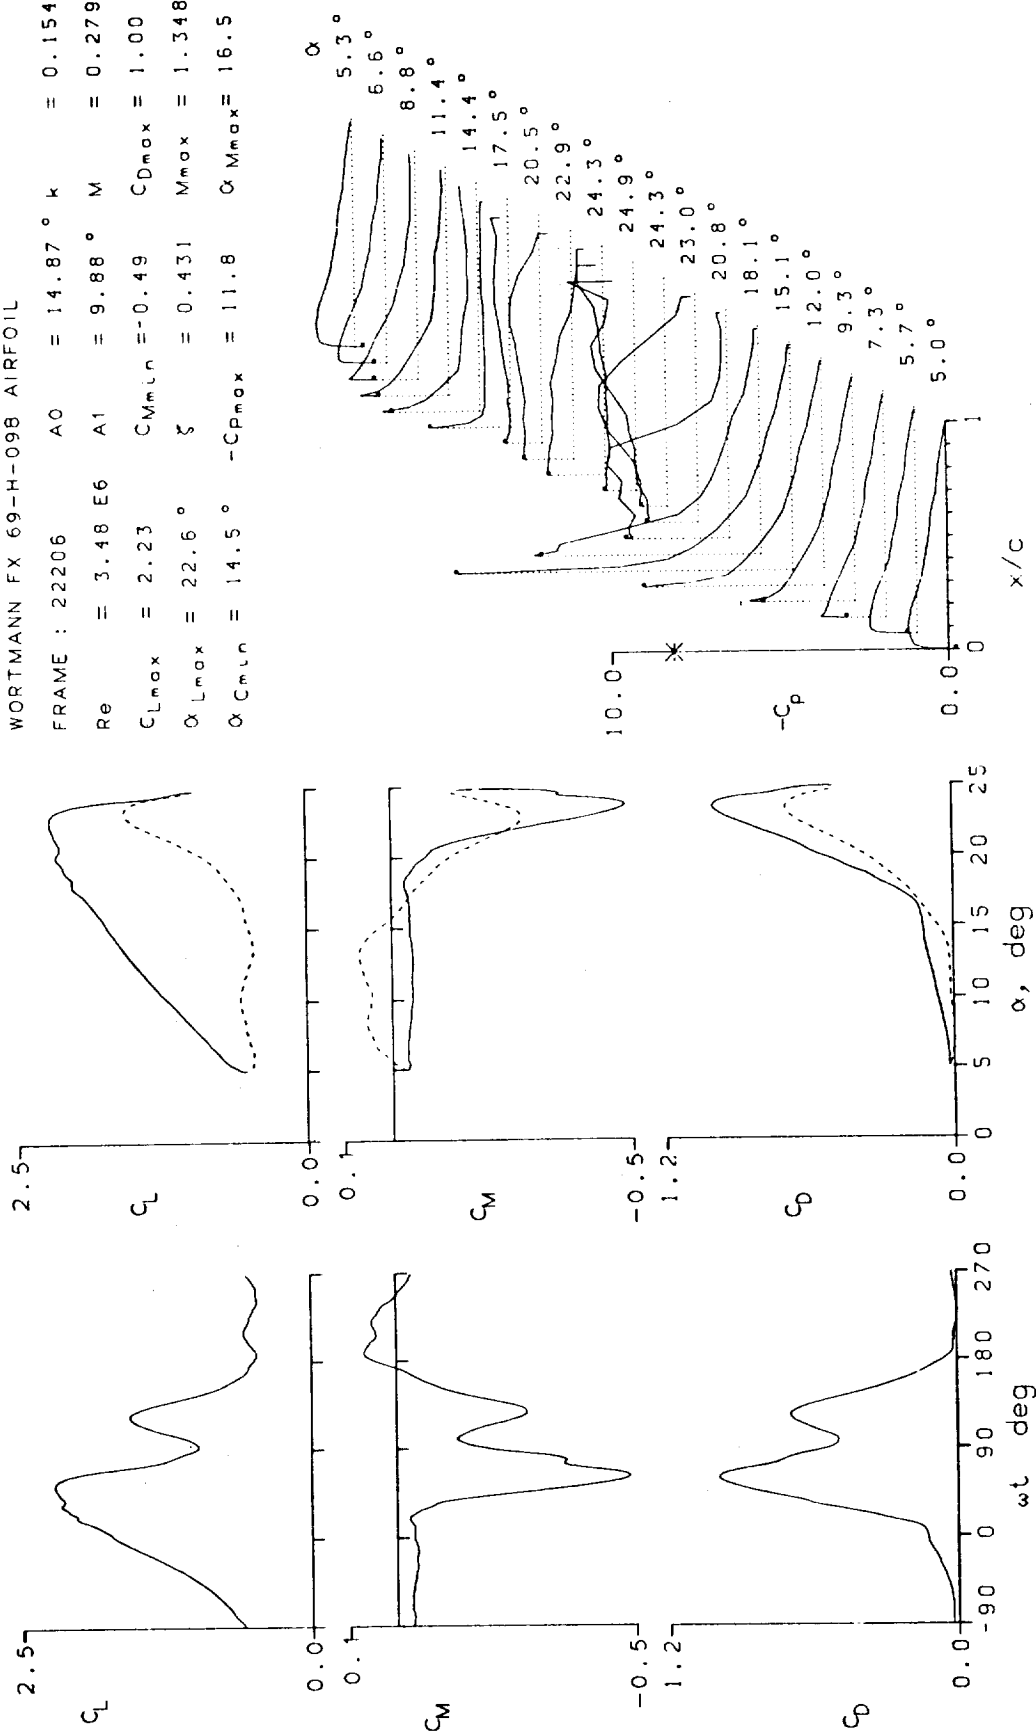


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22208	A0 = 14.81 °	k = 0.097
Re = 3.48 E6	A1 = 9.88 °	M = 0.281
C _{Lmax} = 2.24	C _{Mmin} = -0.45	C _{Dmax} = 0.85
α _{Lmax} = 20.6 °	ξ = 0.607	M _{max} = 1.351
α _{Cmin} = 14.3 °	-C _{pmax} = 11.7	α _{Mmax} = 15.5 °

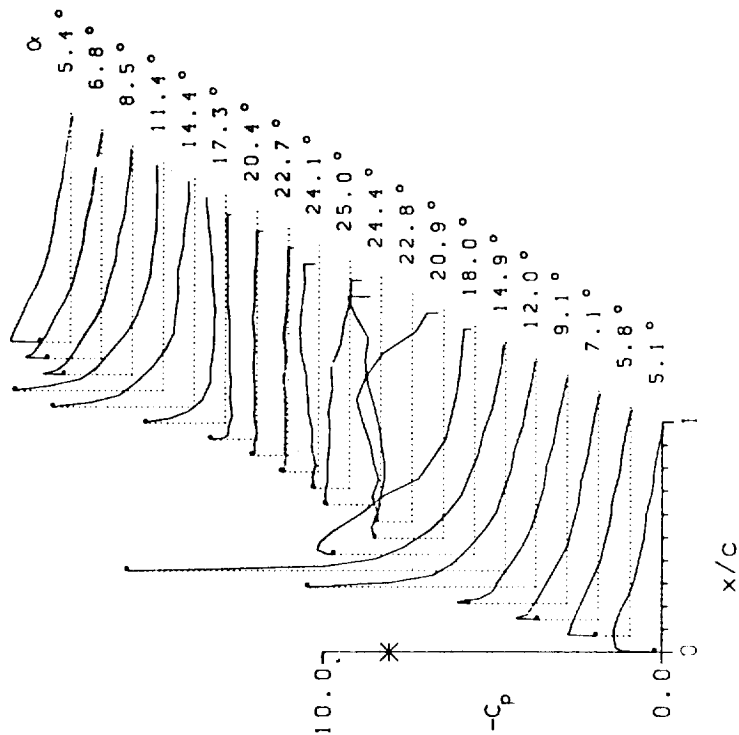
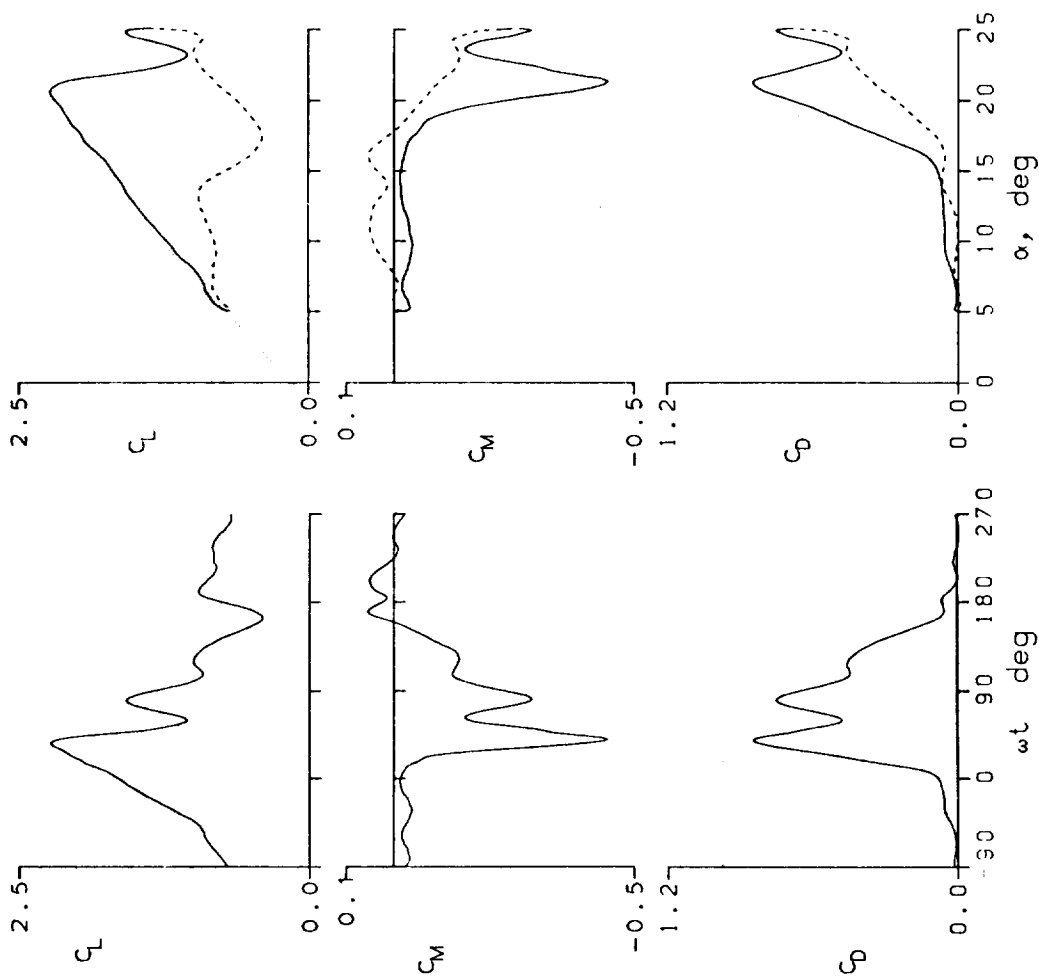


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22216	A0 = 9.81 °	k = 0.024
Re = 3.73 E6	A1 = 9.90 °	M = 0.302
$C_{Lmax} = 1.60$	$C_{Mmin} = -0.13$	$C_{Dmax} = 0.32$
$\alpha_{Lmax} = 15.0 °$	$\xi = 0.086$	$M_{max} = 1.365$
$\alpha_{Cmin} = 9.3 °$	$-C_{Pmax} = 10.2$	$\alpha_{Mmax} = 14.2 °$

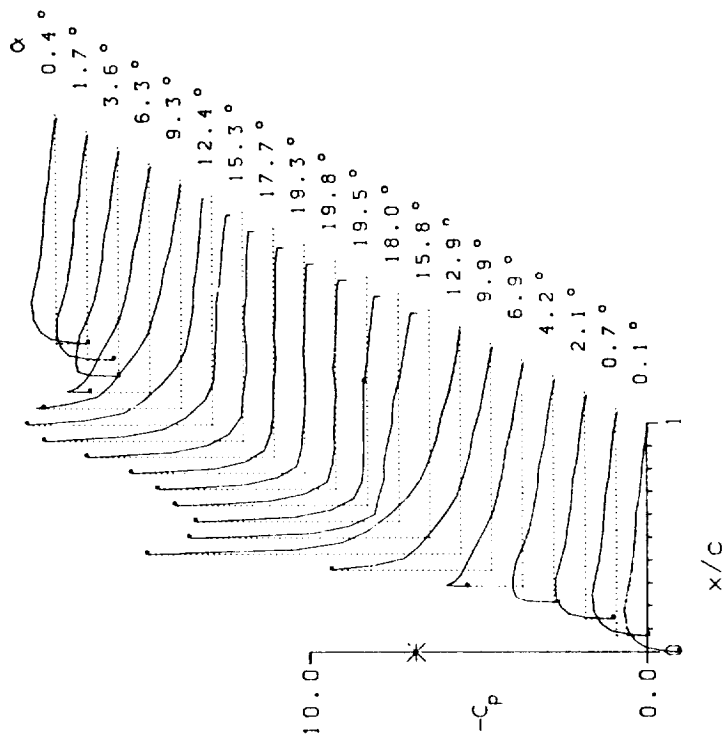
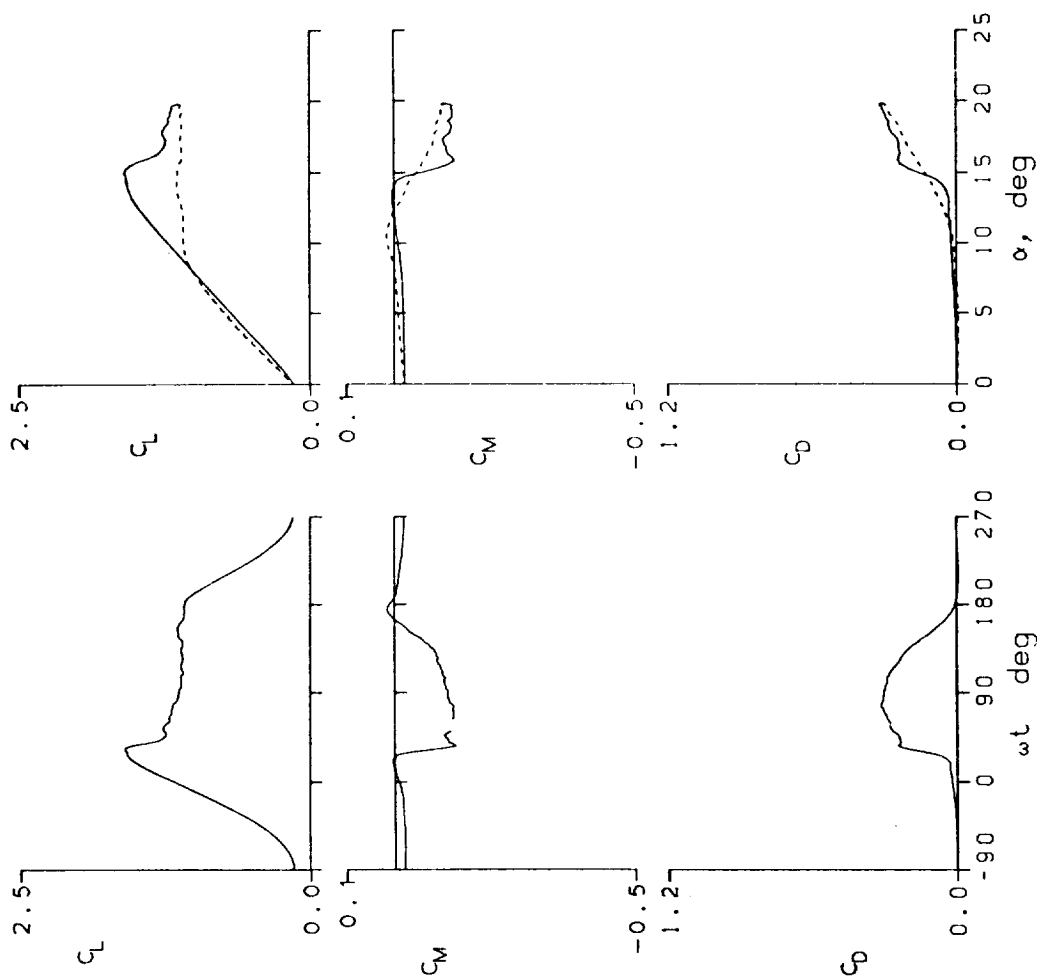


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22217	A0 = 9.79 °	k = 0.049
Re = 3.72 E6	A1 = 9.91 °	M = 0.302
C _{Lmax} = 1.79	C _{Mmin} = -0.22	C _{Dmax} = 0.46
α _{Lmax} = 16.3 °	ξ = 0.159	M _{max} = 1.362
α _{Cmin} = 9.3 °	-C _{pmax} = 10.2	α _{Mmax} = 14.2 °

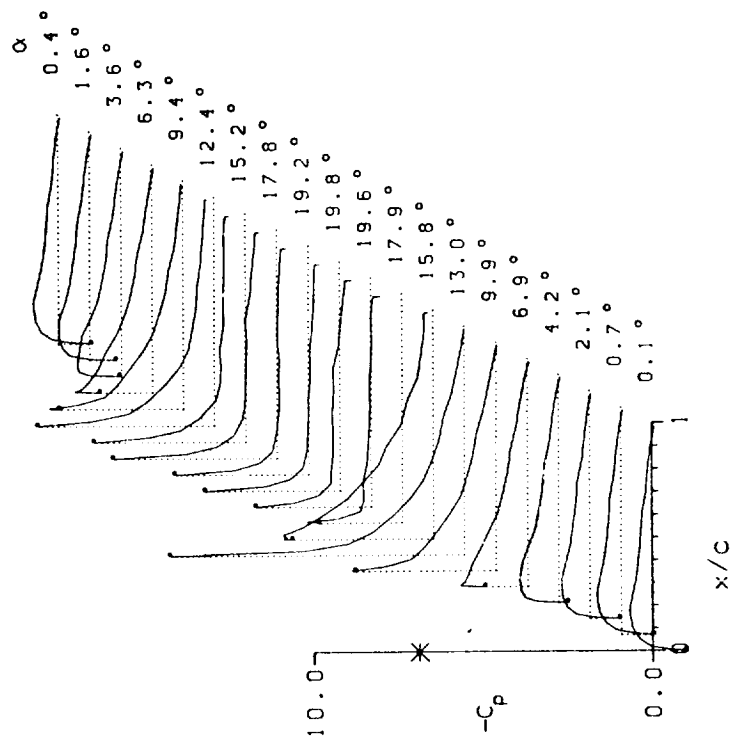
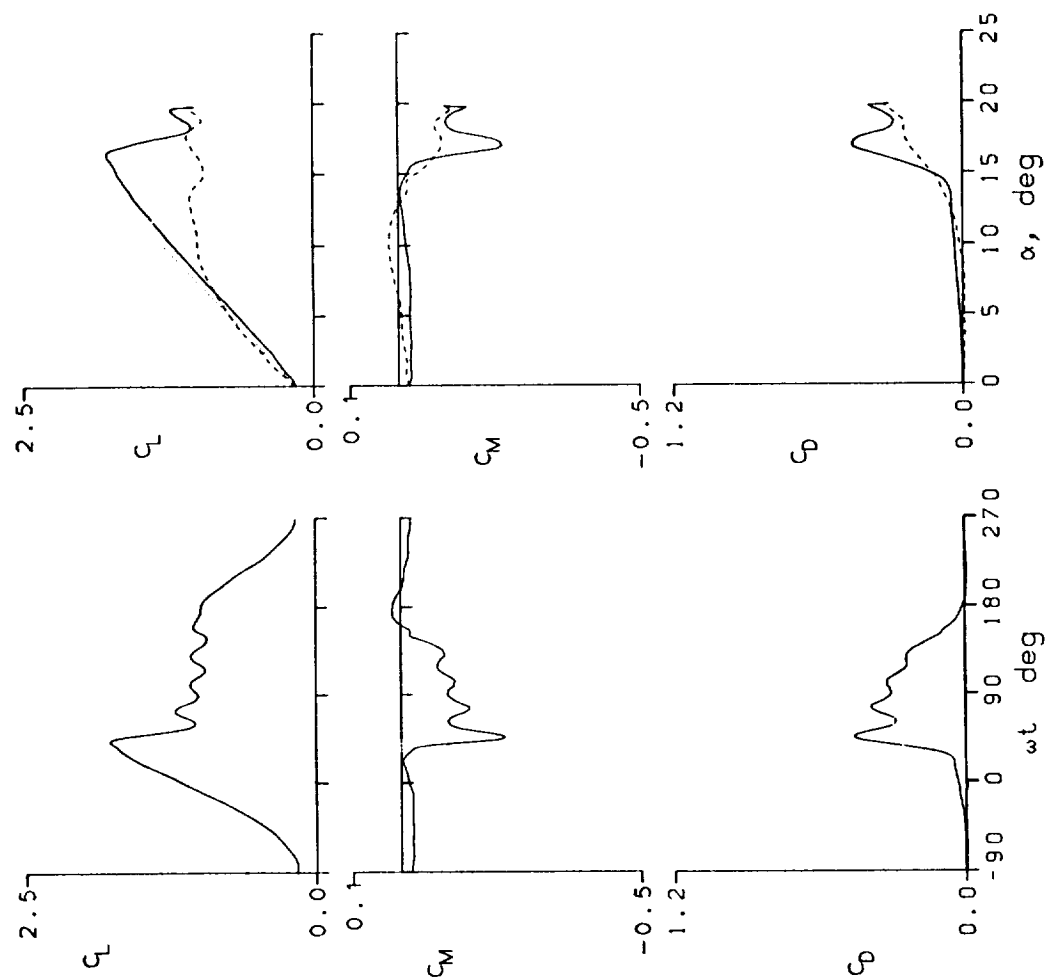


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22218	AC = 9.81°	K = 0.098
Re = 3.68 E6	A1 = 9.86°	M = 0.300
CLmax = 2.01	CMmin = -0.34	CDmax = 0.63
αLmax = 18.2°	ξ = 0.371	Mmax = 1.362
αCMmin = 9.3°	-CDmax = 10.3	αMmax = 14.7°

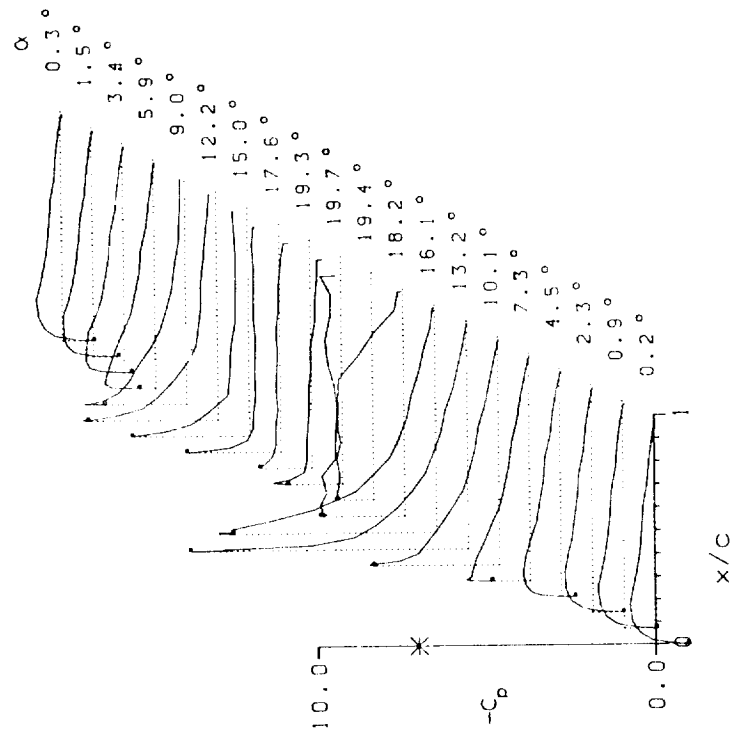
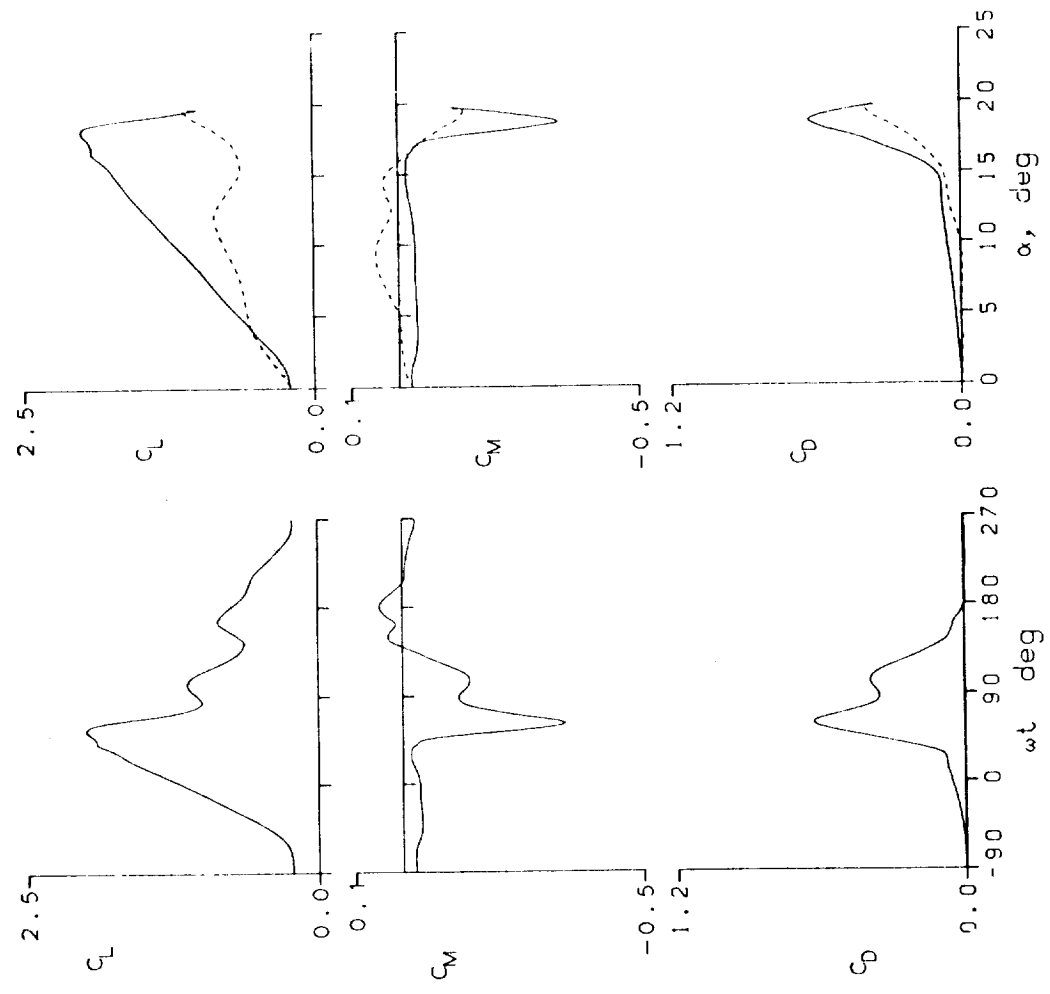


Figure 14.- Continued.

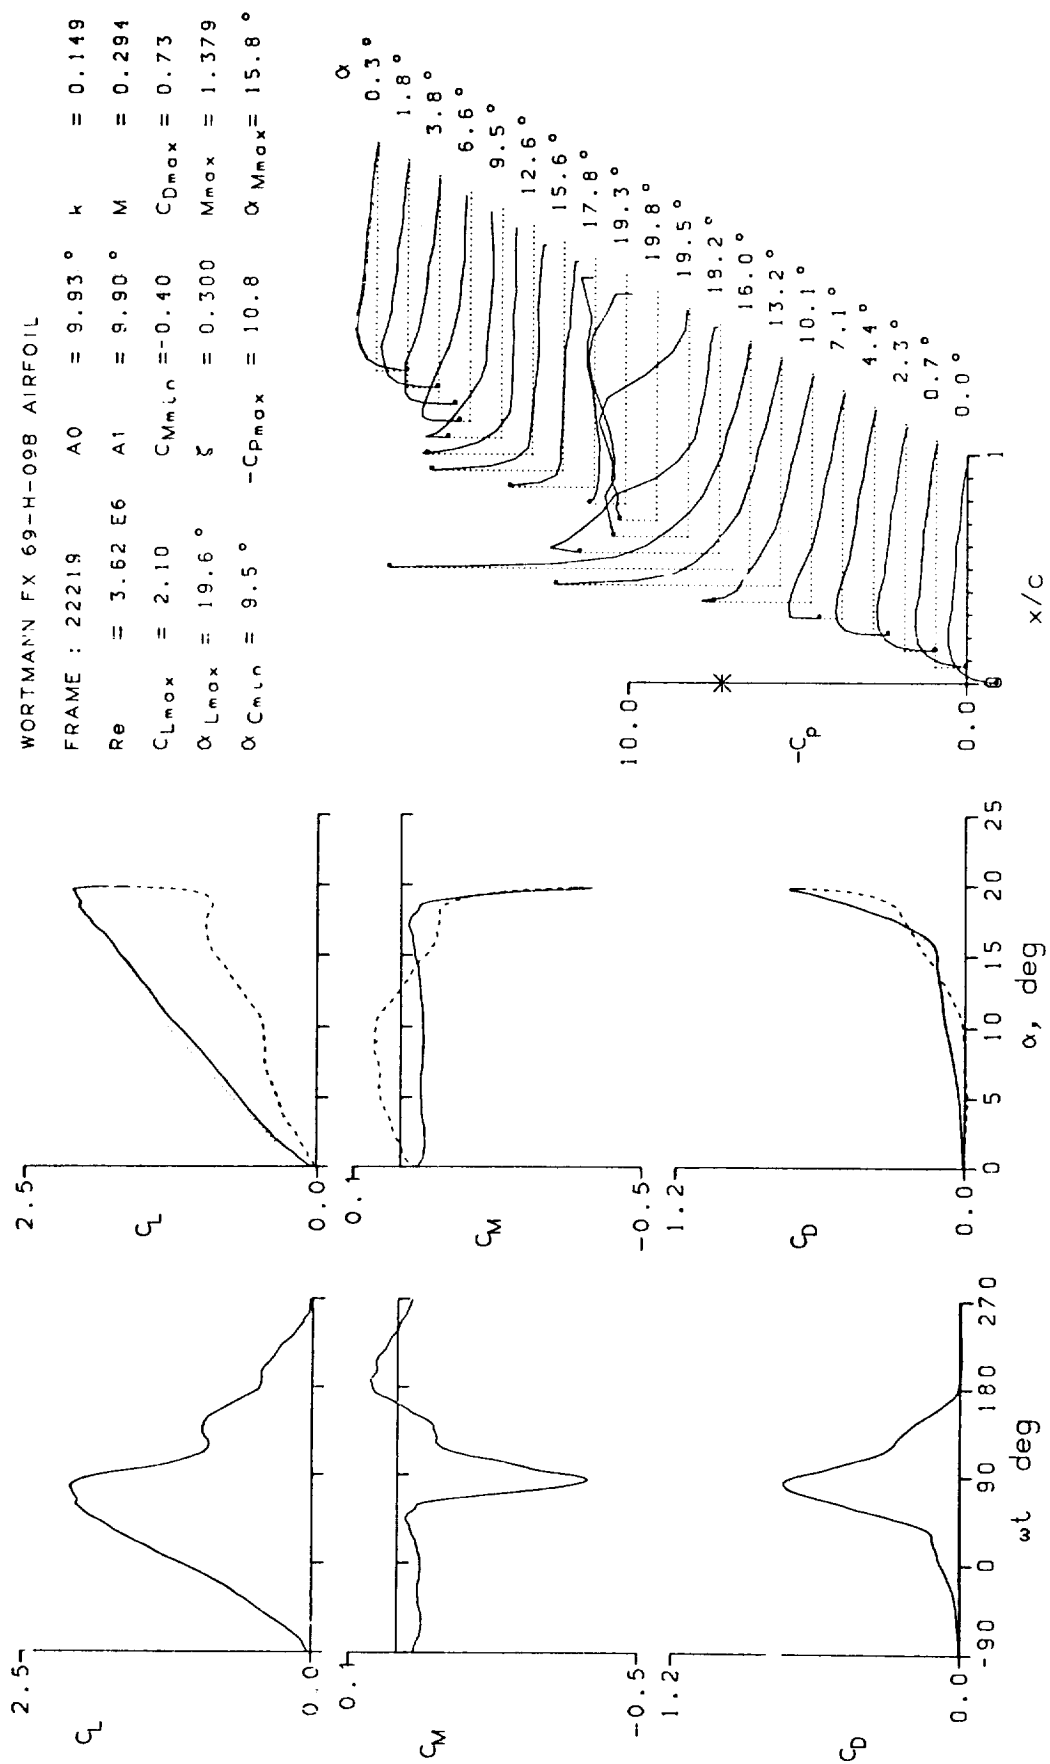


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 22307	A0 = 9.95 °	k = 0.025
Re = 3.85 E6	A1 = 4.90 °	M = 0.301
$C_{Lmax} = 1.53$	$C_{Min} = -0.08$	$C_{Dmax} = 0.15$
$\alpha_{Lmax} = 13.8 °$	$\zeta = -0.108$	$M_{max} = 1.330$
$\alpha_{Cmin} = 9.8 °$	$-C_{Dmax} = 9.9$	$\alpha_{Mmax} = 13.9 °$

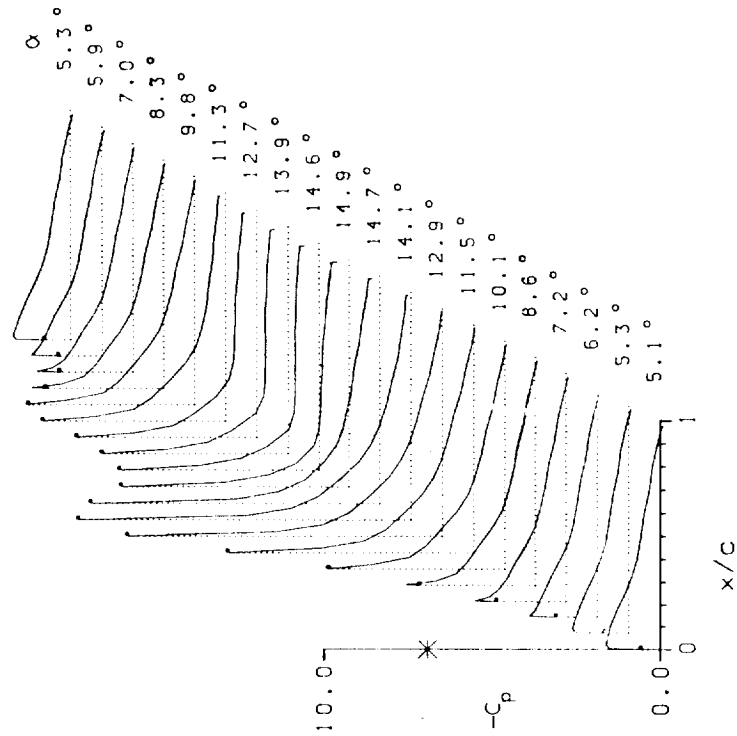
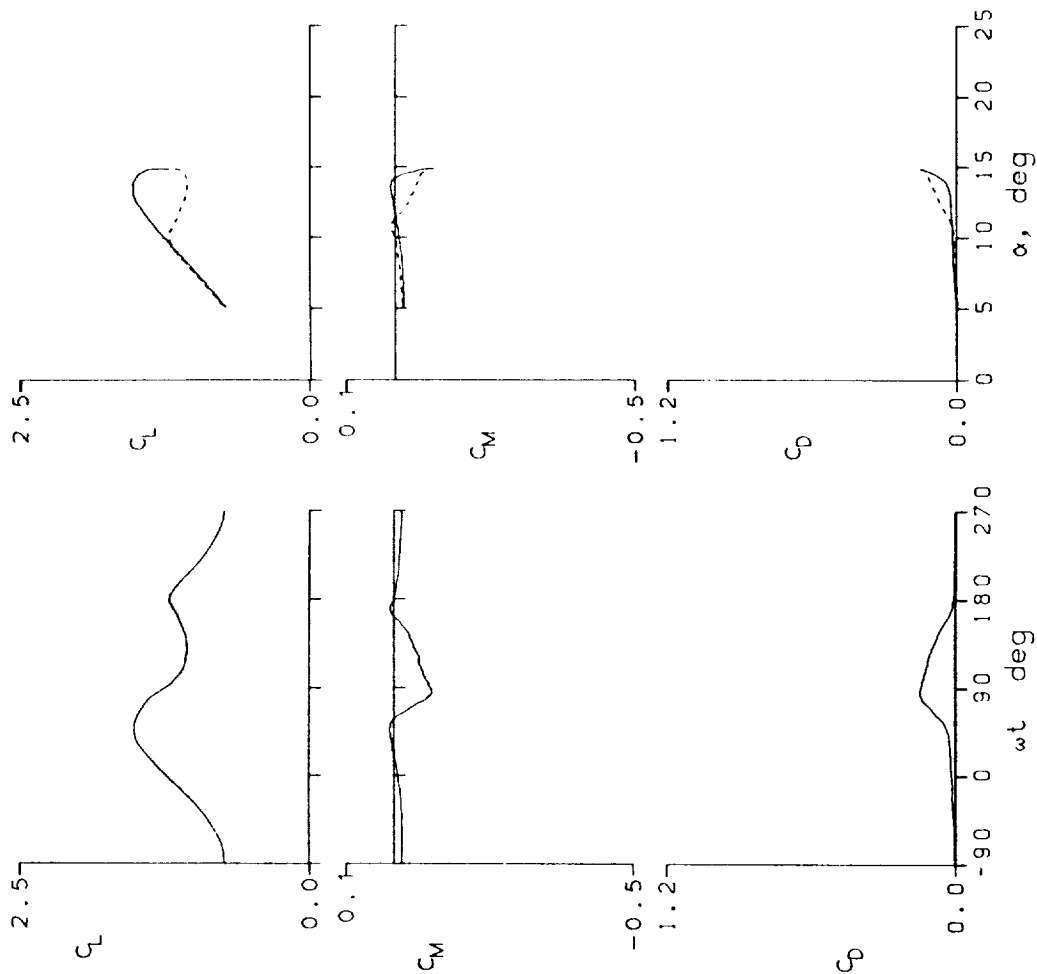


Figure 14.- Continued.

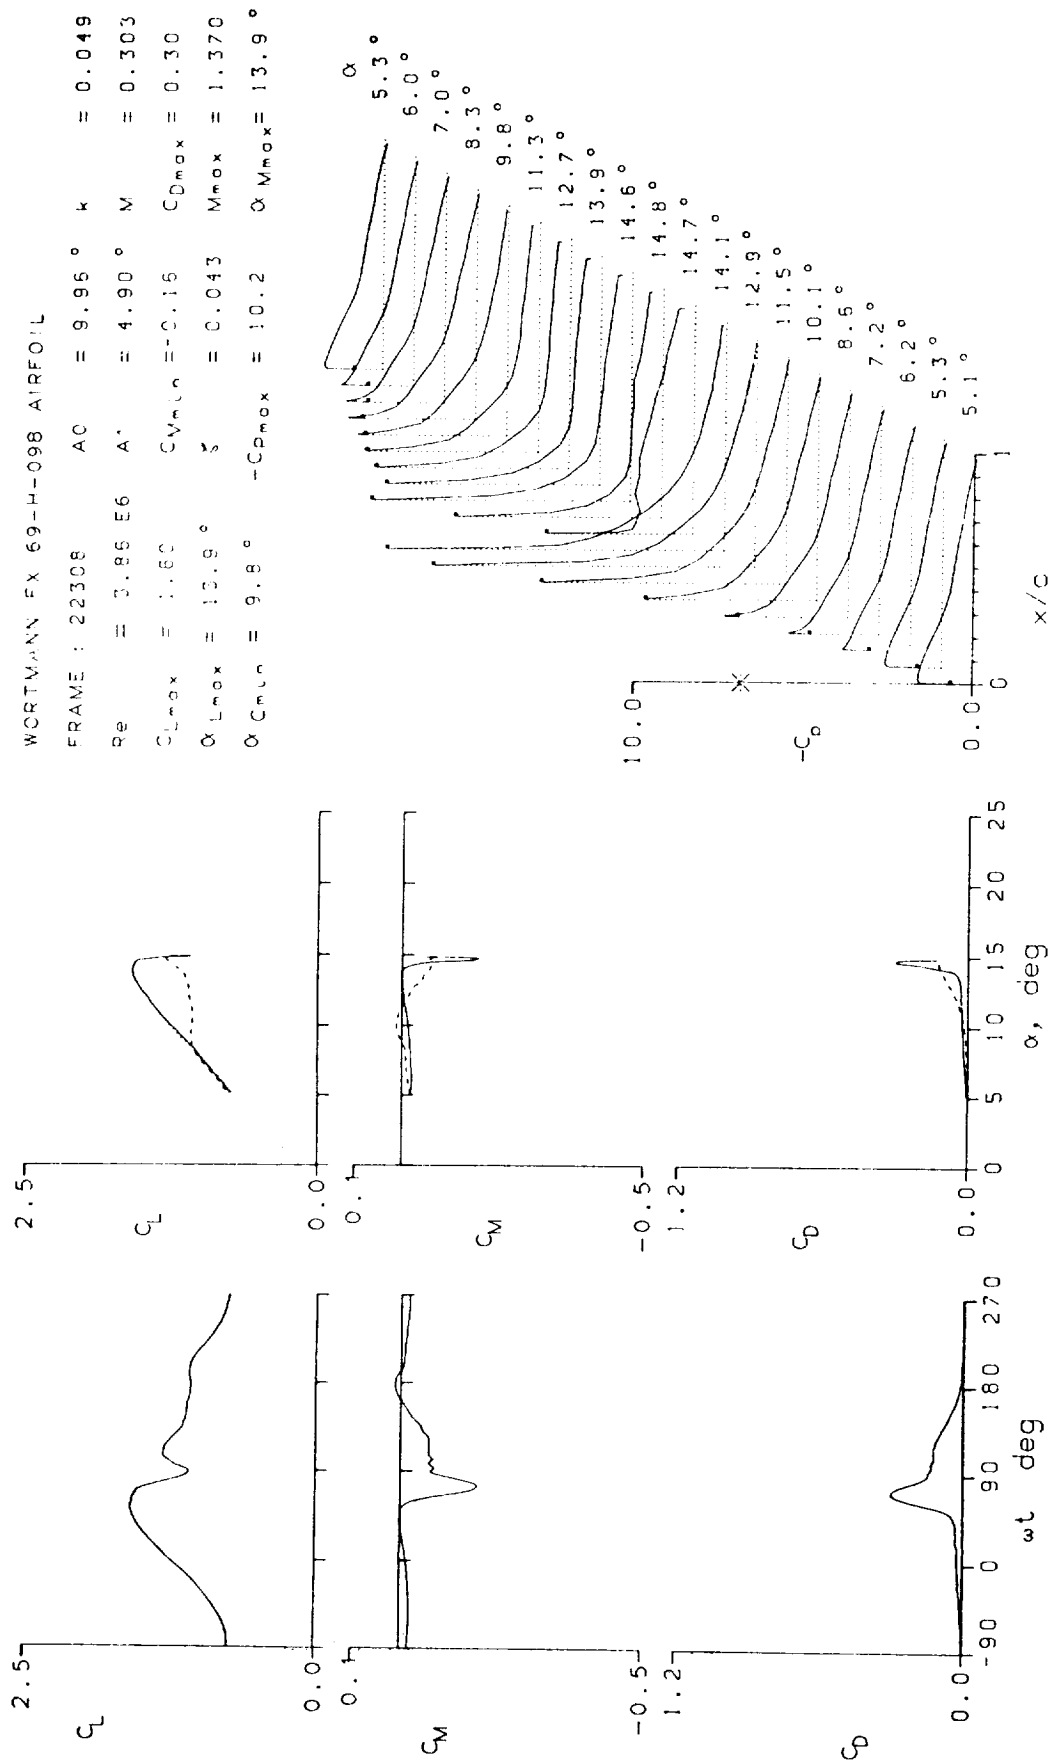


Figure 14.- Continued.

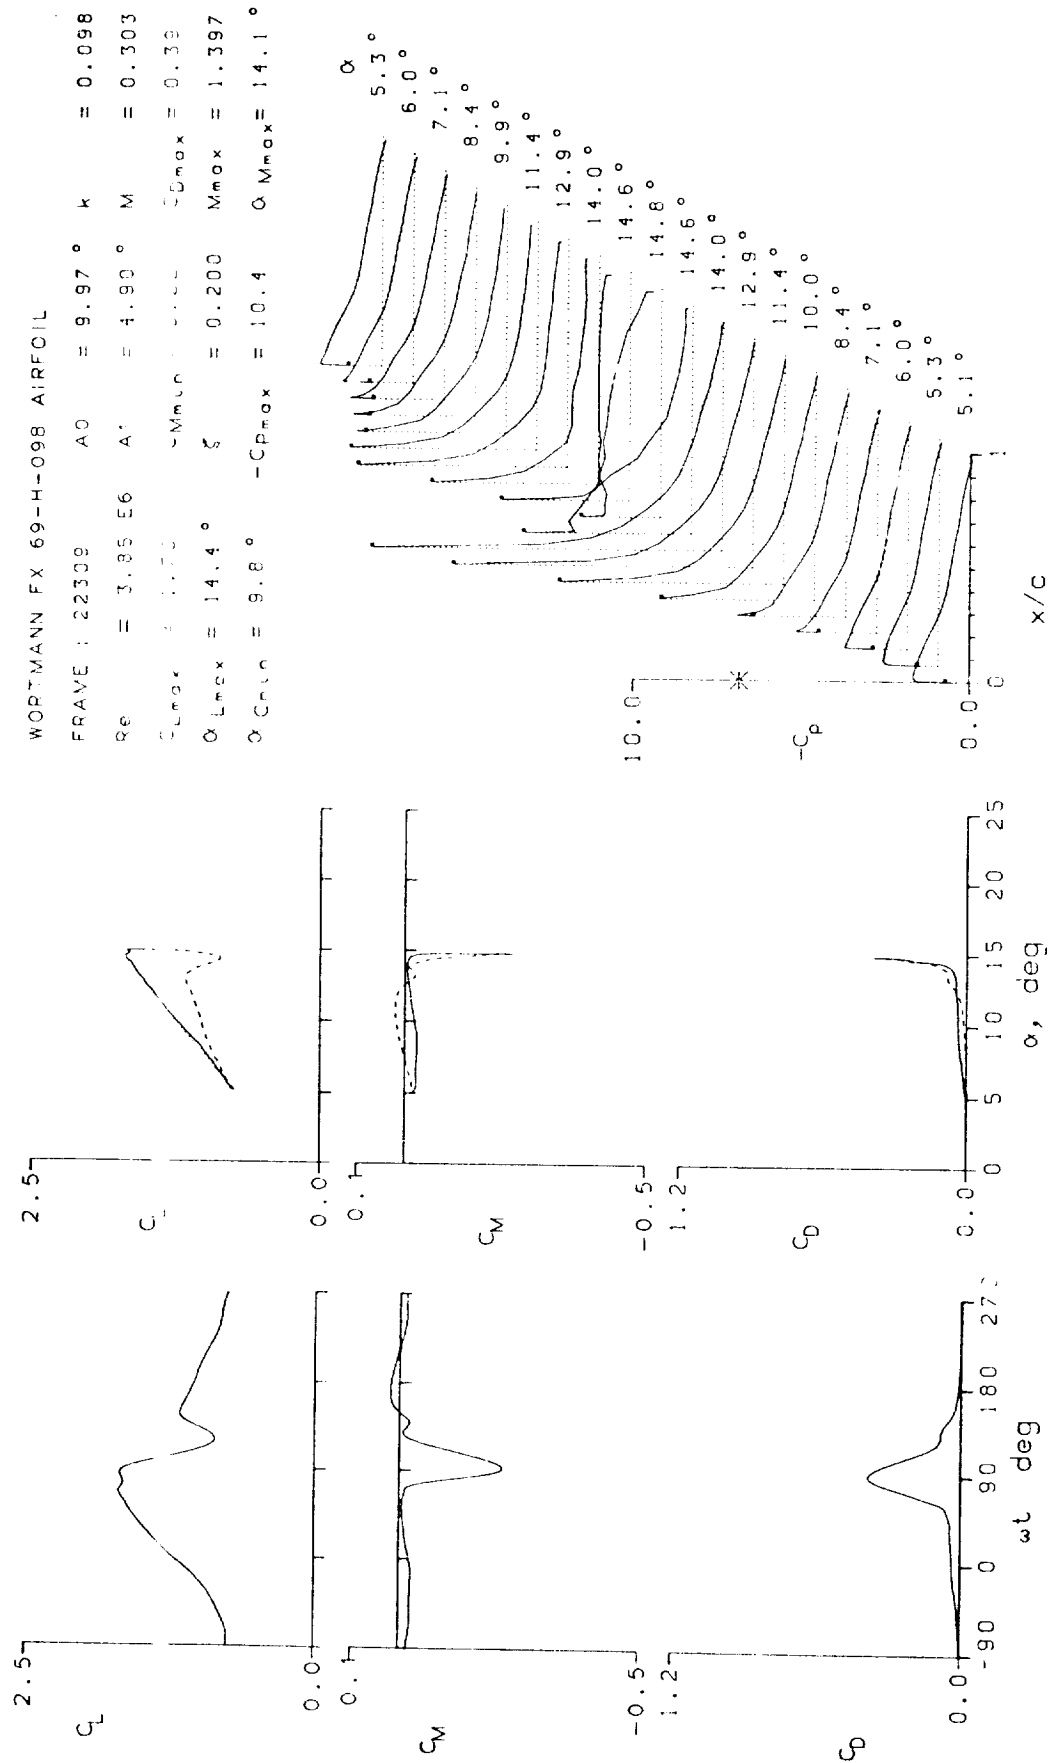


Figure 14.- Continued.

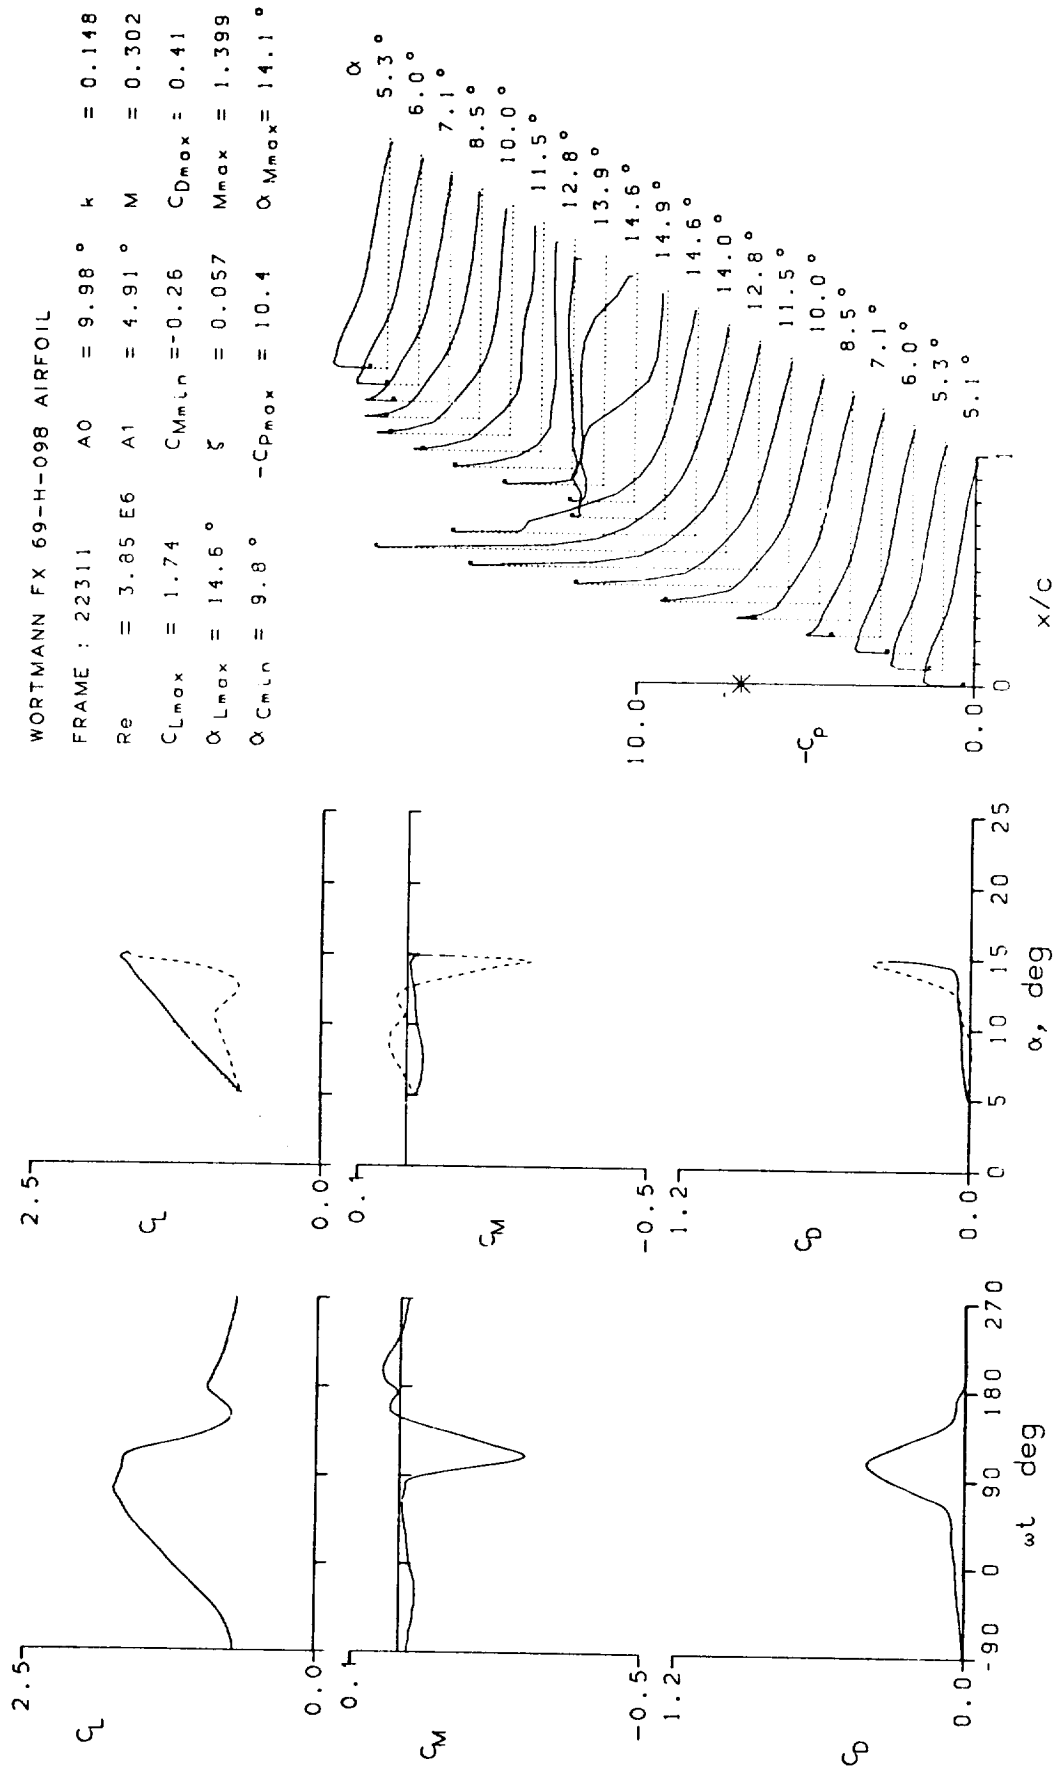


Figure 14.- Continued.

WORTMANN FX 69-H-09B AIRFOIL

FRAME : 22312	A0 = 9.92 °	k = 0.196
Re = 3.85 E6	A1 = 4.92 °	M = 0.303
CLmax = 1.84	CMmin = -0.31	CDmax = 0.45
αLmax = 14.6 °	ξ = -0.005	Mmax = 1.386
αCMmin = 9.7 °	-CPmax = 10.3	αMmax = 13.9 °

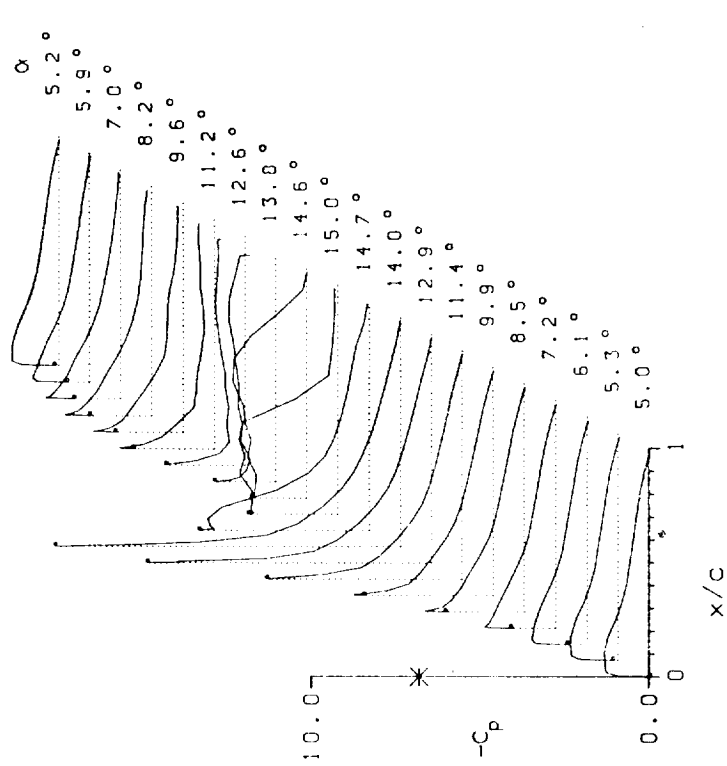
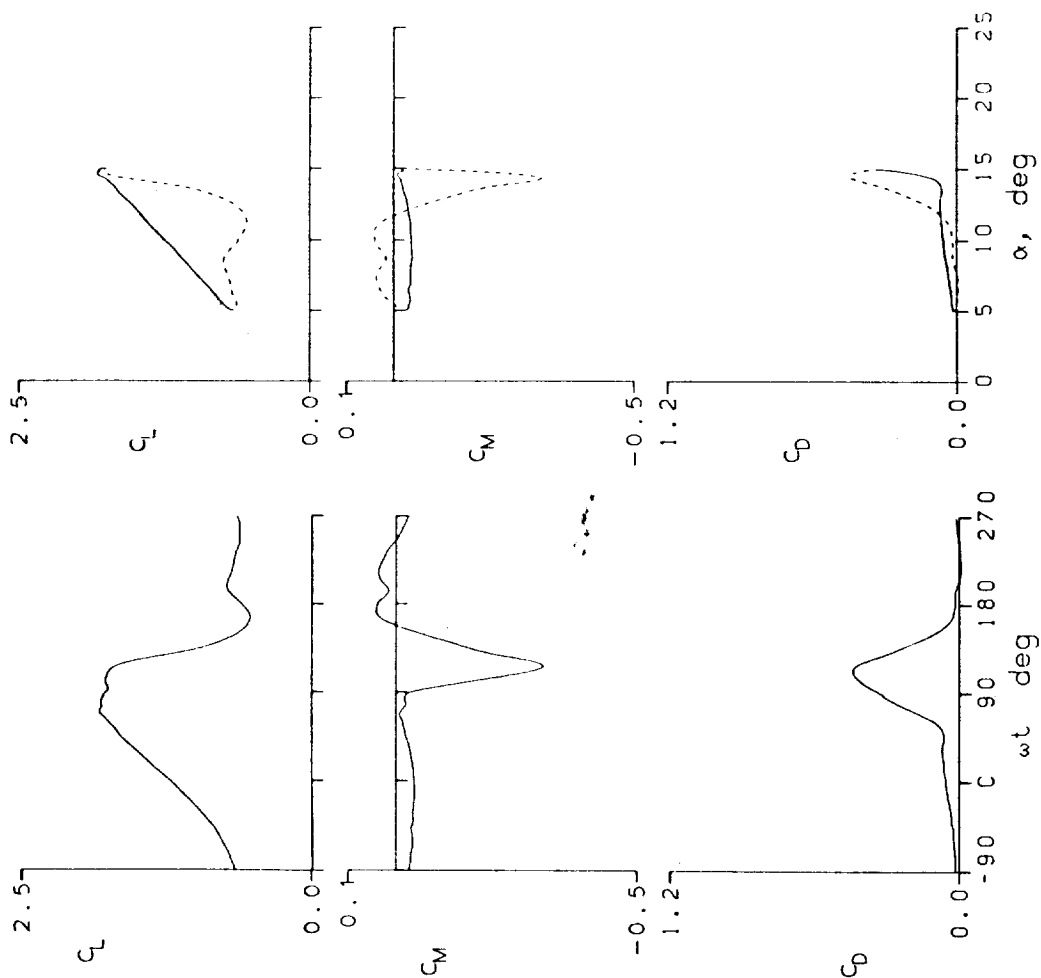


Figure 14.- Continued.

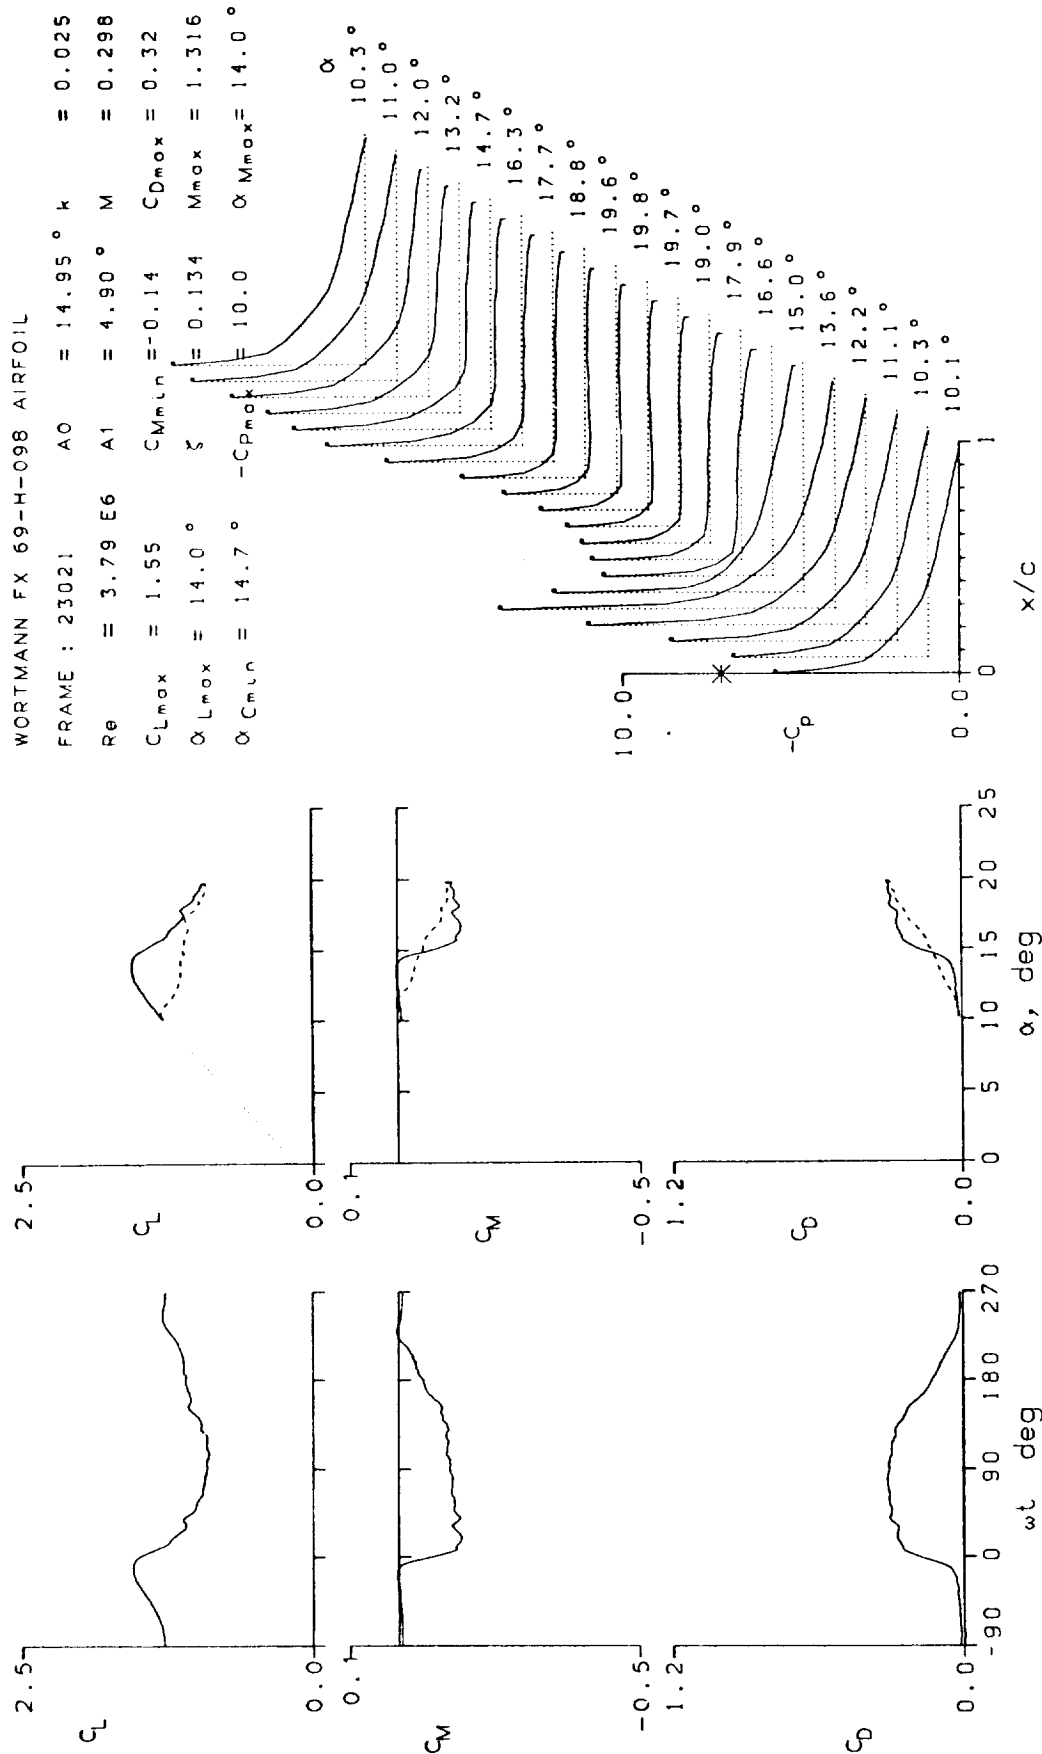


Figure 14.- Continued.

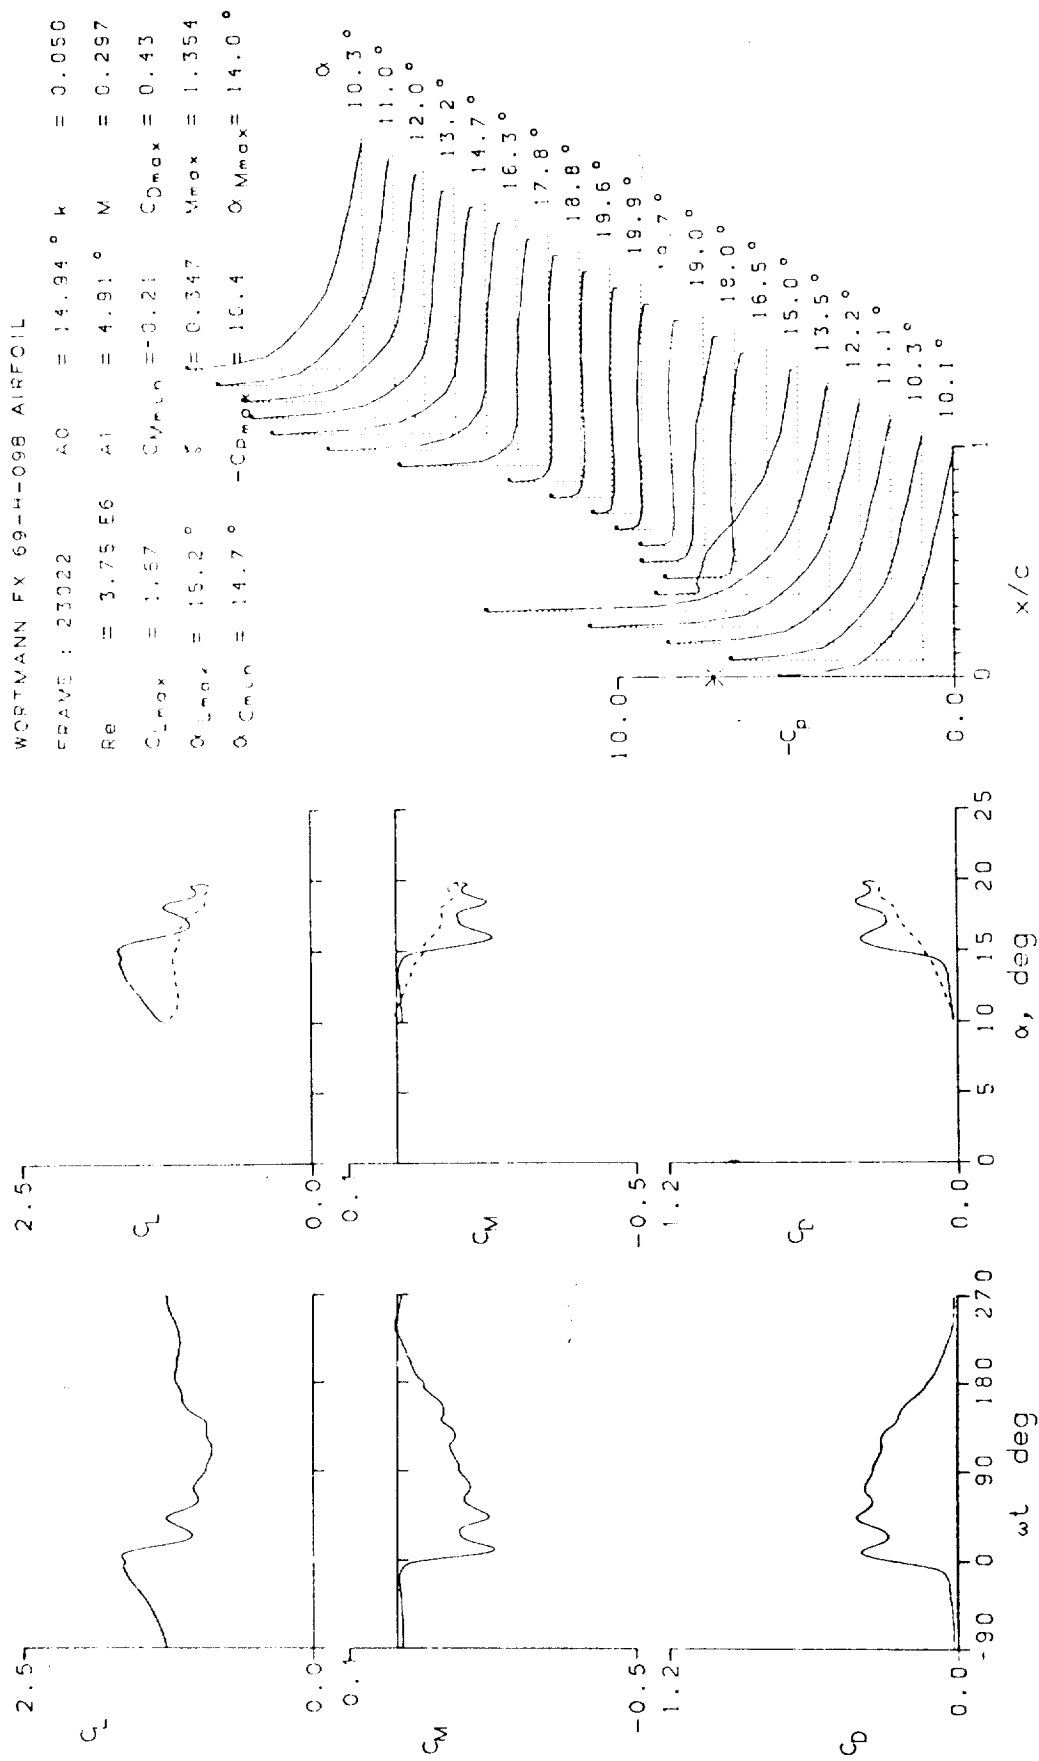


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23023	A0 = 14.94 °	k = 0.100
Re = 3.72 E6	A1 = 4.90 °	M = 0.295
$C_{Lmax} = 1.87$	$C_{Mmin} = -0.33$	$C_{Dmax} = 0.57$
$\alpha_{Lmax} = 17.0 °$	$\xi = 0.742$	$M_{max} = 1.376$
$\alpha_{C_{Lmin}} = 14.8 °$	$-C_{Dmax} = 10.8$	$\alpha_{Mmax} = 14.5 °$

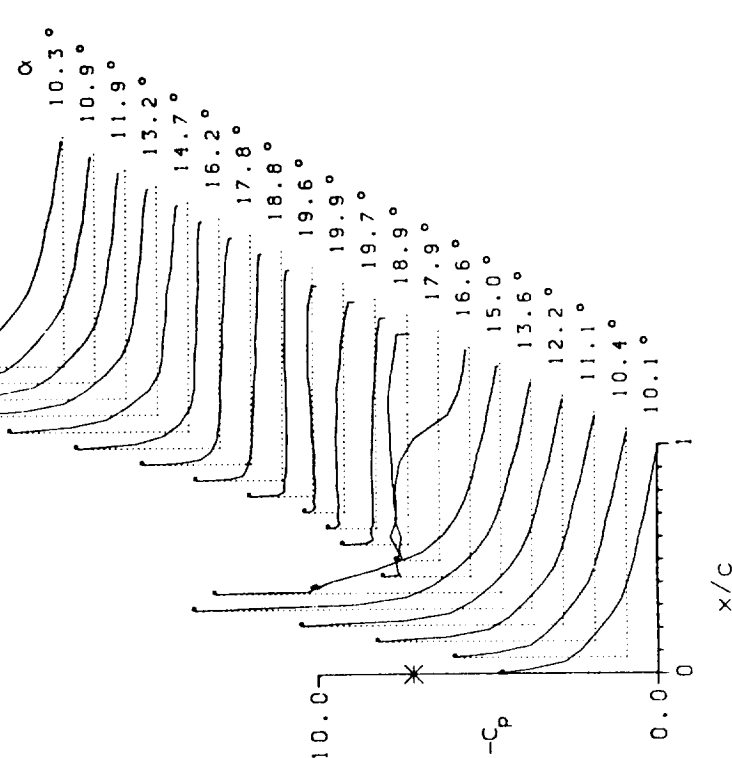
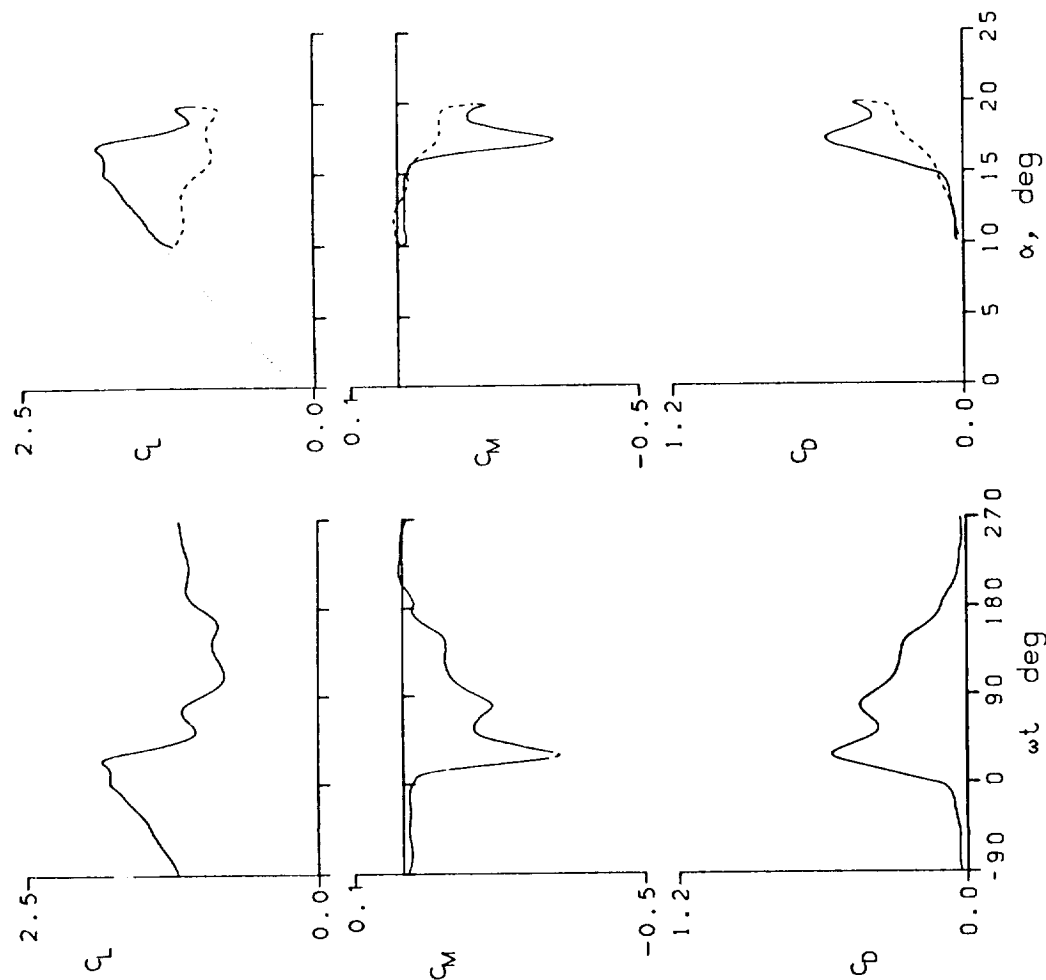


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL
 FRANK : 23100 $A_0 = 14.93^\circ$ $k = 0.152$
 $Re = 3.67 \text{ E}6$ $A_1 = 4.92^\circ$ $M = 0.292$
 $C_{Lmax} = 2.00$ $C_{Mmin} = -0.38$ $C_{Dmax} = 0.67$
 $\alpha_{Lmax} = 18.3^\circ$ $\xi = 0.848$ $M_{max} = 1.376$
 $\alpha_{Crin} = 14.8^\circ$ $-C_{Dmax} = 11.0$ $\alpha_{Mmax} = 14.9^\circ$

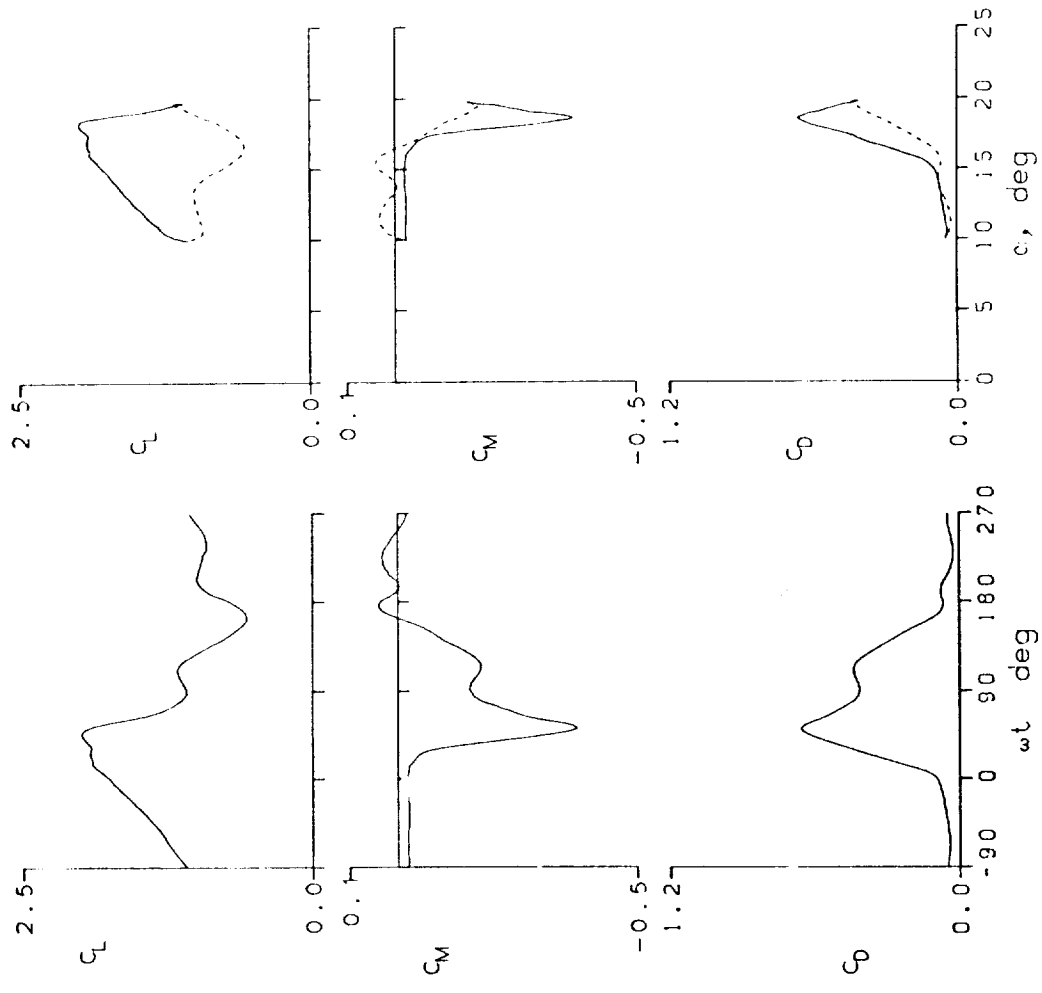


Figure 14.- Continued.

WORTMANN FX 69-H-09B AIRFOIL

FRAME : 23101	A0 = 14.94 °	k = 0.205
Re = 3.52 E6	A1 = 4.87 °	M = 0.287
C _{Lmax} = 2.18	C _{Mmin} = -0.44	C _{Dmax} = 0.76
α _{Lmax} = 19.4 °	ξ = -0.012	M _{max} = 1.364
α _{Cmin} = 14.7 °	-C _{Dmax} = 11.3	α _{Mmax} = 15.7 °

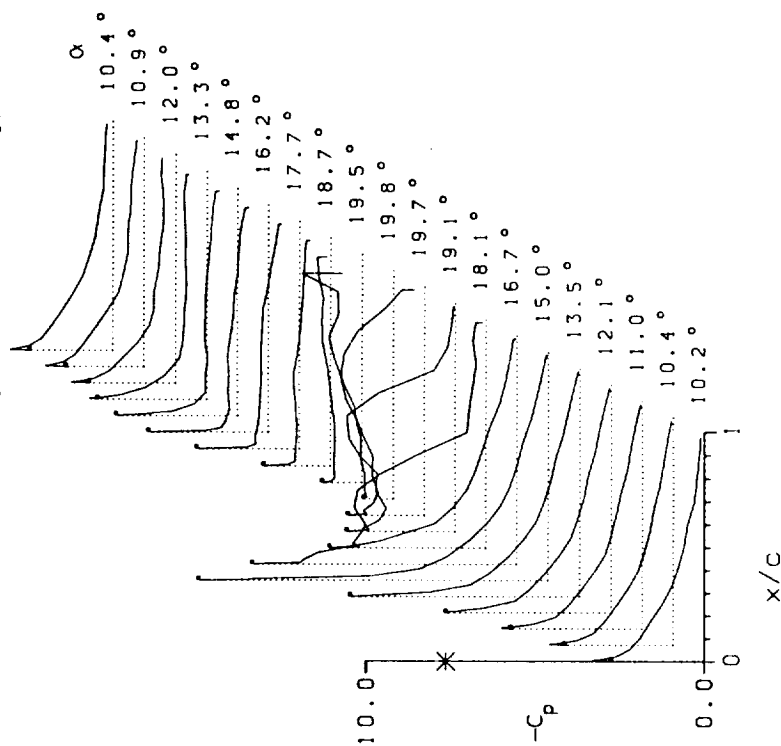
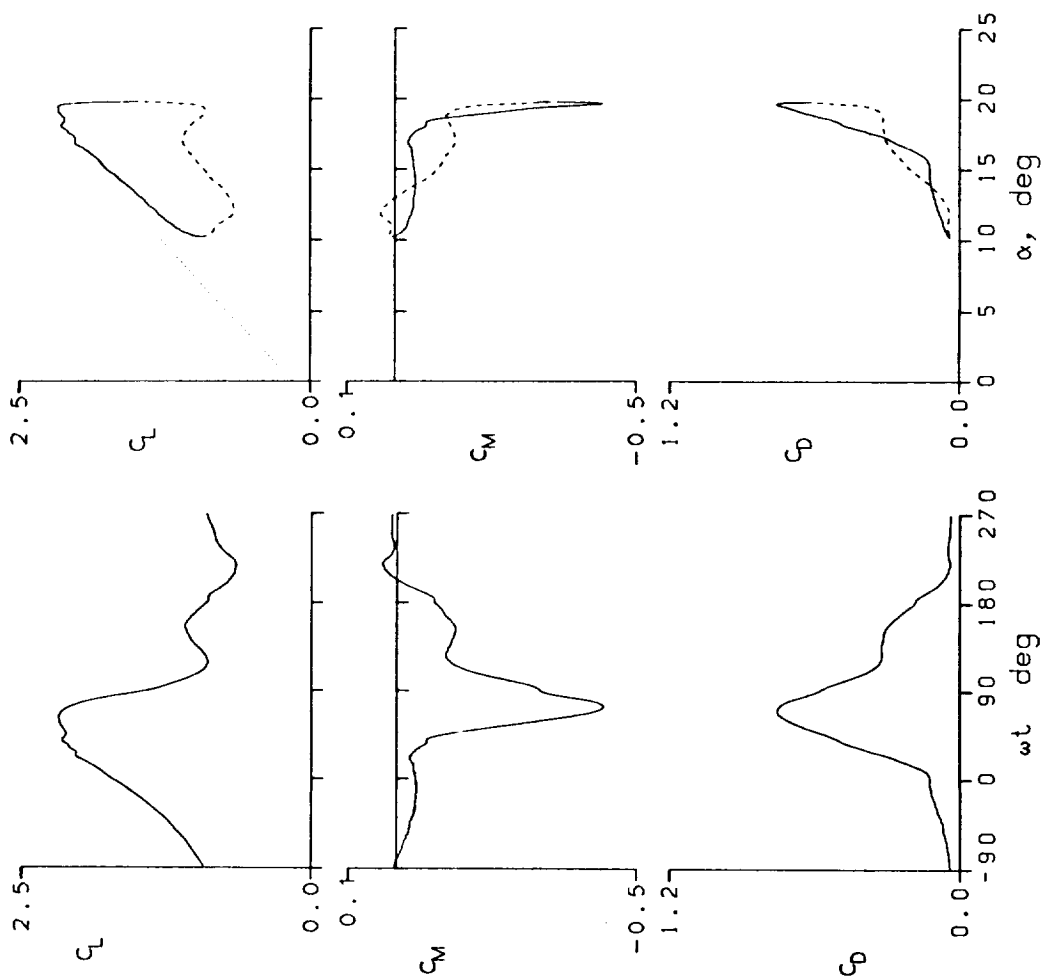


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23107	A0 = 4.95 °	k = 0.099
Re = 3.80 E6	A1 = 5.00 °	M = 0.300
CLmax = 1.25	CMmin = -0.04	CDmax = 0.03
αLmax = 9.9 °	ξ = 0.287	Mmax = 0.829
αCMmin = 4.7 °	-CDmax = 5.1	αMmax = 9.9 °

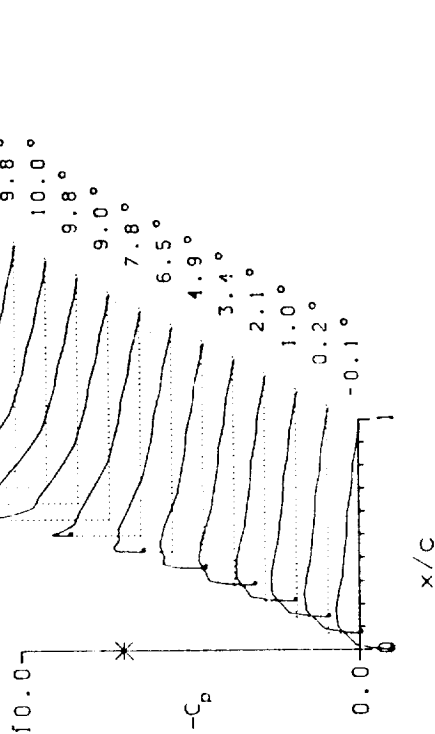
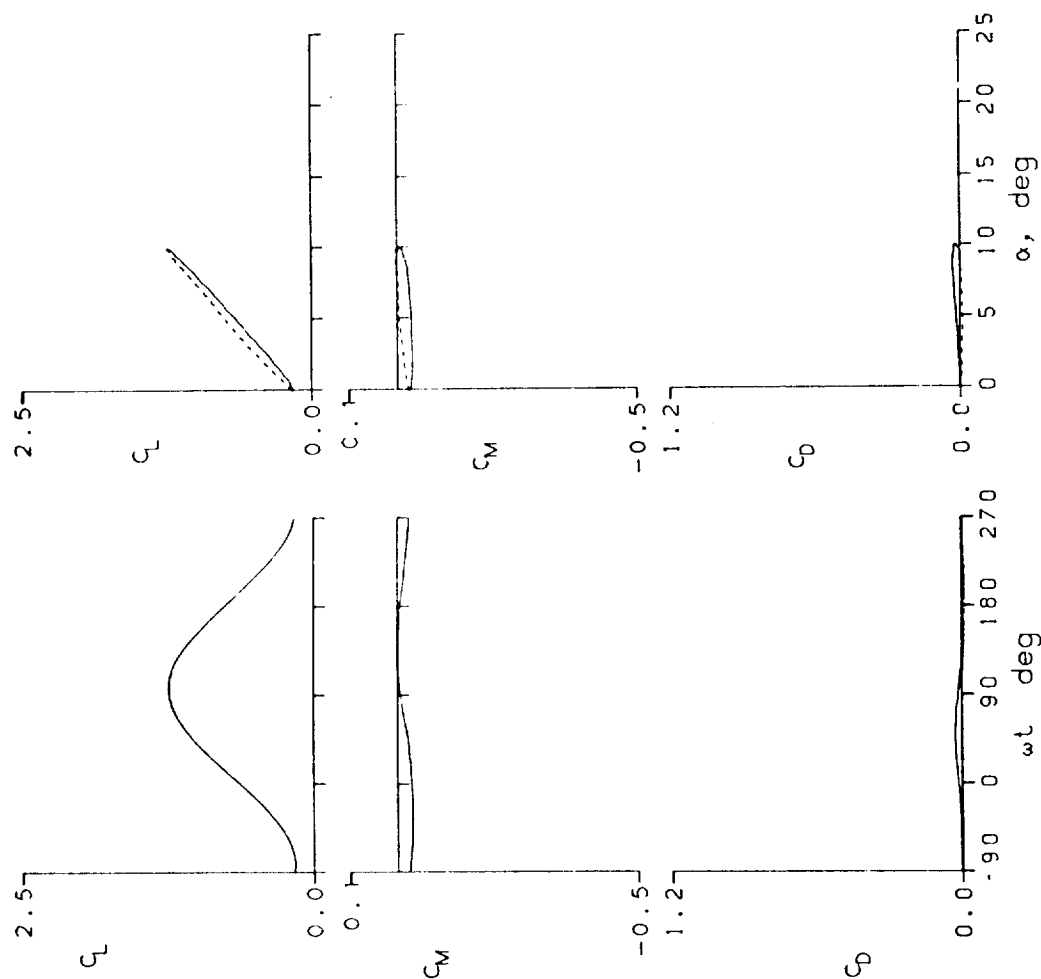


Figure 14.- Continued.

WORTMANN FX 69-H-09B AIRFOIL

FRAME : 23109	A0 = 4.97 °	k = 0.197
Re = 3.79 E6	A1 = 5.01 °	M = 0.300
$C_{Lmax} = 1.27$	$C_{Mmin} = -0.05$	$C_{Dmax} = 0.04$
$\alpha_{Lmax} = 10.0 °$	$\zeta = 0.660$	$M_{max} = 0.868$
$\alpha_{Cmin} = 4.7 °$	$-C_{pmax} = 5.5$	$\alpha_{Mmax} = 9.9 °$

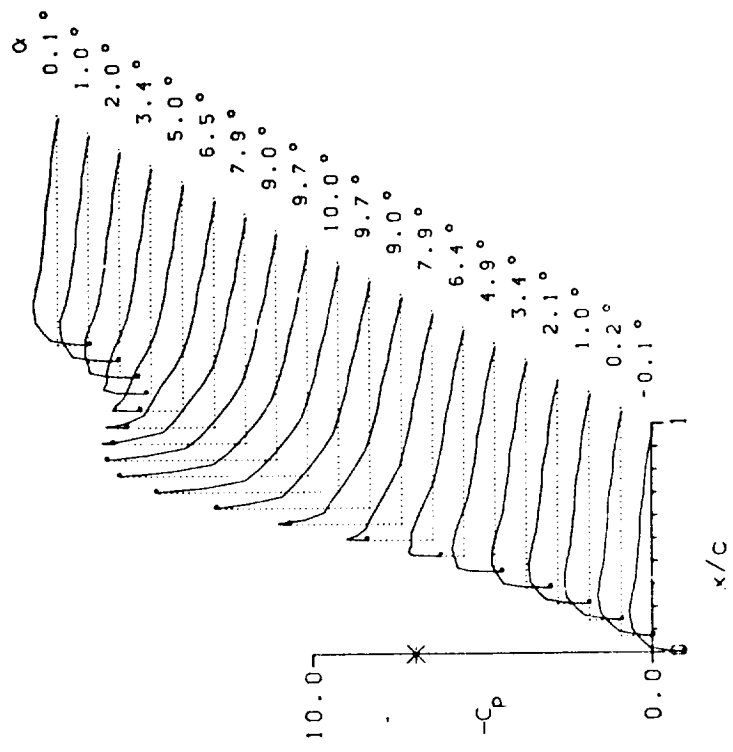
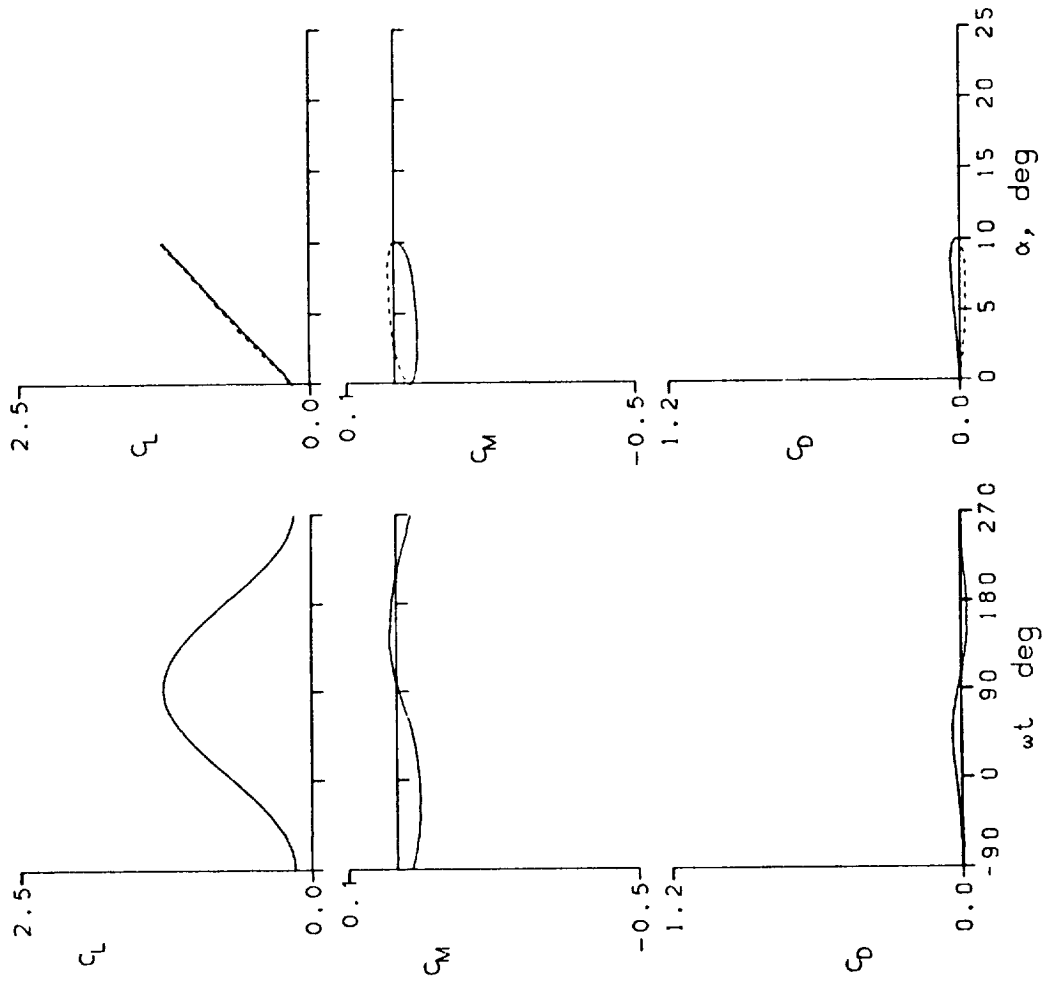


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23117	A0 = 4.84 °	k = 0.098
Re = 3.80 E6	A1 = 10.05 °	M = 0.300
CLmax = 1.74	CMmin = -0.19	CDmax = 0.32
$\alpha_{Lmax} = 14.9^\circ$	$\zeta = 0.226$	Mmax = 1.387
$\alpha_{CMmin} = 4.4^\circ$	-CDmax = 10.4	$\alpha_{Mmax} = 14.4^\circ$

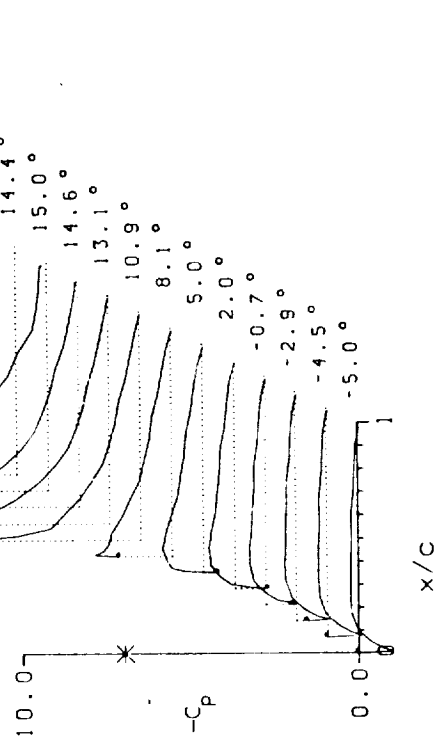
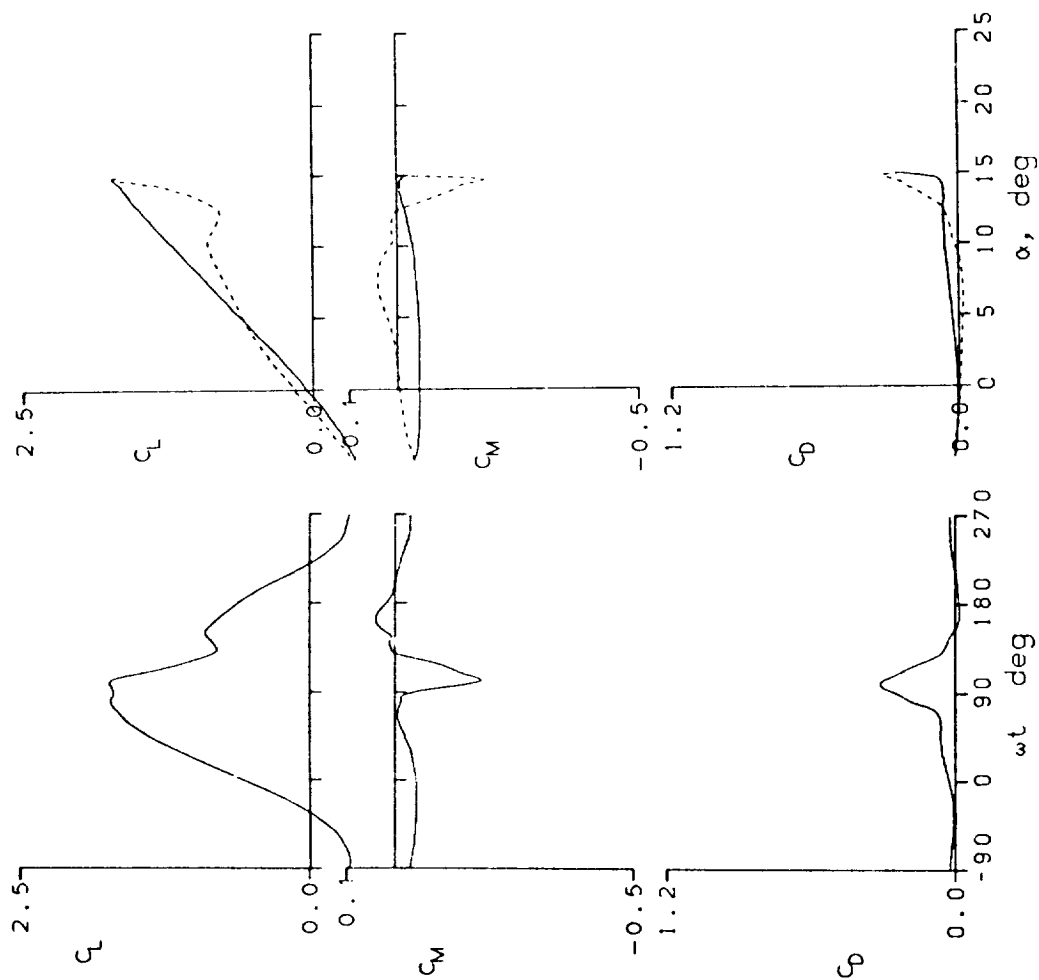


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23201	A0 = 3.66 °	k = 0.100
Re = 3.95 E6	A1 = 10.10 °	M = 0.299
C _{Lmax} = 1.69	C _{Mmin} = -0.05	C _{Dmax} = 0.07
α _{Lmax} = 13.9 °	ξ = 0.275	M _{max} = 1.396
α _{Cmin} = 3.2 °	-C _{Pmax} = 10.6	α _{Mmax} = 13.9 °

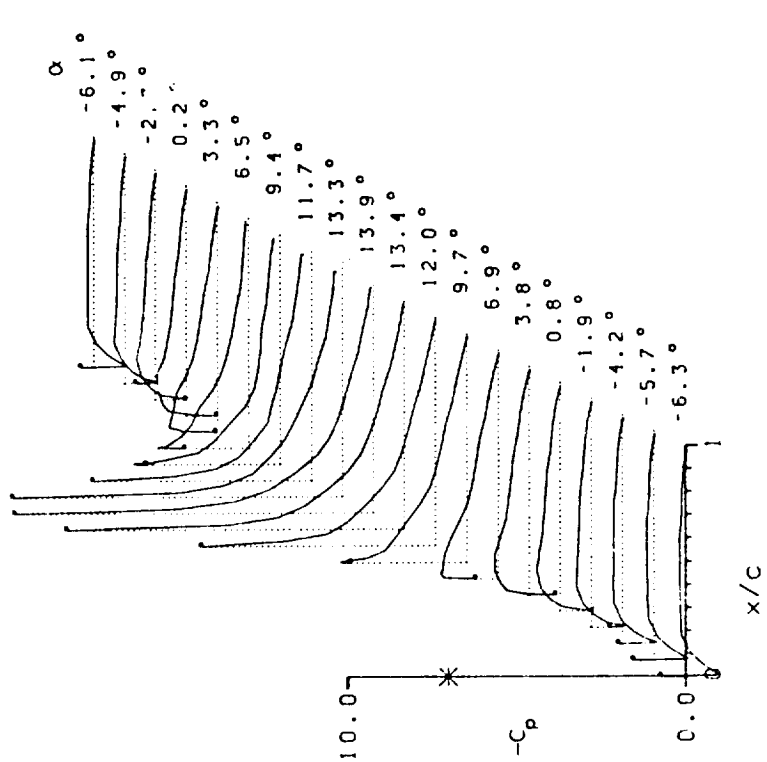
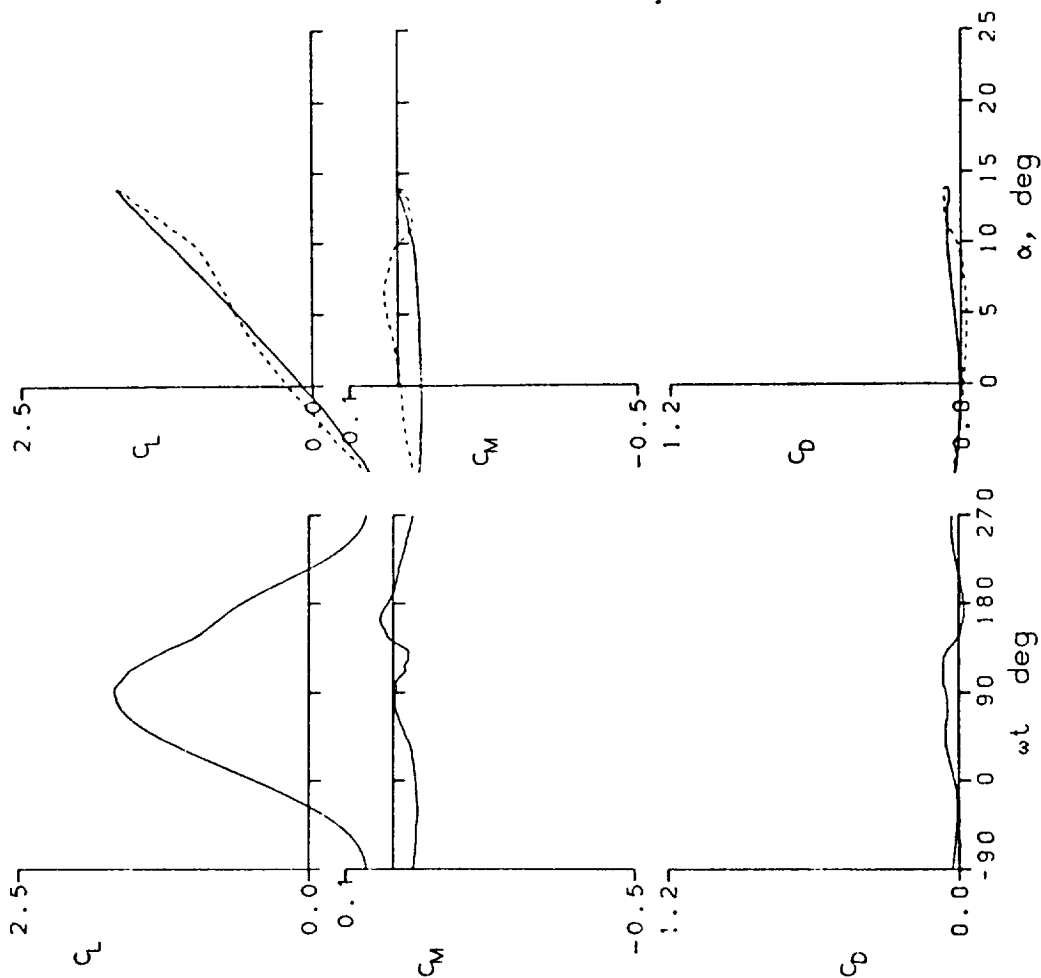


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23206	A0 = 3.07 °	k = 0.050
Re = 3.92 E6	A1 = 10.19 °	M = 0.299
C _{Lmax} = 1.62	C _{Mmin} = -0.05	C _{Dmax} = 0.04
α _{Lmax} = 13.2 °	ξ = 0.147	M _{max} = 1.356
α _{Cmin} = 2.6 °	-C _{pmax} = 10.3	α _{Mmax} = 13.4 °

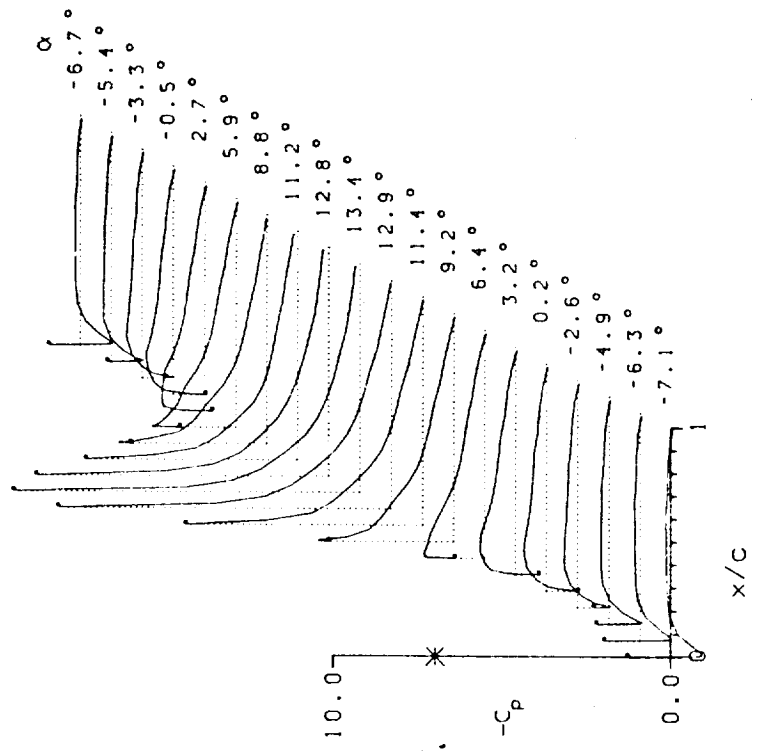
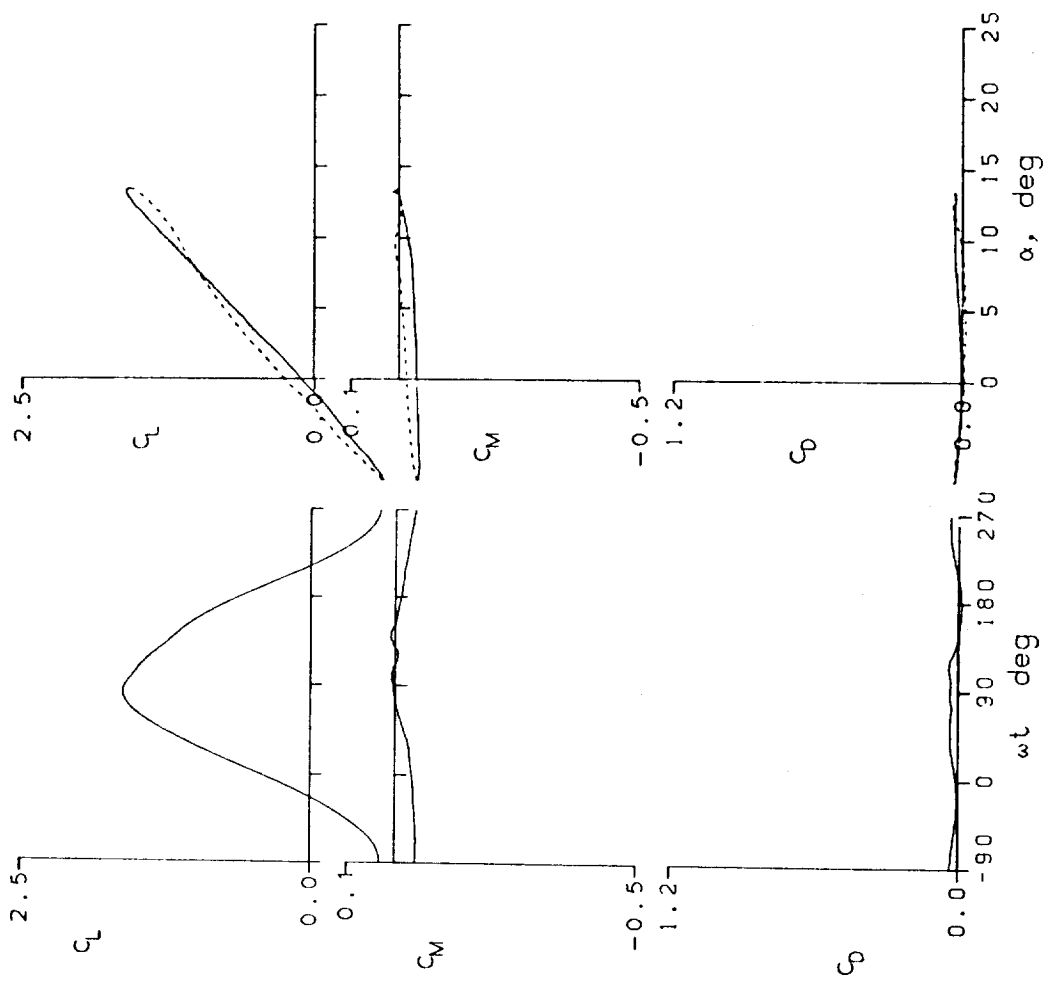


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23208	A0 = 3.15°	k = 0.100
Re = 3.91 E6	A1 = 10.16°	M = 0.300
C _{Lmax} = 1.65	C _{Mmin} = -0.06	C _{Dmax} = 0.06
α _{Lmax} = 13.4°	ξ = 0.319	M _{max} = 1.383
α _{Cmin} = 2.7°	-C _{pmax} = 10.4	α _{Mmax} = 13.4°

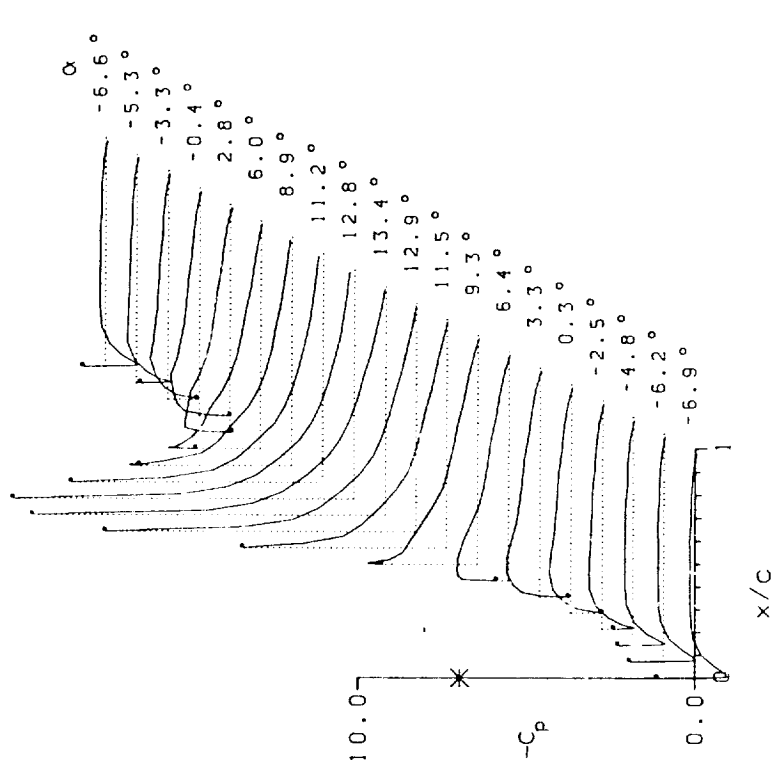
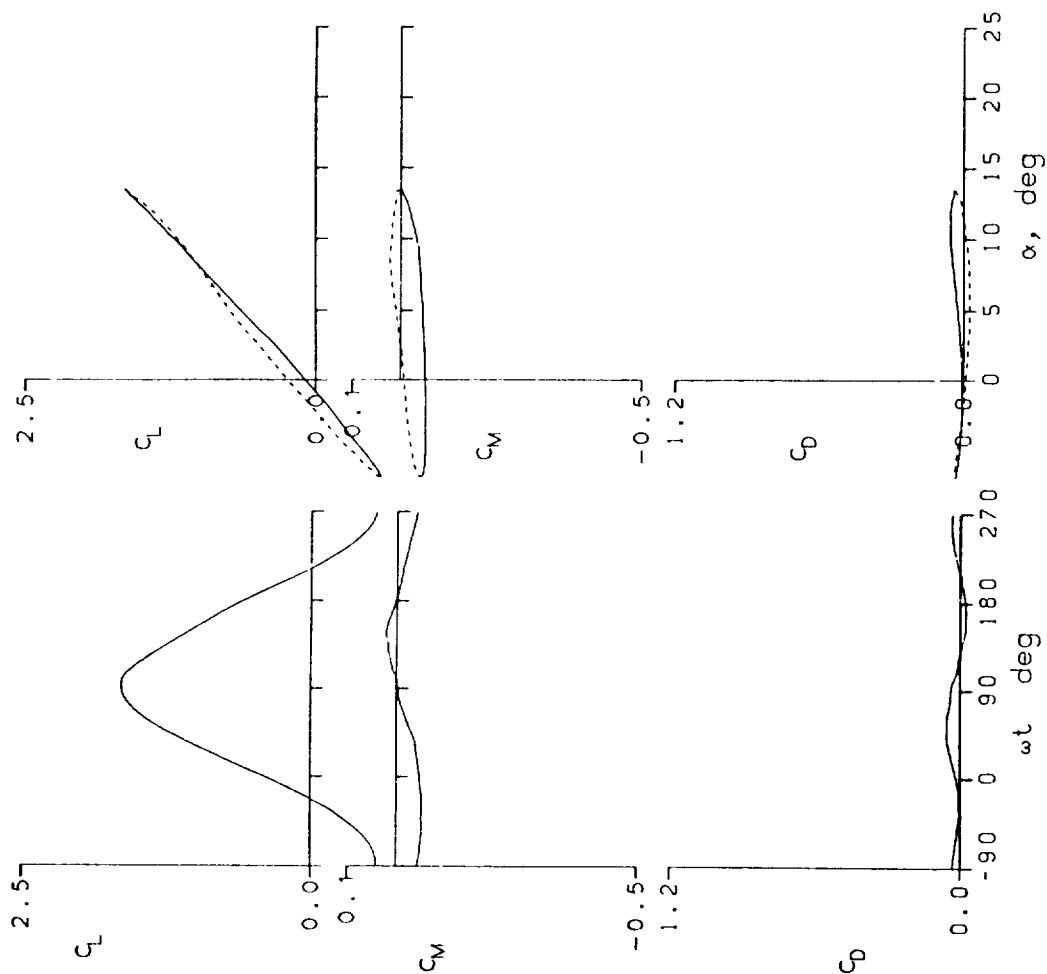


Figure 14.- Continued.

WORTMANN FX 69-H-098 AIRFOIL

FRAME : 23211	A0 = 3.06 °	k = 0.149
Re = 3.90 E6	A1 = 10.17 °	M = 0.300
CLmax = 1.66	CMmin = -0.07	CDmax = 0.08
αLmax = 13.1 °	ξ = 0.497	Mmax = 1.406
αCMmin = 2.7 °	-CPmax = 10.6	αMmax = 13.1 °

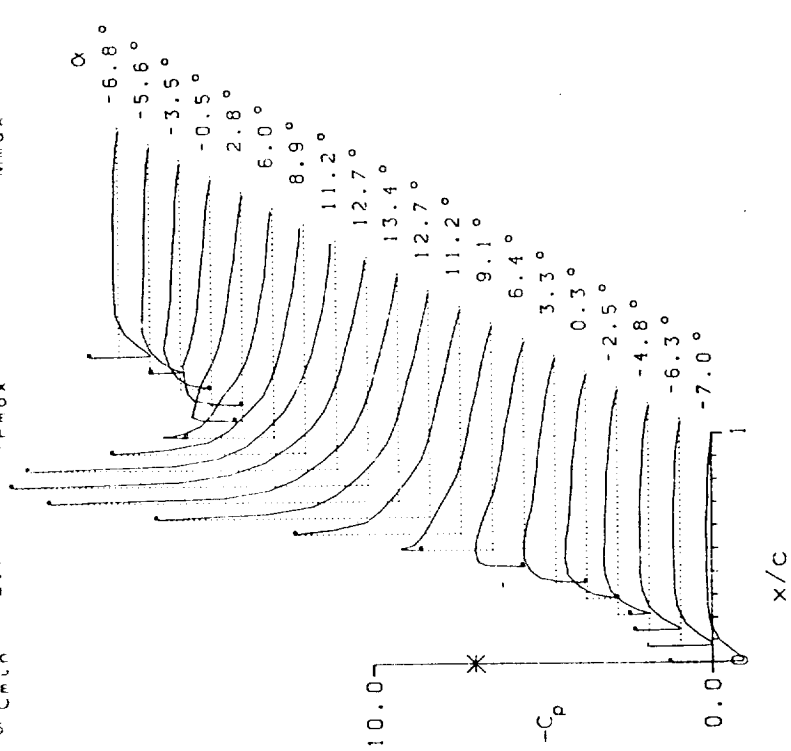
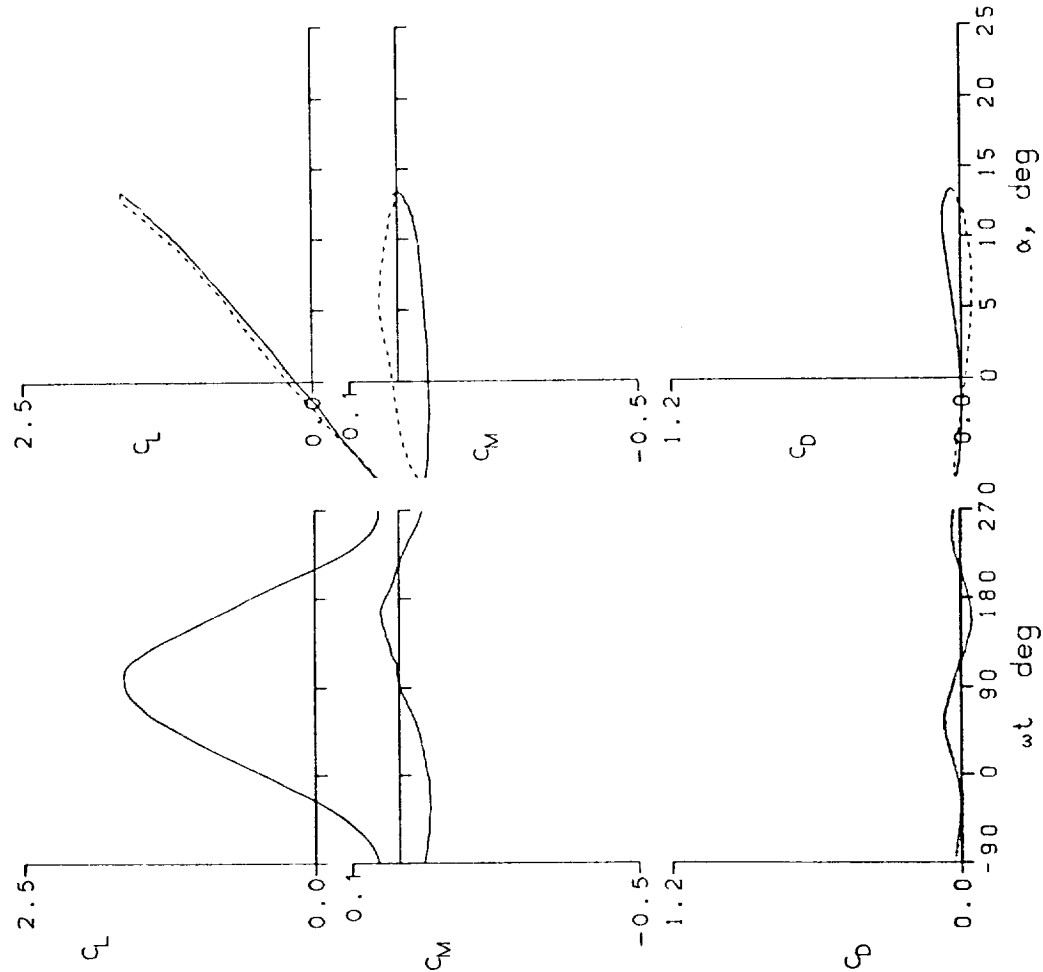


Figure 14.- Continued.


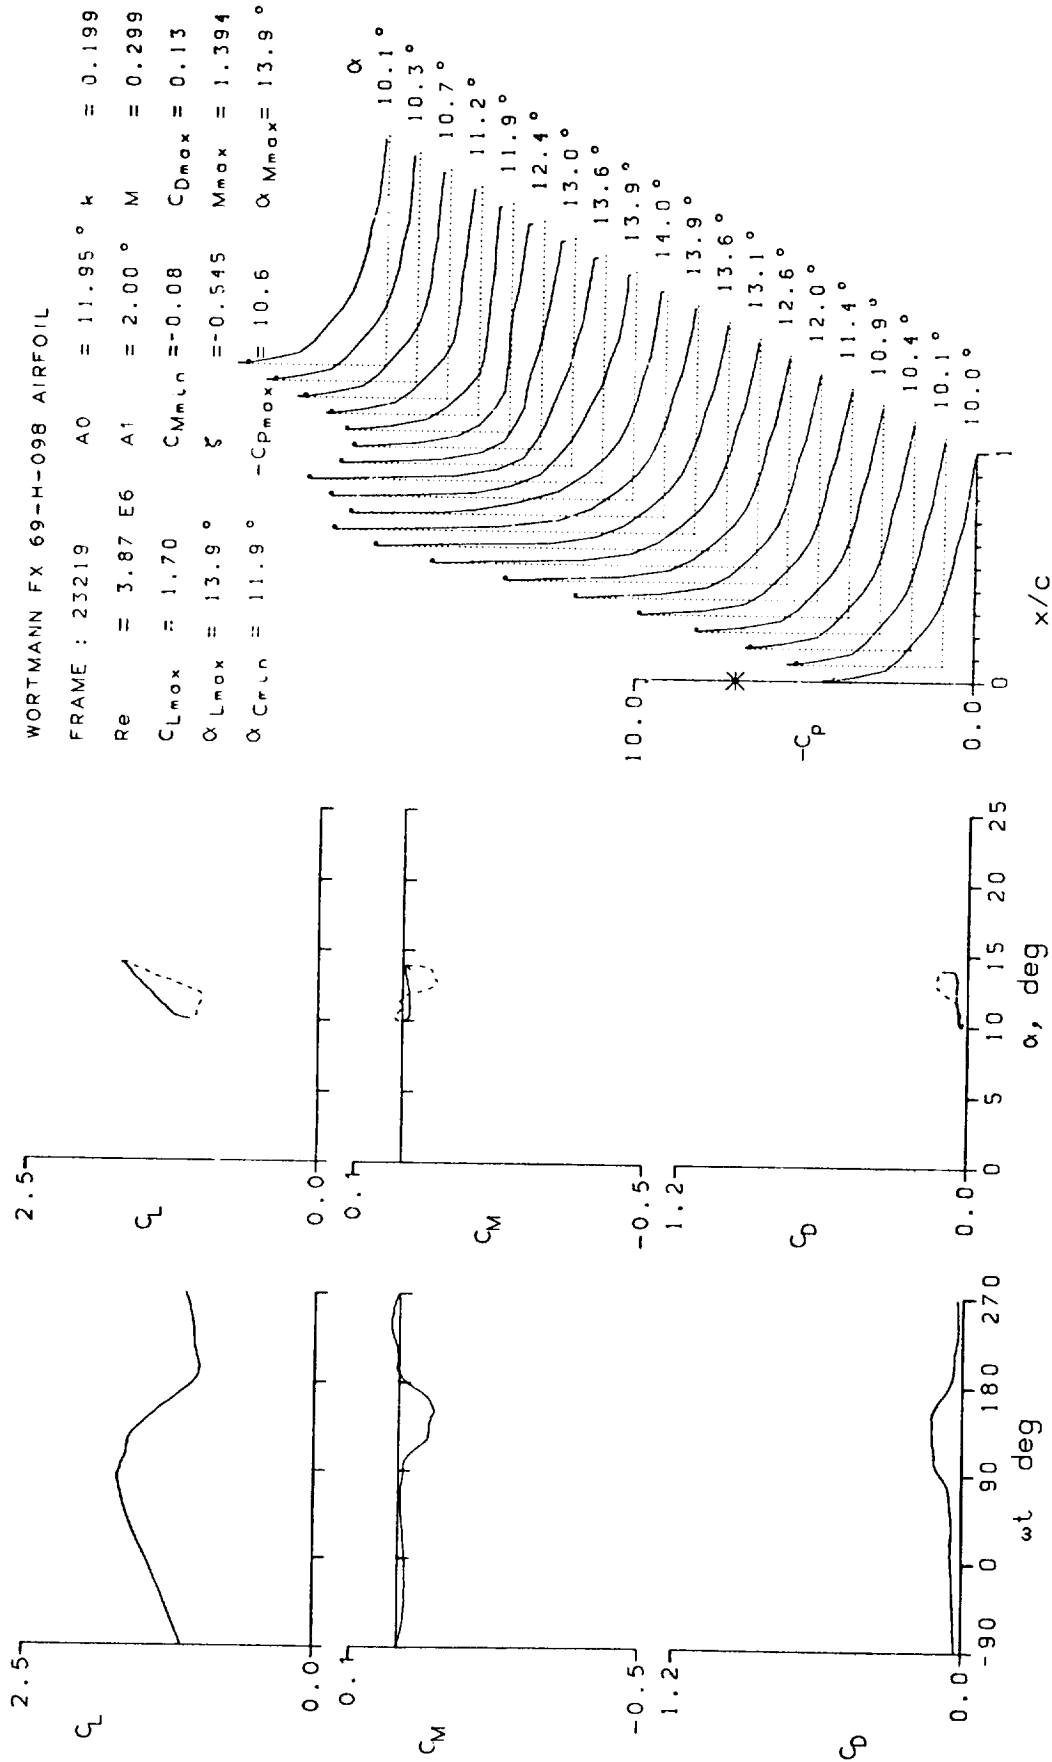


Figure 14.- Continued.

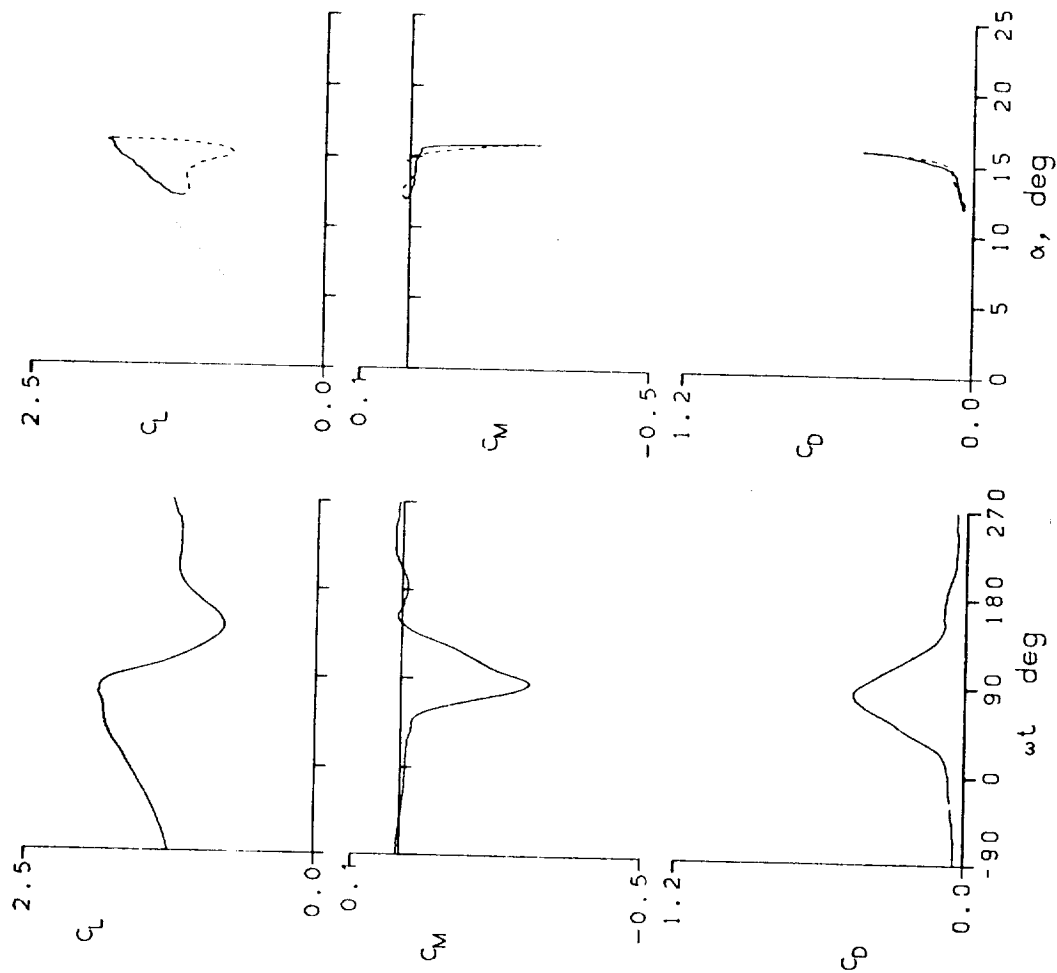

WORTMANN FX 69-H-098 AIRFOIL
 FRAME : 23305 $A_0 = 13.98^\circ$ $k = 0.200$
 $Re = 3.83 E6$ $A_1 = 1.98^\circ$ $M = 0.298$
 $C_{Lmax} = 1.88$ $C_{Mmin} = -0.27$ $C_{Dmax} = 0.47$
 $\alpha_{Lmax} = 15.9^\circ$ $\xi = -0.141$ $M_{max} = 1.385$
 $\alpha_{Cmin} = 13.9^\circ$ $-C_{Dmax} = 10.6$ $\alpha_{Mmax} = 14.6^\circ$

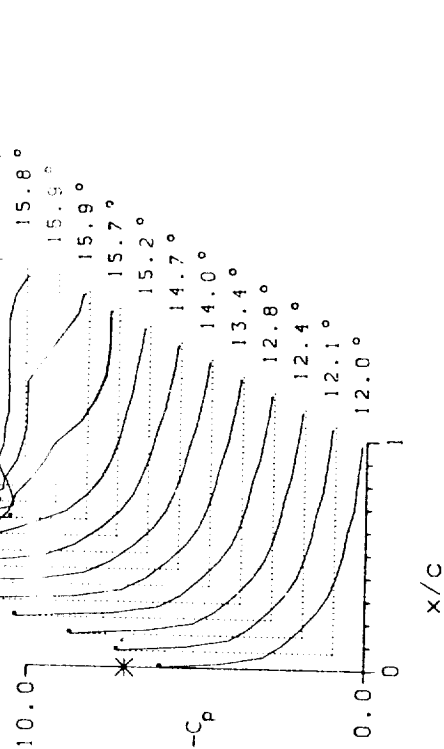


Figure 14.- Continued.

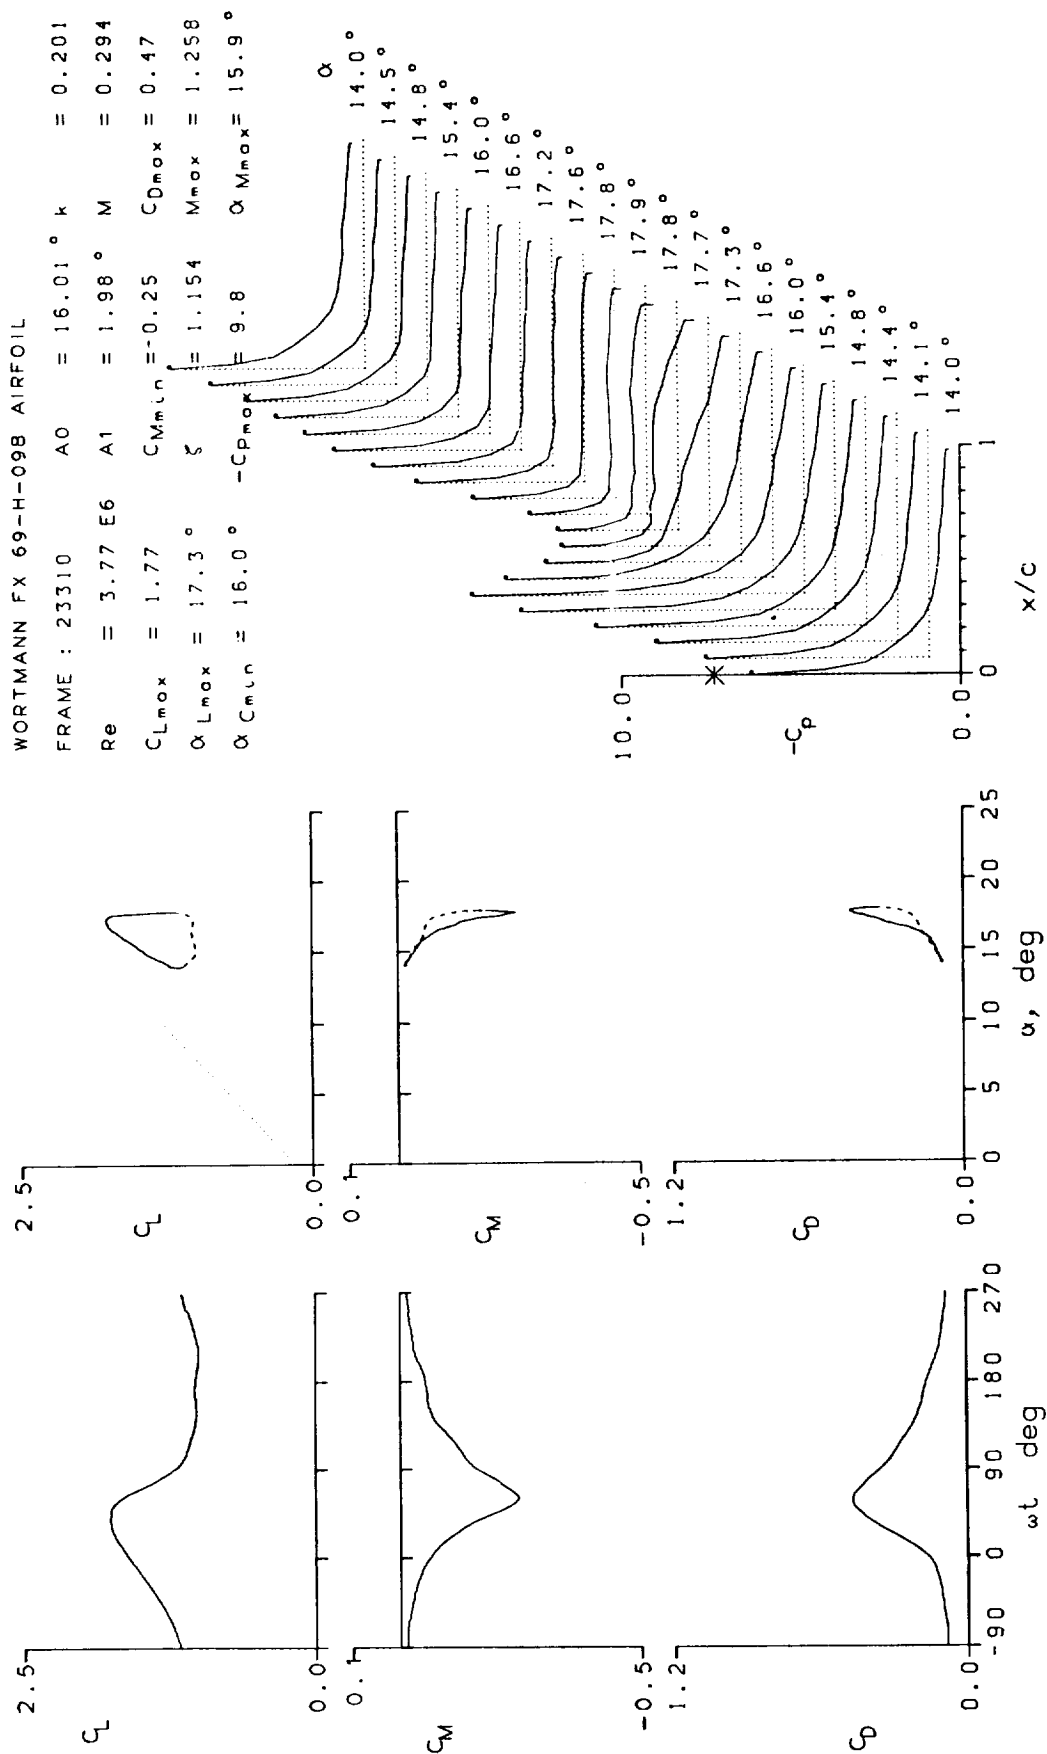


Figure 14.- Concluded.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 33022 $A_0 = 14.82^\circ$ $k = 0.099$
 $Re = 0.98 E6$ $A^* = 9.88^\circ$ $M = 0.073$
 $C_{Lmax} = 2.52$ $C_{Mmin} = -0.49$ $C_{Dmax} = 1.05$
 $\alpha_{Lmax} = 22.8^\circ$ $\xi = 0.156$ $M_{max} = 0.299$
 $\alpha_{Cmin} = 14.4^\circ$ $-C_{Pmax} = 15.4$ $\alpha_{Mmax} = 20.8^\circ$

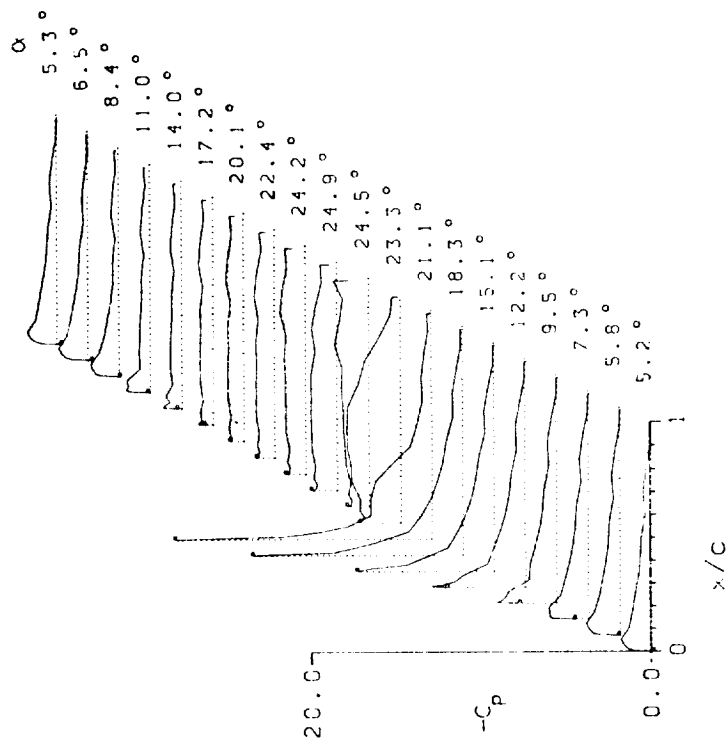
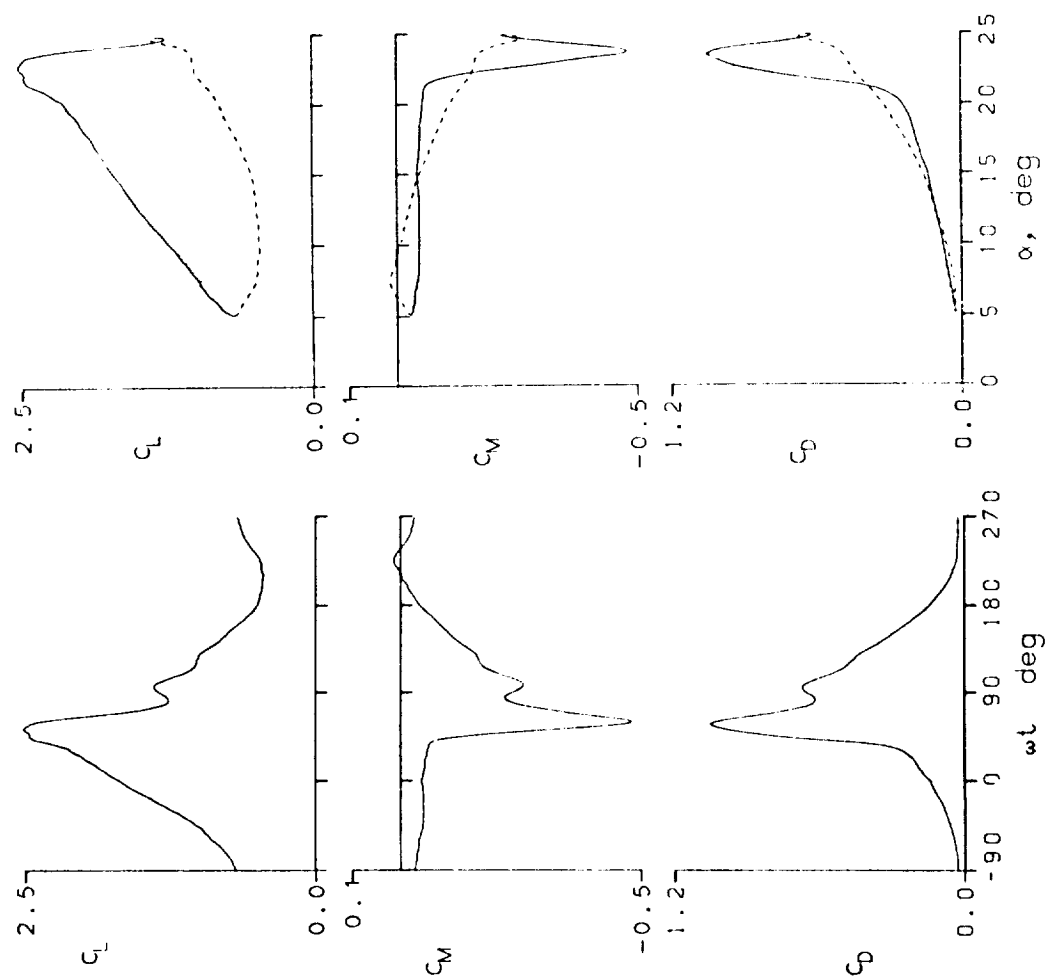


Figure 15.- Dynamic data for Sikorsky SC-1095 airfoil.

SIKORSKY SC-1095 AIRFOIL

FRAME : 33106	A0 = 14.82 °	k = 0.098
Re = 1.45 E6	A1 = 9.88 °	M = 0.110
CLmax = 2.50	CMmin = -0.49	CDmax = 1.05
αLmax = 23.3 °	ξ = 0.215	Mmax = 0.478
αCMmin = 14.4 °	-CPmax = 16.3	αMmax = 21.1 °

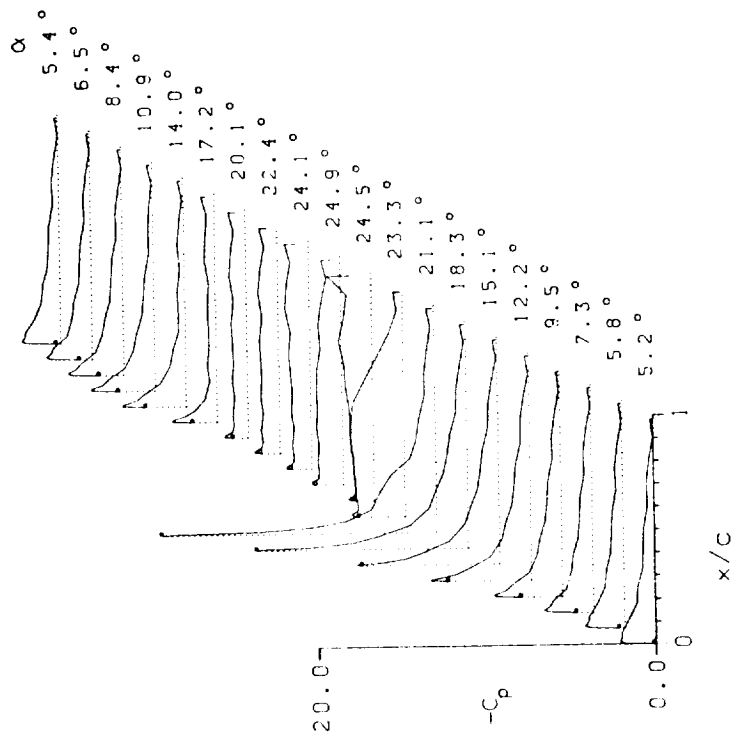
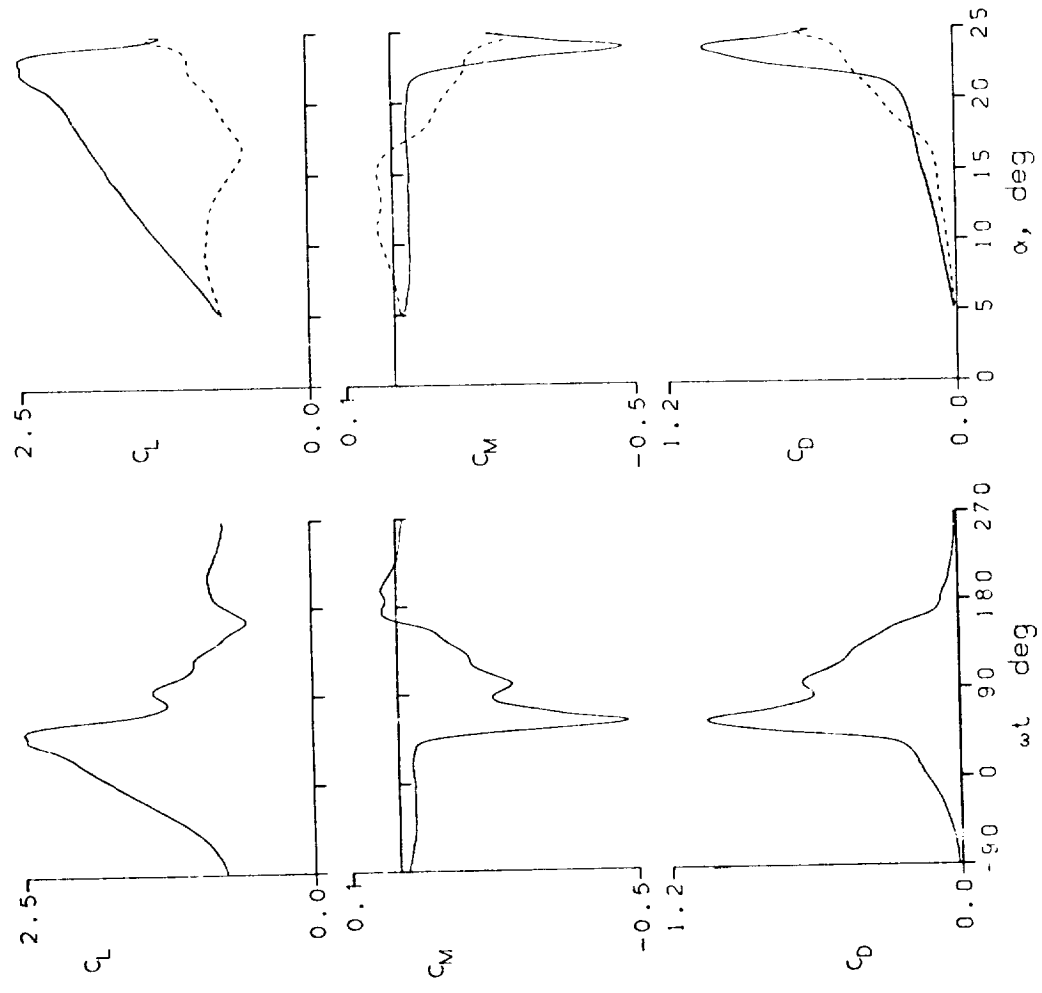


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 33110	A0 = 14.81°	κ = 0.099
Re = 2.40 E6	A1 = 9.92°	M = 0.183
CLmax = 2.58	CMmin = -0.50	CDmax = 1.07
αLmax = 22.9°	ζ = 0.272	Mmax = 0.904
αCMmin = 14.4°	-CPmax = 16.9	αMmax = 20.9°

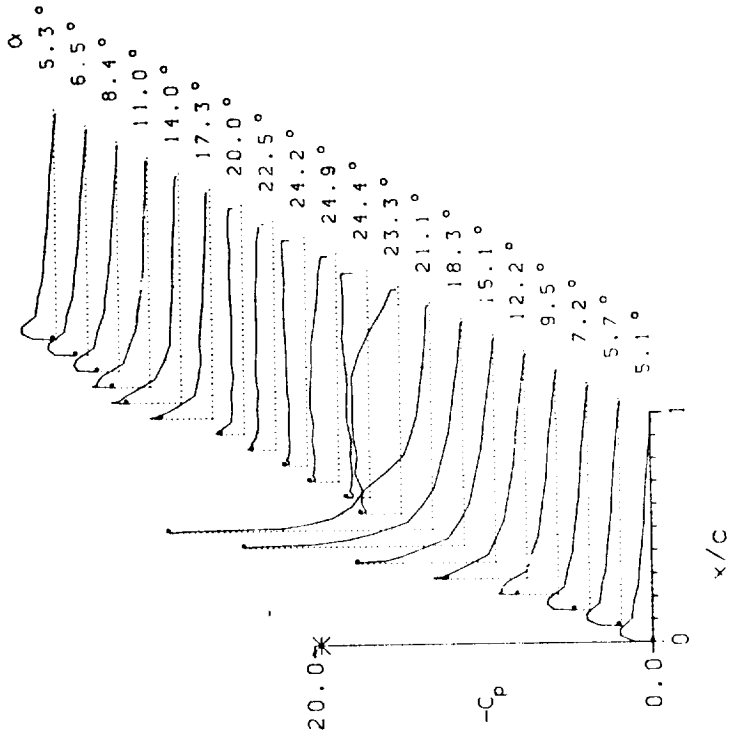
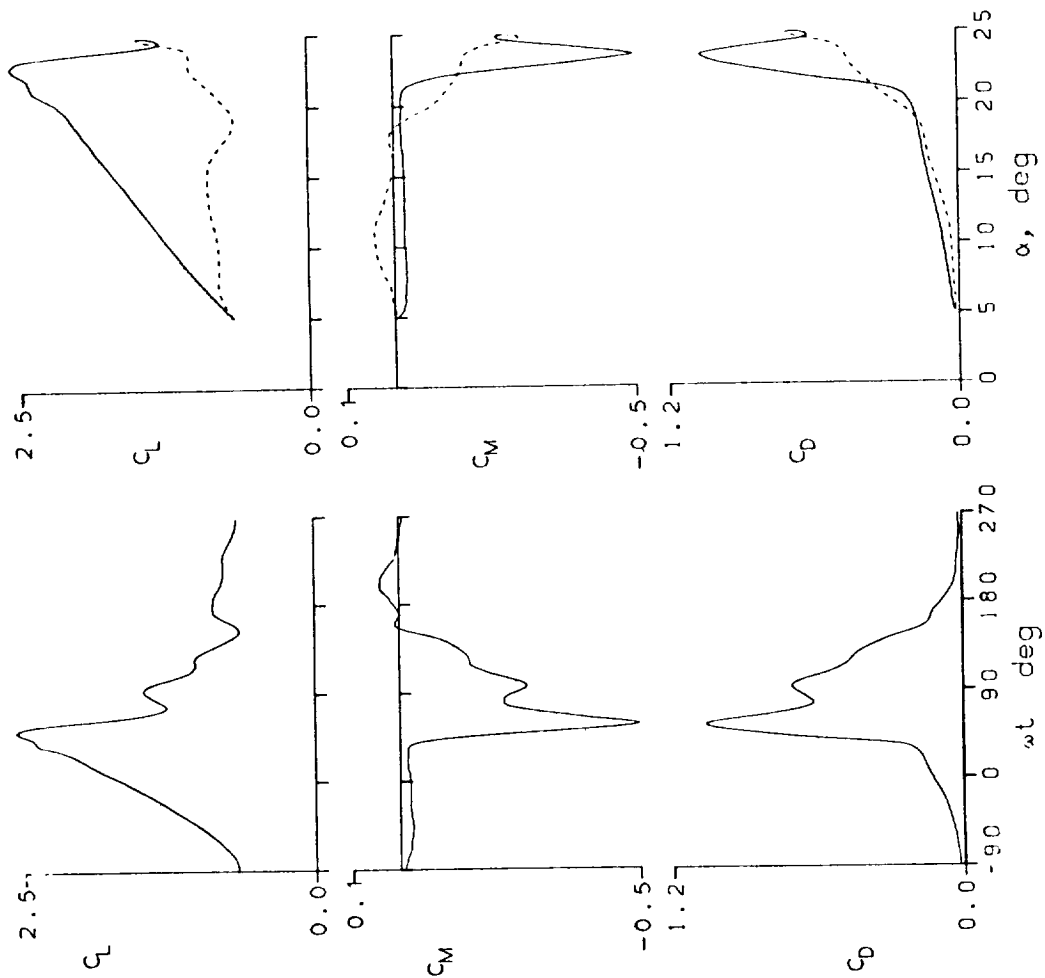


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 33118 $A_0 = 5.97^\circ$ $k = 0.050$
 $Re = 2.39 \text{ E}6$ $A_1 = 10.05^\circ$ $M = 0.182$
 $C_{Lmax} = 1.74$ $C_{Mmin} = -0.06$ $C_{Dmax} = 0.15$
 $\alpha_{Lmax} = 15.2^\circ$ $\xi = 0.083$ $M_{max} = 0.685$
 $\alpha_{Cmin} = 5.4^\circ$ $-C_{Dmax} = 10.9$ $\alpha_{Mmax} = 16.2^\circ$

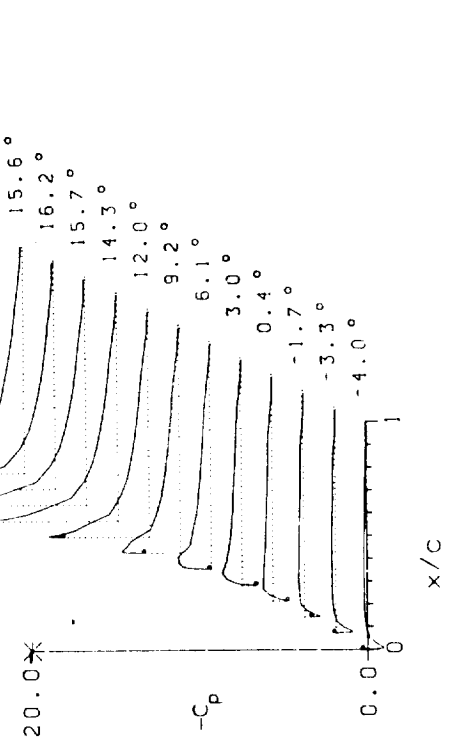
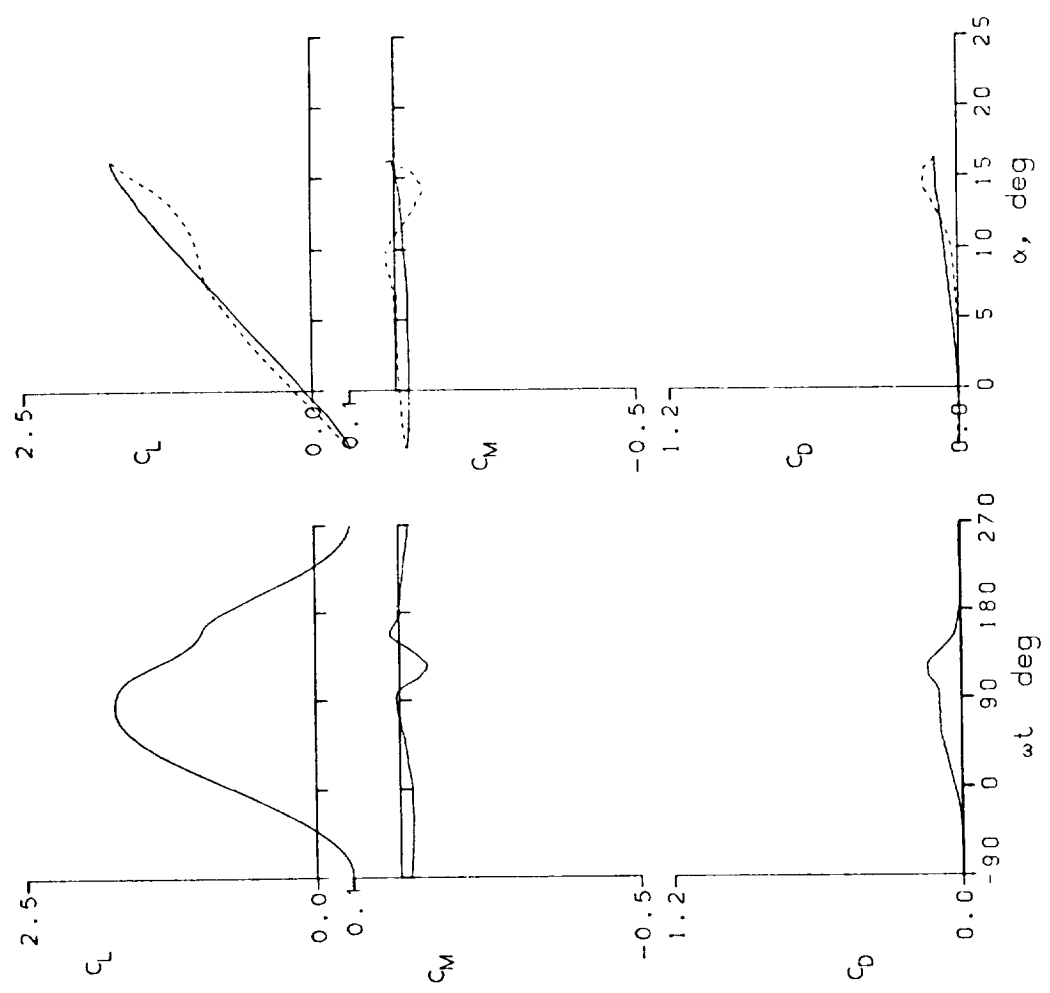


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 33121 A0 = 6.03° k = 0.198
 Re = 2.41 E6 A1 = 10.00° M = 0.184
 C_{Lmax} = 1.74 C_{Mmin} = -0.07 C_{Dmax} = 0.14
 α_{Lmax} = 16.2° ζ = 0.634 M_{max} = 0.690
 α_{Cmin} = 5.4° -C_{pmax} = 10.8 α_{Mmax} = 16.1°

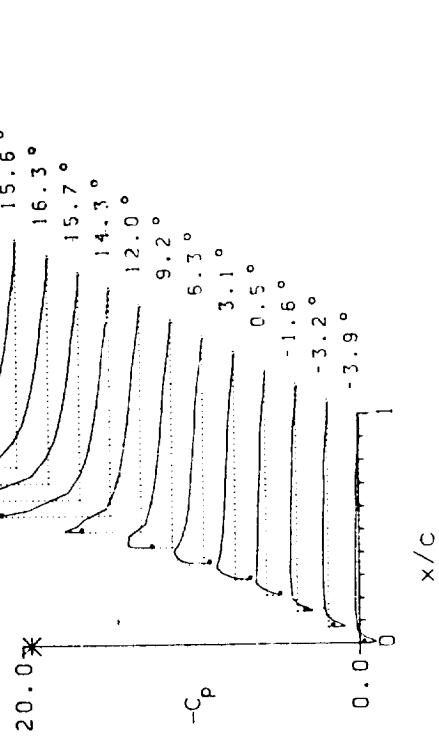
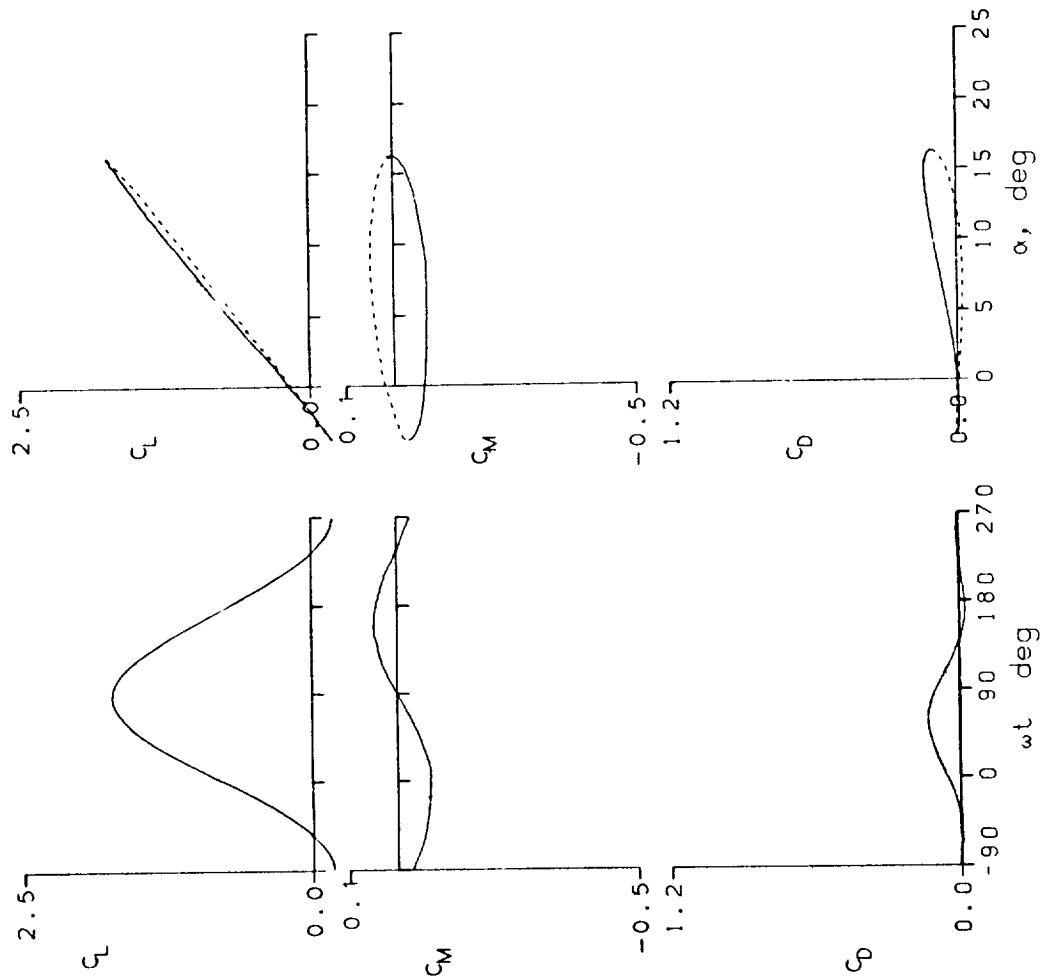


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 33205 $A_0 = 14.80^\circ$ $\mu = 0.099$
 $Re = 2.84 \text{ E}6$ $A_1 = 9.84^\circ$ $M = 0.219$
 $C_{Lmax} = 2.44$ $C_{Mmin} = -0.48$ $C_{Dmax} = 0.99$
 $\alpha_{Lmax} = 22.3^\circ$ $\xi = 0.353$ $M_{max} = 1.100$
 $\alpha_{Cmin} = 14.3^\circ$ $-C_{Dmax} = 15.4$ $\alpha_{Mmax} = 20.0^\circ$

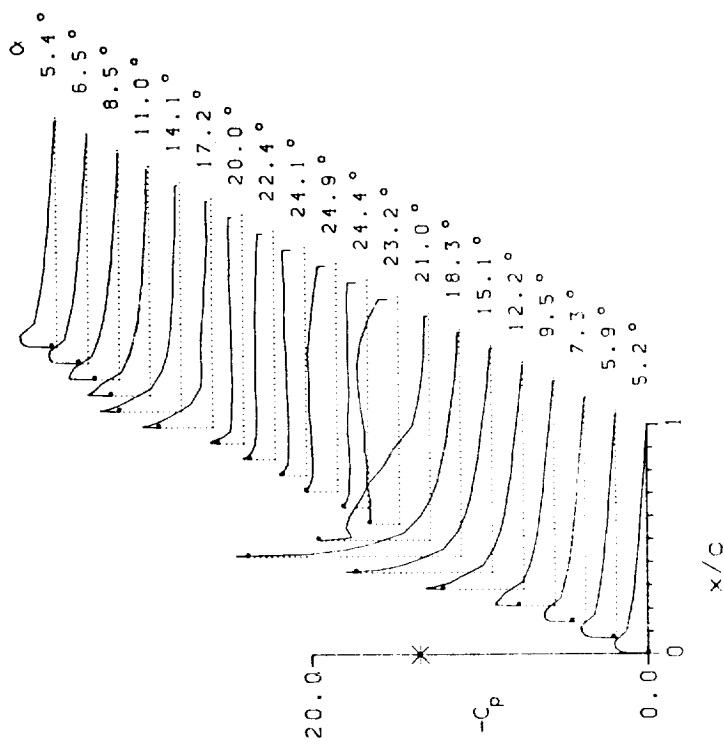
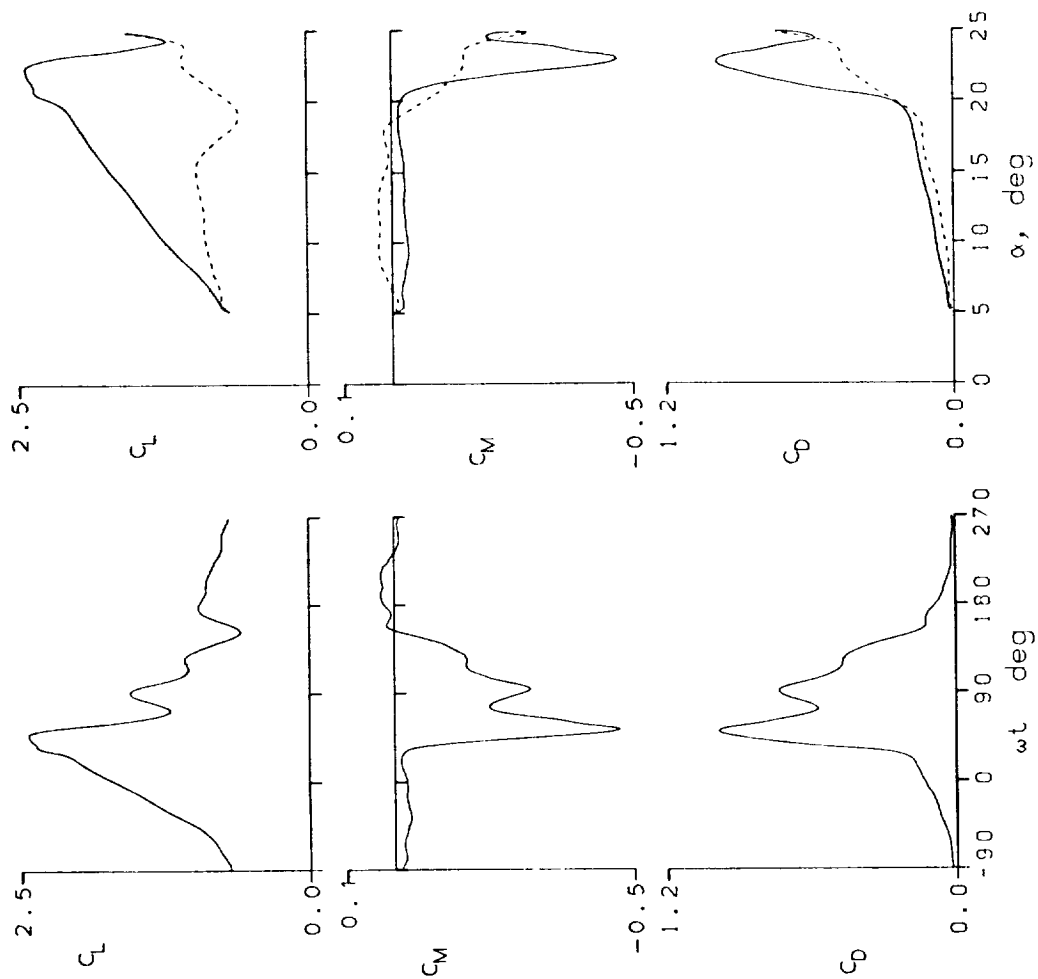


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 33207 $A_0 = 14.83^\circ$ $k = 0.098$
 $Re = 3.19 \text{ E}6$ $A_1 = 9.86^\circ$ $M = 0.249$
 $C_{Lmax} = 2.40$ $C_{Mmin} = -0.46$ $C_{Dmax} = 0.93$
 $\alpha_{Lmax} = 21.6^\circ$ $\xi = 0.470$ $M_{max} = 1.208$
 $\alpha_{Cmin} = 14.4^\circ$ $-C_{Dmax} = 13.3$ $\alpha_{Mmax} = 18.6^\circ$

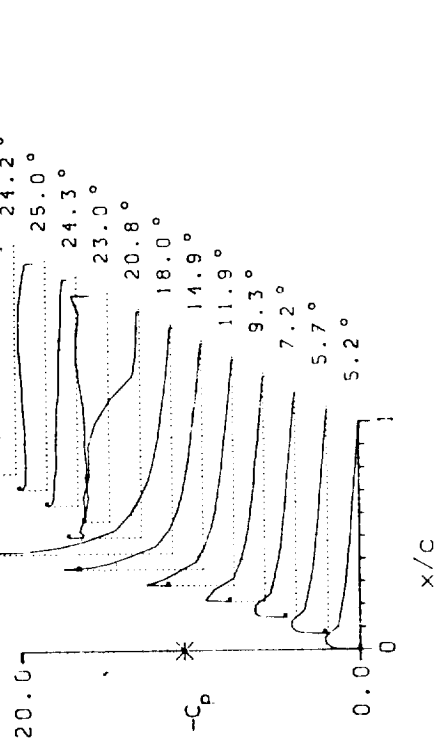
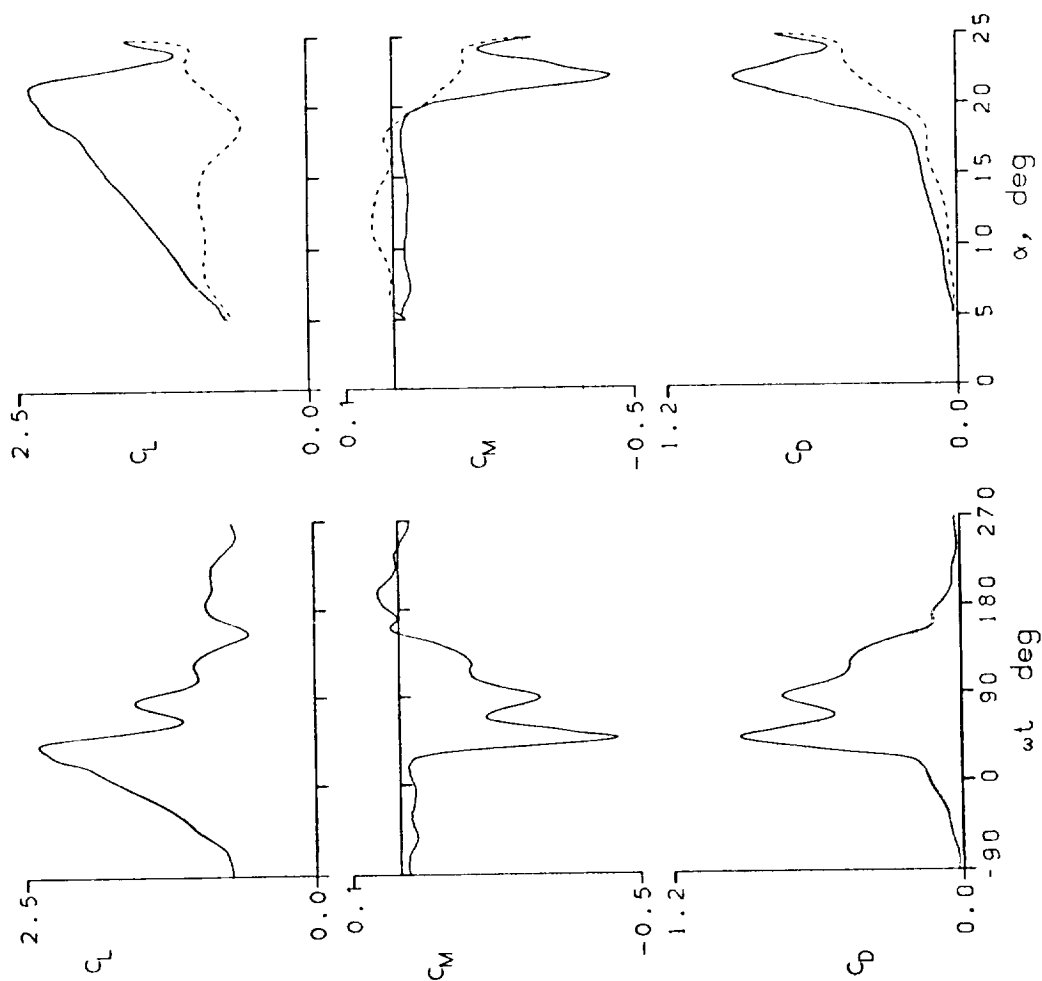


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 33215	A0 = 14.85 °	k = 0.100
Re = 3.74 E6	A1 = 9.87 °	M = 0.279
$C_{Lmax} = 2.40$	$C_{Mmin} = -0.44$	$C_{Dmax} = 0.88$
$\alpha_{Lmax} = 20.4 °$	$\xi = 0.485$	$M_{max} = 1.346$
$\alpha_{Cmin} = 14.5 °$	$-C_{pmax} = 11.8$	$\alpha_{Mmax} = 17.8 °$

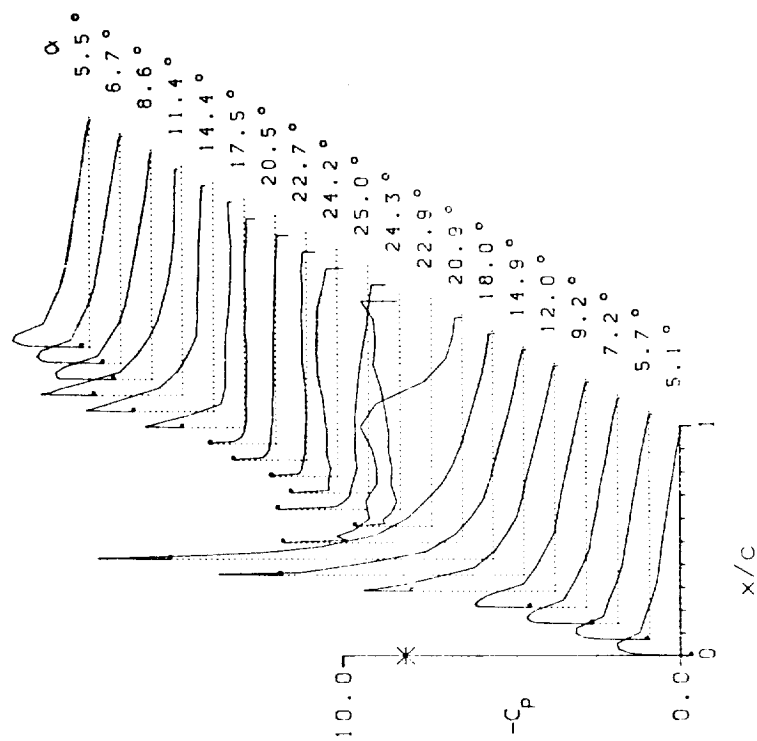
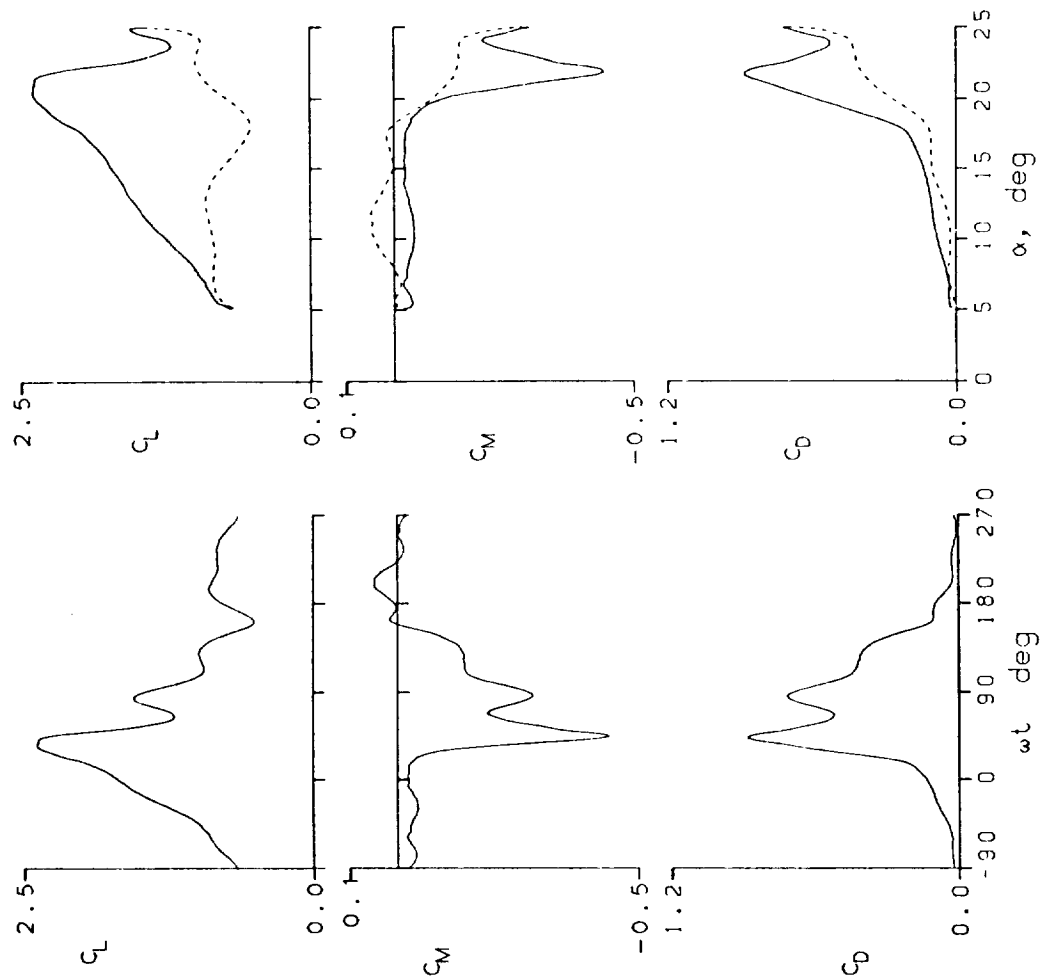


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 33217 $\Lambda_0 = 14.87^\circ$ $k = 0.025$
 $Re = 3.92 \times 10^6$ $A_1 = 9.88^\circ$ $M = 0.297$
 $C_{Lmax} = 1.91$ $C_{Mmin} = -0.22$ $C_{Dmax} = 0.45$
 $\alpha_{Lmax} = 16.3^\circ$ $\xi = 0.102$ $M_{max} = 1.354$
 $\alpha_{Cmin} = 14.5^\circ$ $-C_{Dmax} = 10.5$ $\alpha_{Mmax} = 15.7^\circ$

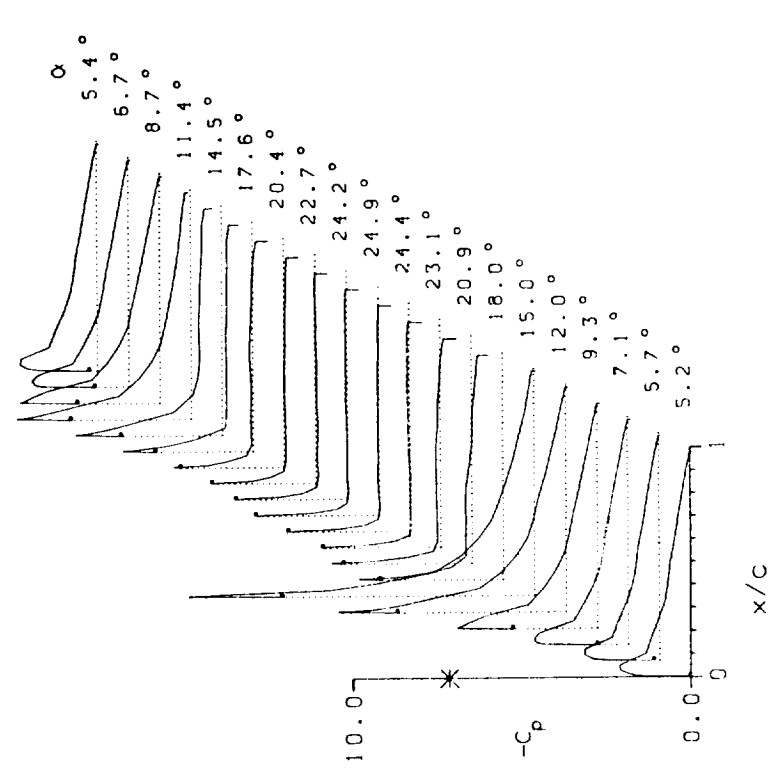
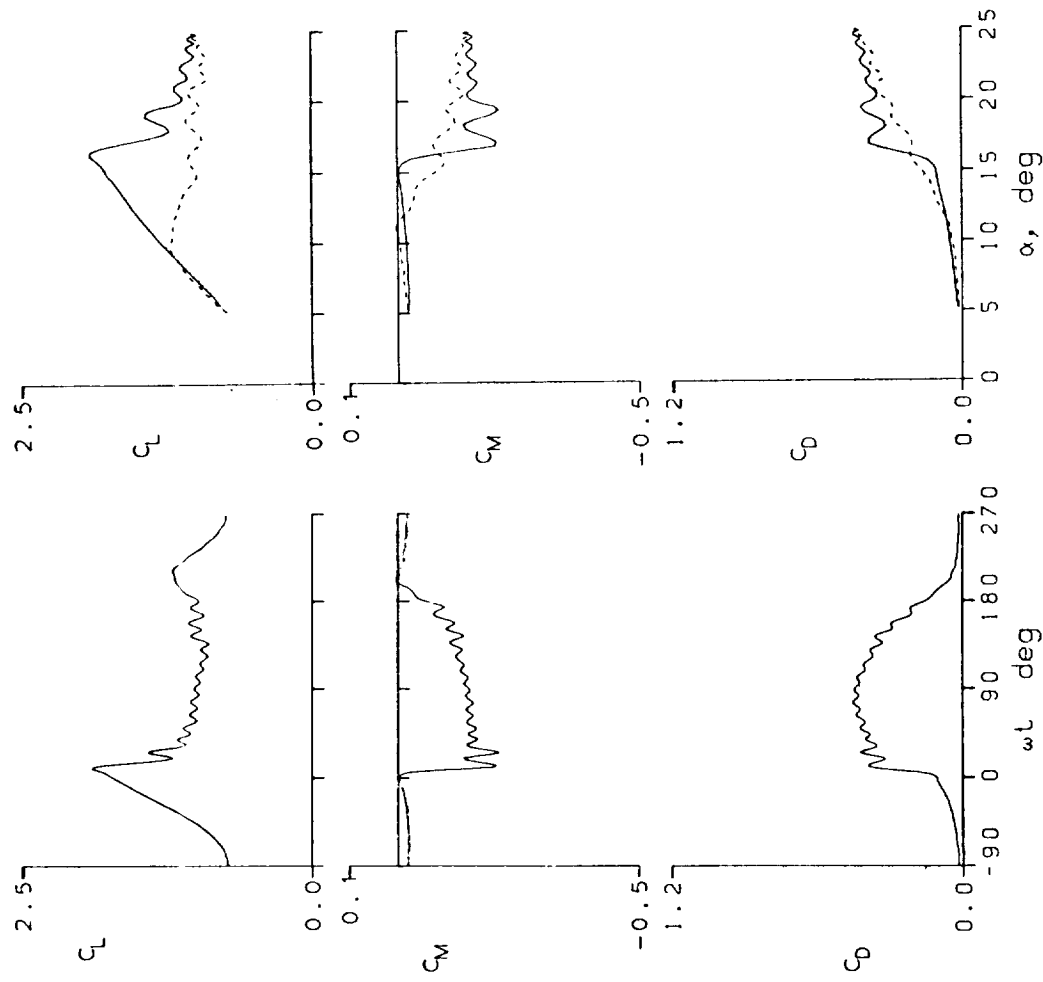


Figure 15.- Continued.

SIKORSKY SC-1045 AIRFOIL

FRAME : 33222	A0 = 14.82 °	k = 0.049
Re = 3.89 E6	A1 = 9.91 °	M = 0.296
C _{Lmax} = 2.10	C _{Mmin} = -0.29	C _{Dmax} = 0.53
α _{Lmax} = 18.1 °	ζ = 0.216	M _{max} = 1.389
α _{Cmin} = 14.4 °	-C _{Dmax} = 10.8	α _{Mmax} = 16.2 °



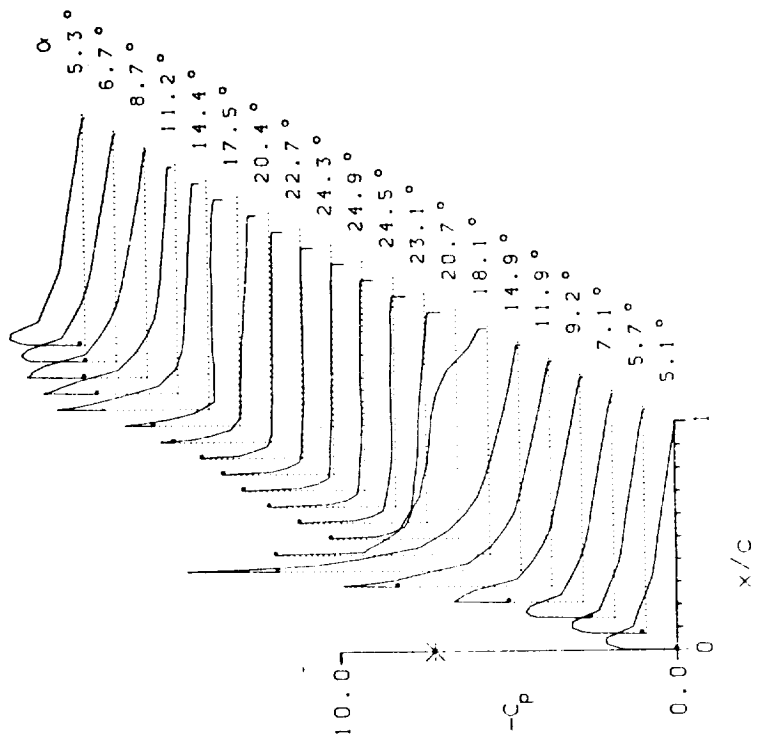


Figure 15.- Continued.

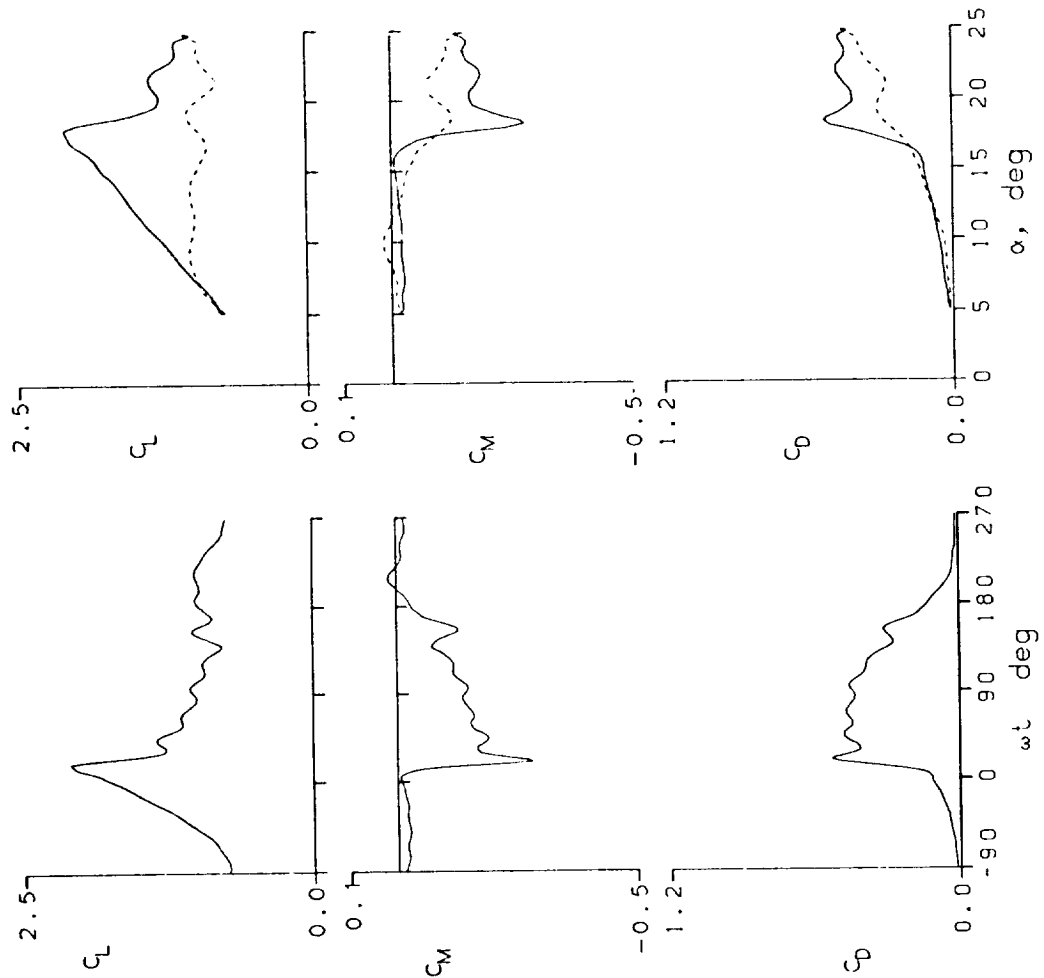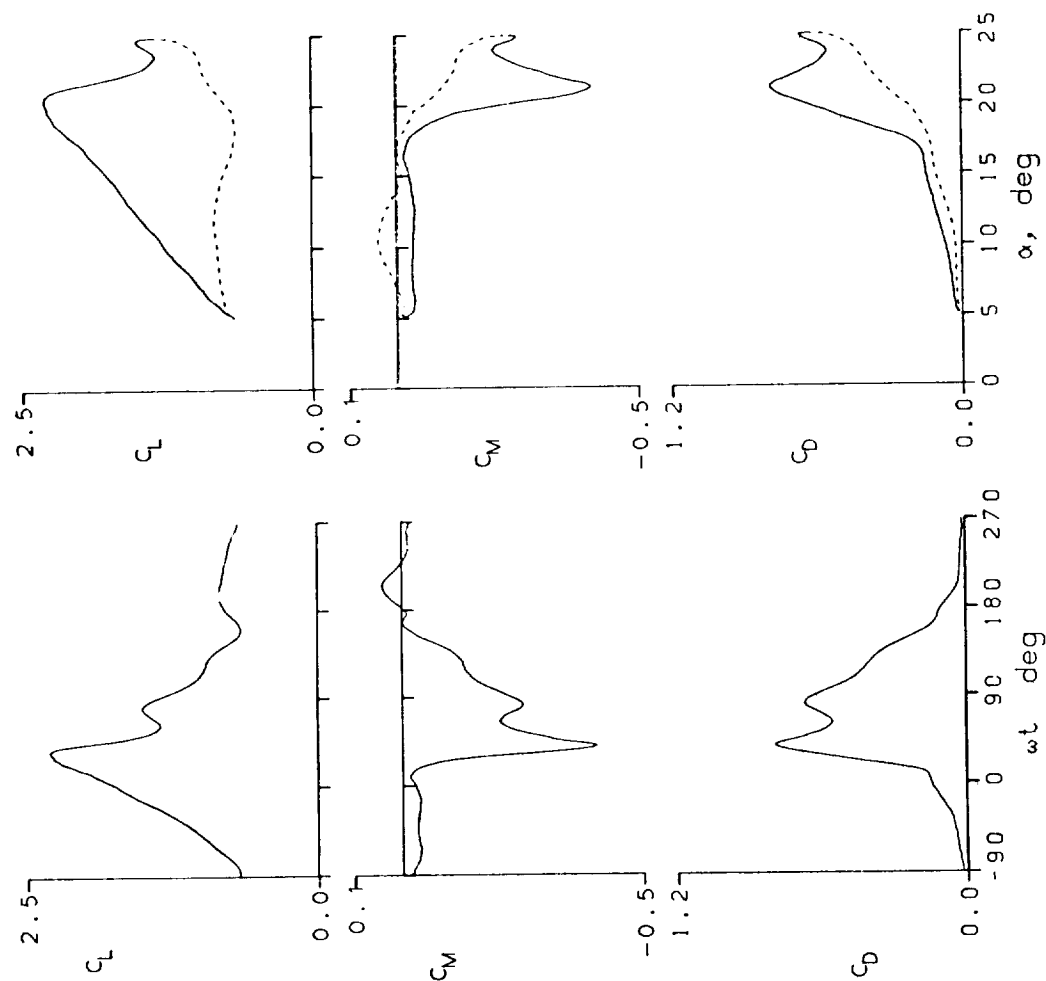

SIKORSKY SC-1095 AIRFOIL
 FRAME : 33300 $A_0 = 14.83^\circ$ $k = 0.100$
 $Re = 3.82 \text{ E} 6$ $A_1 = 9.87^\circ$ $M = 0.292$
 $C_{L_{max}} = 2.31$ $C_{M_{min}} = -0.41$ $C_{D_{max}} = 0.79$
 $\alpha_{L_{max}} = 20.5^\circ$ $\zeta = 0.544$ $M_{max} = 1.391$
 $\alpha_{C_{min}} = 14.6^\circ$ $-C_{D_{max}} = 11.1$ $\alpha_{M_{max}} = 16.8^\circ$

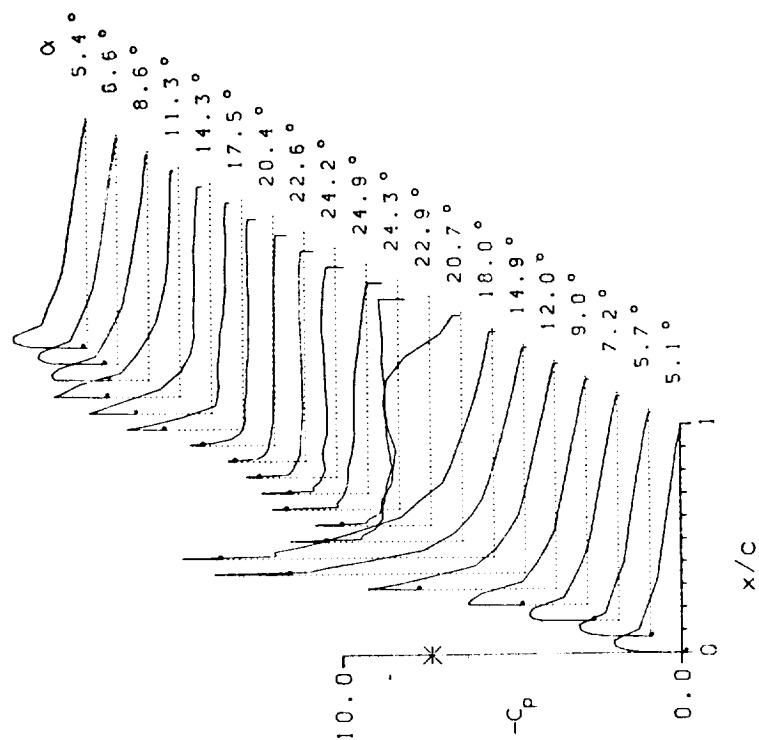


Figure 15.- Continued.

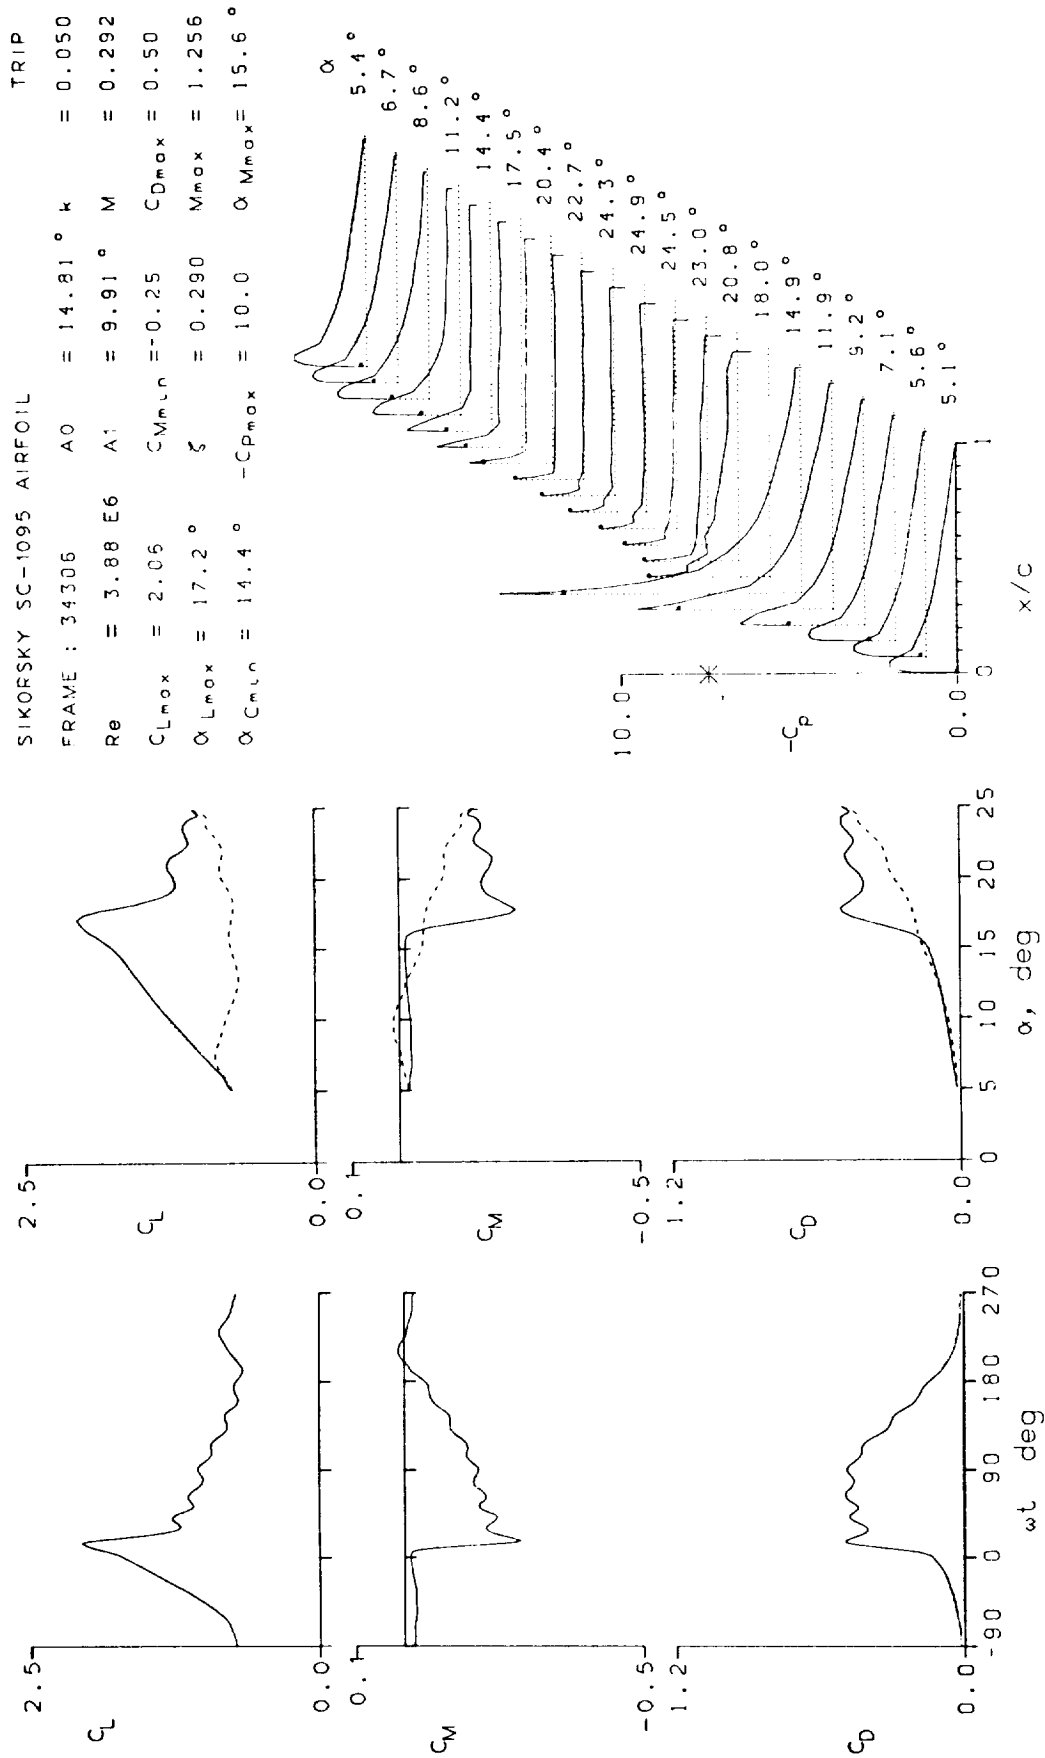


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL TRIP
 FRAME : 34308 A0 = 14.82° k = 0.102
 Re = 3.80 E6 A1 = 9.89° M = 0.288
 CLmax = 2.38 CMmin = -0.41 CDmax = 0.80
 αLmax = 20.3° ζ = 0.526 Vmax = 1.329
 αCmin = 14.4° -CDmax = 10.9 αMmax = 17.2°

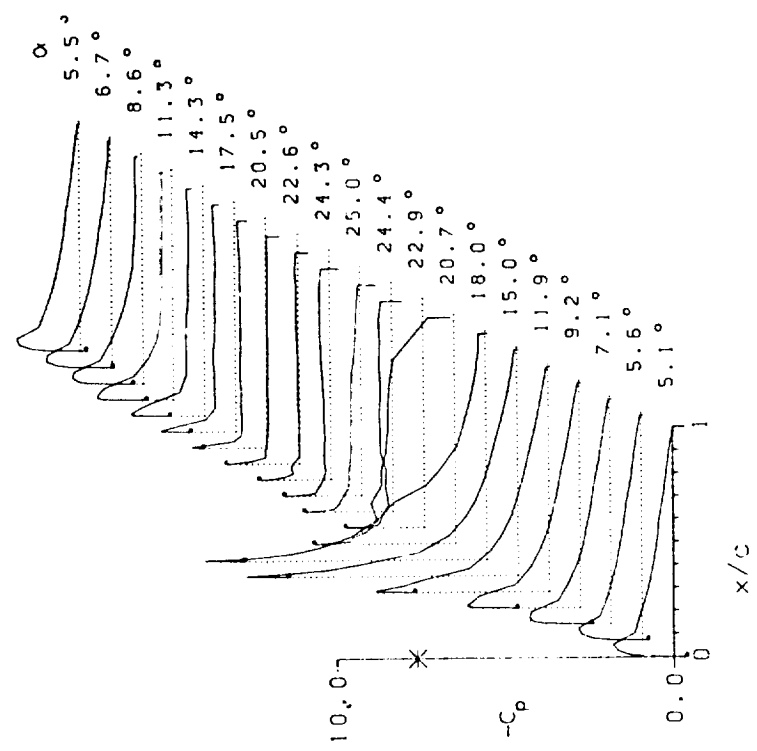
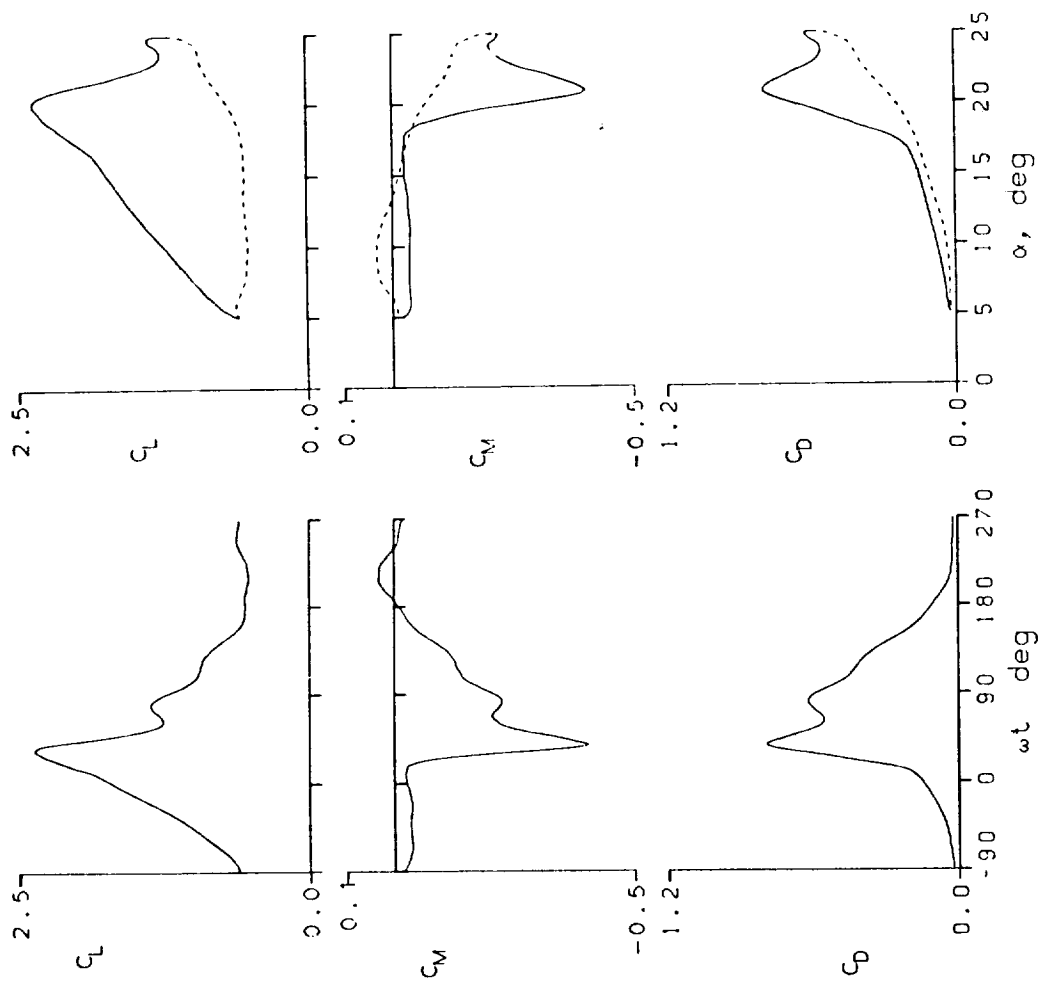


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL TRIP

FRAME : 34318 A0 = 14.81° k = 0.050

Re = 2.48 E6 A1 = 9.91° M = 0.184

C_{Lmax} = 2.15 C_{Mmin} = -0.32 C_{Dmax} = 0.64

α_{Lmax} = 18.9° ξ = 0.255 M_{max} = 0.702

α_{Cmin} = 14.4° -C_{Dmax} = 11.2 α_{Mmax} = 17.2°

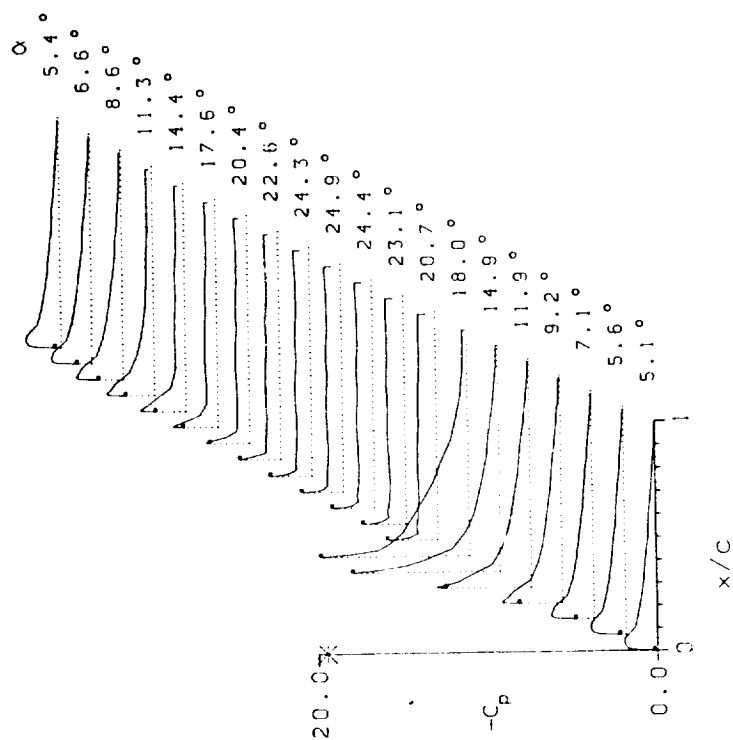
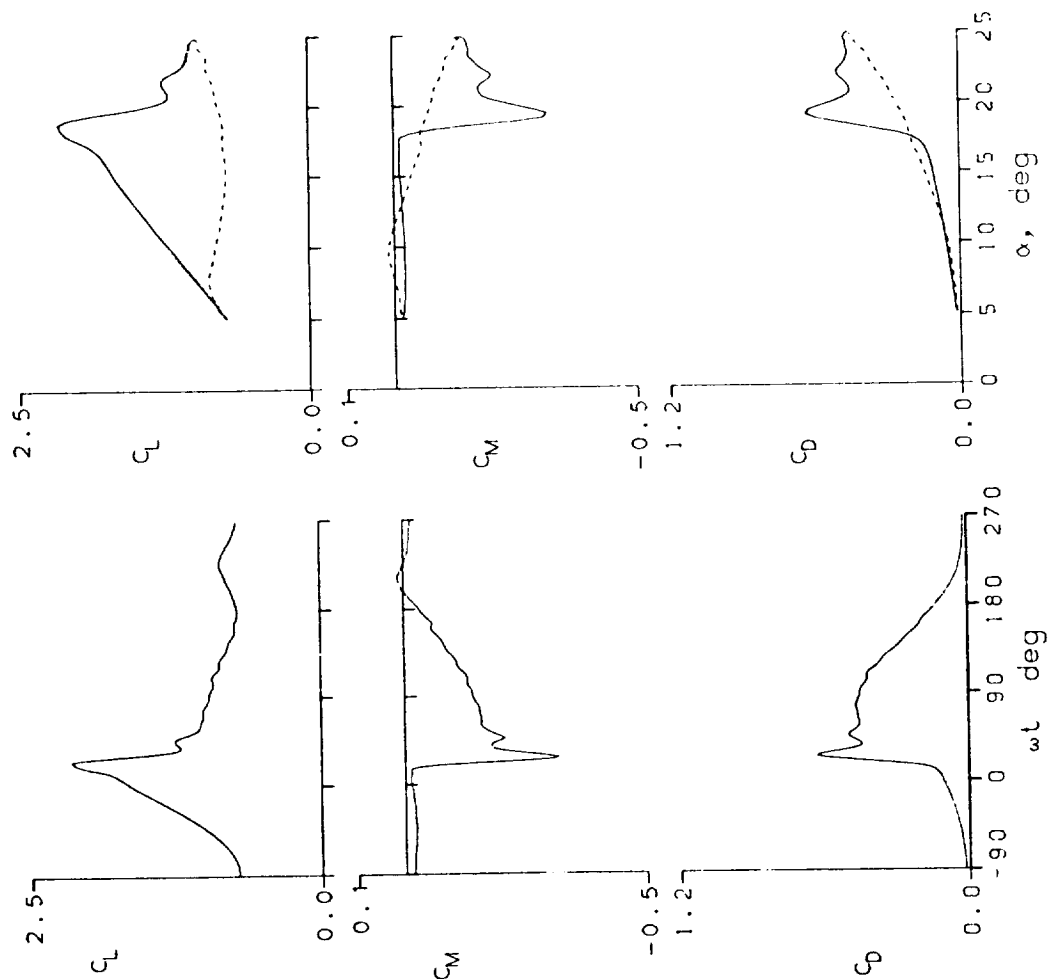


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 34321	A0	= 14.79 °	k	= 0.100	
Re	= 2.48 E6	A1	= 9.93 °	M	= 0.184
CLmax	= 2.44	CMmin	= -0.45	CDmax	= 0.91
αLmax	= 21.3 °	ξ	= 0.387	Mmax	= 0.754
αCmin	= 14.4 °	-CDmax	= 12.6	αMmax	= 18.5 °

TRIP

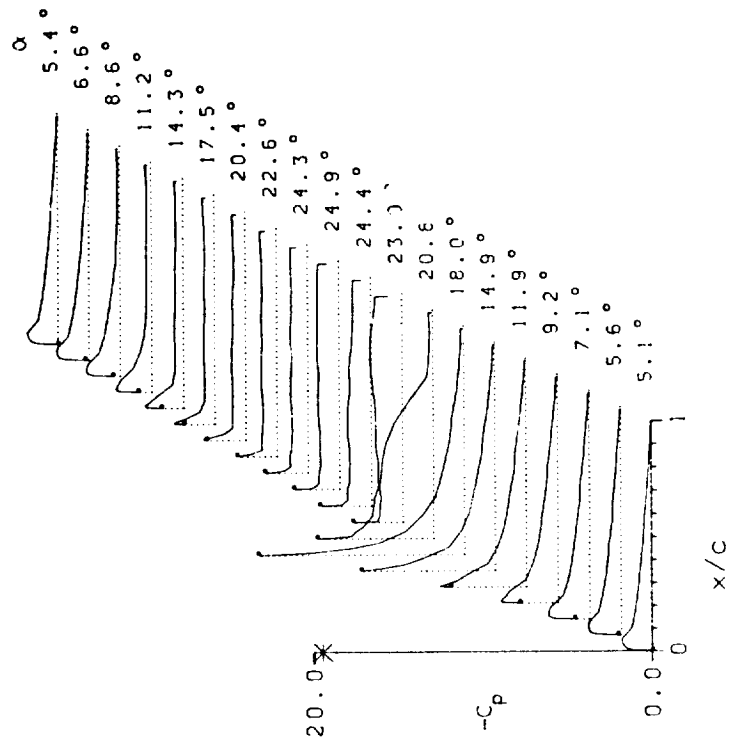
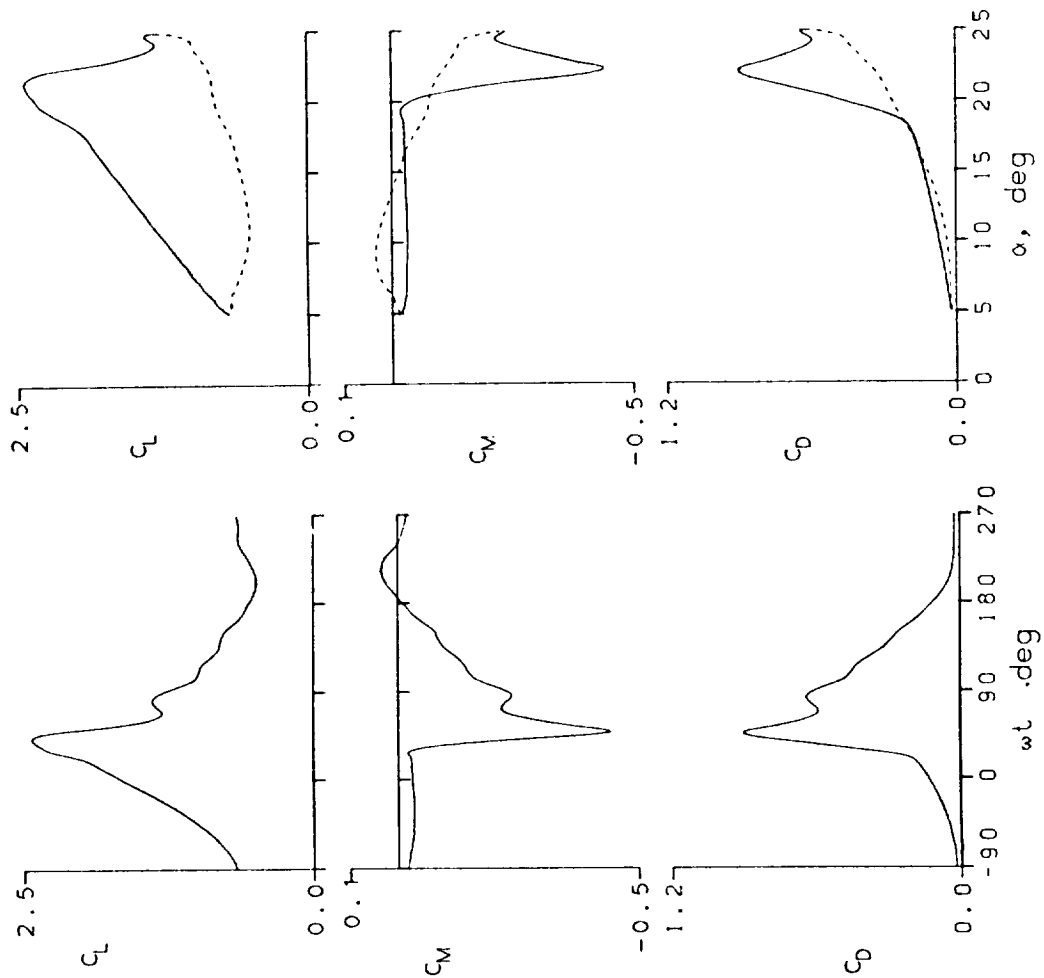


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 34323	$\Lambda_0 = 14.81^\circ$	$k = 0.150$	TRIP
$Re = 2.47 \text{ E}6$	$A1 = 9.90^\circ$	$M = 0.184$	
$C_{Lmax} = 2.58$	$C_{Mmin} = -0.51$	$C_{Dmax} = 1.08$	
$\alpha_{Lmax} = 23.1^\circ$	$\zeta = 0.208$	$M_{max} = 0.784$	
$\alpha_{Cmin} = 14.4^\circ$	$-C_{Dmax} = 13.4$	$\alpha_{Mmax} = 19.7^\circ$	

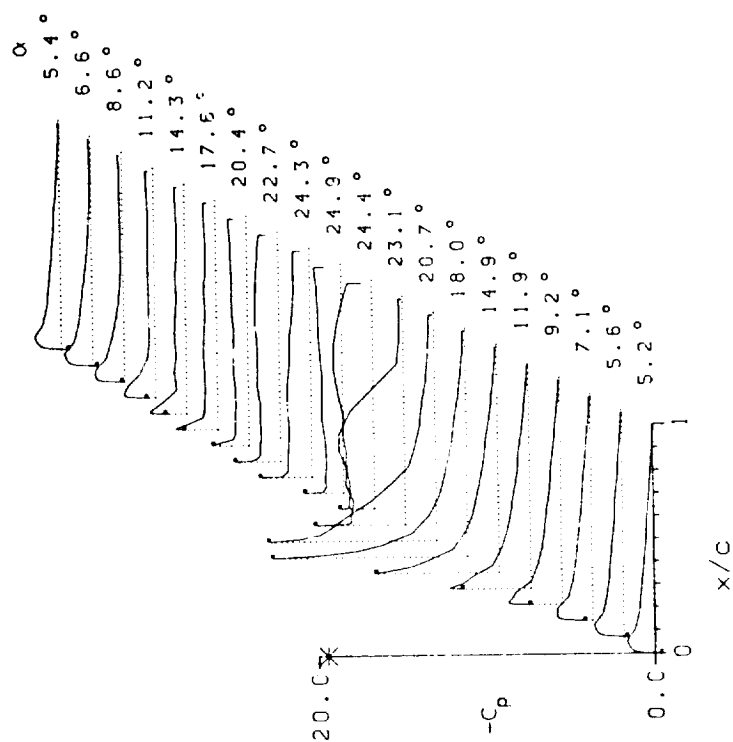
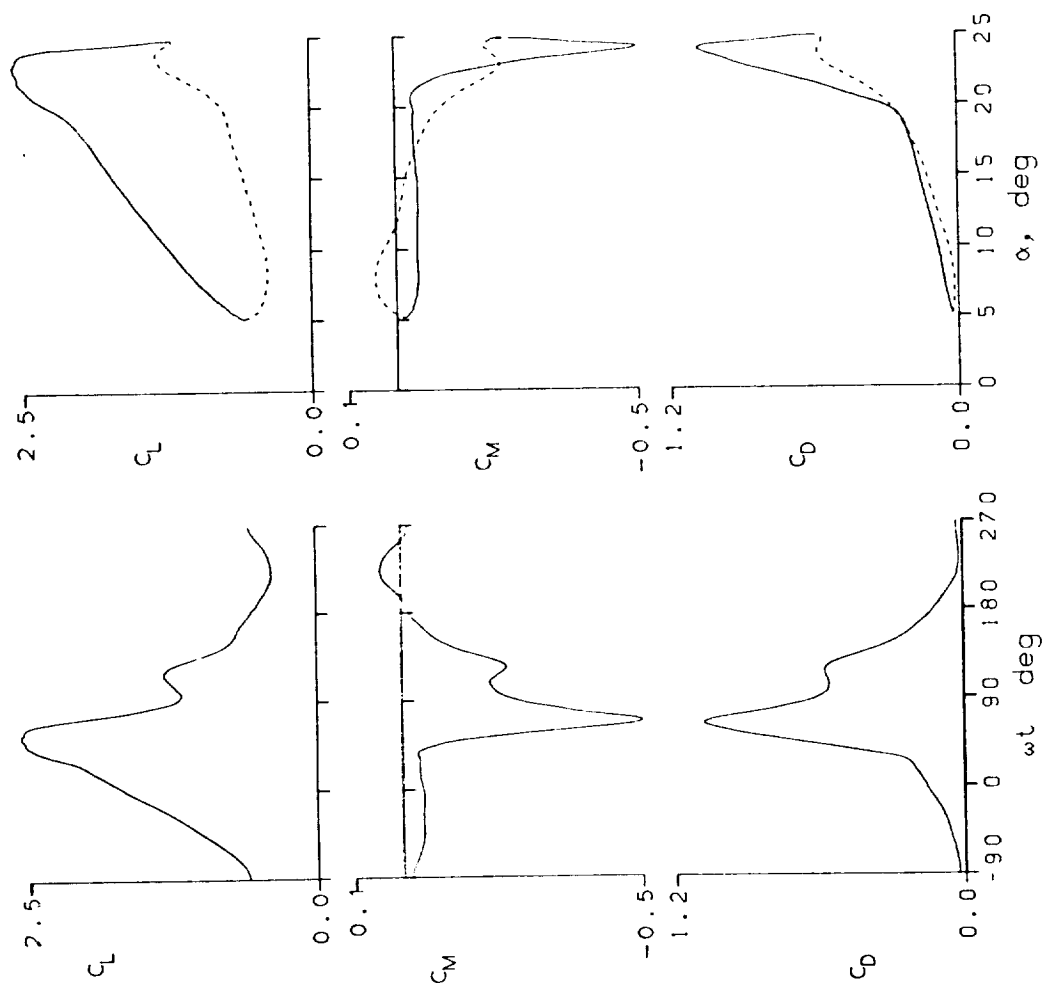


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 34409	A0 = 14.91 °	k = 0.156
Re = 3.60 E6	A1 = 9.87 °	M = 0.279
C _{Lmax} = 2.45	C _{Mmin} = -0.47	C _{Dmax} = 0.96
α _{Lmax} = 21.4 °	ξ = 0.452	M _{max} = 1.287
α _{Cmin} = 14.6 °	-C _{pmax} = 11.2	α _{Mmax} = 18.4 °

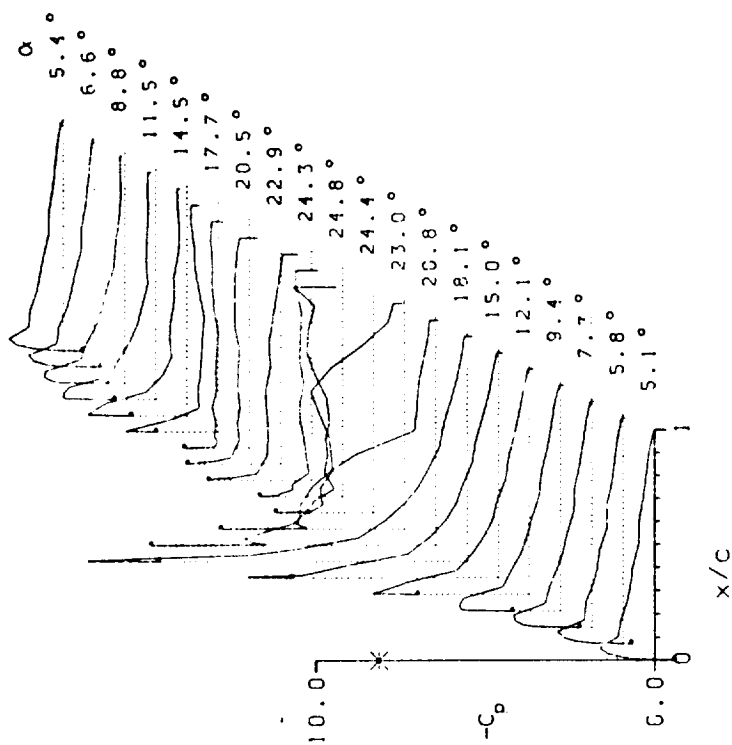
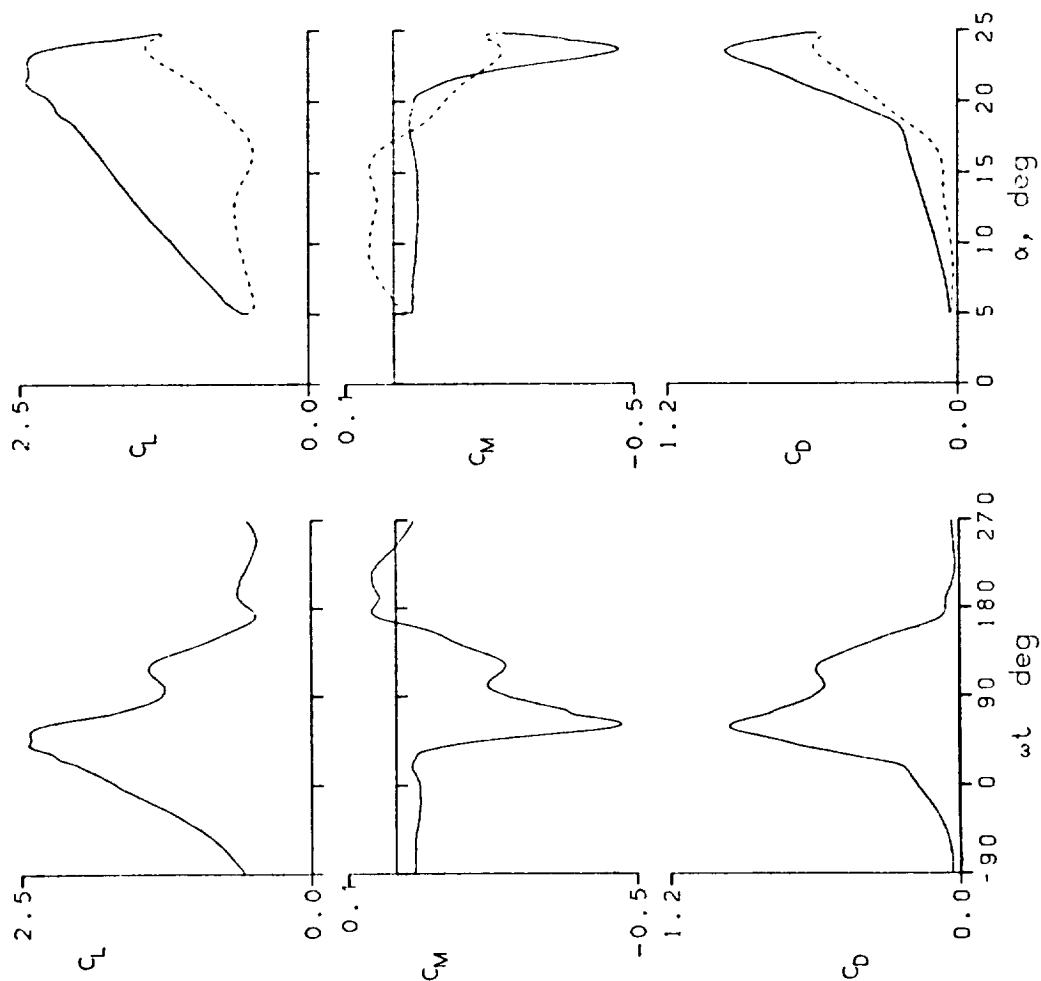


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 34418	A0 = 4.25 °	k = 0.098
Re = 3.86 E6	A1 = 10.11 °	M = 0.302
C _{Lmax} = 1.69	C _{Mmin} = -0.07	C _{Dmax} = 0.13
α _{Lmax} = 14.5 °	ξ = 0.246	M _{max} = 1.296
α _{Cmin} = 3.6 °	-C _{pmax} = 9.7	α _{Mmax} = 14.5 °

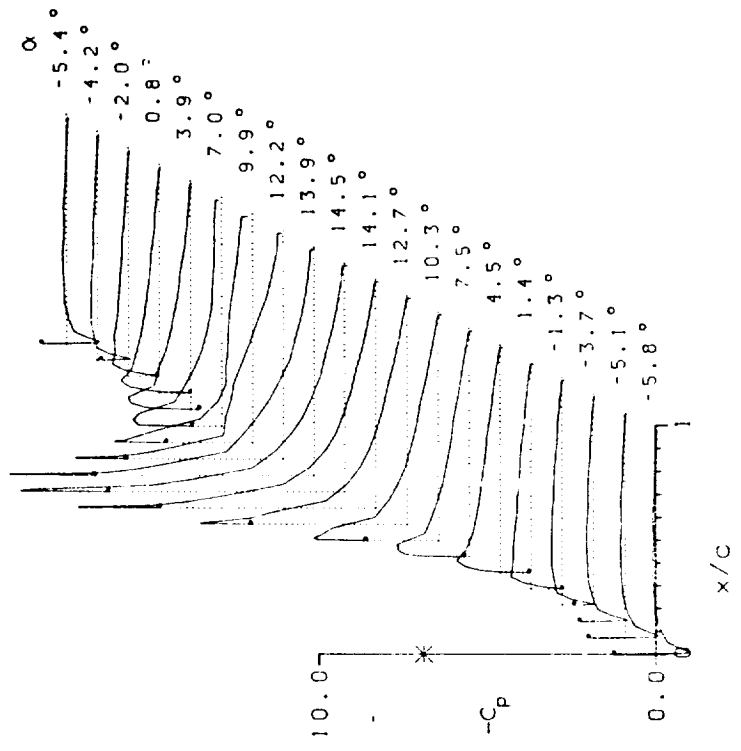
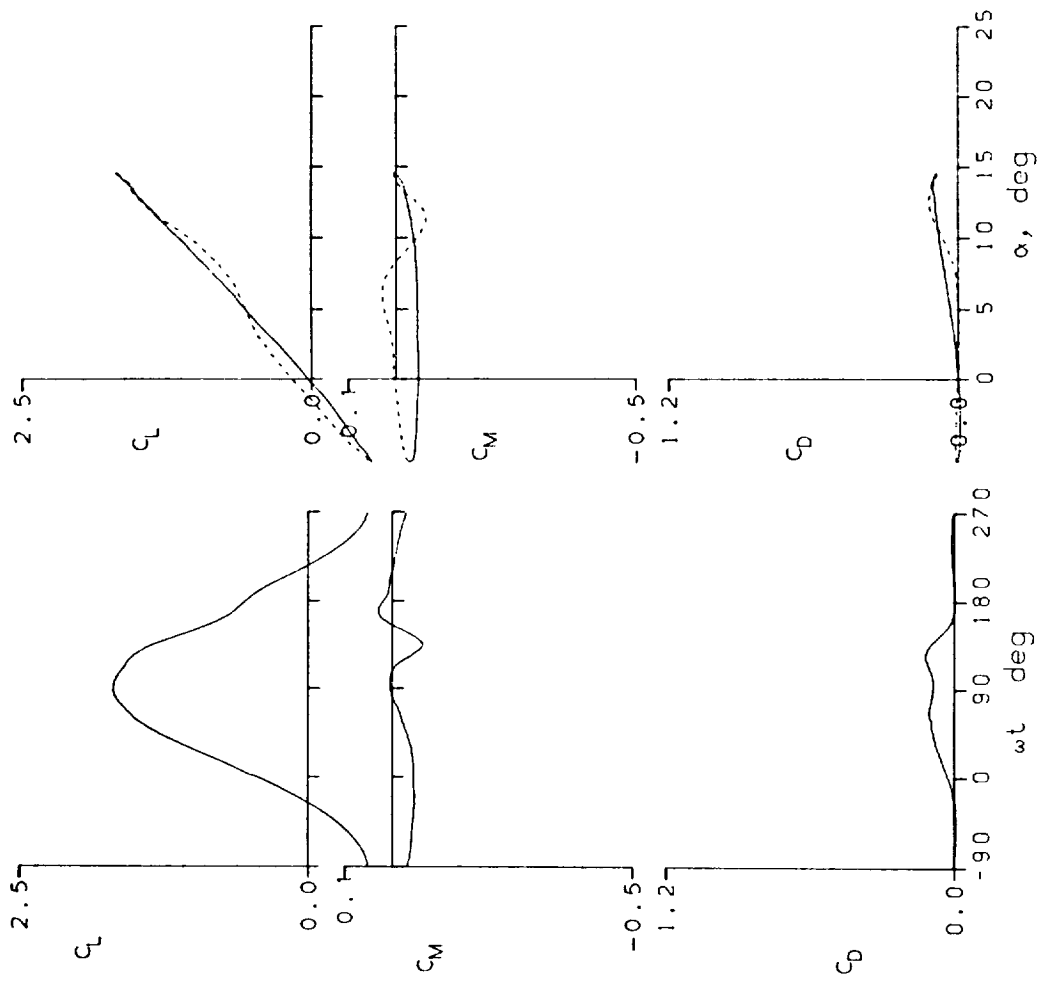


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37023 $A_0 = 9.73^\circ$ $k = 0.025$
 $Re = 3.94 \text{ E}6$ $A_1 = 9.95^\circ$ $M = 0.300$
 $C_{Lmax} = 1.83$ $C_{Mmin} = -0.21$ $C_{Dmax} = 0.35$
 $\alpha_{Lmax} = 15.6^\circ$ $\zeta = 0.041$ $M_{max} = 1.309$
 $\alpha_{C_{min}} = 9.2^\circ$ $-C_{pmax} = 9.9$ $\alpha_{Mmax} = 15.0^\circ$

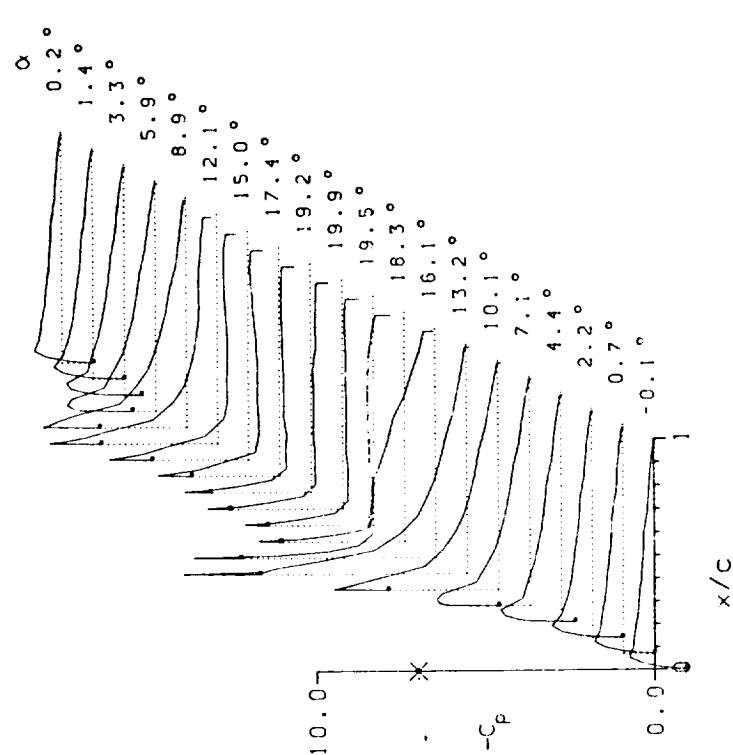
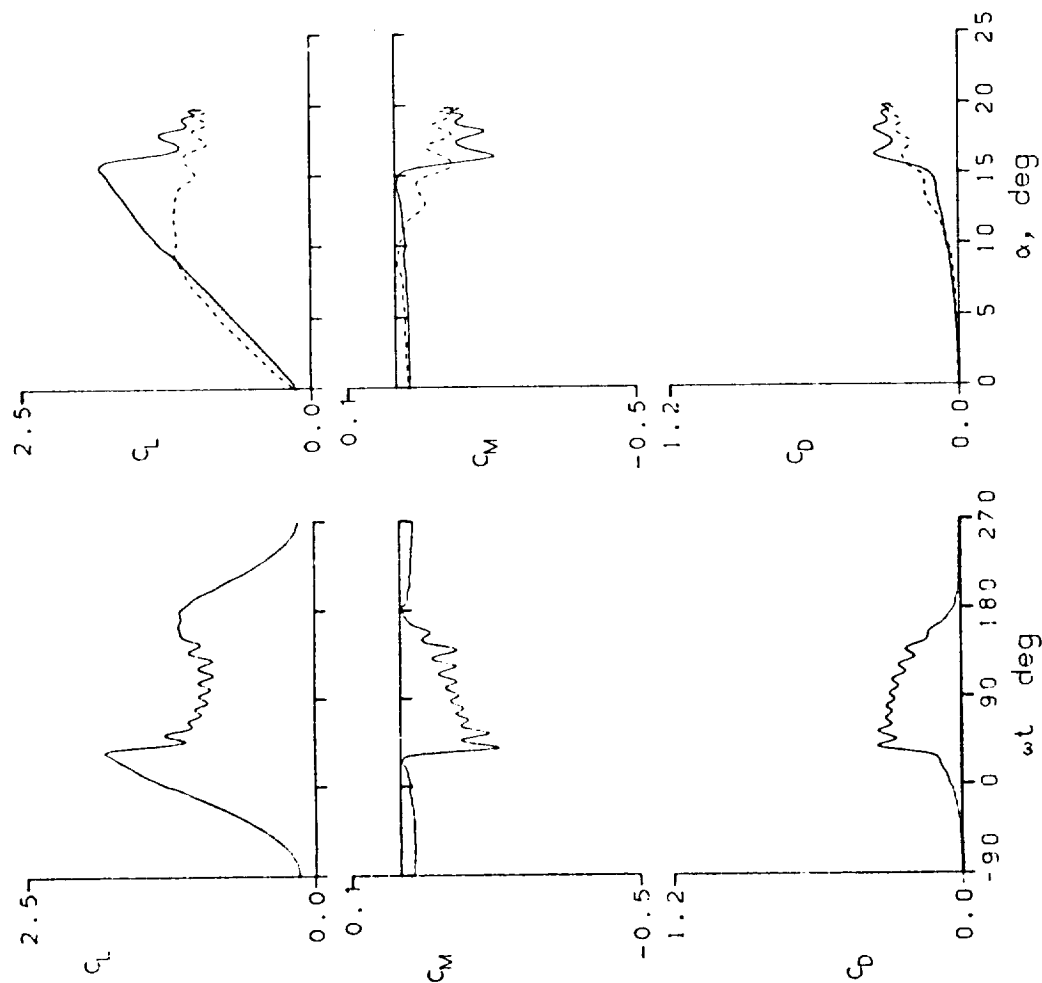


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 37101 $A_0 = 9.77^\circ$ $k = 0.050$
 $Re = 3.93 \text{ E}6$ $A_1 = 9.93^\circ$ $M = 0.301$
 $C_{L_{max}} = 2.04$ $C_{M_{min}} = -0.28$ $C_{D_{max}} = 0.47$
 $\alpha_{L_{max}} = 17.1^\circ$ $\zeta = 0.121$ $M_{max} = 1.369$
 $\alpha_{C_{min}} = 9.3^\circ$ $-C_{D_{max}} = 10.3$ $\alpha_{M_{max}} = 15.8^\circ$

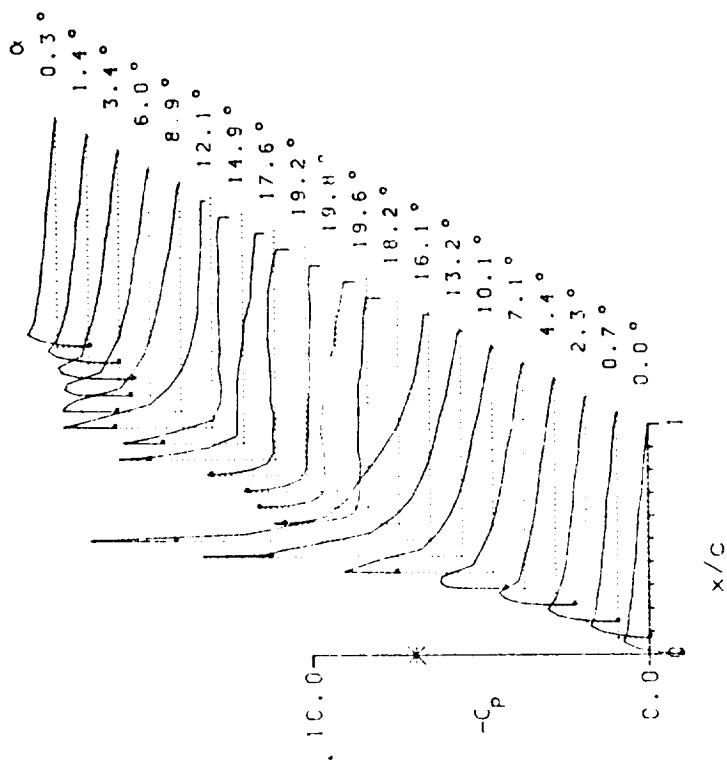
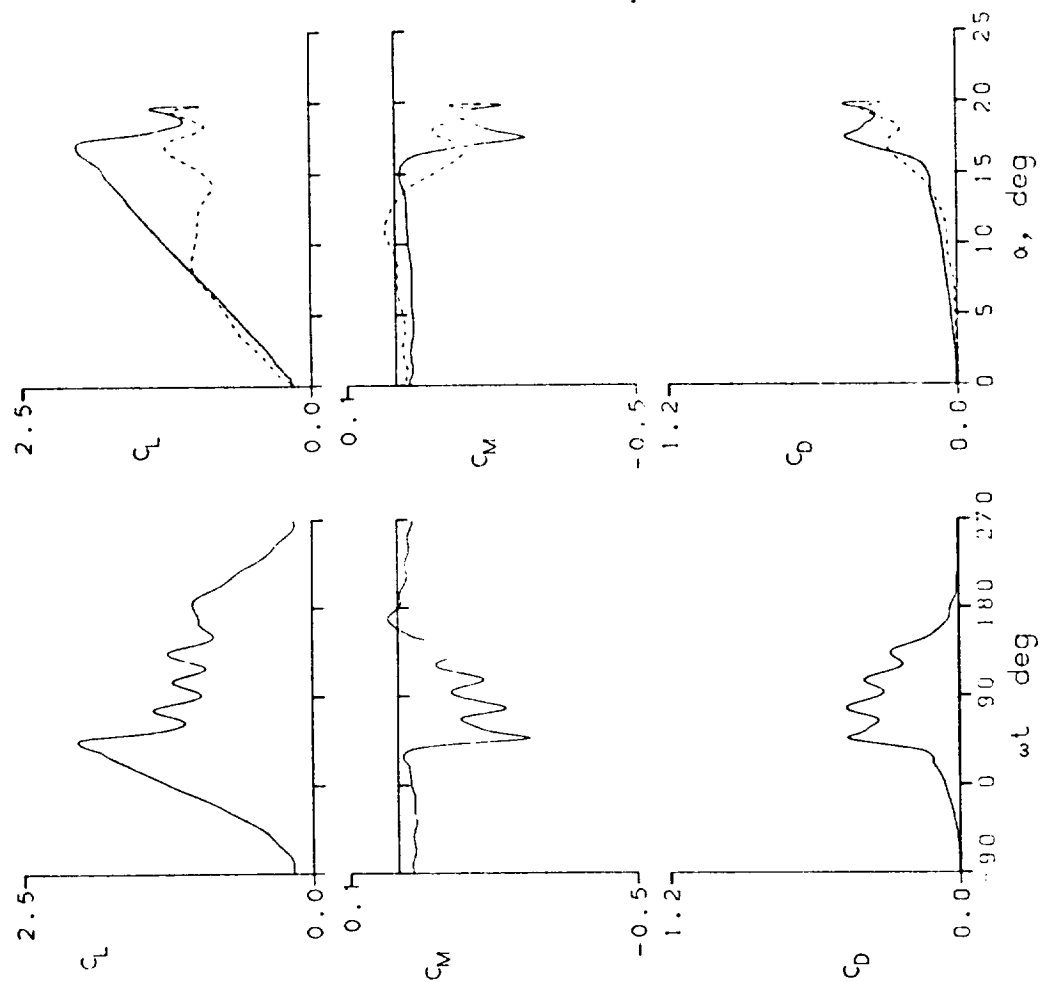


Figure 15.- Continued.

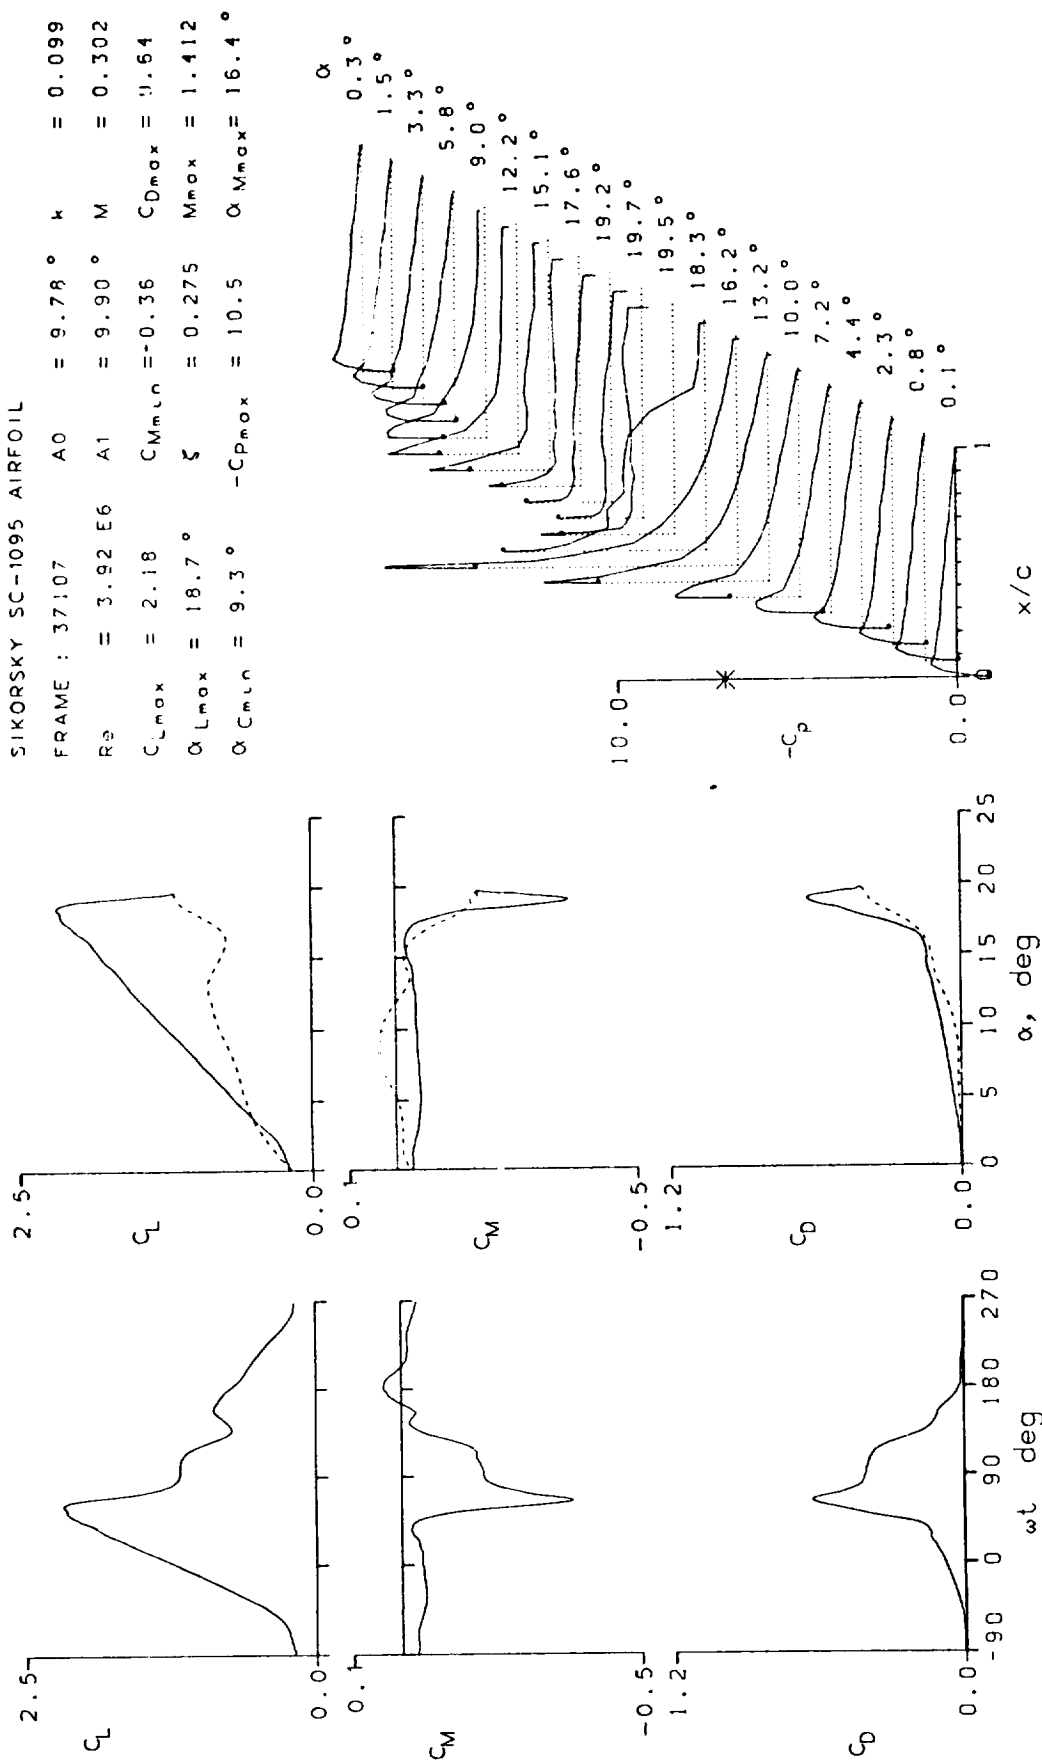


Figure 15.- Continued.

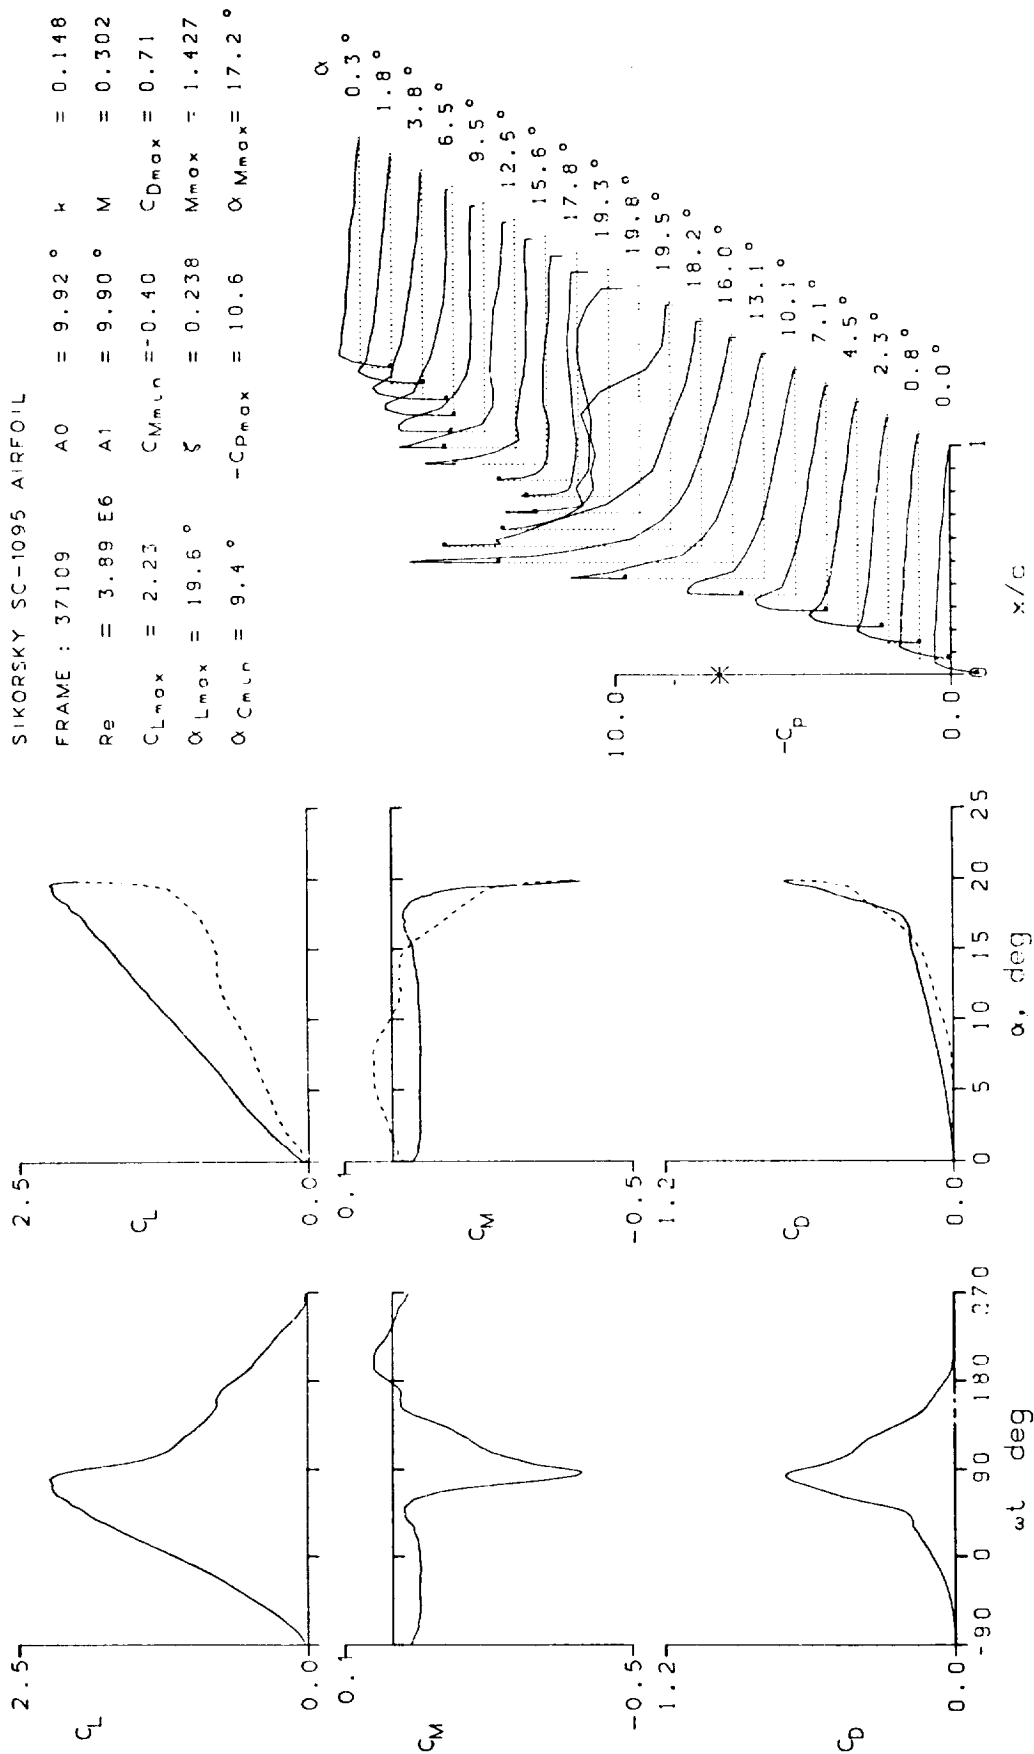


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37119	A0 = 3.90 °	k = 0.049
Re = 3.87 E6	A1 = 10.13 °	M = 0.302
$C_{Lmax} = 1.65$	$C_{Mmin} = -0.08$	$C_{Dmax} = 0.14$
$\alpha_{Lmax} = 14.1 °$	$\xi = 0.104$	$M_{max} = 1.276$
$\alpha_{Cmin} = 3.4 °$	$-C_{Pmax} = 9.5$	$\alpha_{Mmax} = 14.2 °$

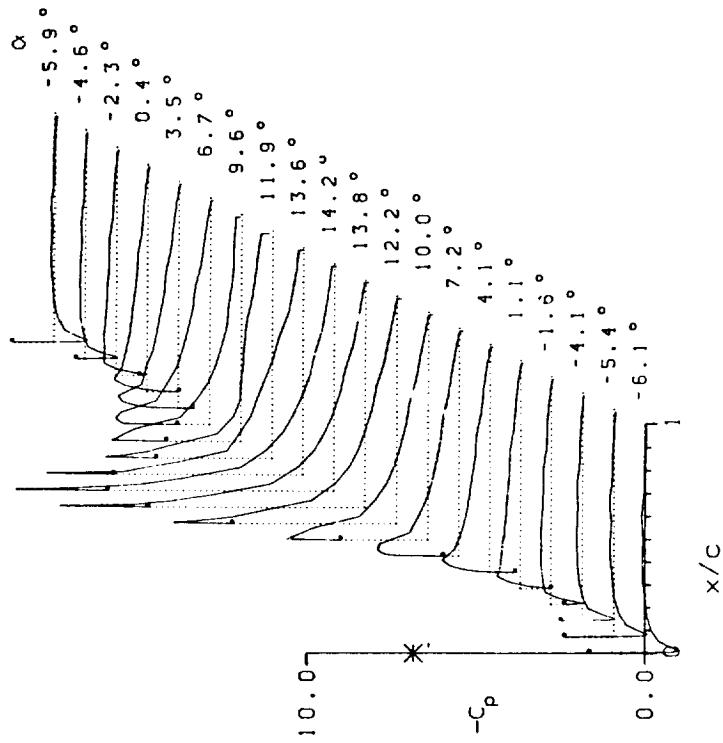
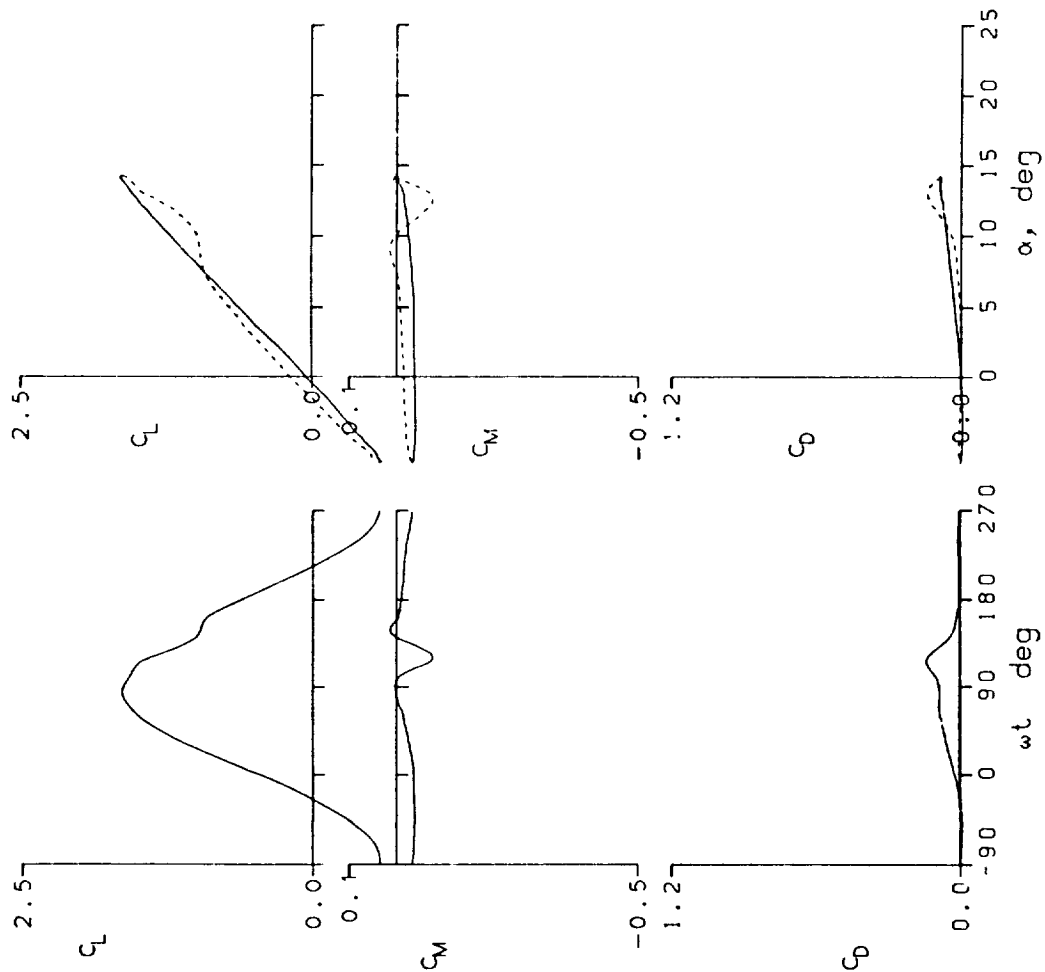


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37121	A0 = 3.93°	k = 0.098
Re = 3.86 E6	A1 = 10.11°	M = 0.303
C _{Lmax} = 1.68	C _{ymax} = -0.06	C _{Dmax} = 0.11
α _{Lmax} = 14.2°	ξ = 0.313	M _{max} = 1.304
α _{Cmin} = 3.3°	-C _{pmax} = 9.6	α _{Mmax} = 14.2°

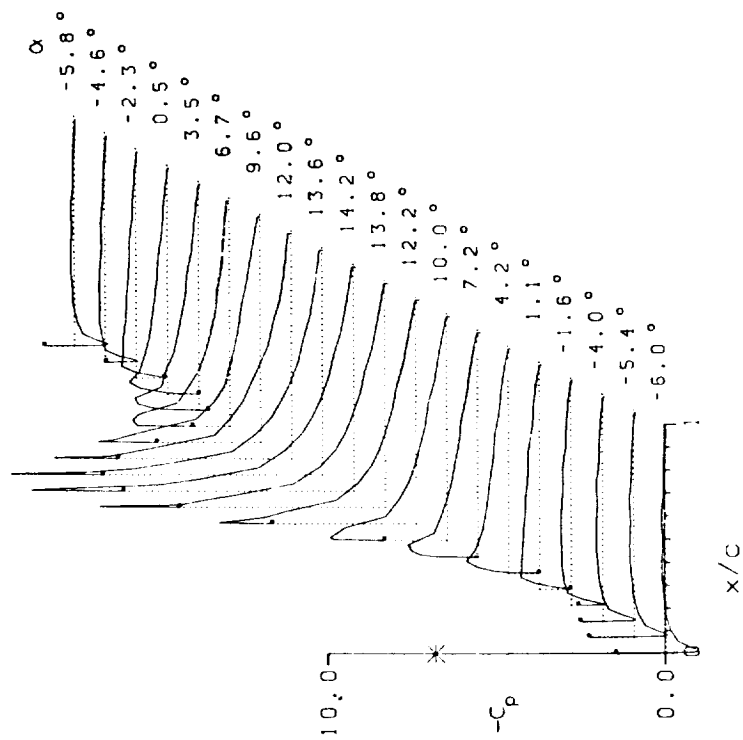
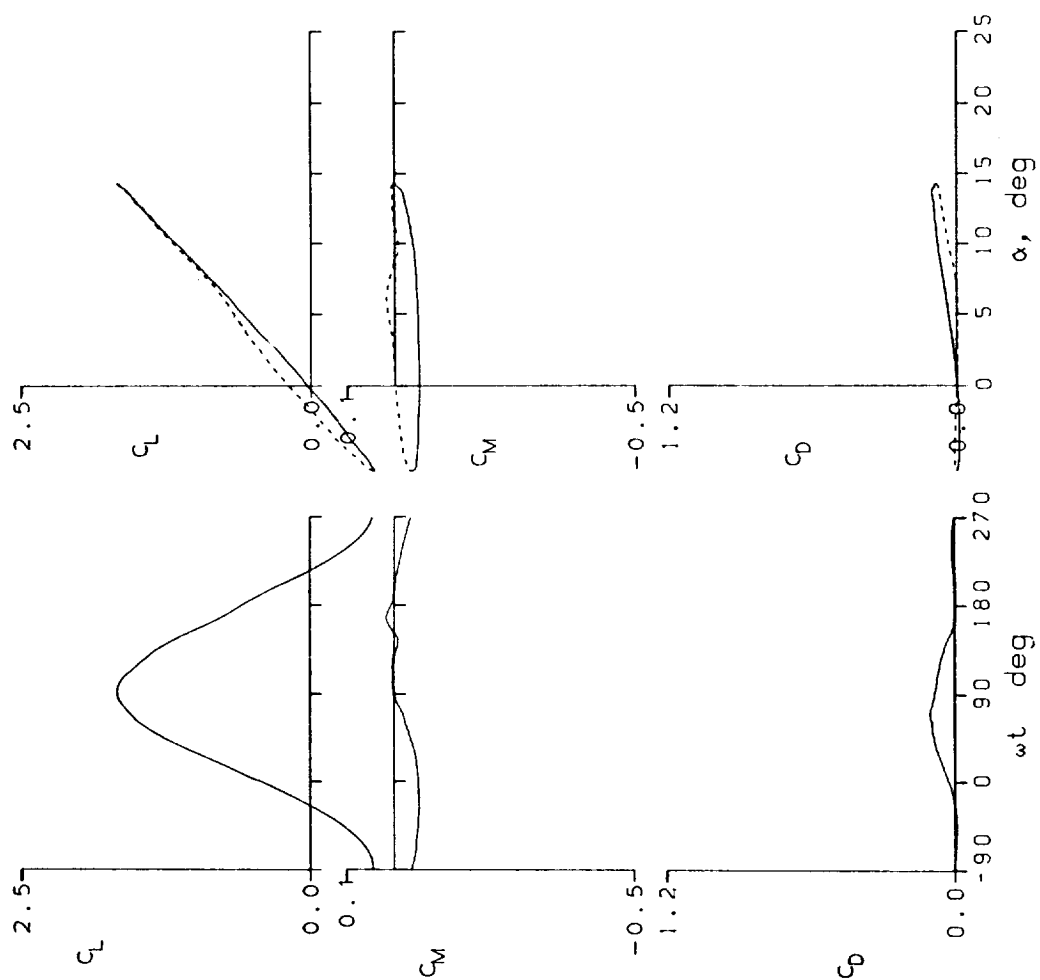


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37123	A0 = 3.88°	k = 0.147
Re = 3.84 E6	A1 = 10.11°	M = 0.302
C _{Lmax} = 1.70	C _{Mmin} = -0.07	C _{Dmax} = 0.12
α _{Lmax} = 14.1°	ξ = 0.508	M _{max} = 1.327
α _{Cmin} = 3.4°	-C _{pmax} = 9.9	α _{Mmax} = 13.8°

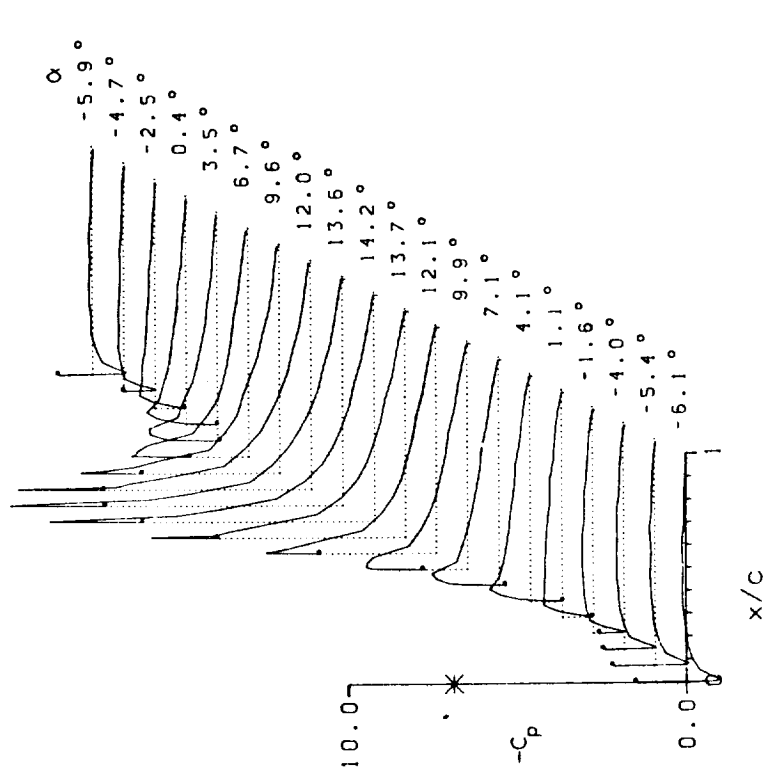
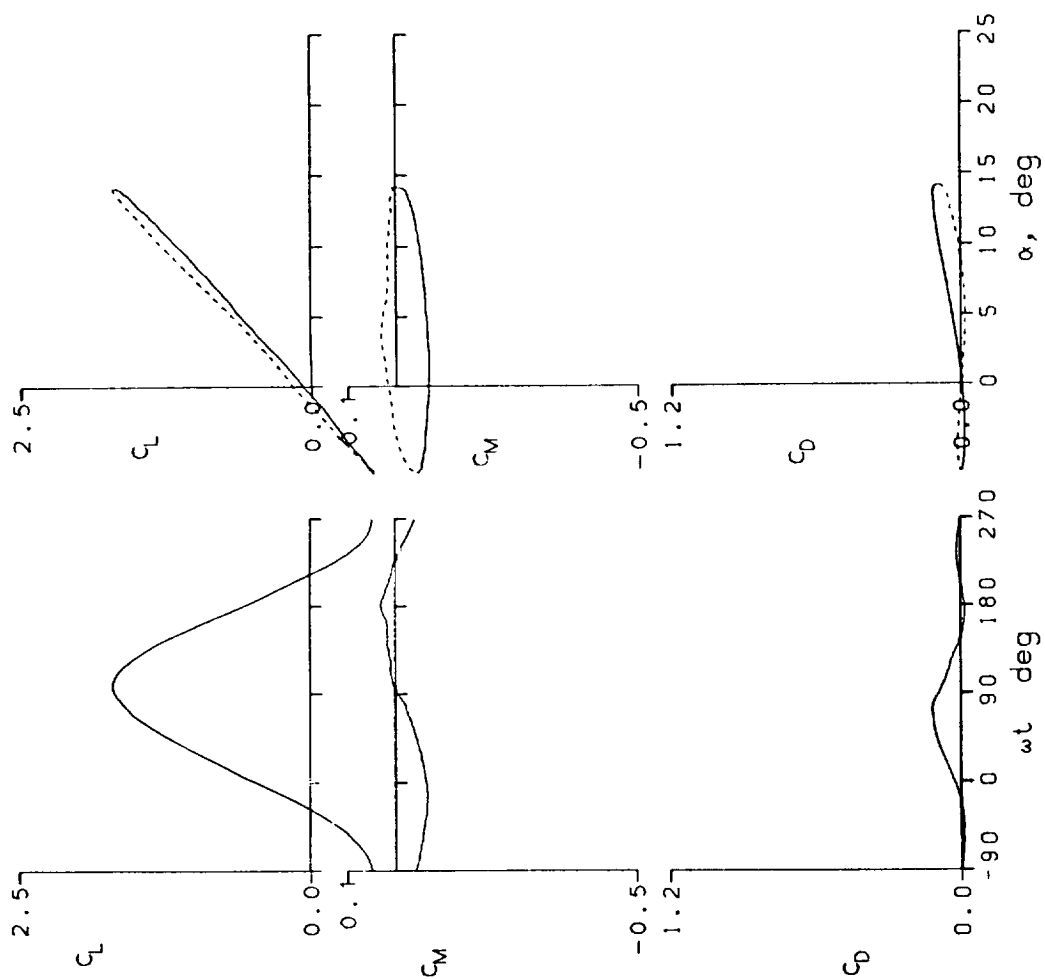


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37207	A0 = 9.94 °	k = 0.024
Re = 3.78 E6	A1 = 4.90 °	M = 0.302
CLmax = 1.61	CMmin = -0.14	CDmax = 0.24
αLmax = 14.3 °	ξ = -0.241	Mmax = 1.247
αCMmin = 9.7 °	-CPmax = 9.2	αMmax = 14.2 °

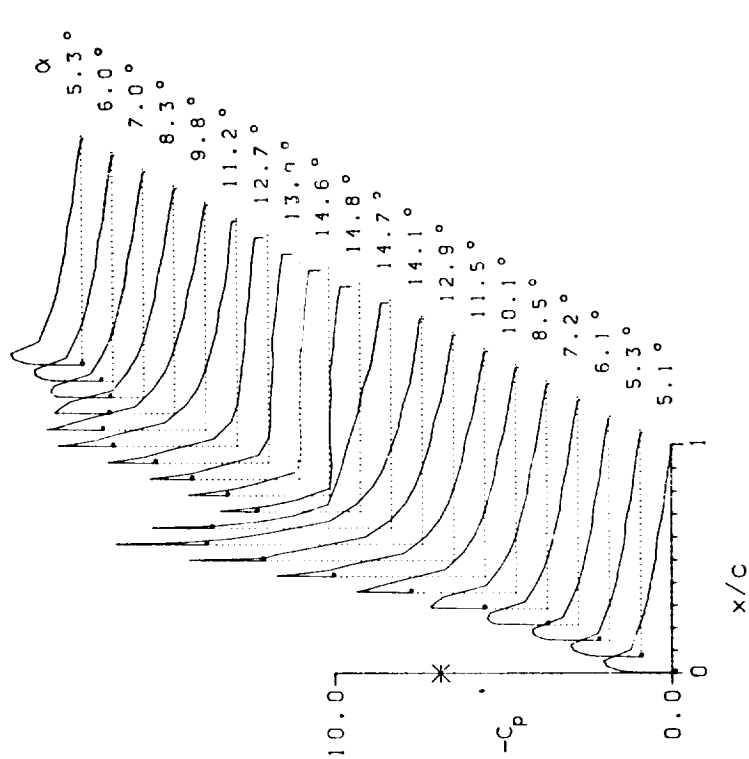
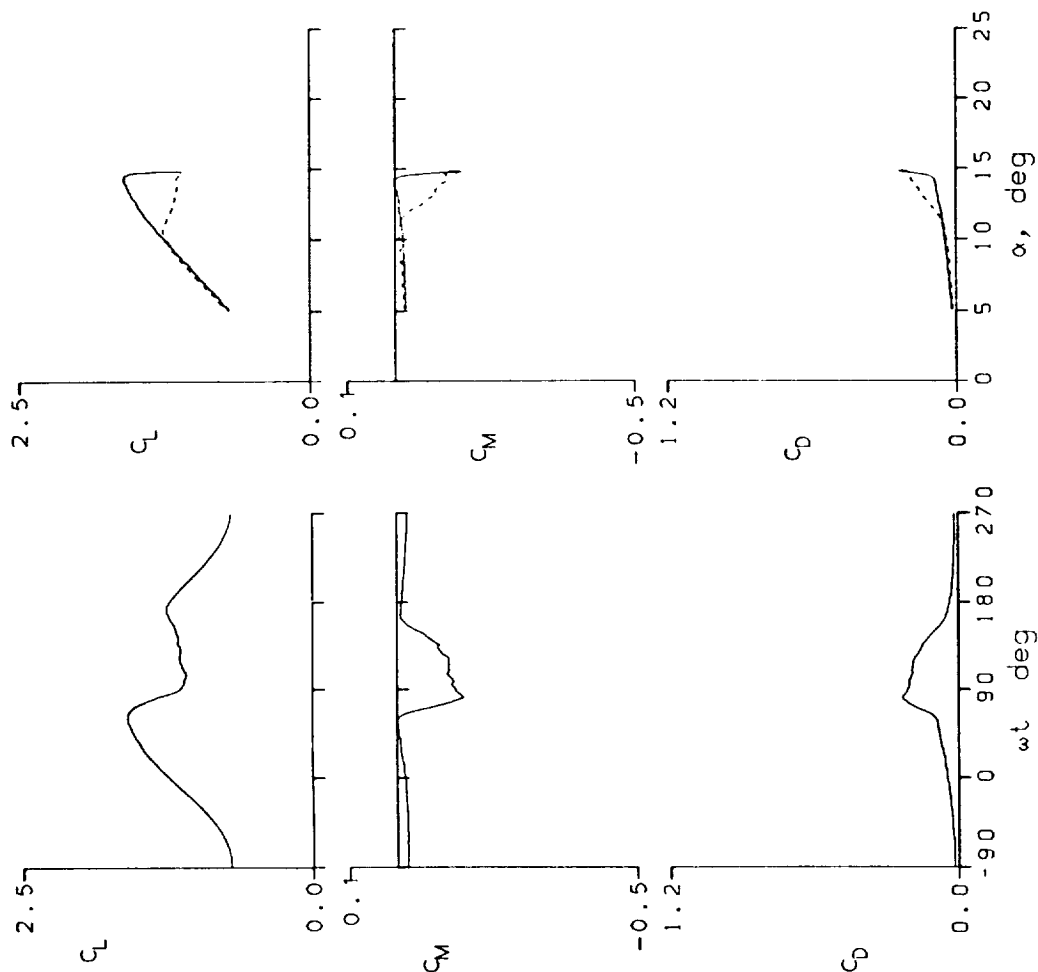


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37208	A0 = 9.93°	k = 0.049
Re = 3.75 E6	A1 = 4.91°	M = 0.301
CLmax = 1.67	CMmin = -0.16	CDmax = 0.26
αLmax = 14.7°	ξ = -0.152	Mmax = 1.287
αCMln = 9.7°	-CDmax = 9.6	αMmax = 14.6°

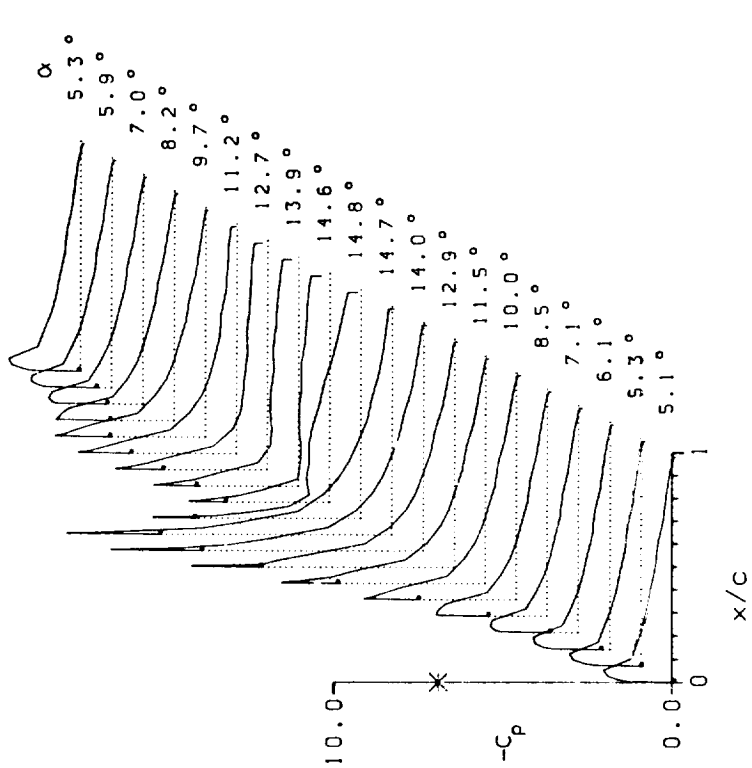
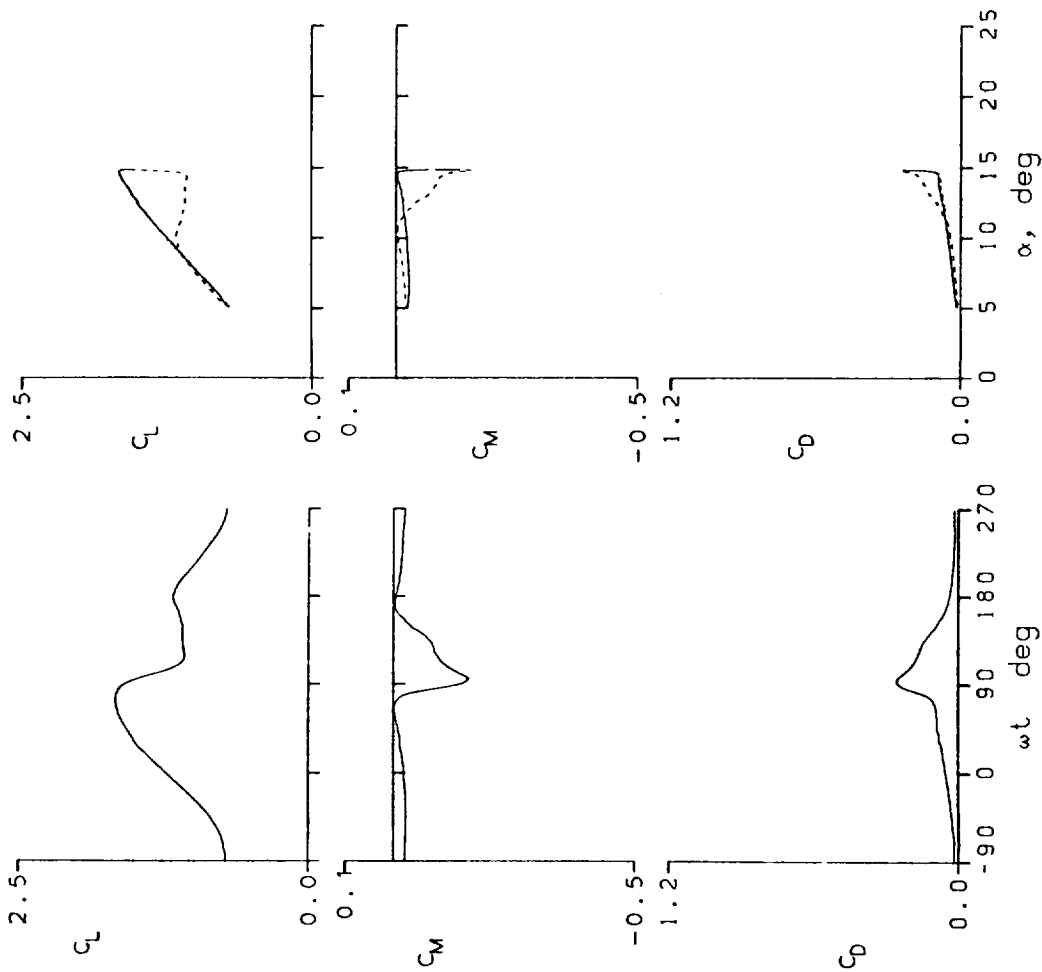


Figure 15.- Continued.

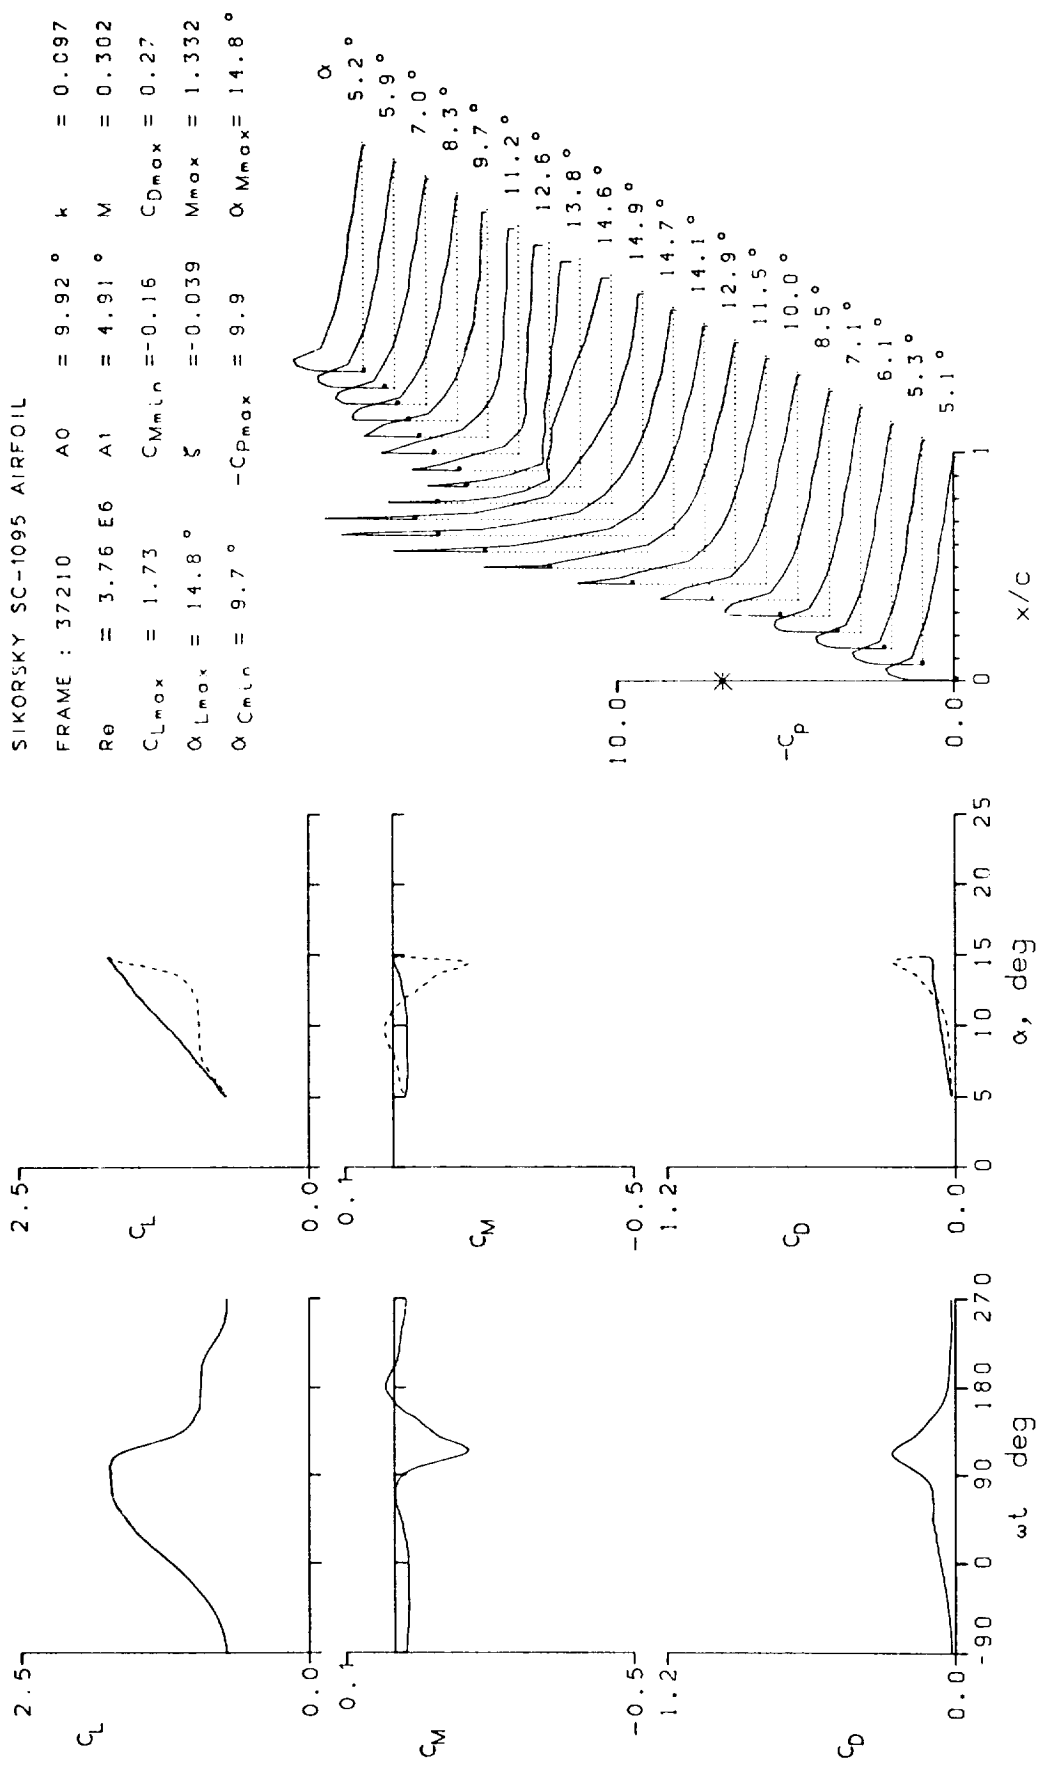


Figure 15.- Continued.

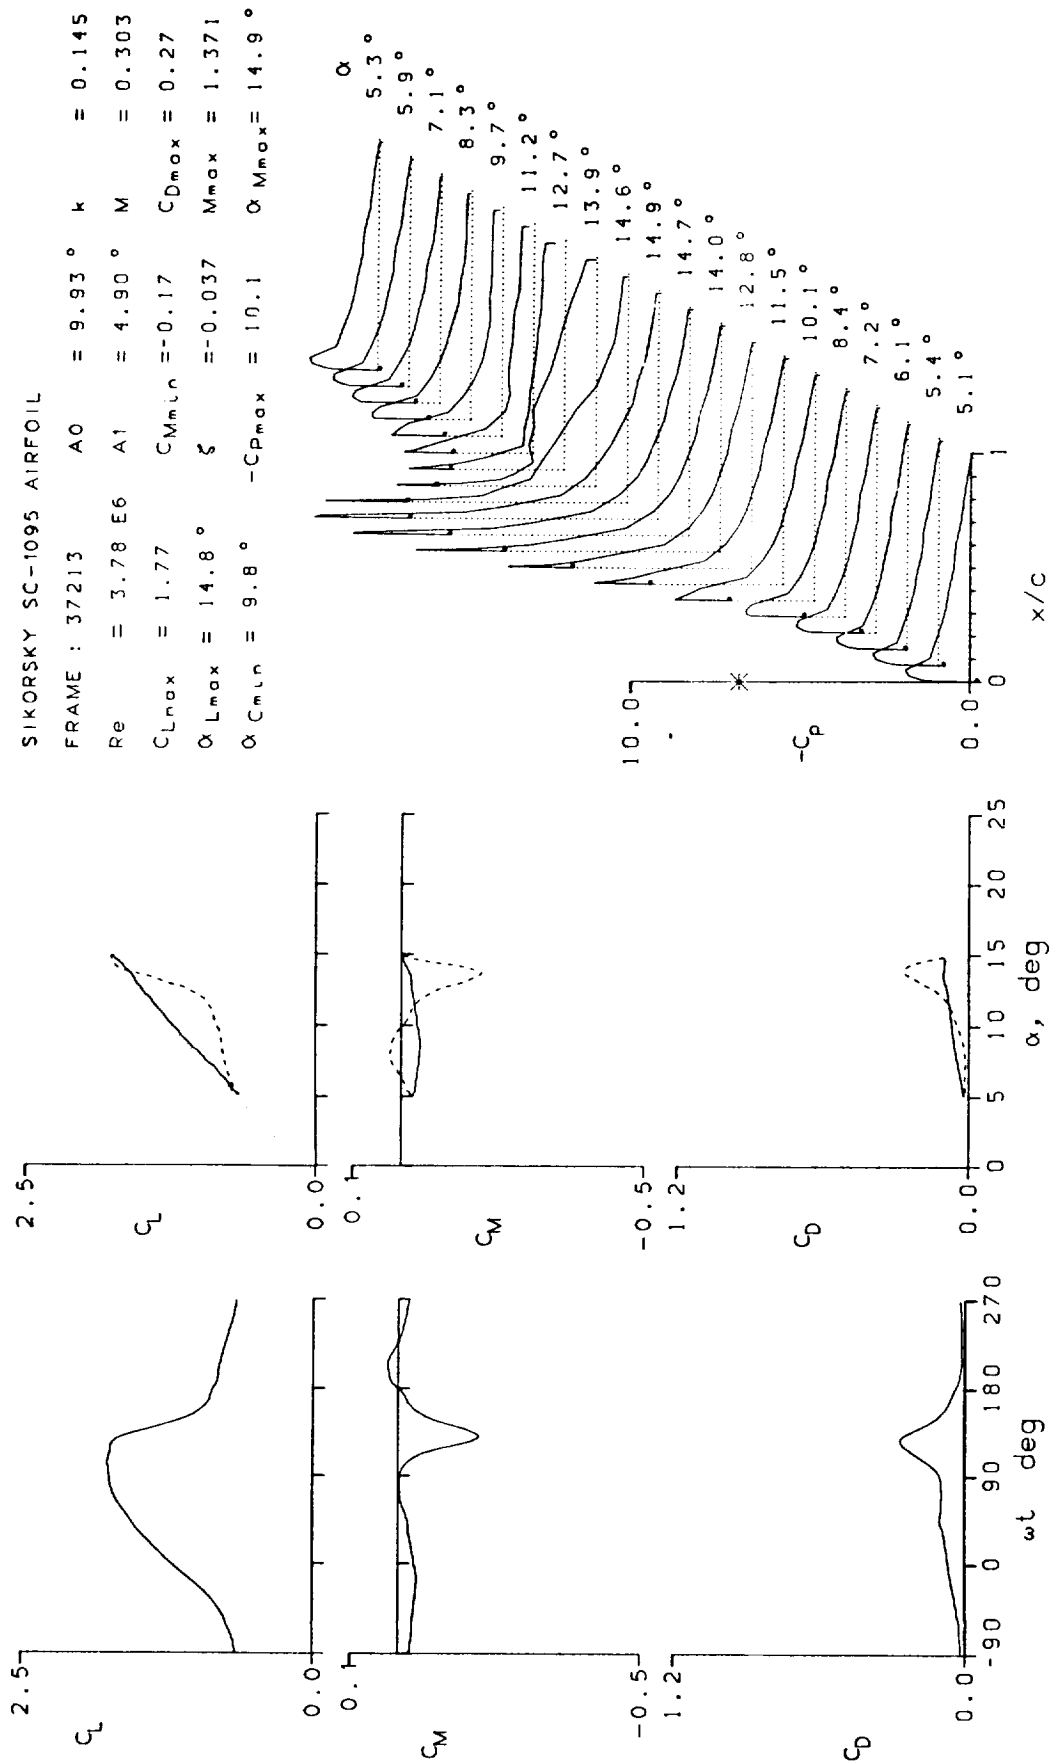


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 37215 A0 = 9.89° κ = 0.194
 Re = 3.76 E6 A1 = 4.91° M = 0.303
 CLmax = 1.89 CMmin = -0.22 CDmax = 0.31
 αLmax = 14.8° ζ = -0.045 Mmax = 1.394
 αCrln = 9.7° -CDmax = 10.3 αMmax = 14.9°

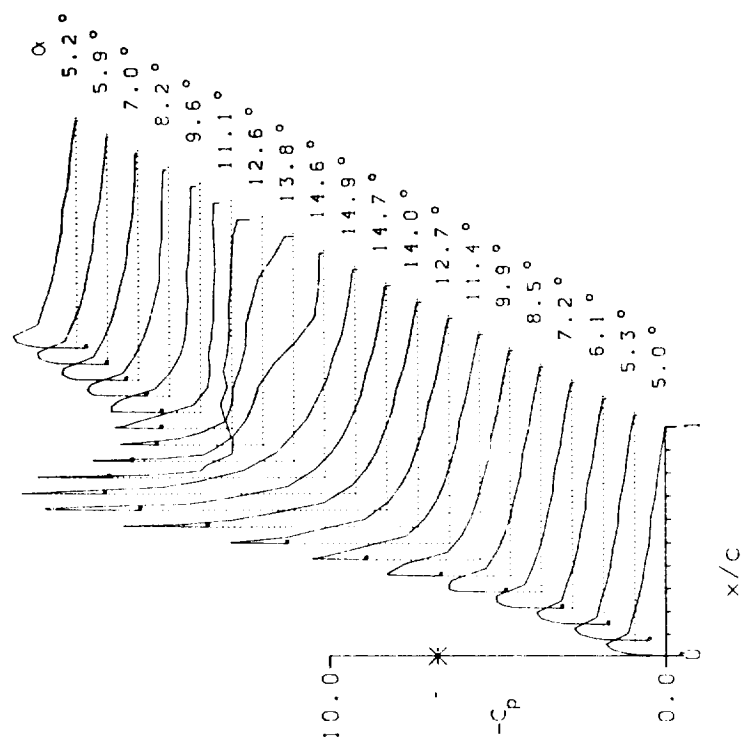
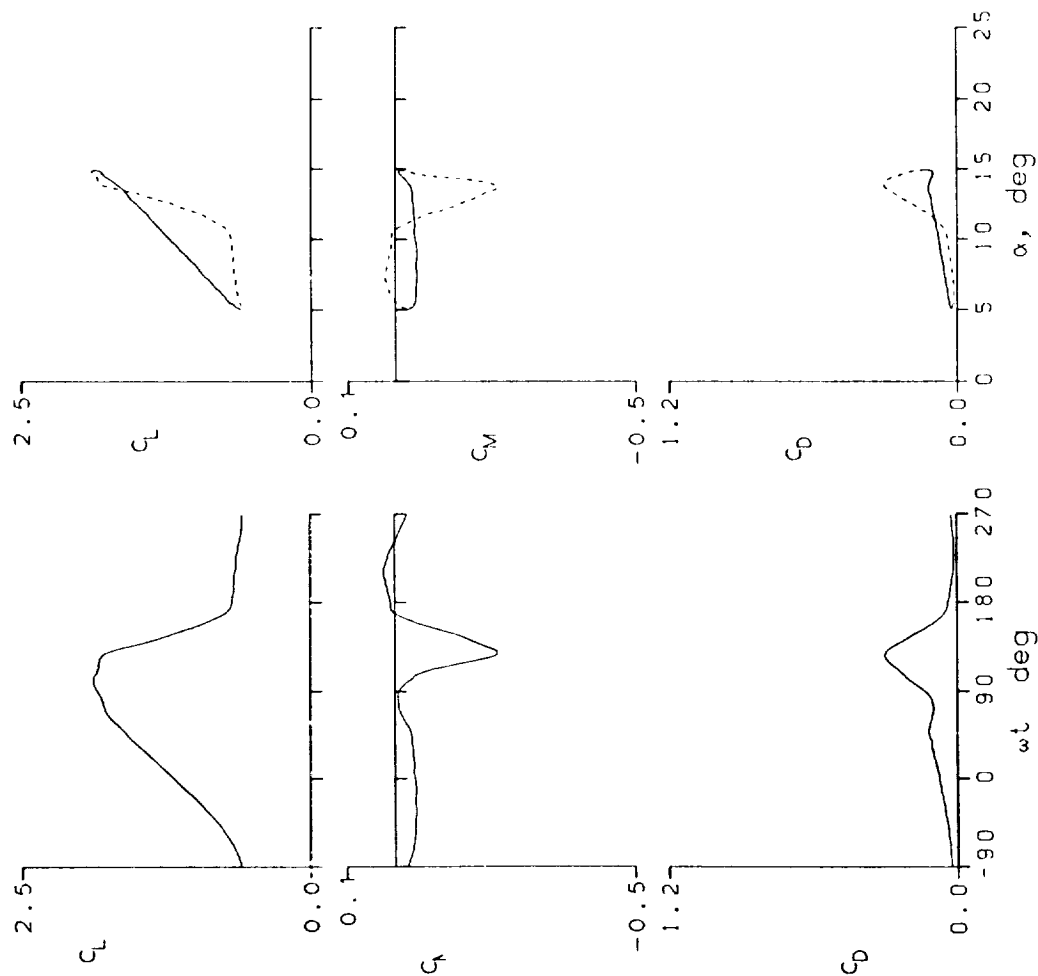


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37219	A0 = 10.93 °	k = 0.049
Re = 3.75 E6	A1 = 4.91 °	M = 0.301
C _{Lmax} = 1.72	C _{Mmin} = -0.19	C _{Dmax} = 0.32
α _{Lmax} = 15.5 °	ξ = -0.191	M _{max} = 1.305
α _{Cmin} = 10.7 °	-C _{pmax} = 9.8	α _{Mmax} = 14.9 °

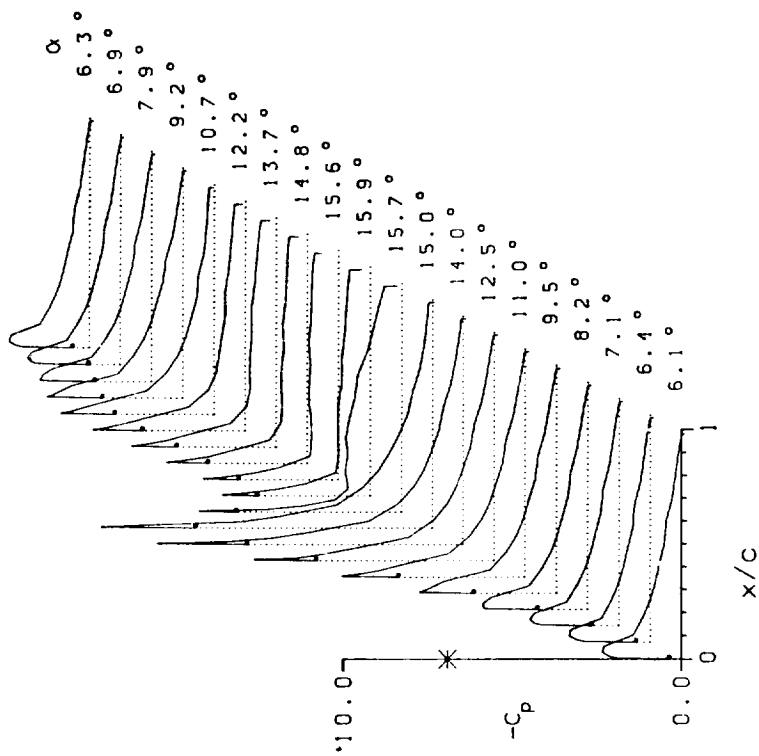
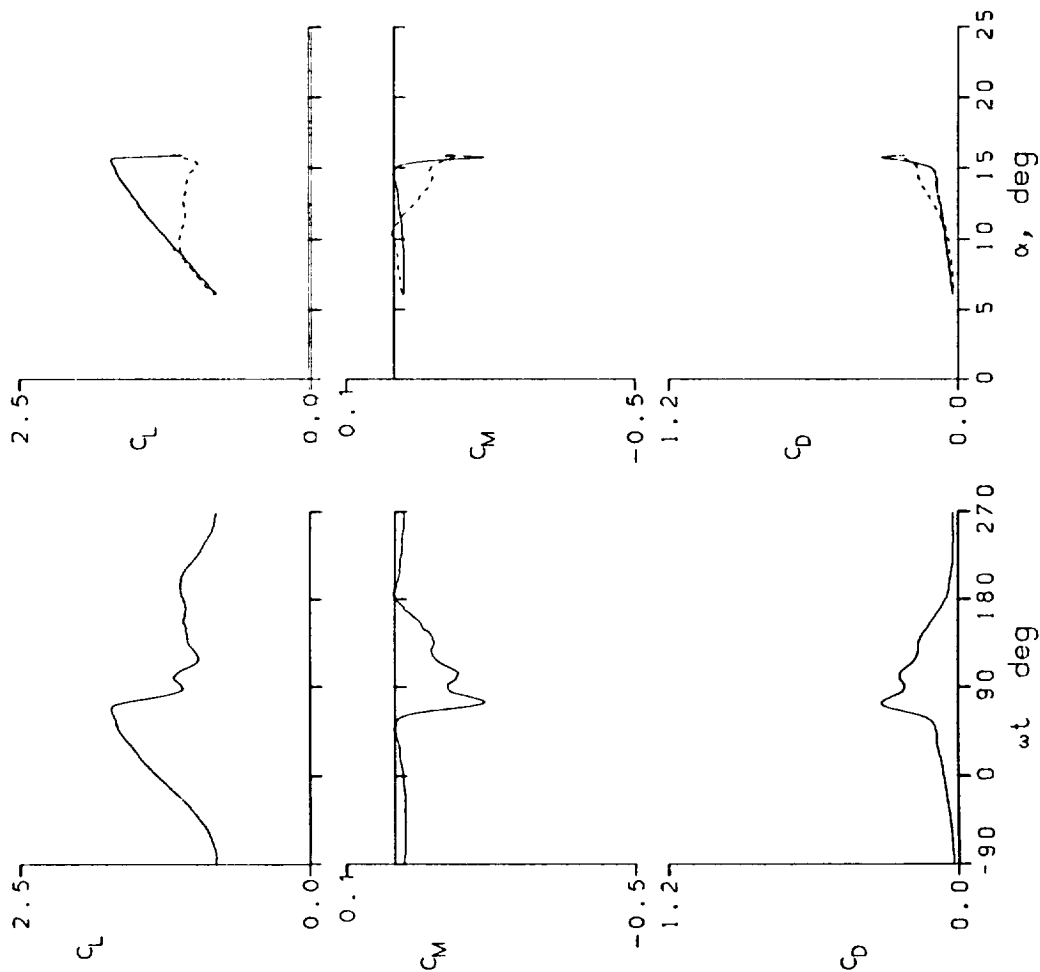


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL
 FRAME : 37221 $A_0 = 10.93^\circ$ $k = 0.097$
 $Re = 3.75 \text{ E} 6$ $A_1 = 4.89^\circ$ $M = 0.302$
 $C_{L_{max}} = 1.88$ $C_{M_{min}} = -0.24$ $C_{D_{max}} = 0.39$
 $\alpha_{L_{max}} = 15.9^\circ$ $\zeta = -0.087$ $M_{max} = 1.354$
 $\alpha_{C_{min}} = 10.7^\circ$ $-C_{p_{max}} = 10.1$ $\alpha_{M_{max}} = 15.5^\circ$

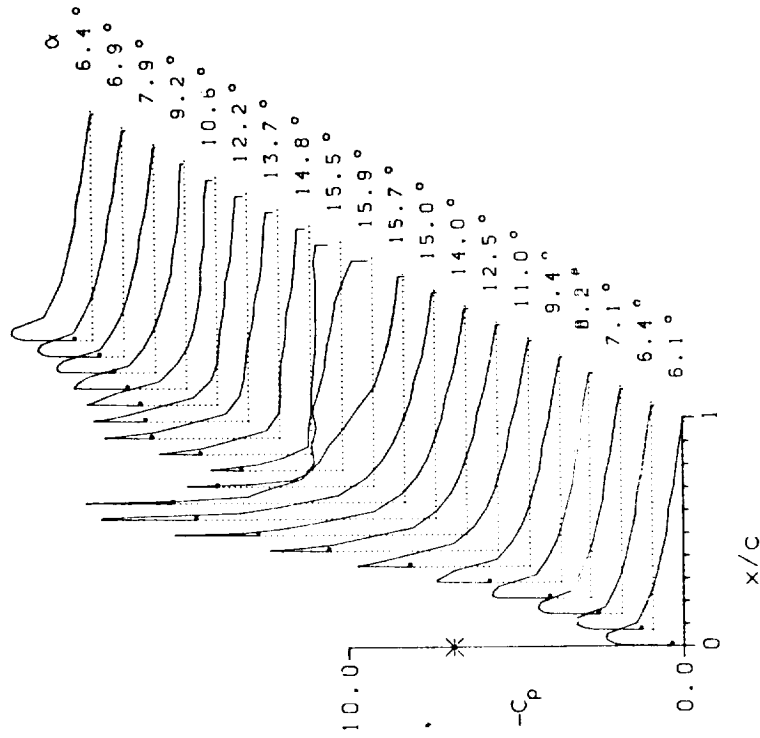
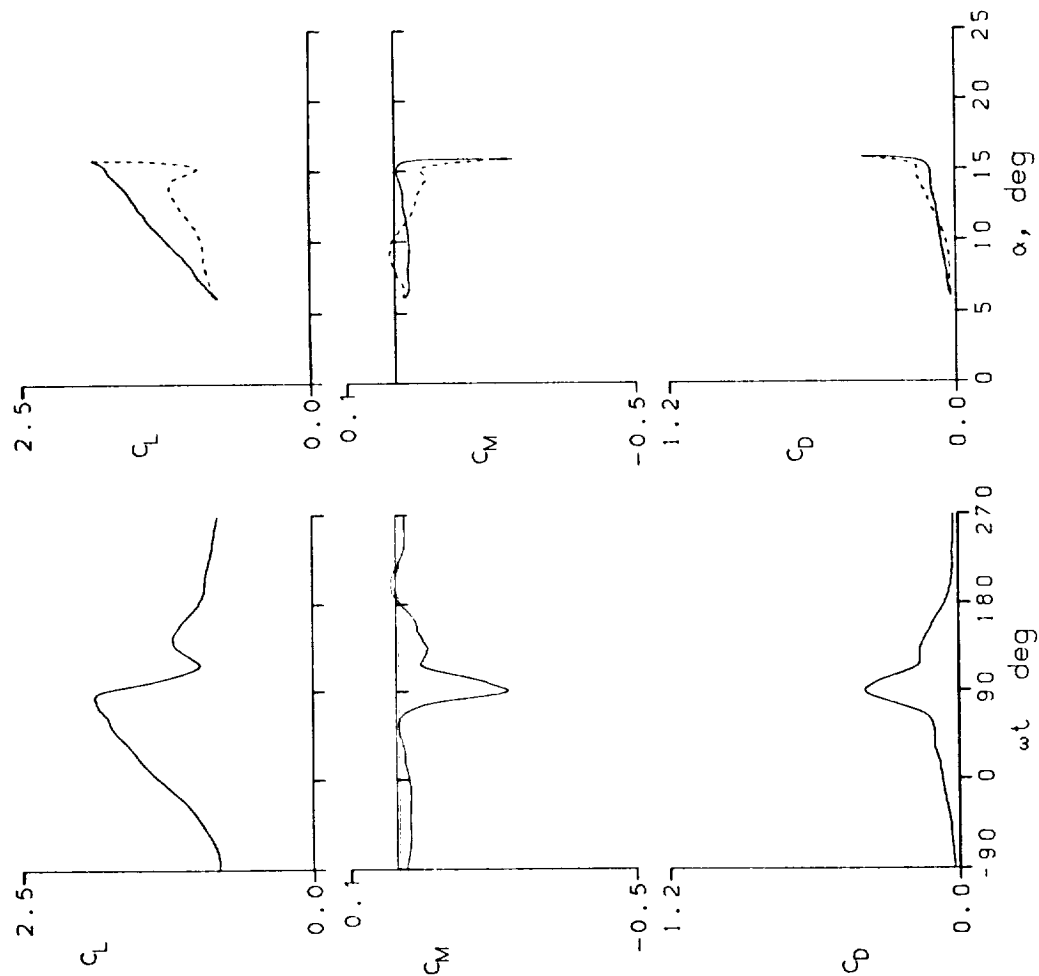


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37304	A0 = 11.88 °	k = 0.050
Re = 4.00 E6	A1 = 7.90 °	M = 0.301
$C_{Lmax} = 1.97$	$C_{Mmin} = -0.26$	$C_{Dmax} = 0.47$
$\alpha_{Lmax} = 16.7 °$	$\xi = 0.098$	$M_{max} = 1.363$
$\alpha_{Cmin} = 11.4 °$	$-C_{pmax} = 10.2$	$\alpha_{Mmax} = 15.7 °$

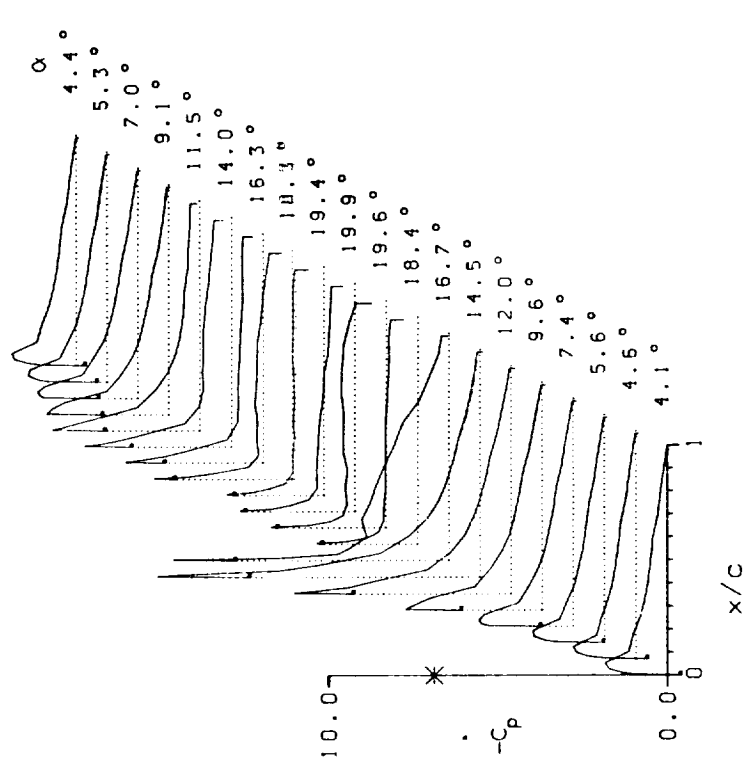
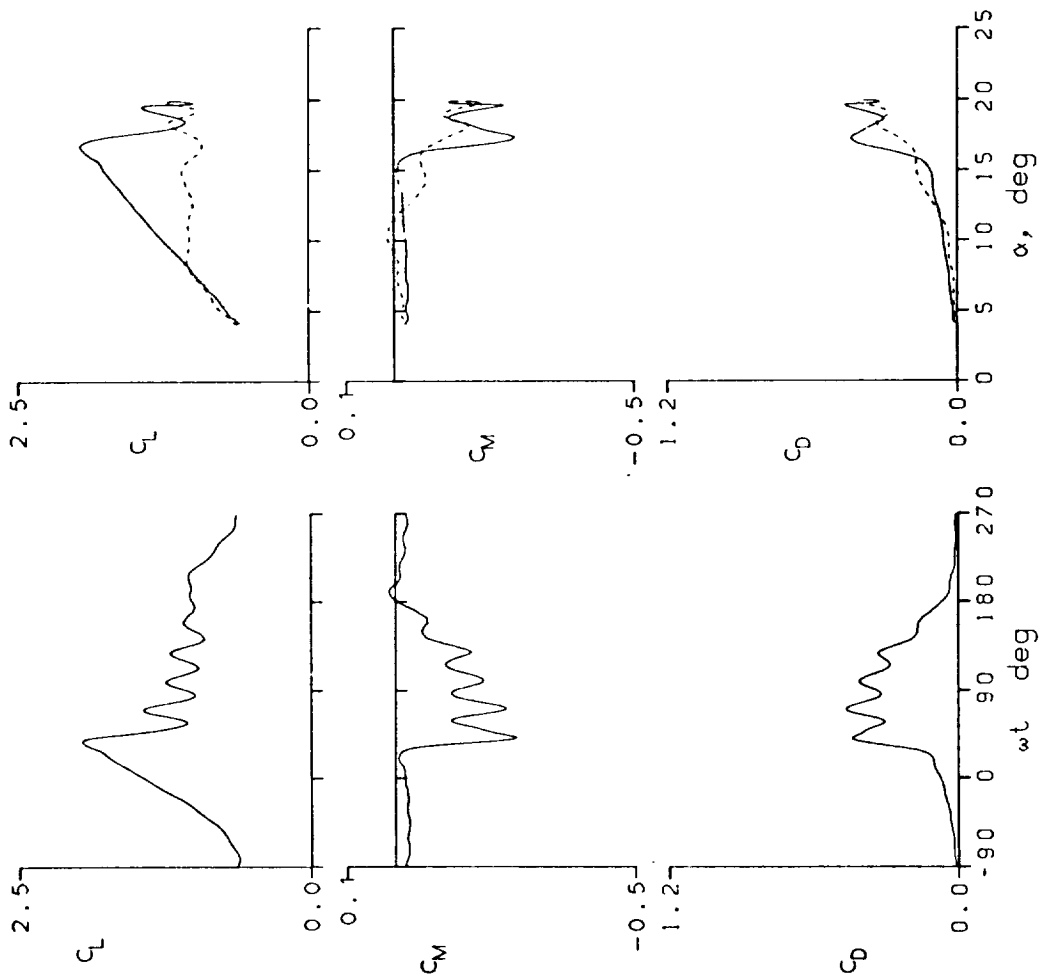


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37305	A0 = 11.86 °	k = 0.100
Rc = 3.98 E6	A1 = 7.90 °	M = 0.301
CLmax = 2.12	CMmin = -0.34	CDmax = 0.57
α Lmax = 17.7 °	ξ = 0.249	Mmax = 1.409
α CMmin = 11.4 °	-CDmax = 10.6	α Mmax = 16.2 °

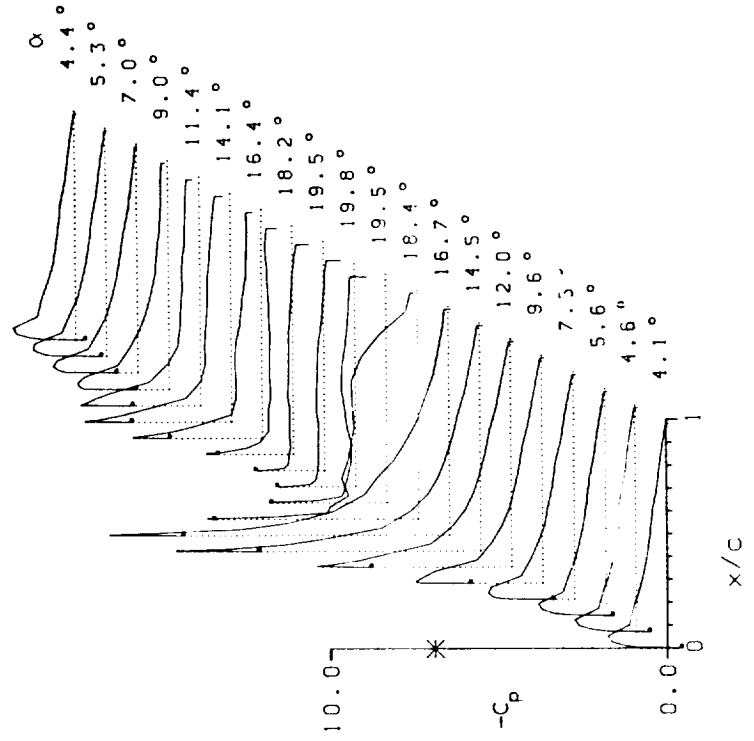
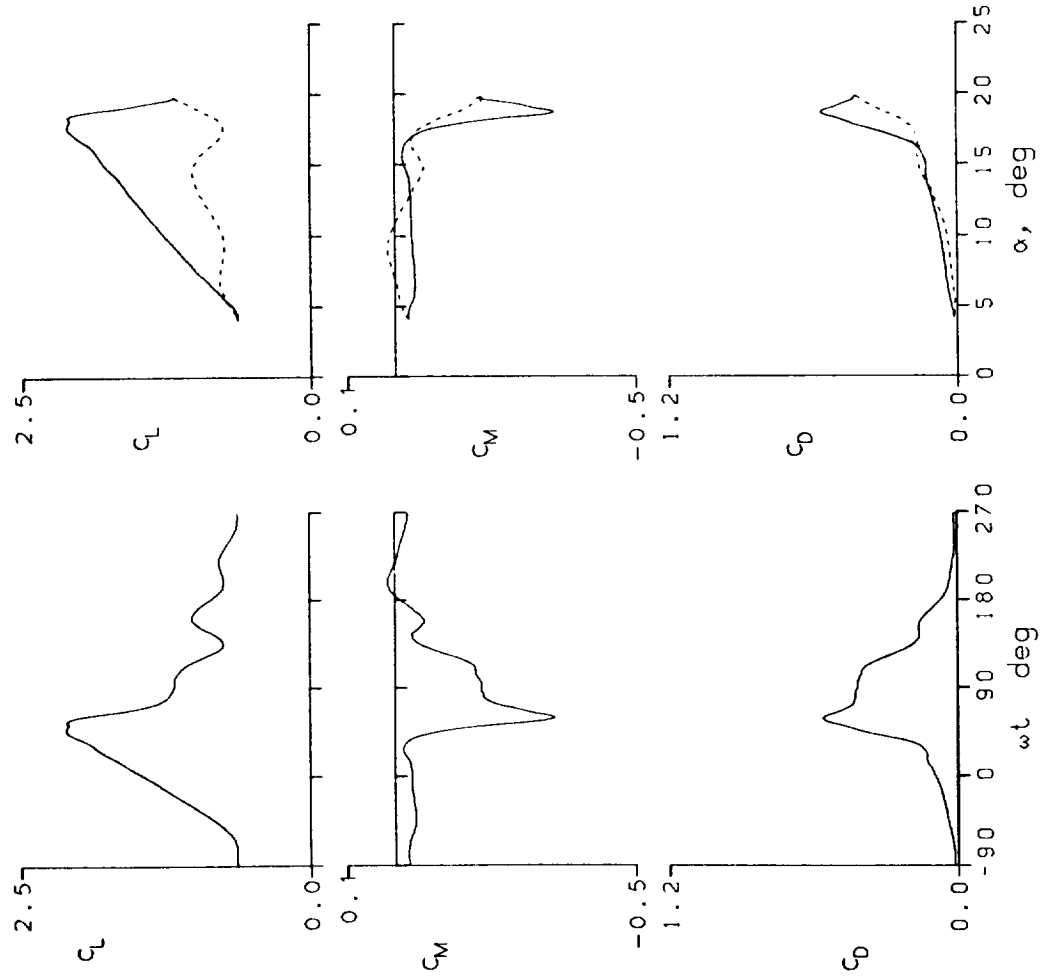


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 37306 $A_0 = 11.91^\circ$ $k = 0.127$

$Re = 3.97 \text{ E}6$ $A_1 = 7.89^\circ$ $M = 0.301$

$C_{L_{max}} = 2.25$ $C_{M_{min}} = -0.39$ $C_{D_{max}} = 0.69$

$\alpha_{L_{max}} = 18.7^\circ$ $\xi = 0.158$ $M_{max} = 1.412$

$\alpha_{C_{min}} = 11.6^\circ$ $-C_{D_{max}} = 10.6$ $\alpha_{M_{max}} = 17.0^\circ$



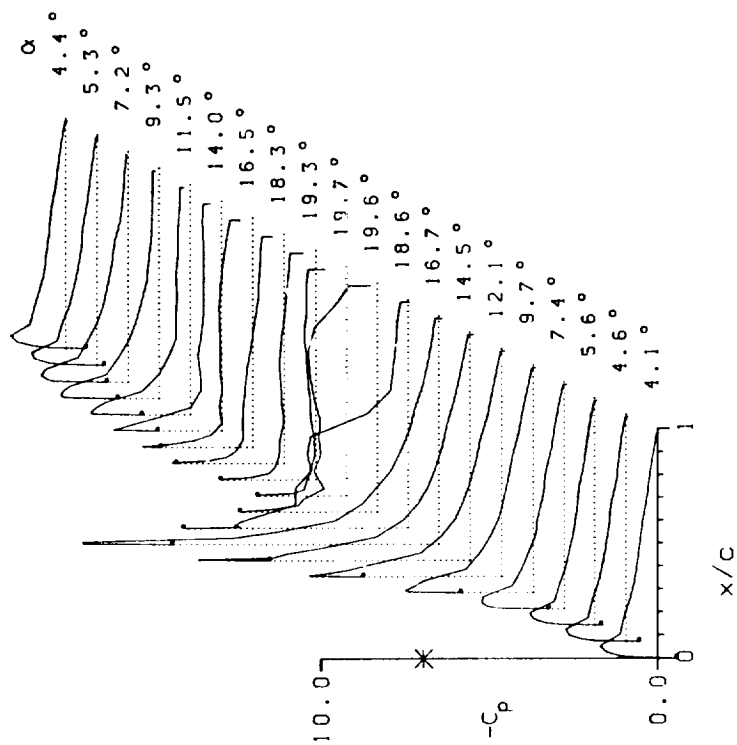


Figure 15.- Continued.

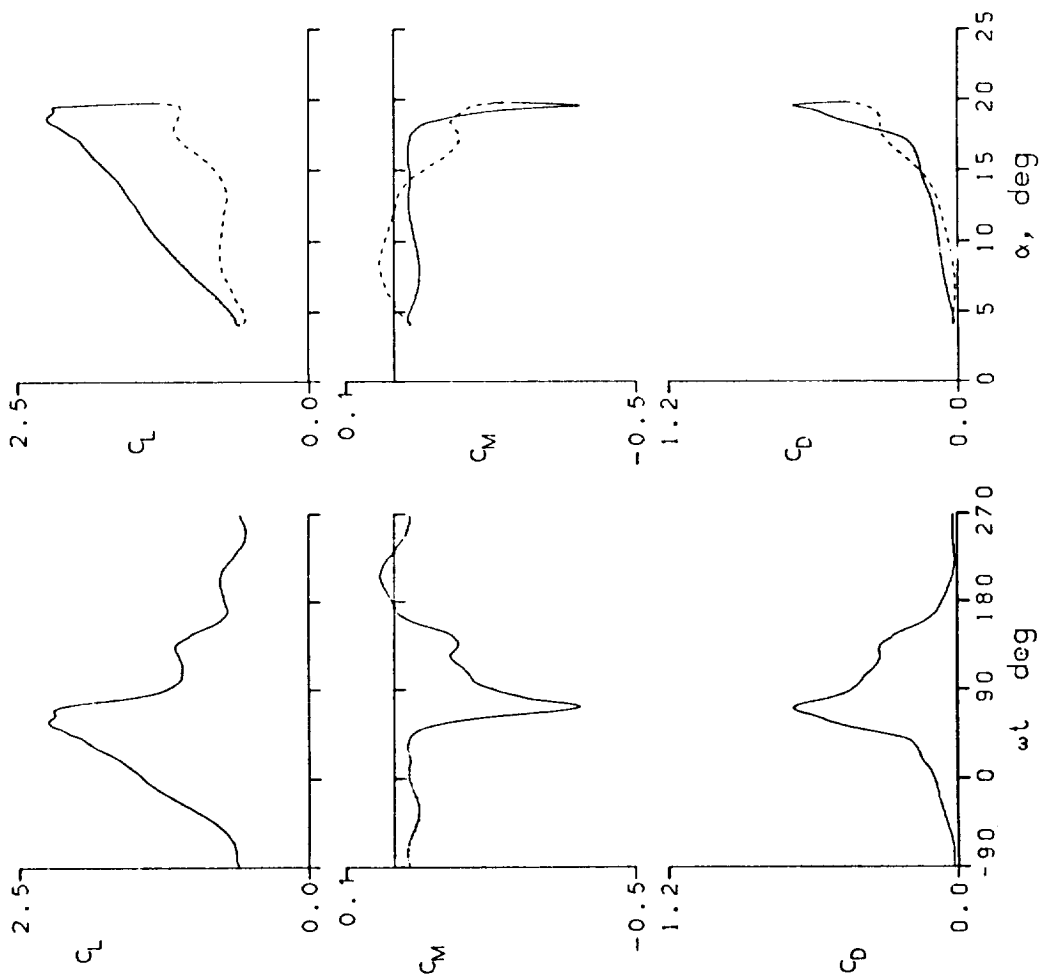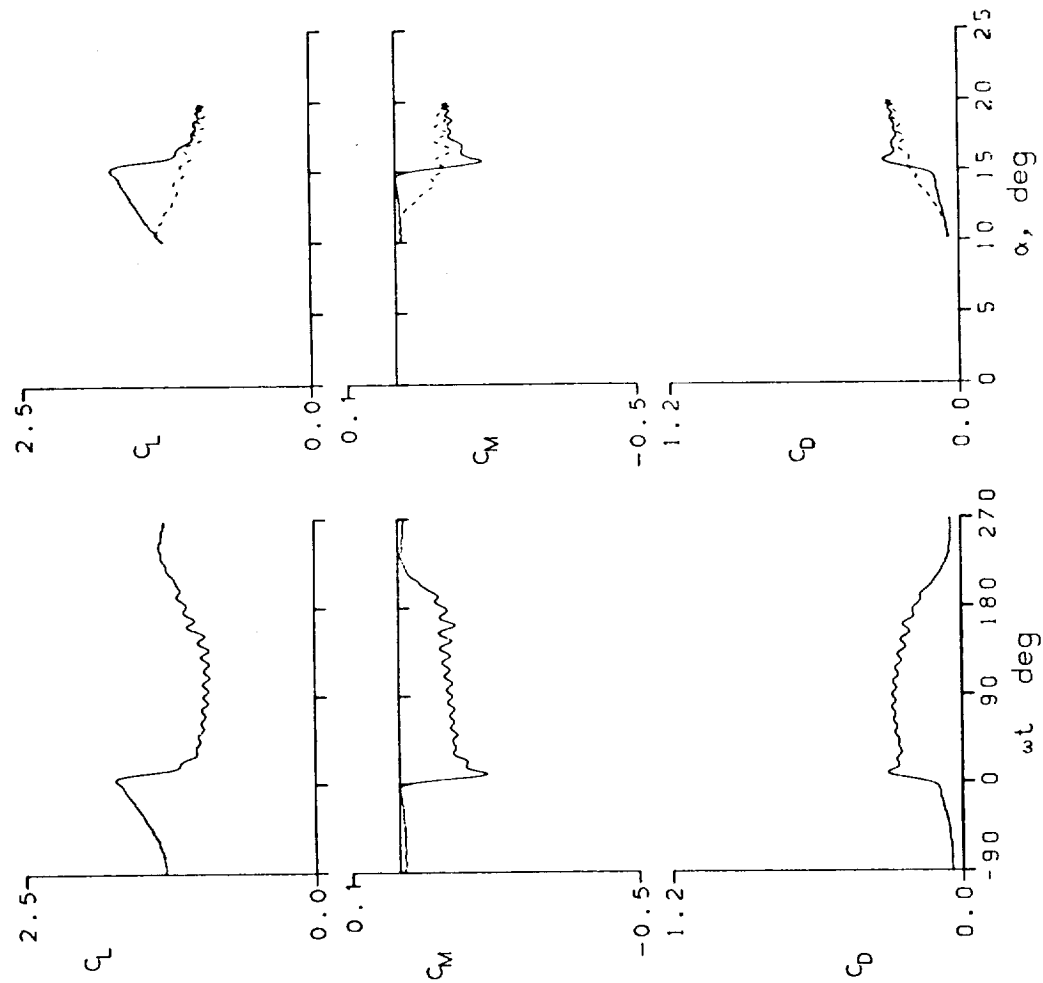

SIKORSKY SC-1095 AIRFOIL
 FRAME : 38021 $A_0 = 14.98^\circ$ $k = 0.025$
 $Re = 3.95 E6$ $A_1 = 4.90^\circ$ $M = 0.302$
 $C_{Lmax} = 1.74$ $C_{Mmin} = -0.19$ $C_{Dmax} = 0.31$
 $\alpha_{Lmax} = 15.2^\circ$ $\xi = -0.050$ $M_{max} = 1.282$
 $\alpha_{Cmin} = 14.8^\circ$ $-C_{Dmax} = 9.5$ $\alpha_{Mmax} = 14.7^\circ$

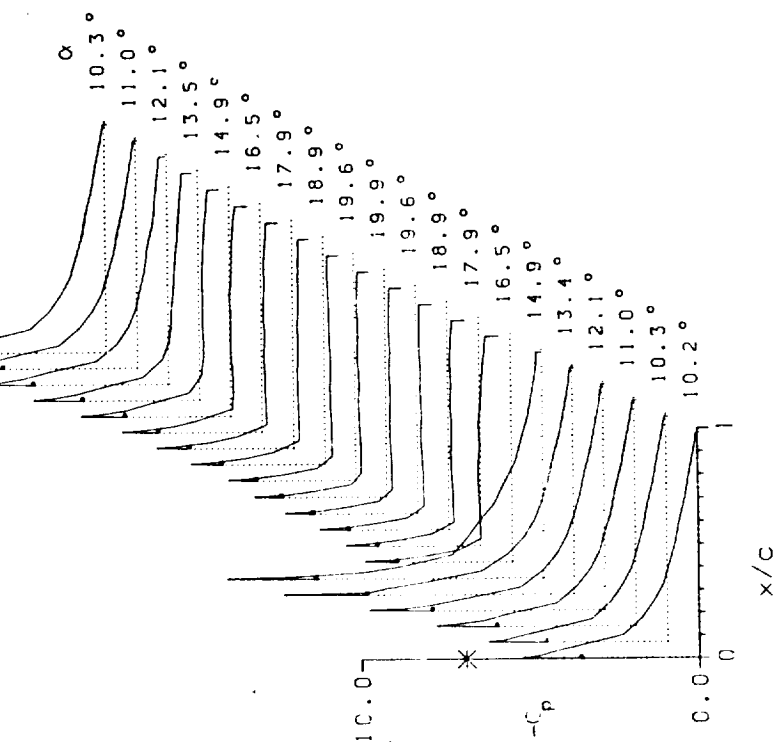


Figure 15.- Continued.

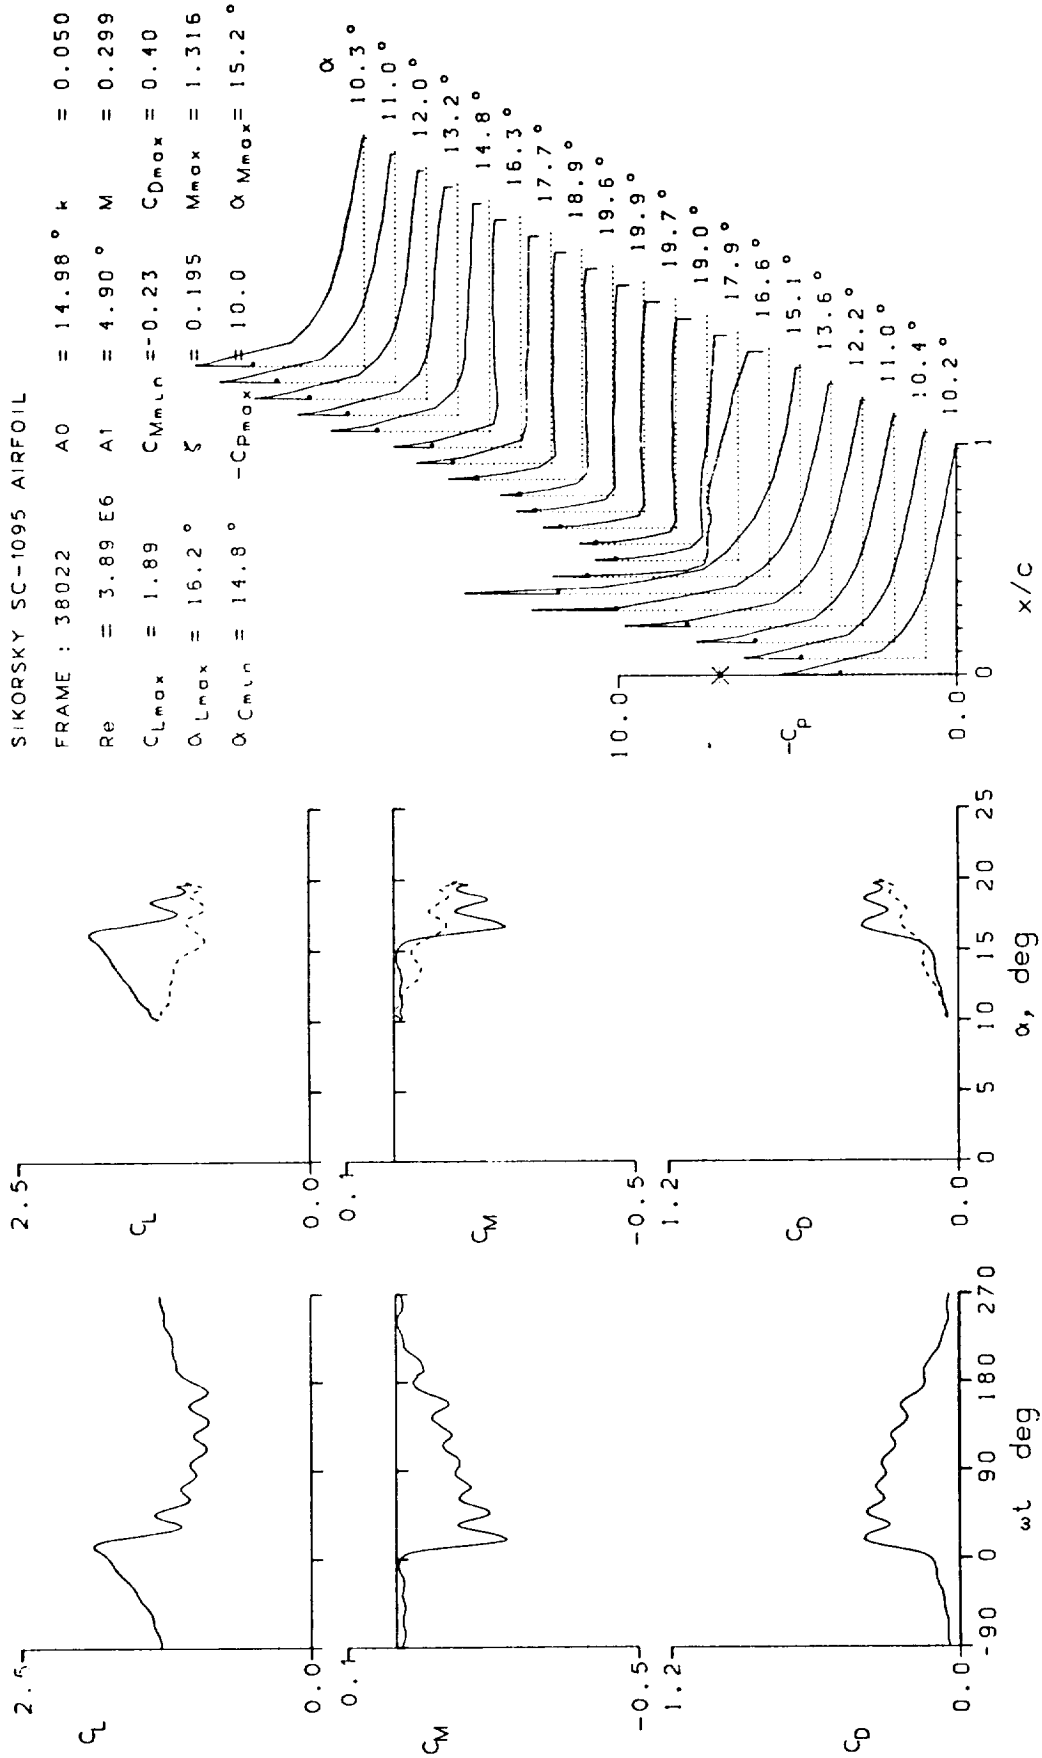


Figure 15.- Continued.

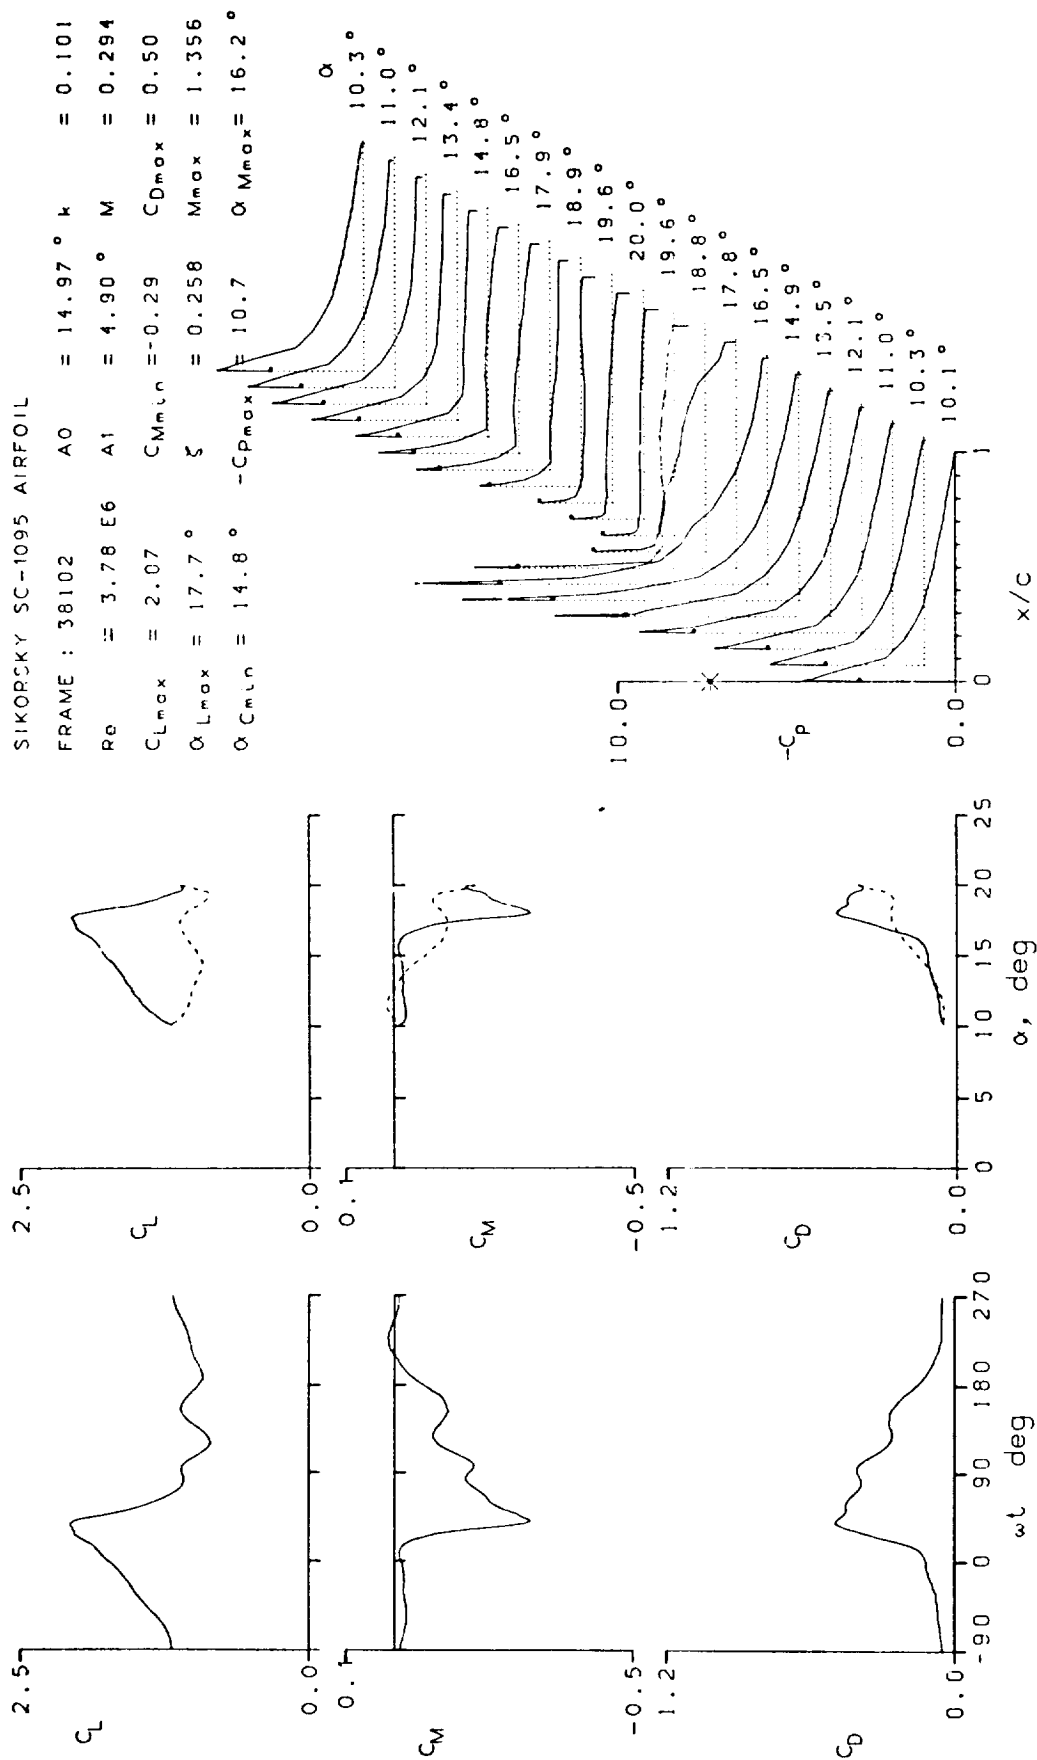


Figure 15.- Continued.

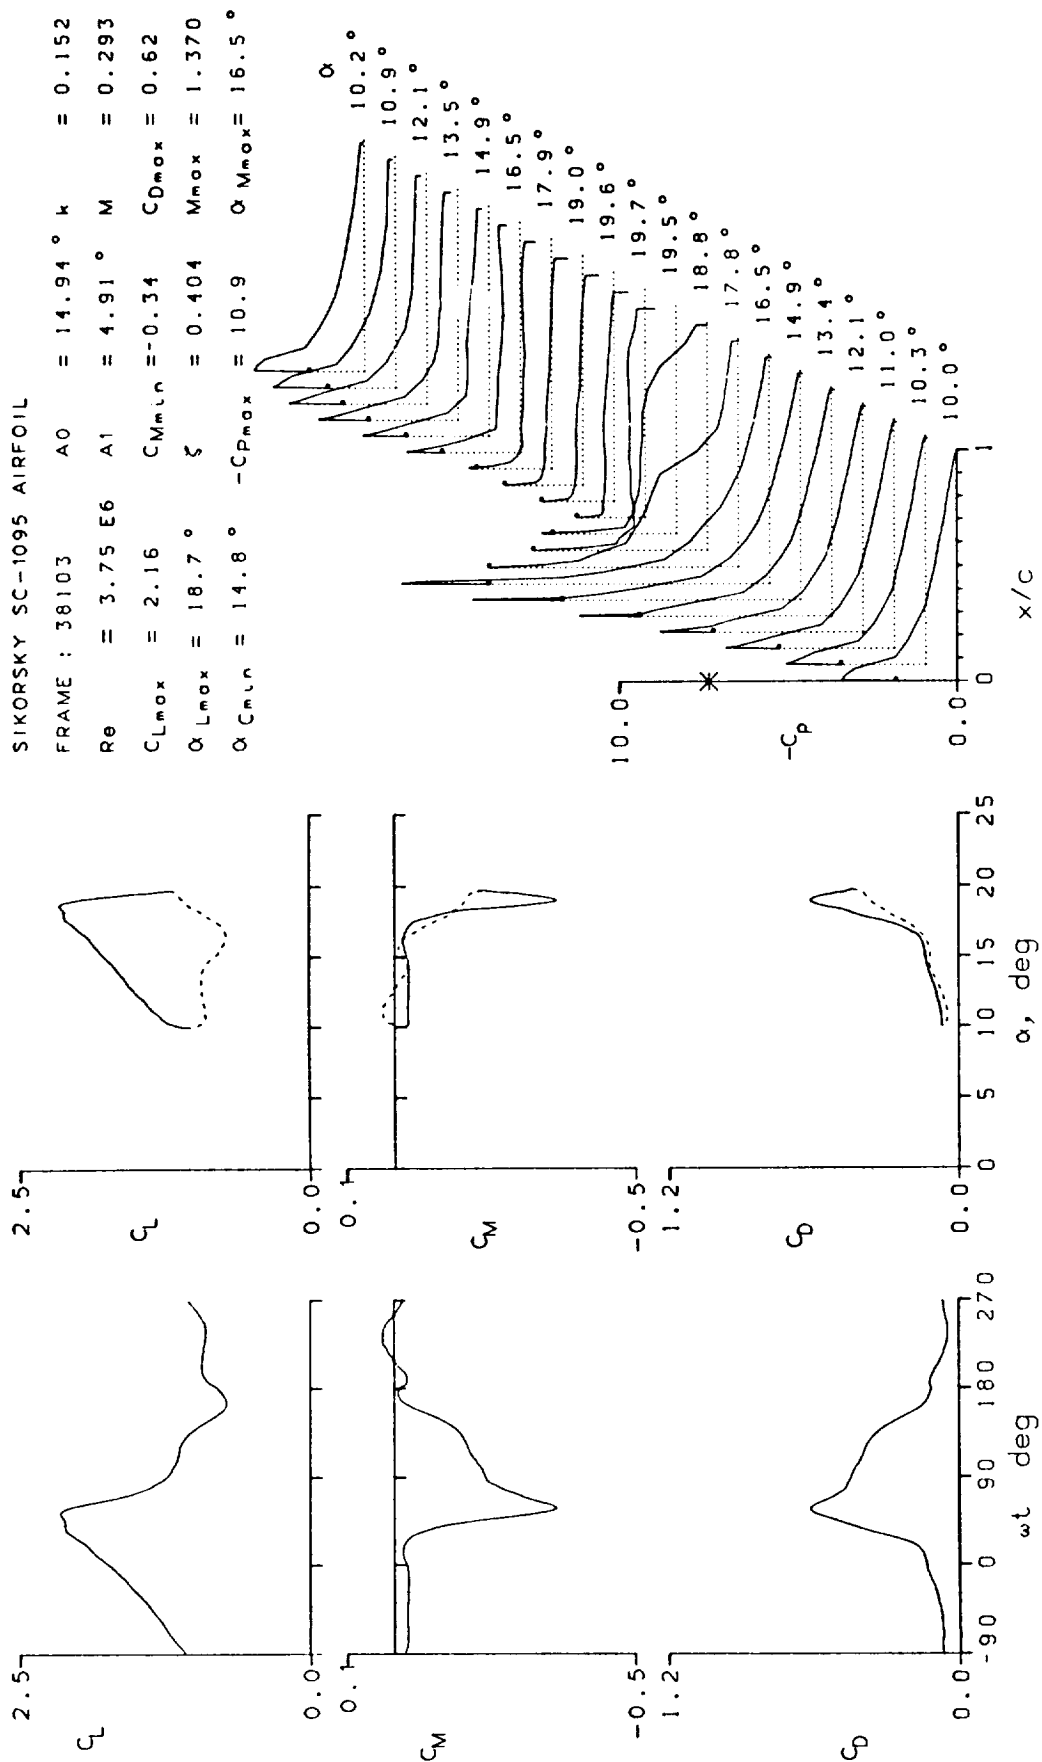


Figure 15.- Continued.

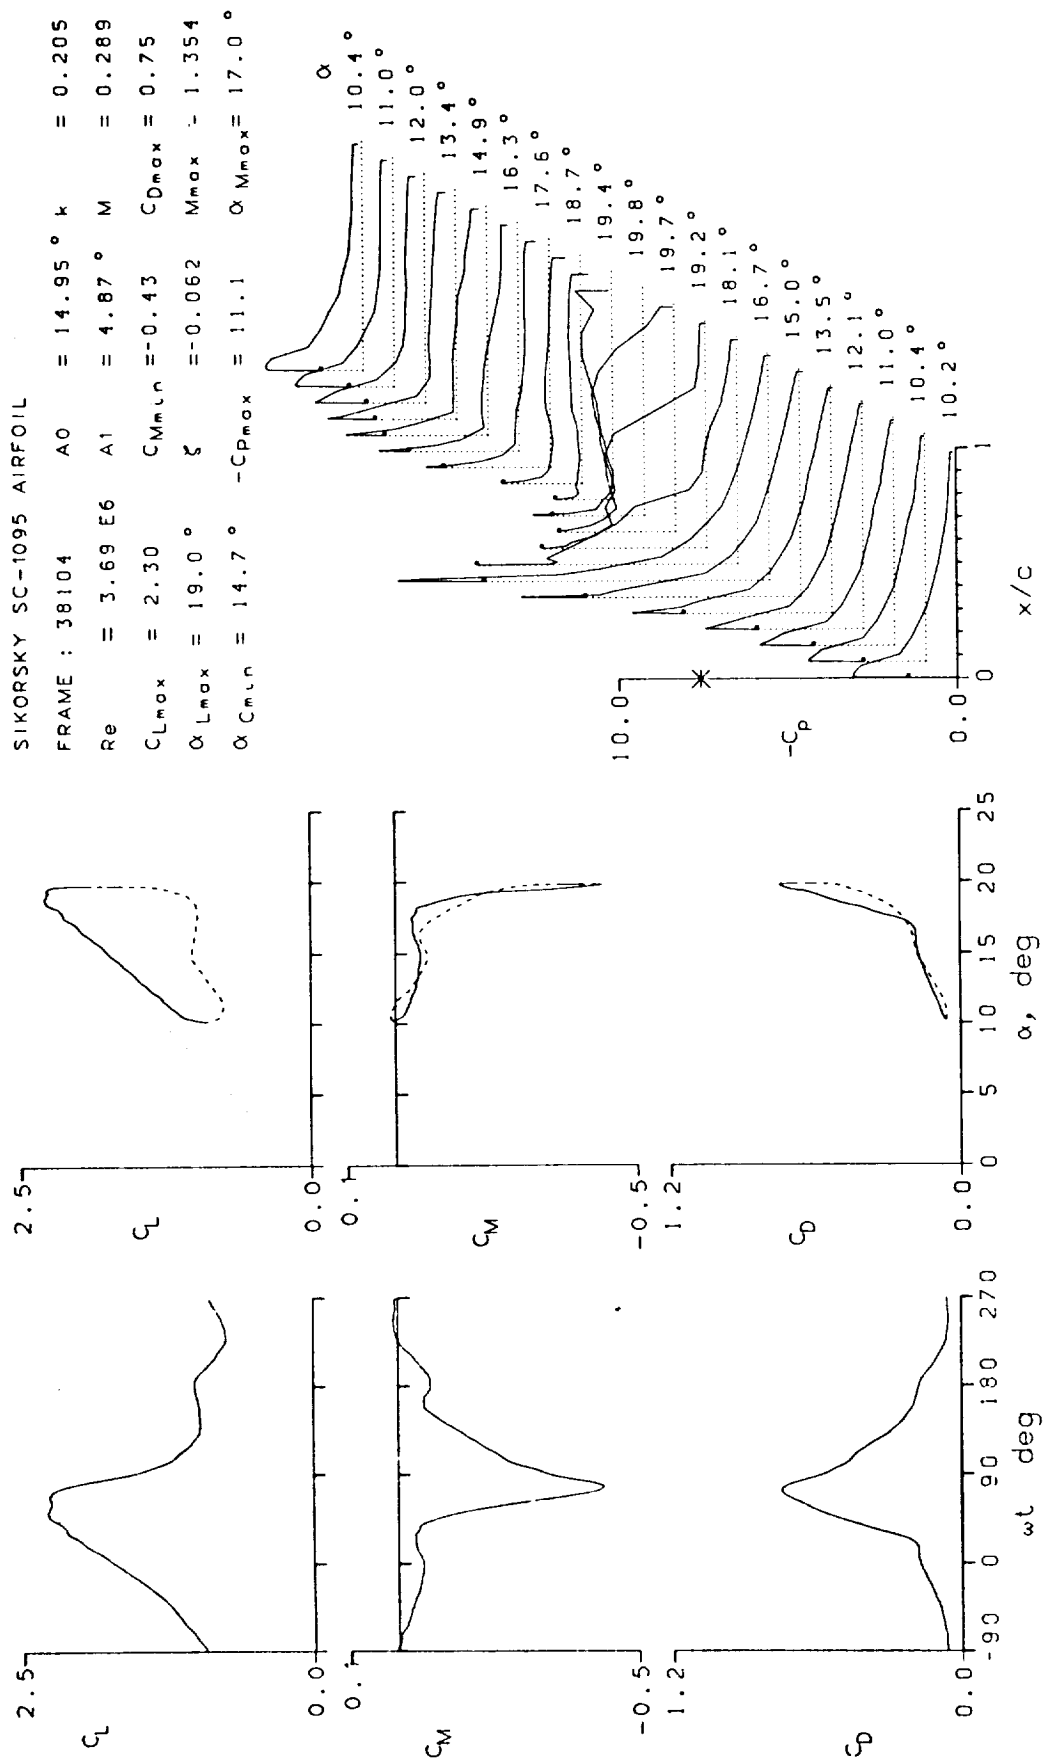


Figure 15.- Continued.

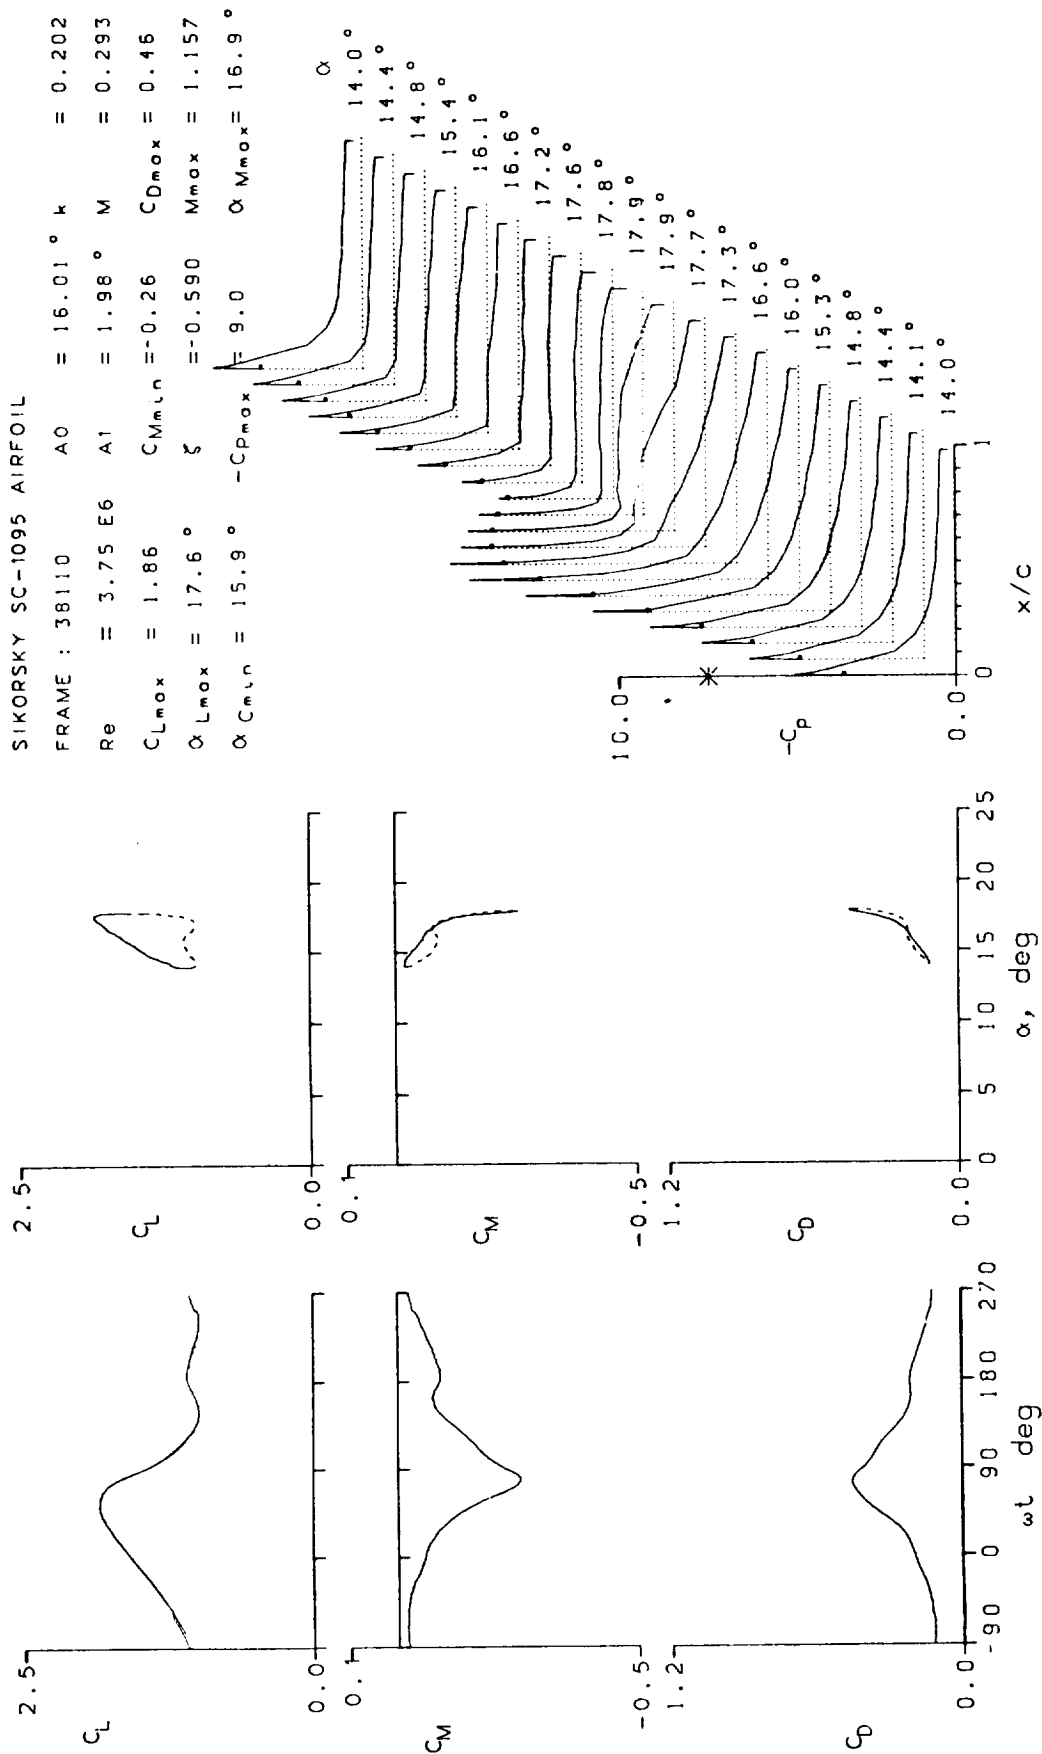


Figure 15.- Continued.

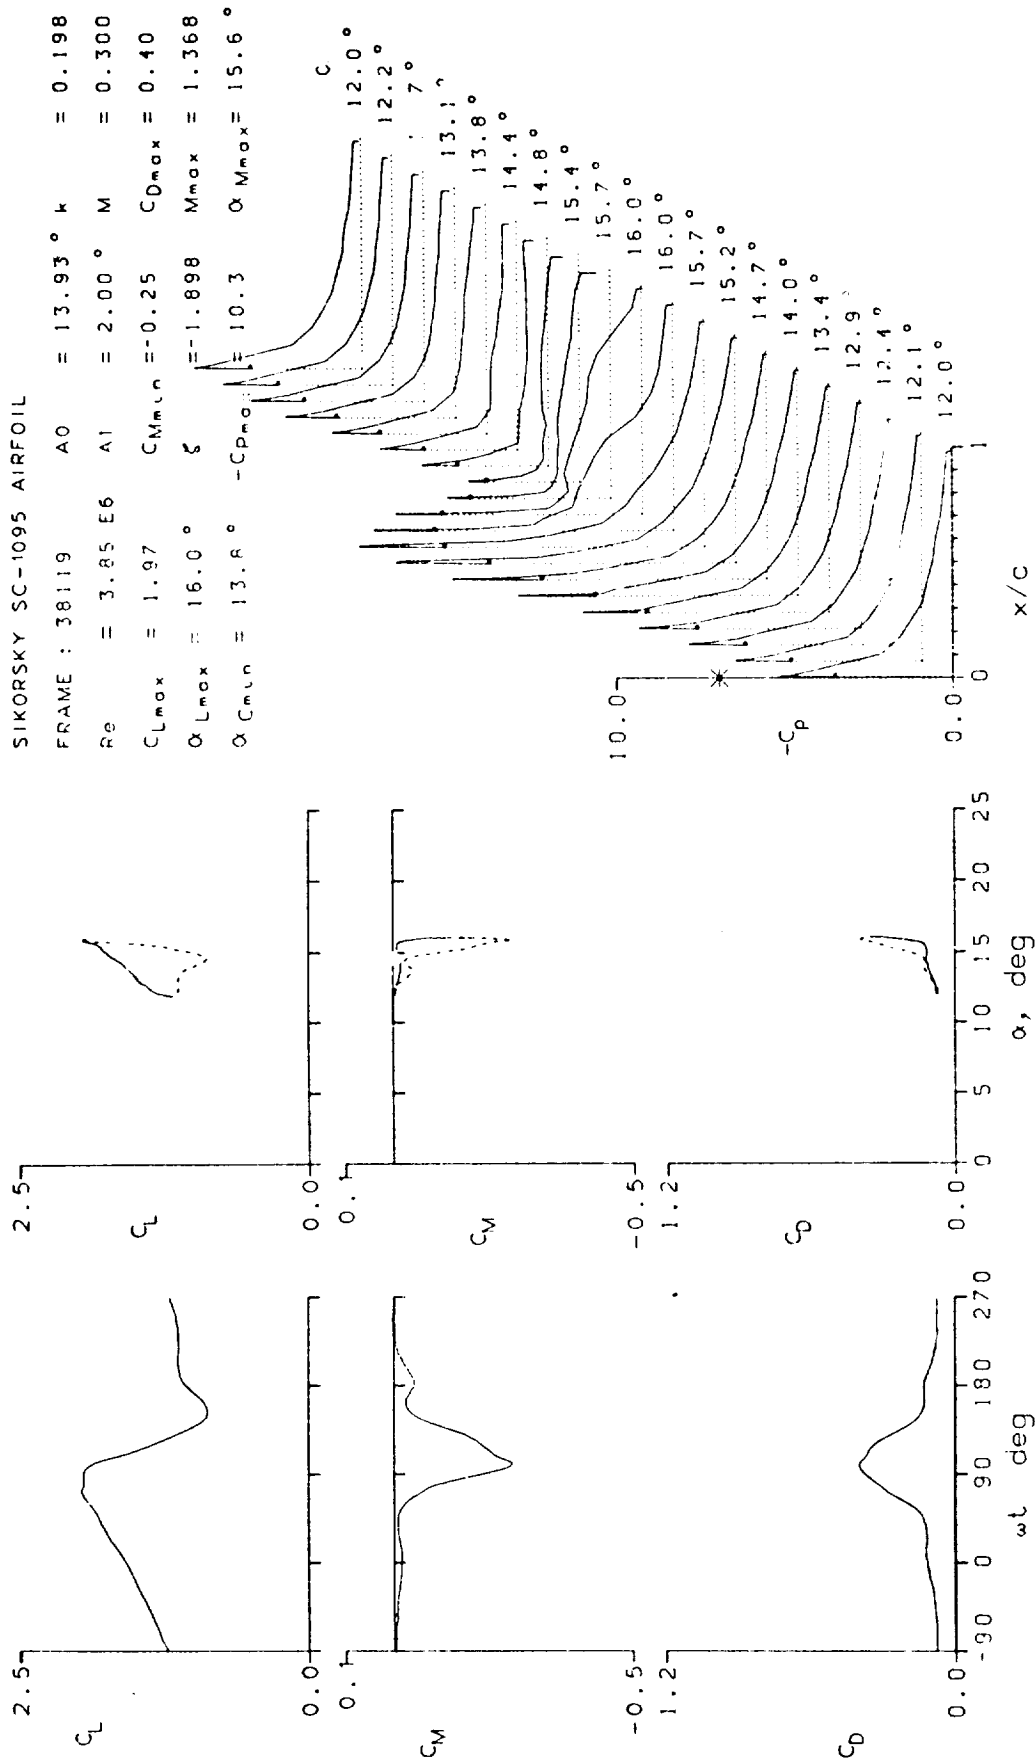


Figure 15.- Continued.

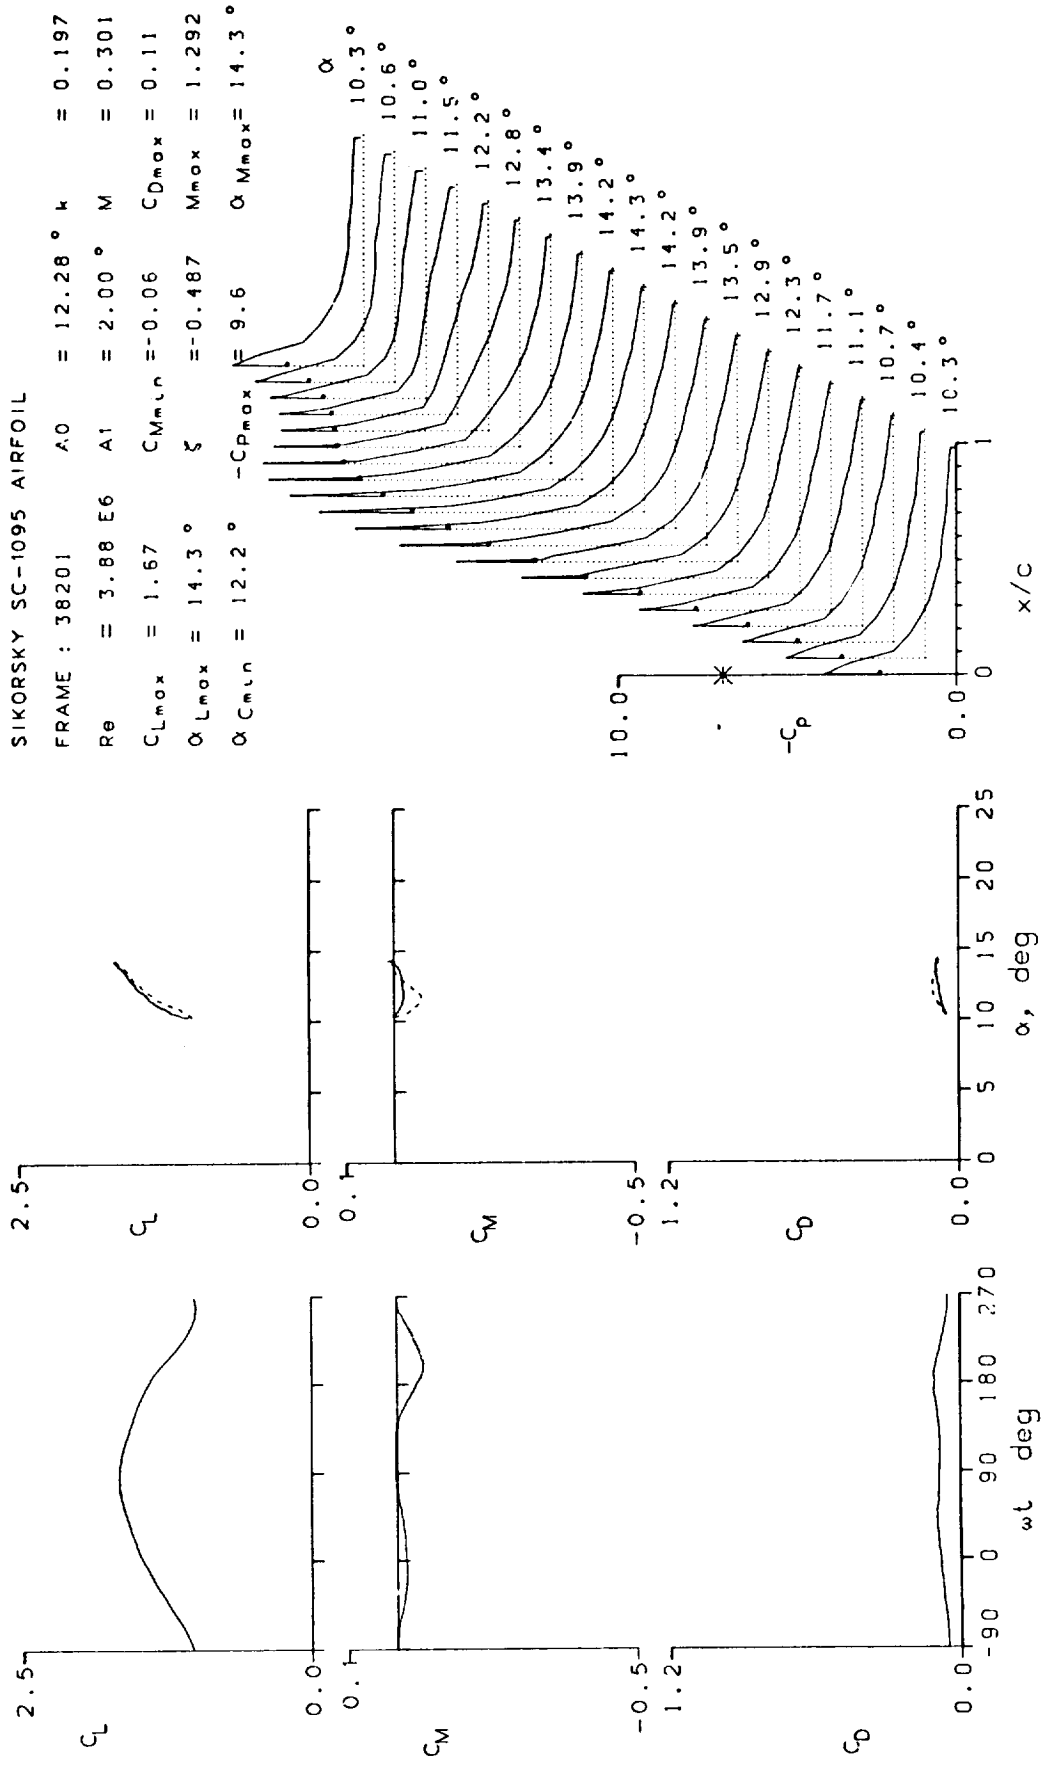


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 38216	A0 = 6.02 °	k = 0.010
Re = 2.47 E6	A1 = 10.02 °	M = 0.183
CLmax = 1.70	CMmin = -0.14	CDmax = 0.24
αLmax = 15.4 °	ξ = -0.075	Mmax = 0.654
αCMmin = 5.5 °	-CPmax = 9.9	αMmax = 15.2 °

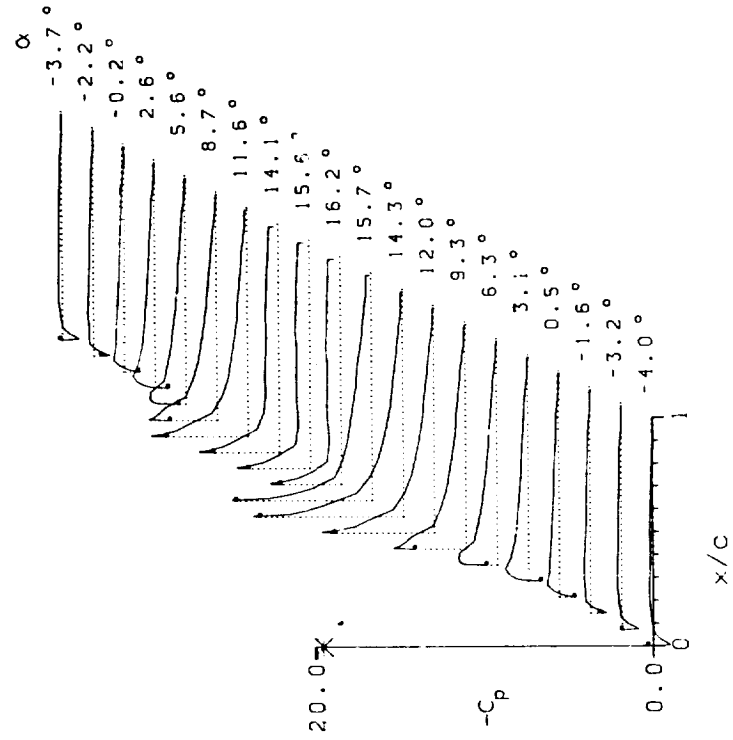
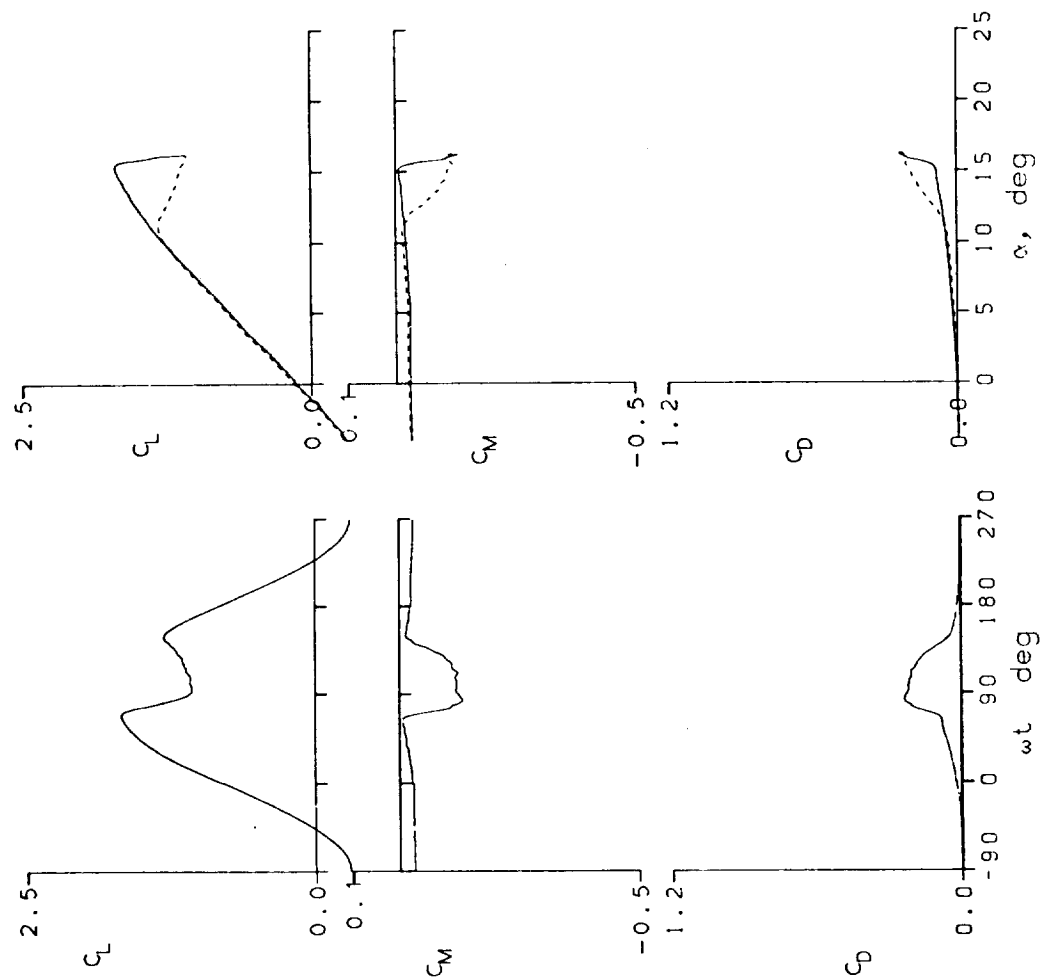


Figure 15.- Continued.

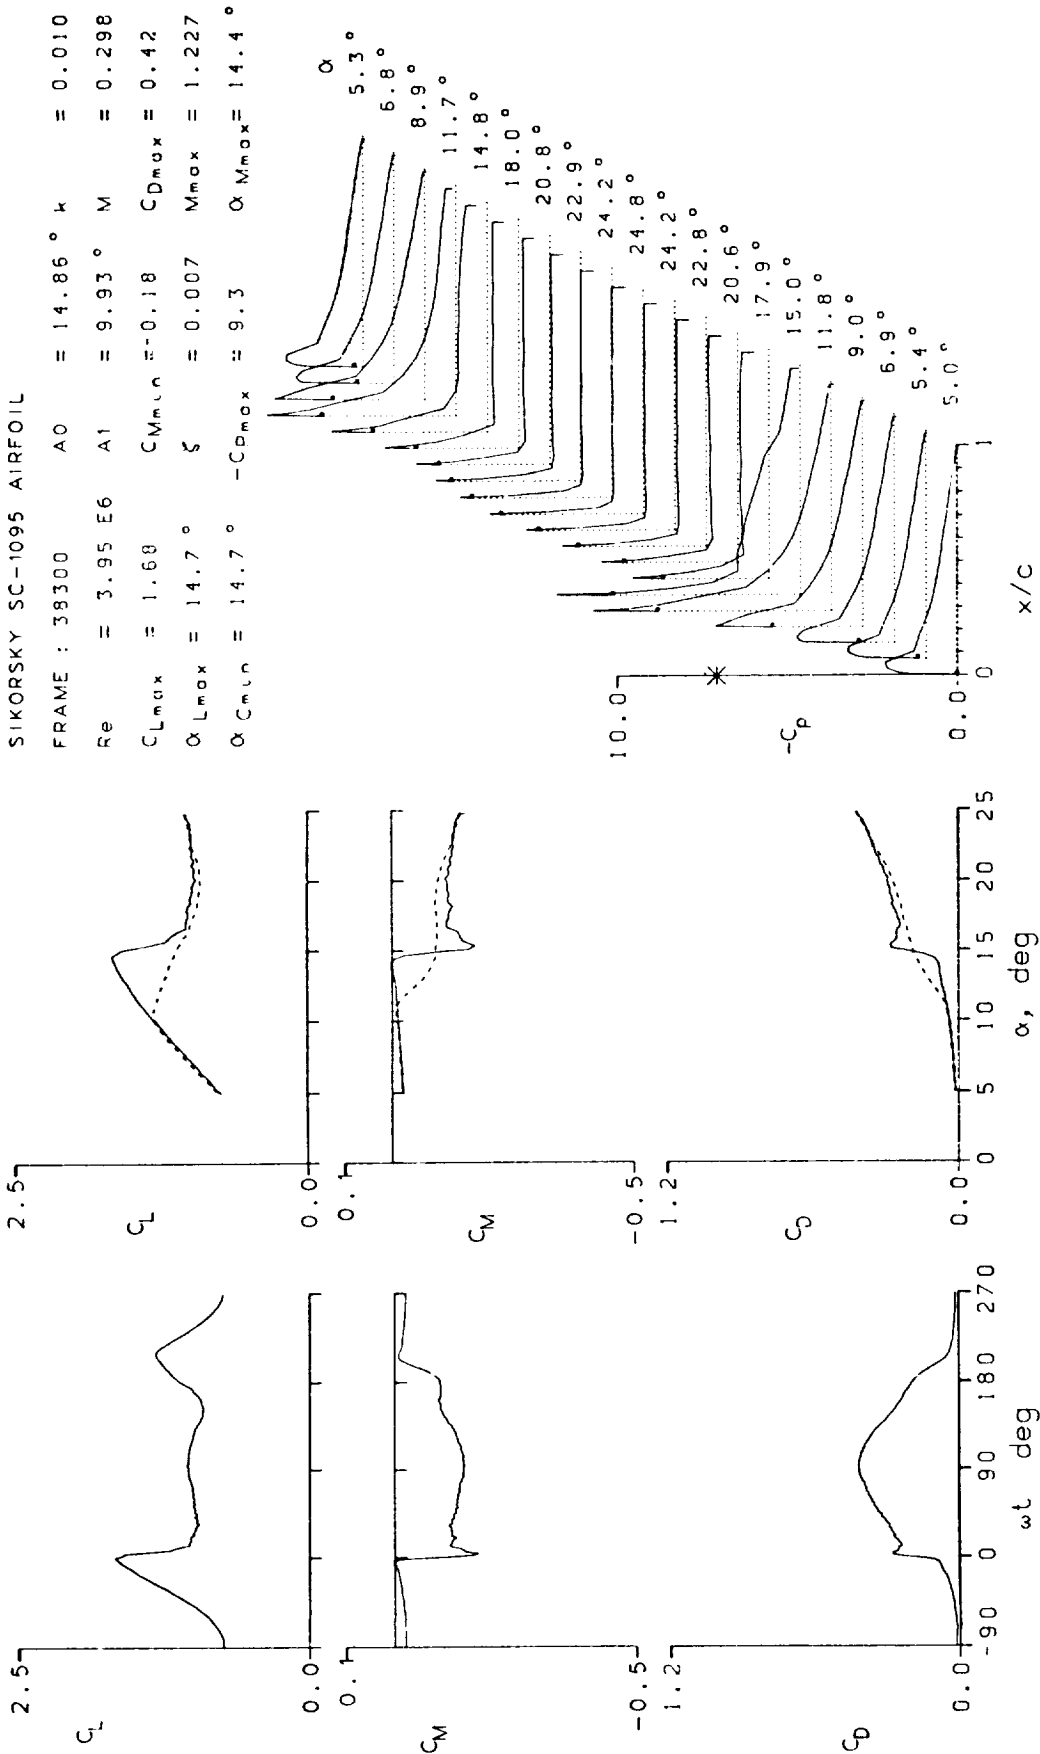


Figure 15.- Continued.

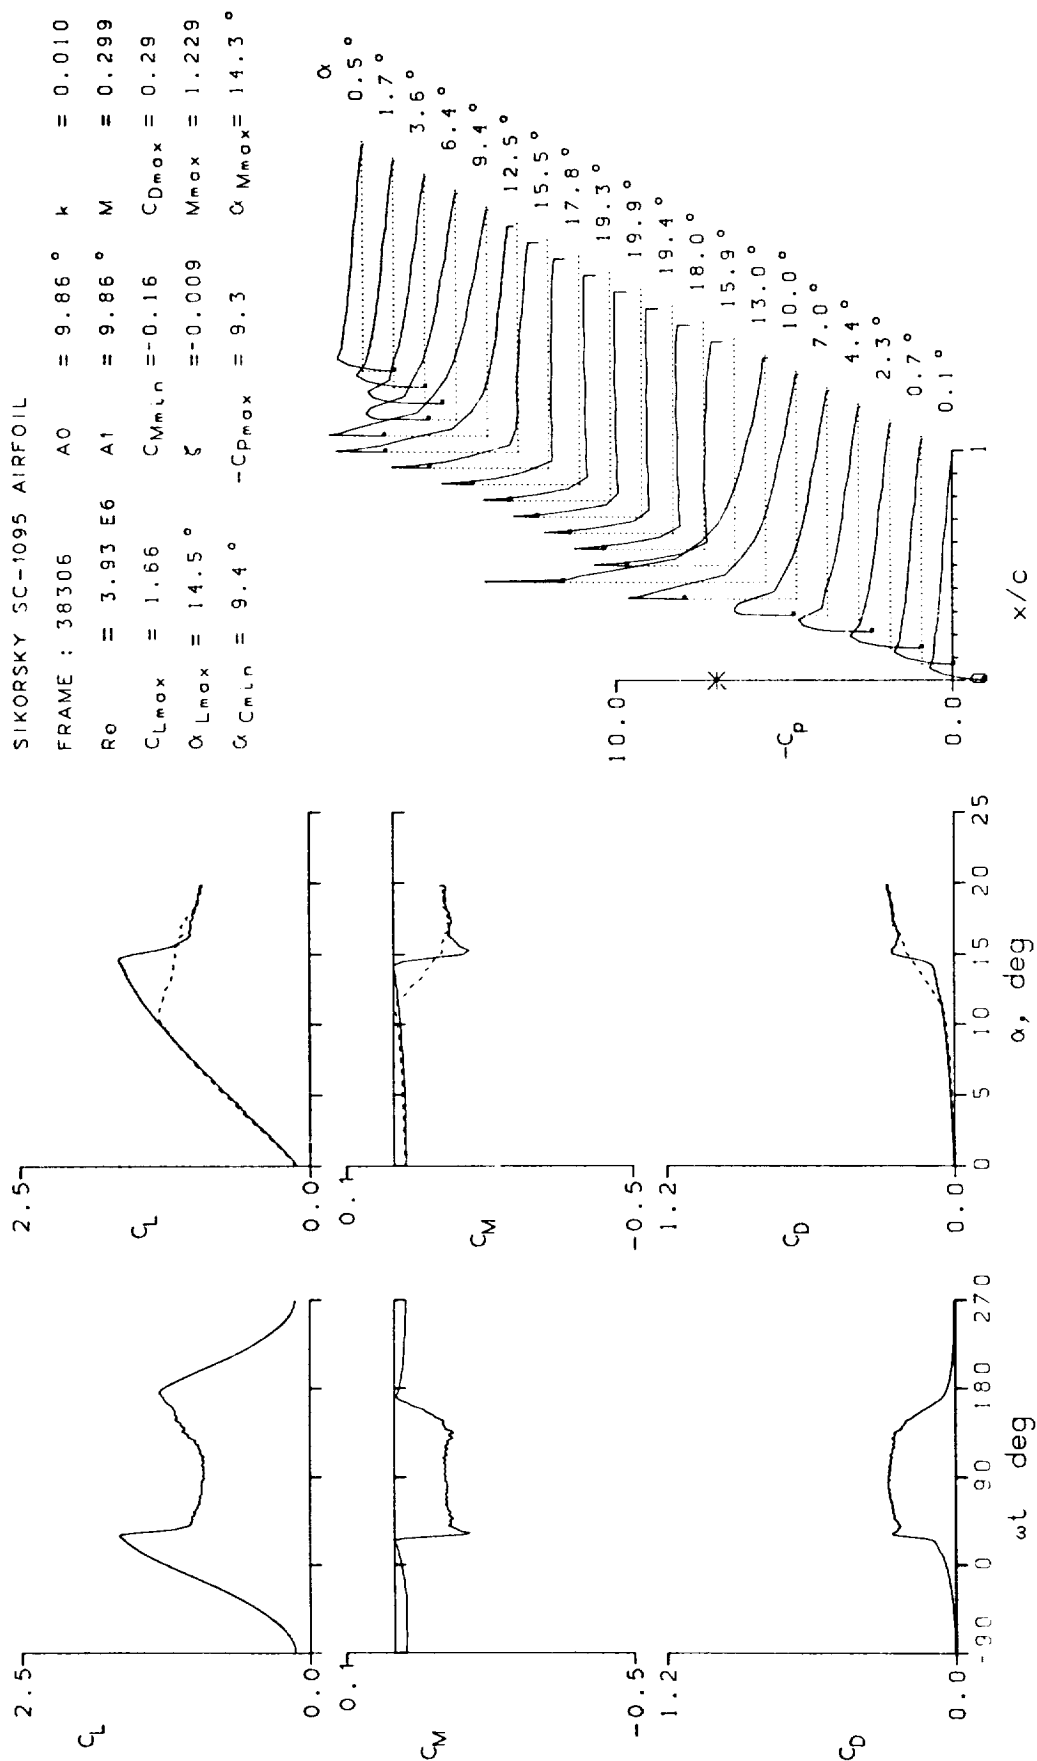


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 39021	A0 = 4.05 °	k = 0.010
Re = 3.81 E6	A1 = 10.08 °	M = 0.300
$C_{Lmax} = 1.58$	$C_{Mmin} = -0.12$	$C_{Dmax} = 0.20$
$\alpha_{Lmax} = 13.5 °$	$\xi = -0.018$	$M_{max} = 1.161$
$\alpha_{Cmin} = 3.5 °$	$-C_{Dmax} = 8.6$	$\alpha_{Mmax} = 13.5 °$

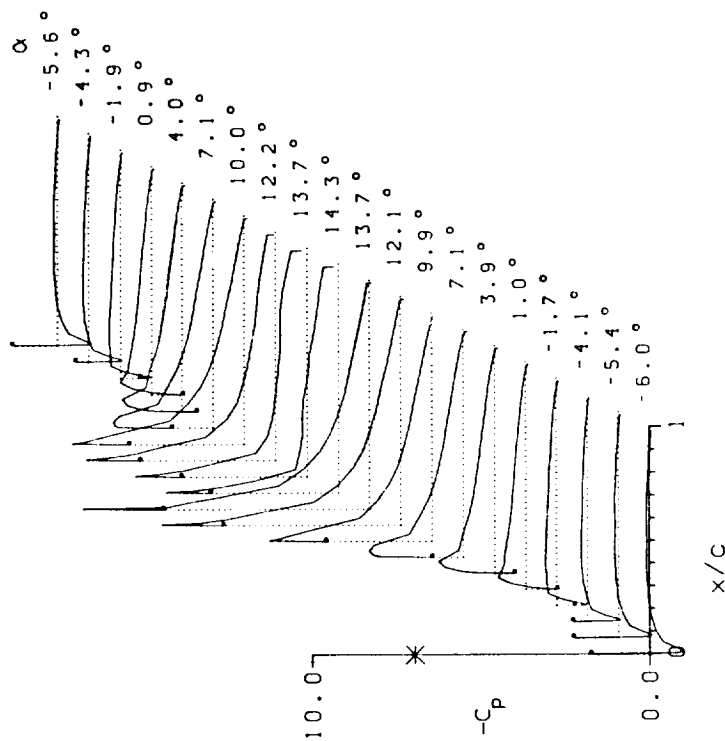
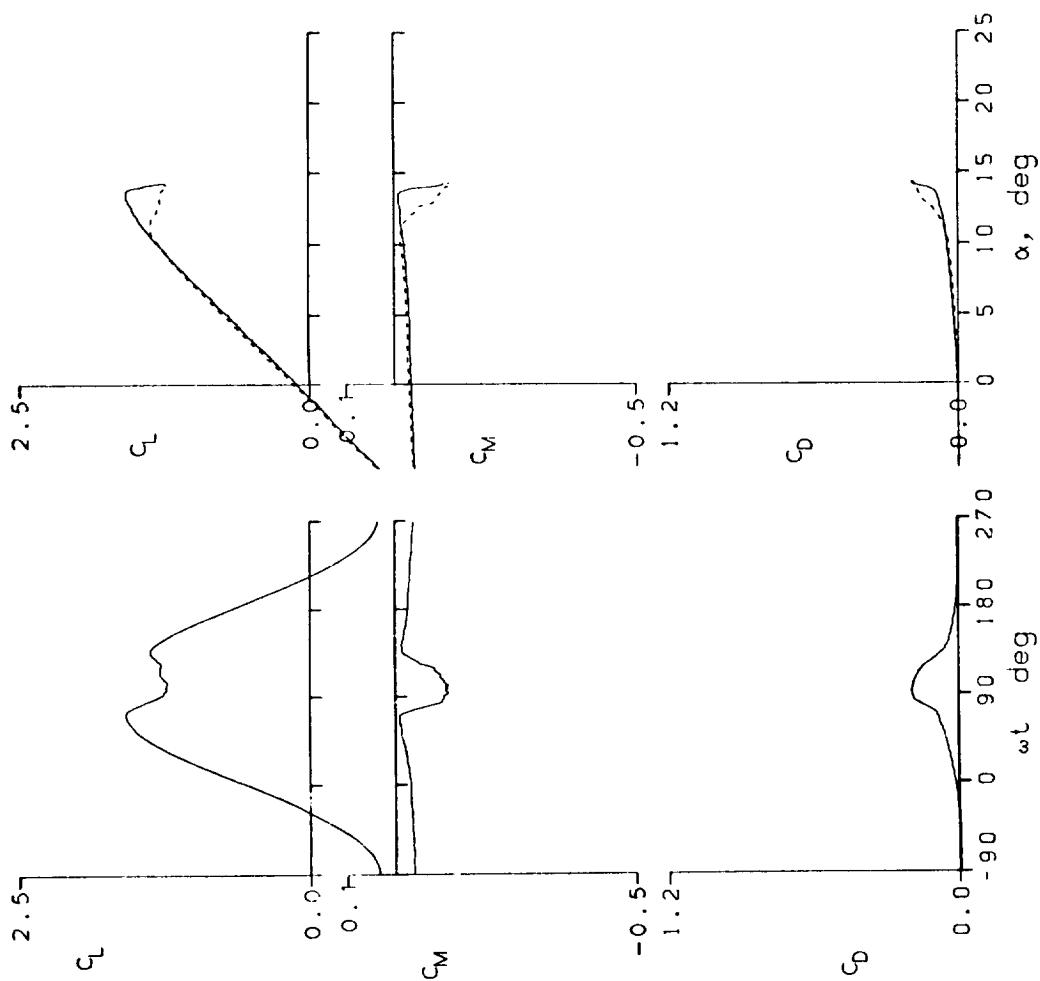


Figure 15.- Continued.

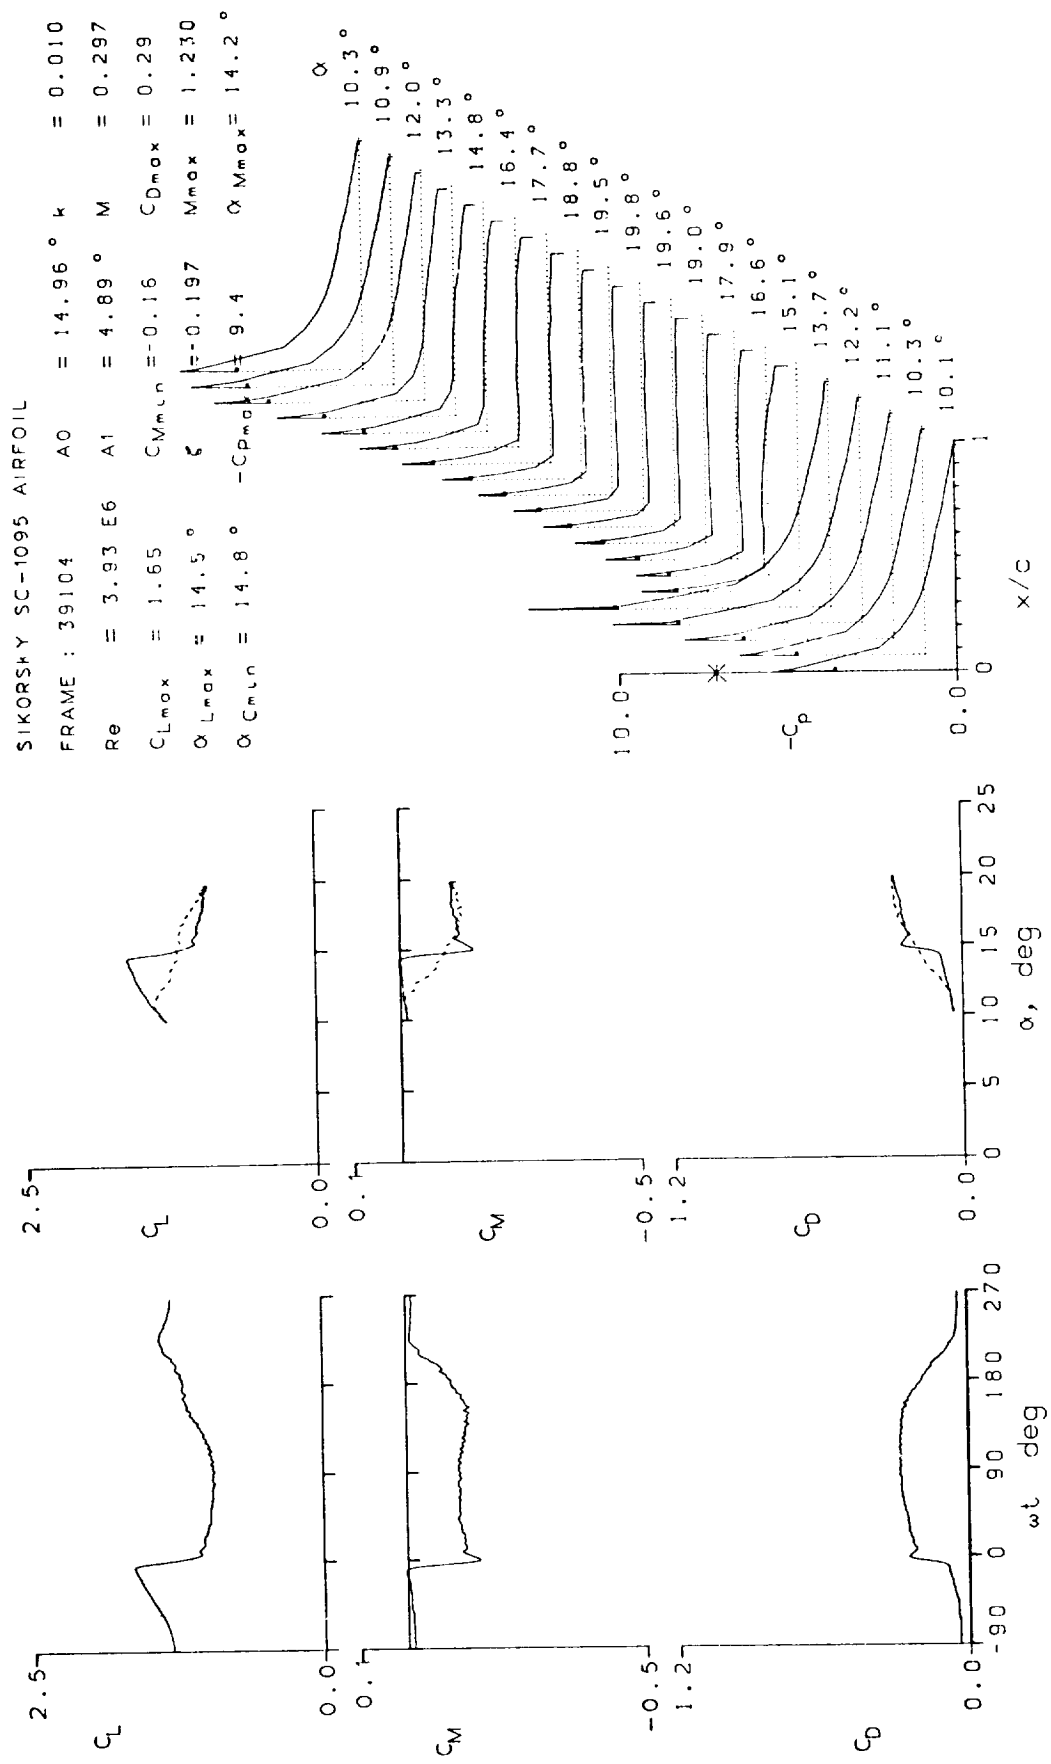


Figure 15.- Continued.

SIKORSKY SC-1095 AIRFOIL

FRAME : 39107 $A_0 = 9.94^\circ$ $k = 0.010$
 $Re = 3.94 \text{ E}6$ $A' = 4.91^\circ$ $M = 0.300$
 $C_{Lmax} = 1.62$ $C_{Mmin} = -0.13$ $C_{Dmax} = 0.22$
 $\alpha_{Lmax} = 14.1^\circ$ $\zeta = -0.244$ $M_{max} = 1.232$
 $\alpha_{Cmin} = 9.8^\circ$ $-C_{Dmax} = 9.2$ $\alpha_{Mmax} = 14.1^\circ$

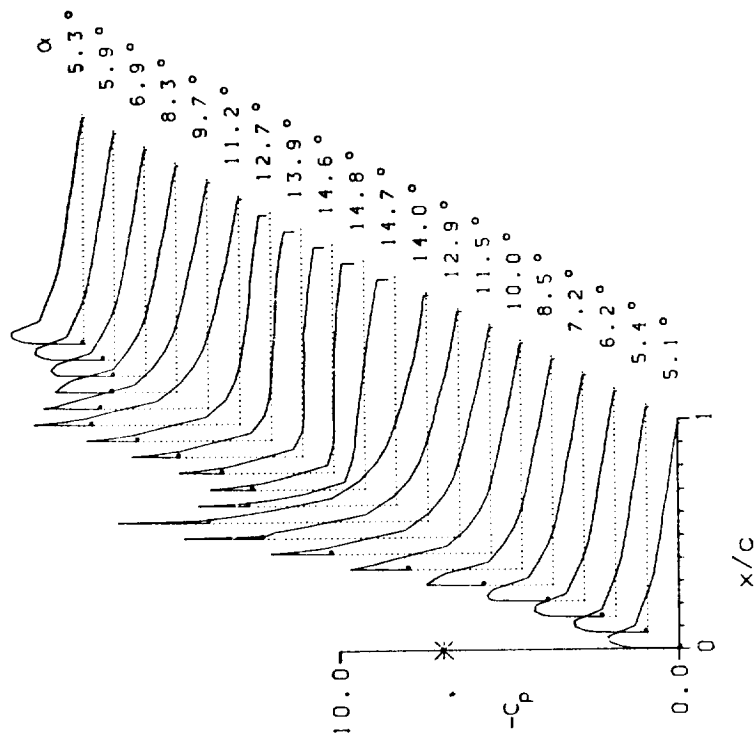
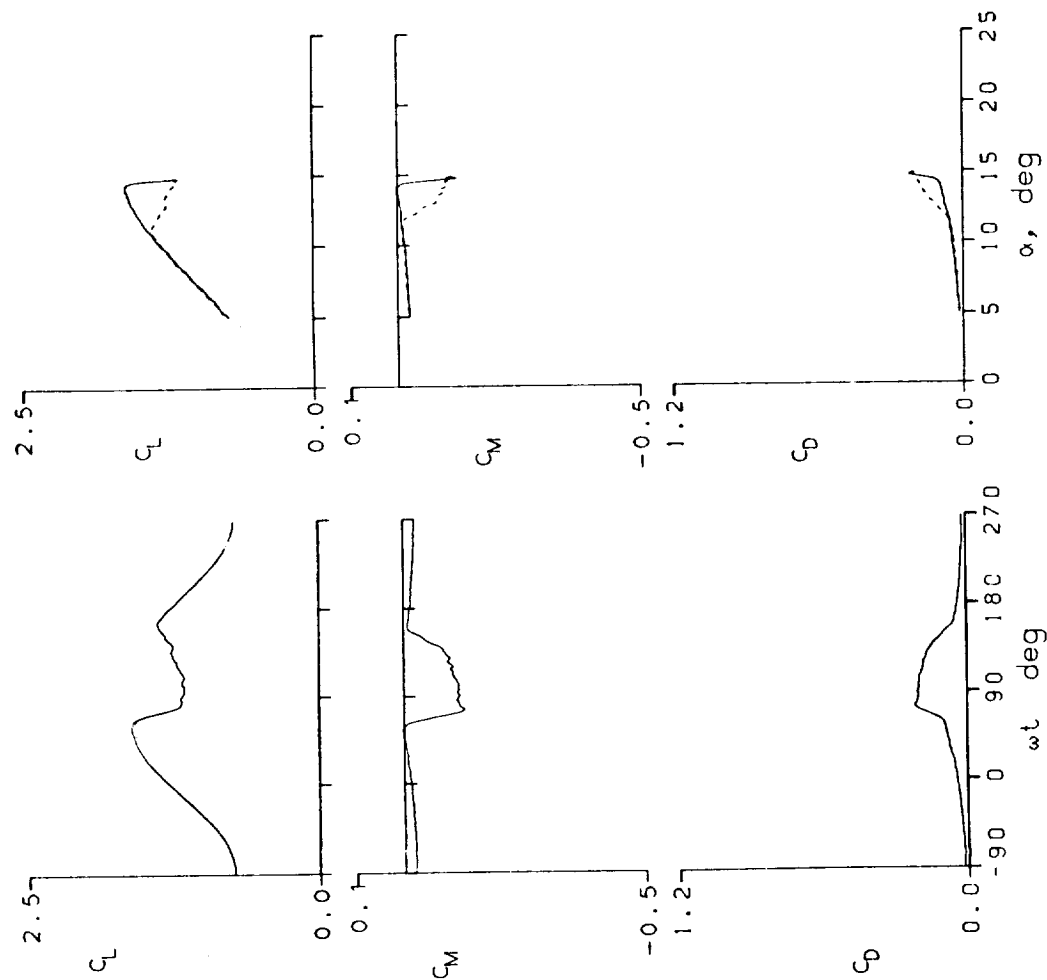


Figure 15.- Continued.

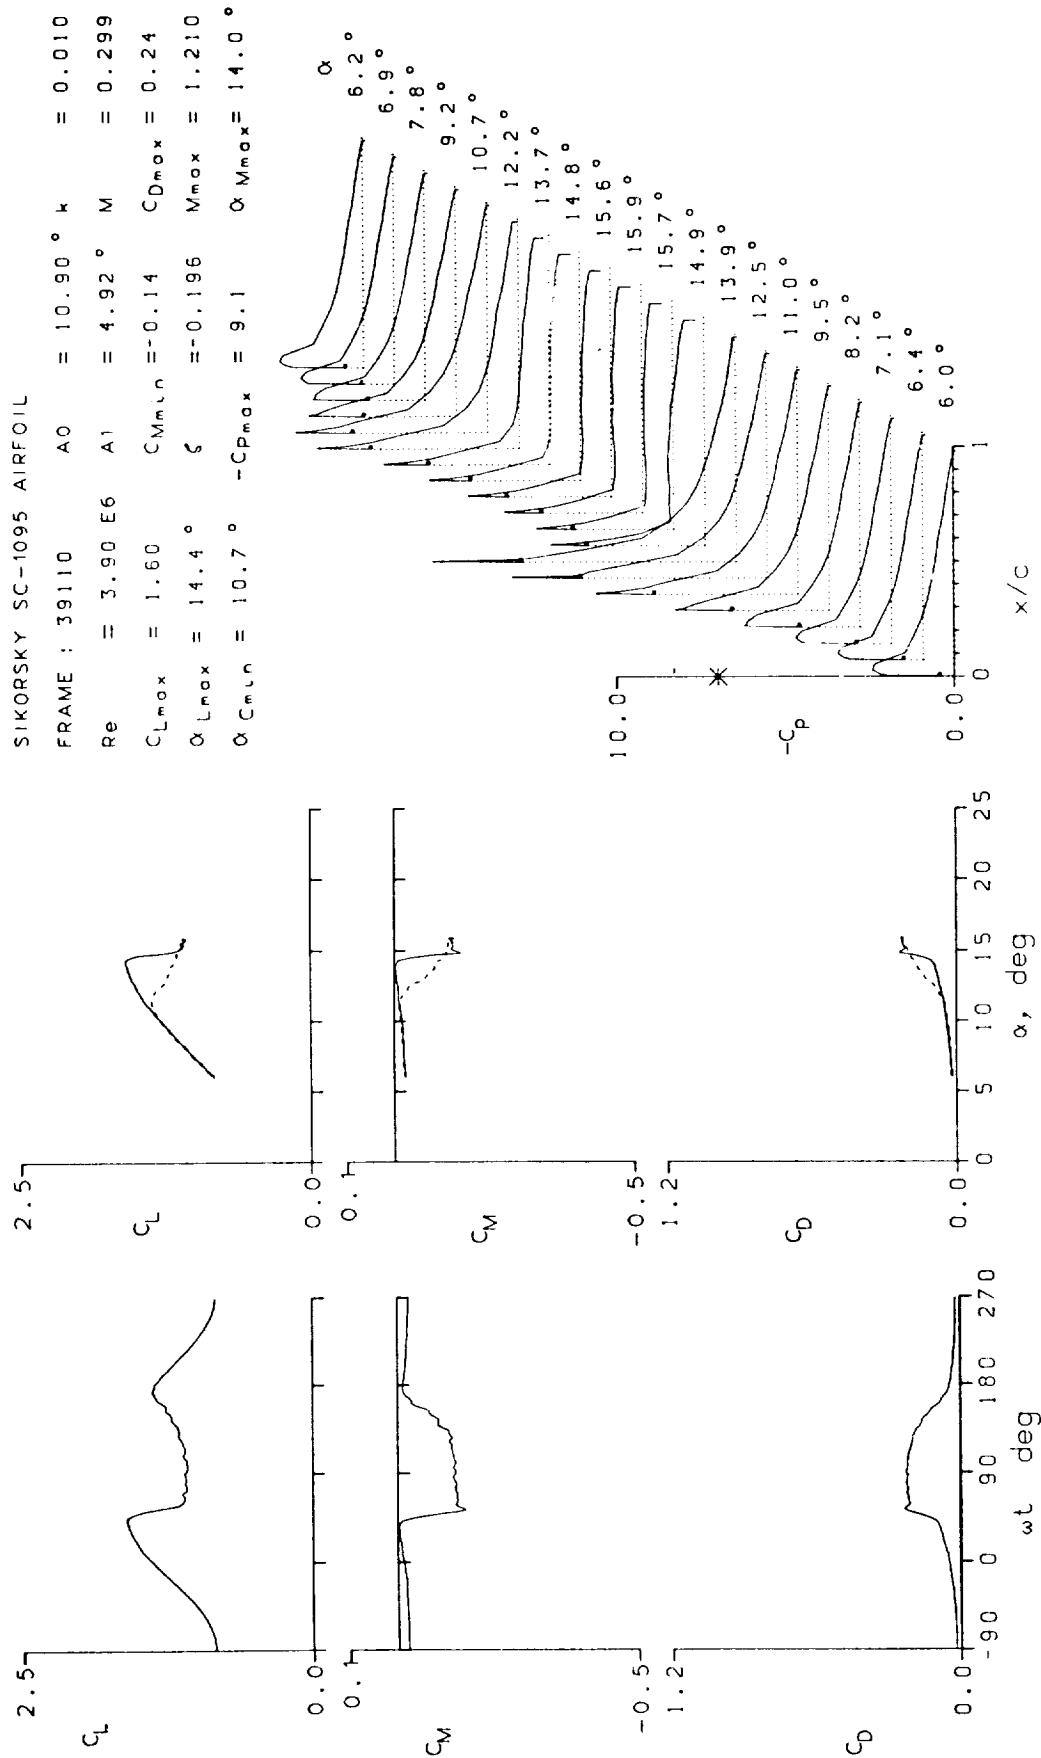


Figure 15.- Continued.

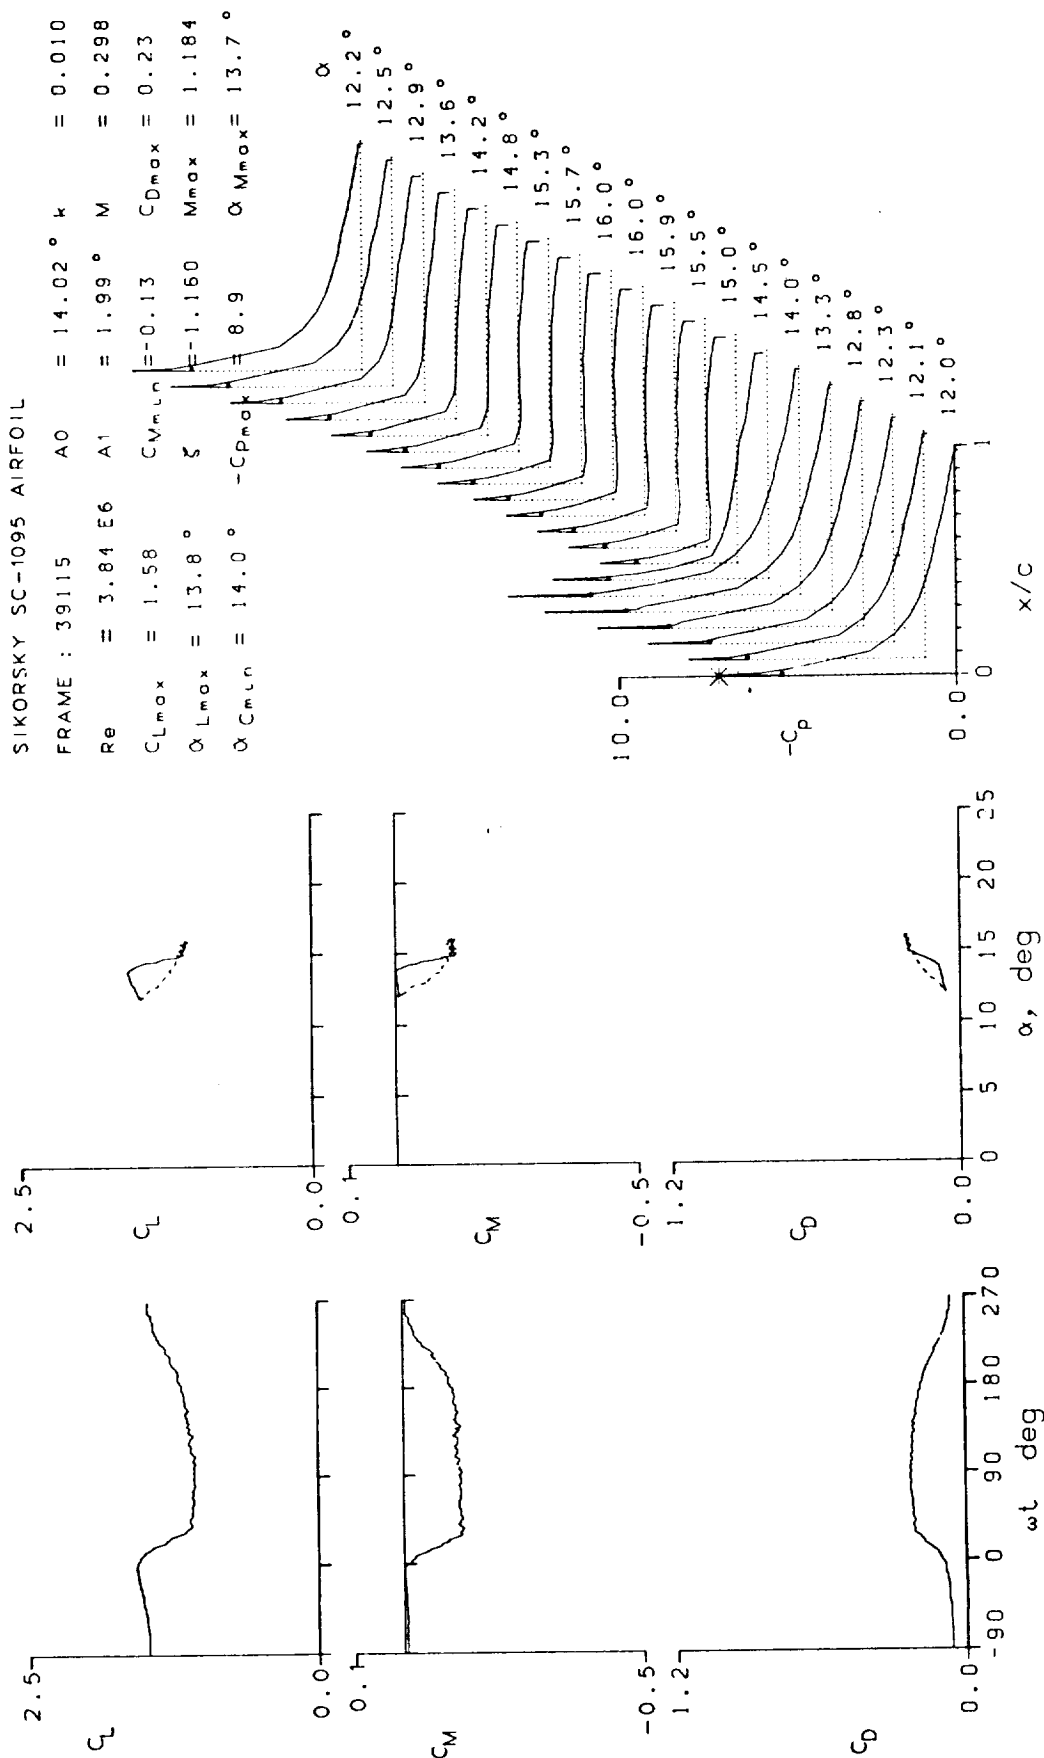


Figure 15.- Concluded.

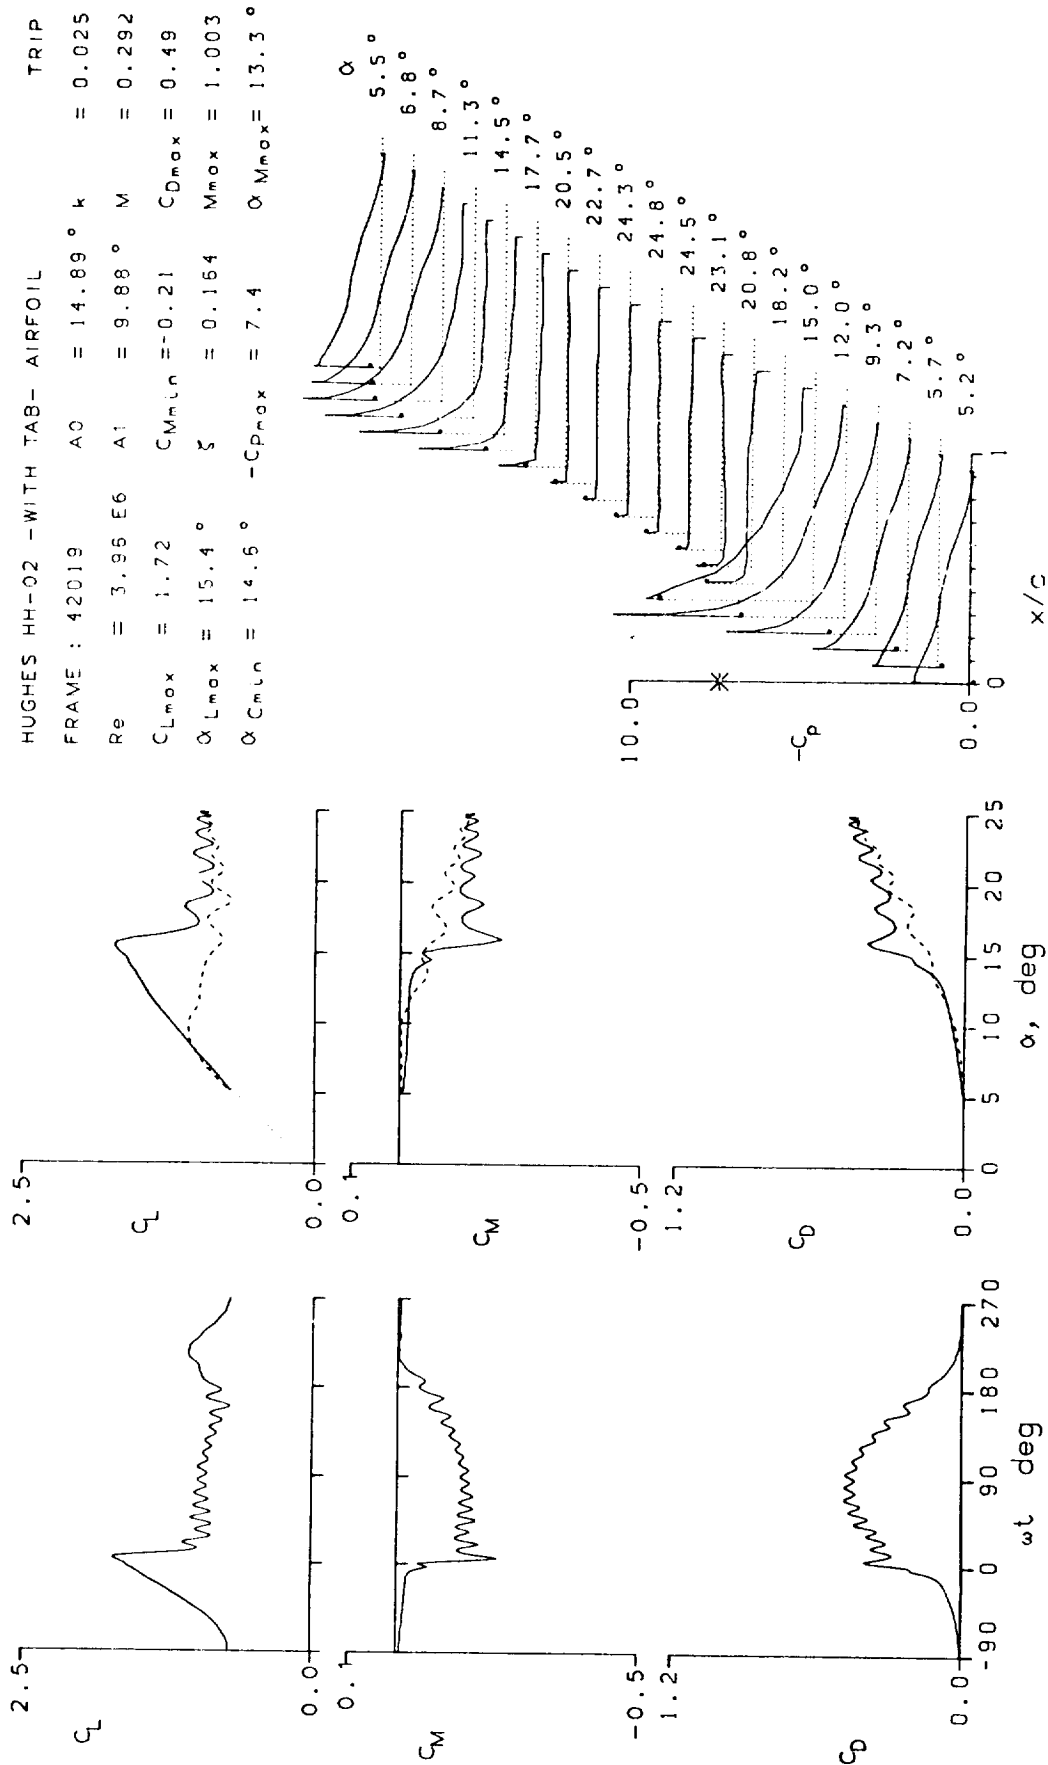


Figure 16.- Dynamic data for Hughes HH-02 airfoil.

HUGHES HH-02 -WITH TAB- AIRFOIL TRIP

FRAME : 42021 A0 = 14.85 ° k = 0.051

Re = 3.68 E6 A1 = 9.99 ° M = 0.289

C_{Lmax} = 1.98 C_{Mmin} = -0.30 C_{Dmax} = 0.59

α_{Lmax} = 17.5 ° ξ = 0.365 M_{max} = 1.049

α_{Cmin} = 14.5 ° $-C_{pmax}$ = 8.1 α_{Mmax} = 14.5 °

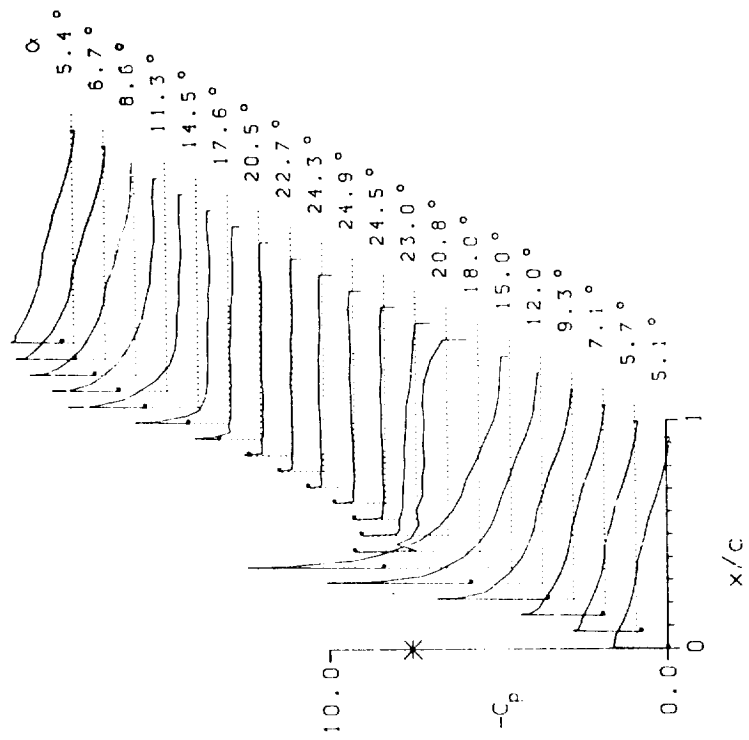
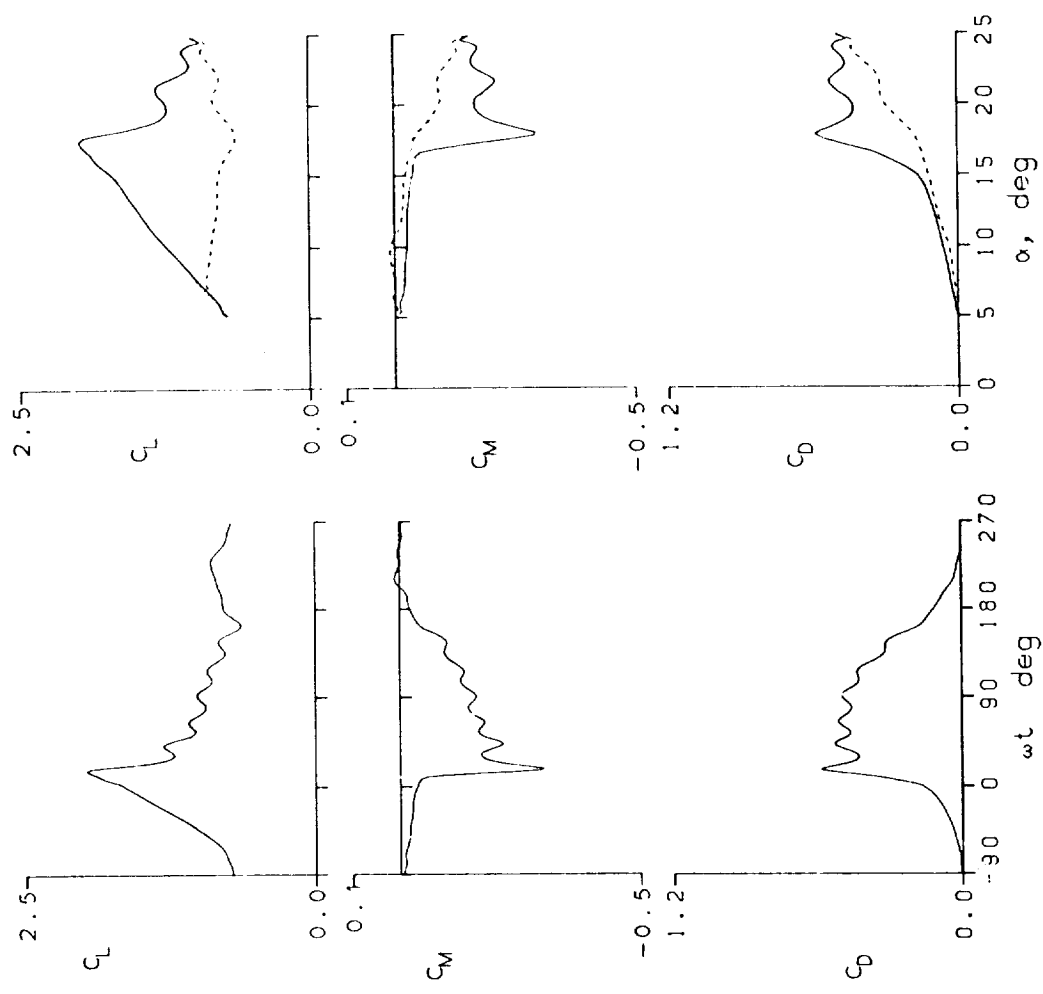


Figure 16.- Continued.

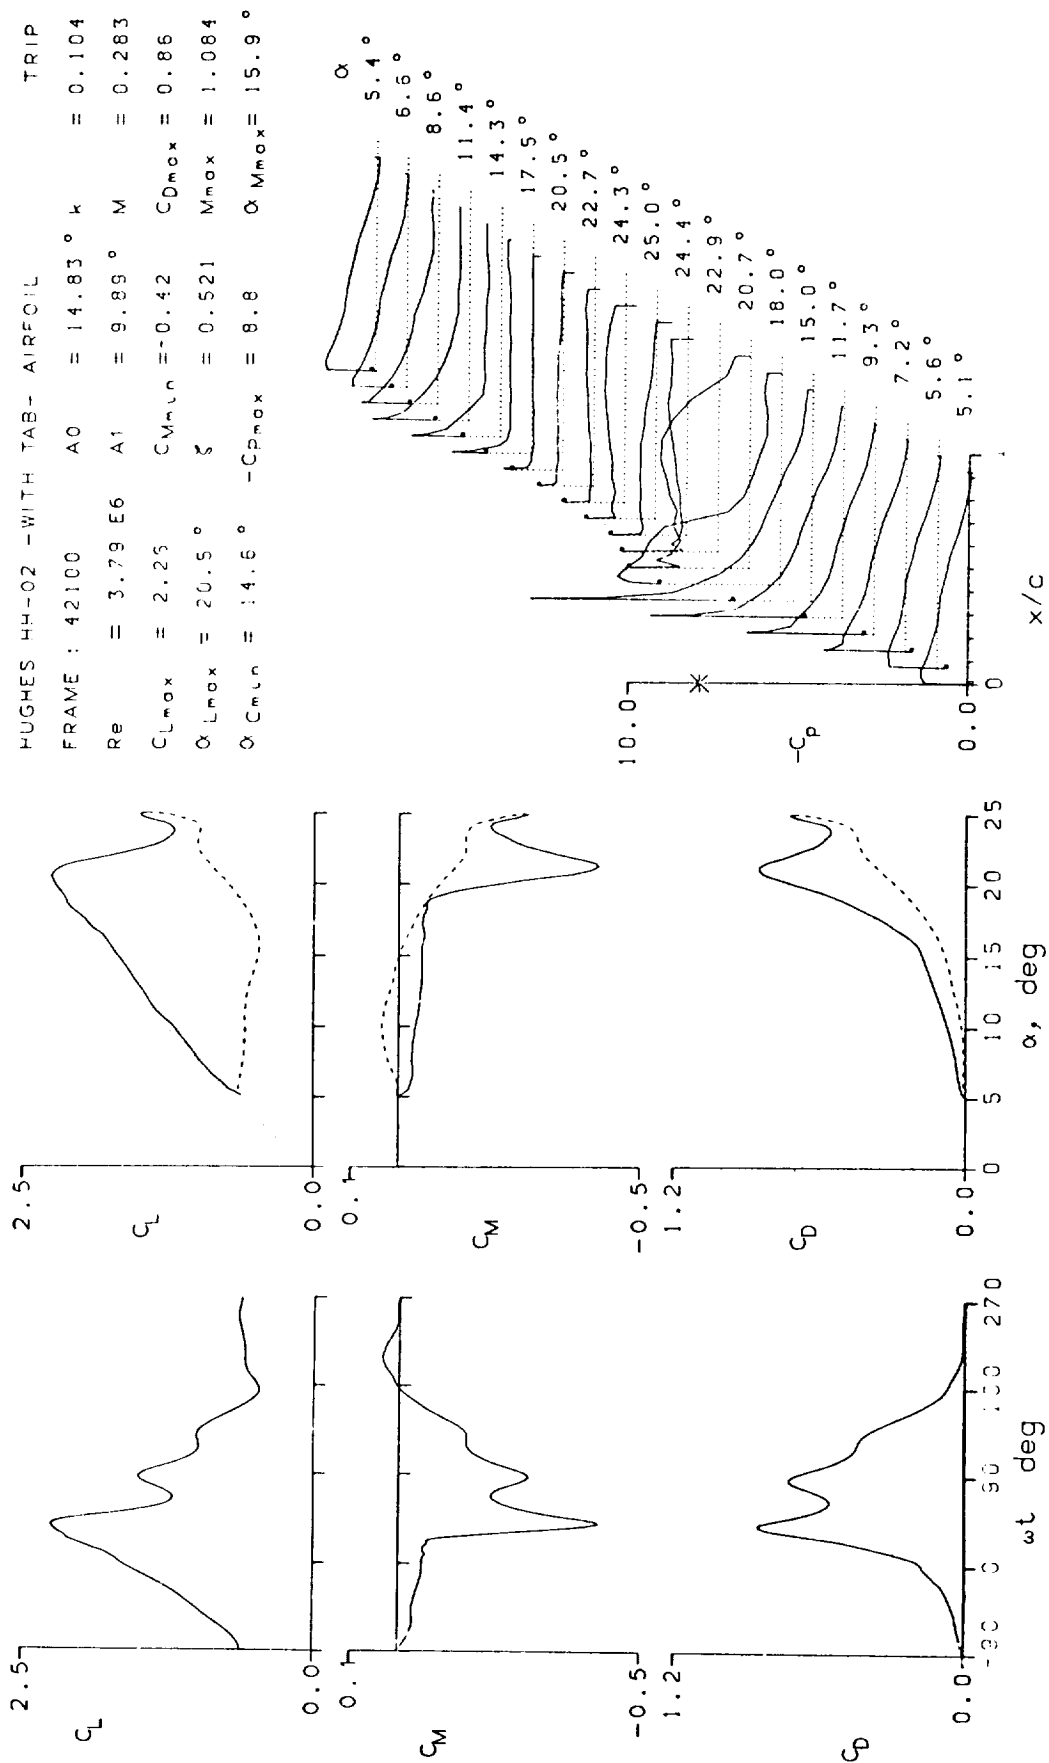


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL TRIP

FRAME : 42108 A0 = 14.83° k = 0.051

Re = 2.53 E6 A1 = 9.89° M = 0.183

C_{Lmax} = 2.07 C_{Mmin} = -0.31 C_{Dmax} = 0.67

α_{Lmax} = 13.2° ζ = 0.285 M_{max} = 0.699

α_{Cmin} = 14.5° $-C_{pmax}$ = 11.2 α_{Mmax} = 18.0°

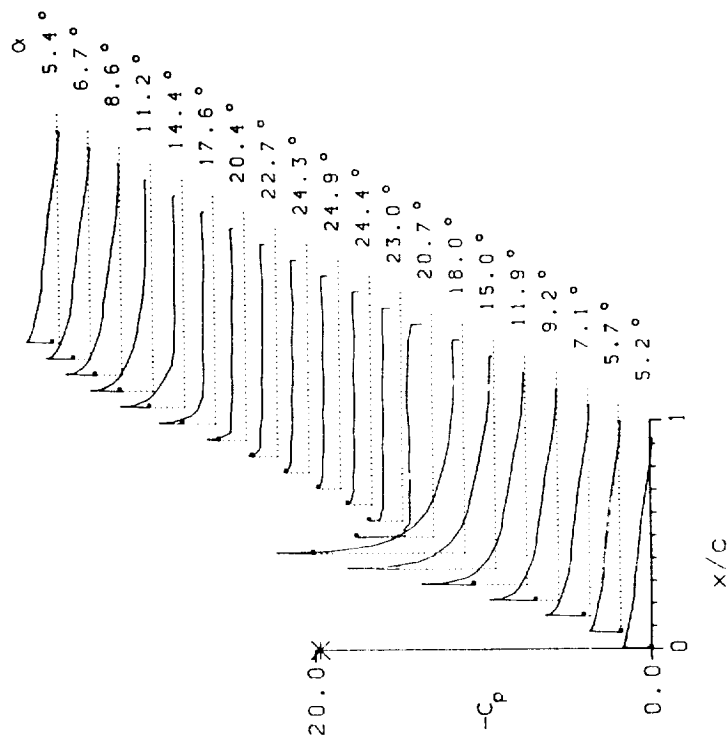
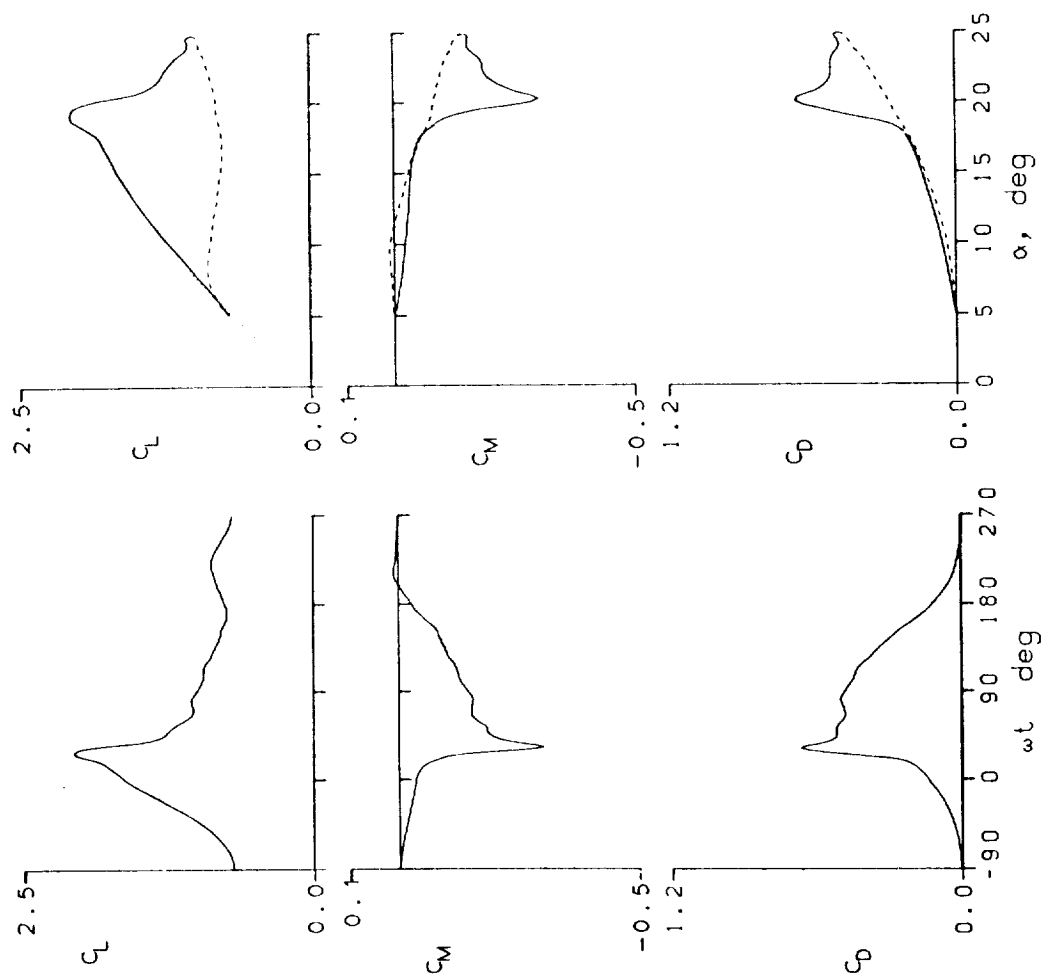


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL TRIP

FRAME : 42110 A0 = 14.82° k = 0.101

Re = 2.53 E6 A1 = 9.91° M = 0.183

$C_{Lmax} = 2.39$ $C_{Mmin} = -0.40$ $C_{Dmax} = 0.91$

$\alpha_{Lmax} = 20.8^\circ$ $\zeta = 0.404$ $M_{max} = 0.713$

$\alpha_{Cmin} = 14.5^\circ$ $-C_{Pmax} = 11.6$ $\alpha_{Mmax} = 18.9^\circ$

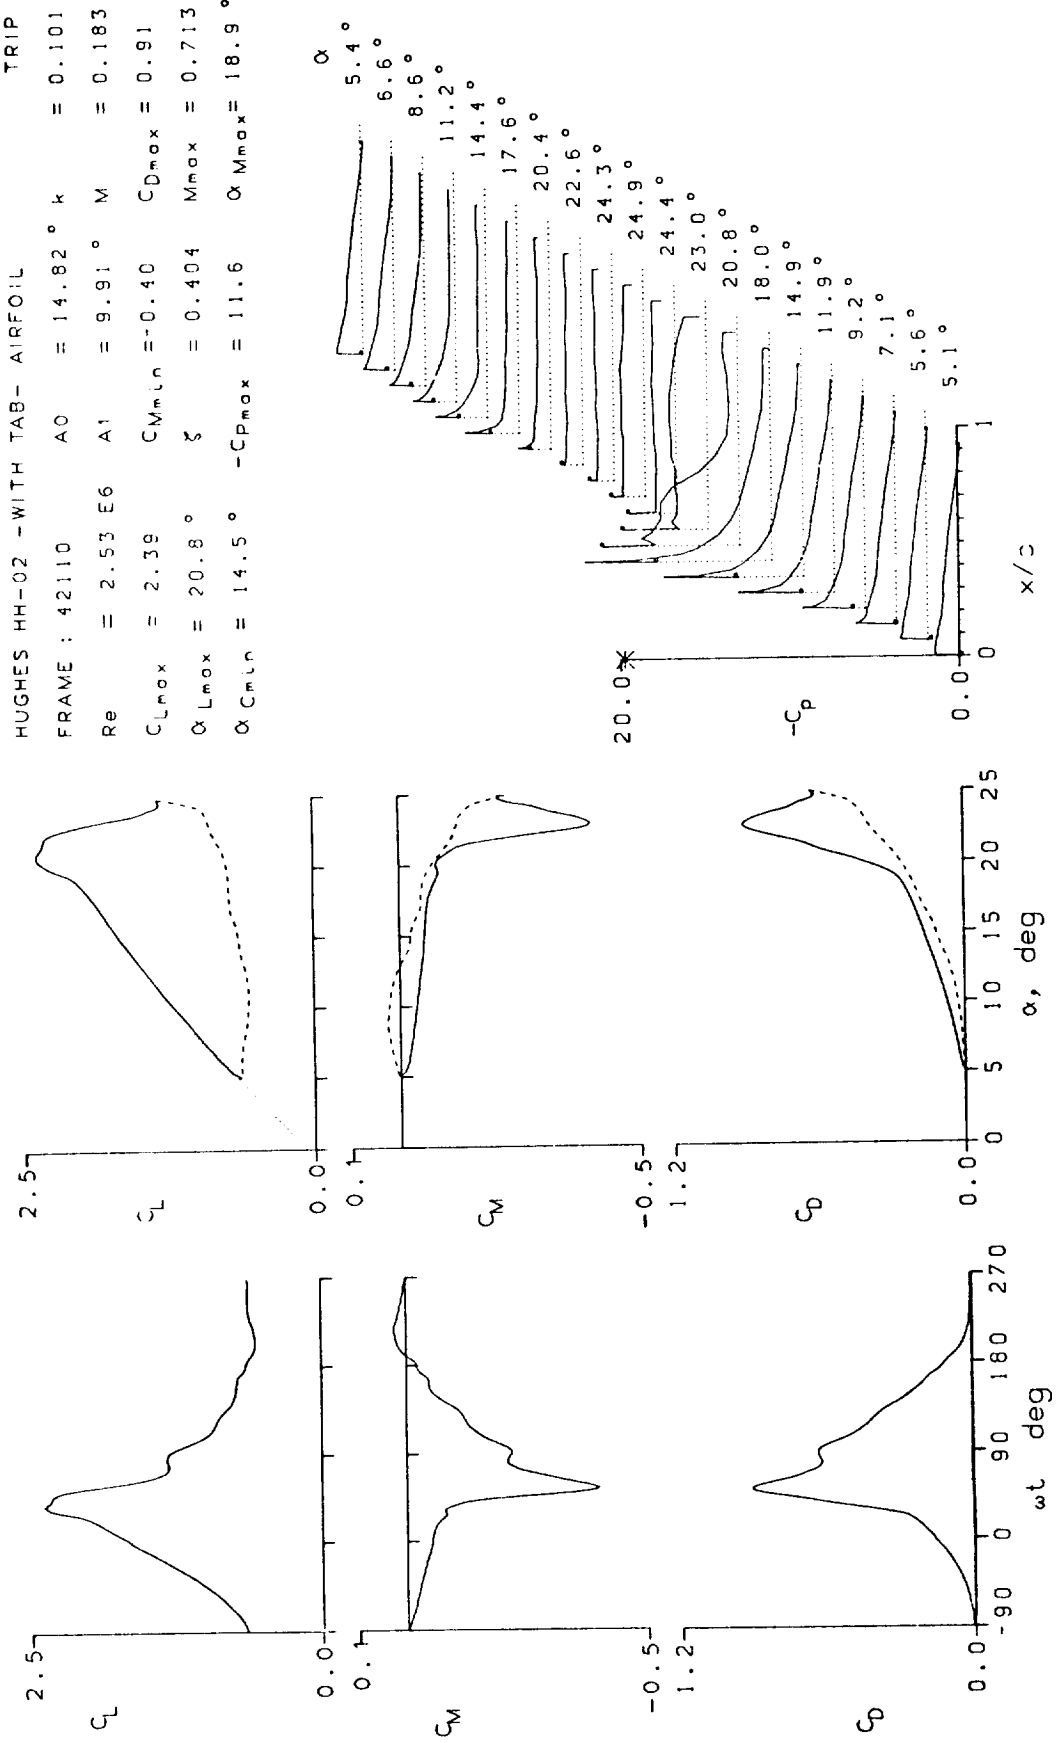


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL TRIP
 FRAME : 42113 AO = 14.84° k = 0.152
 Re = 2.53 E6 A1 = 9.88° M = 0.183
 CLmax = 2.61 CMmin = -0.46 CDmax = 1.09
 αLmax = 22.4° ζ = 0.286 Mmax = 0.724
 αCMmin = 14.5° -CDmax = 11.9 αMmax = 19.5°

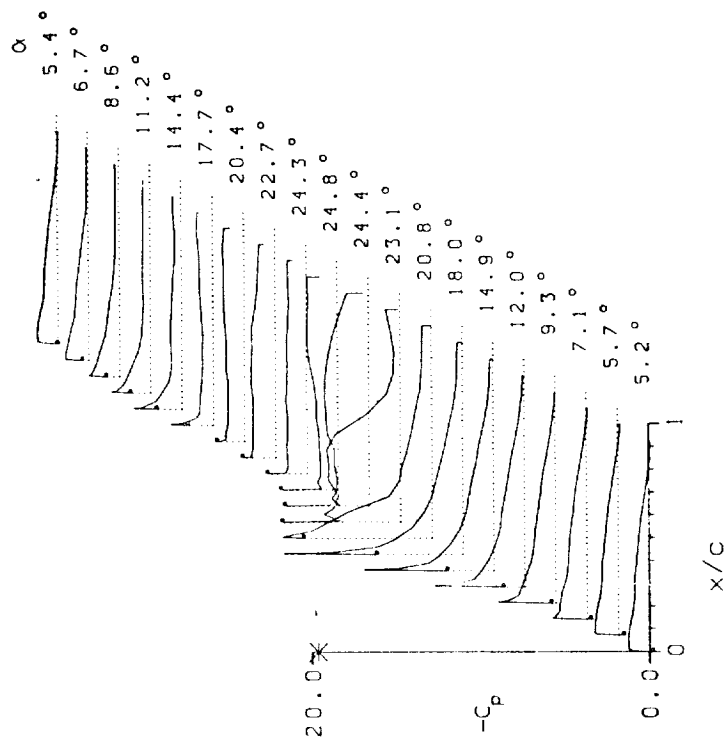
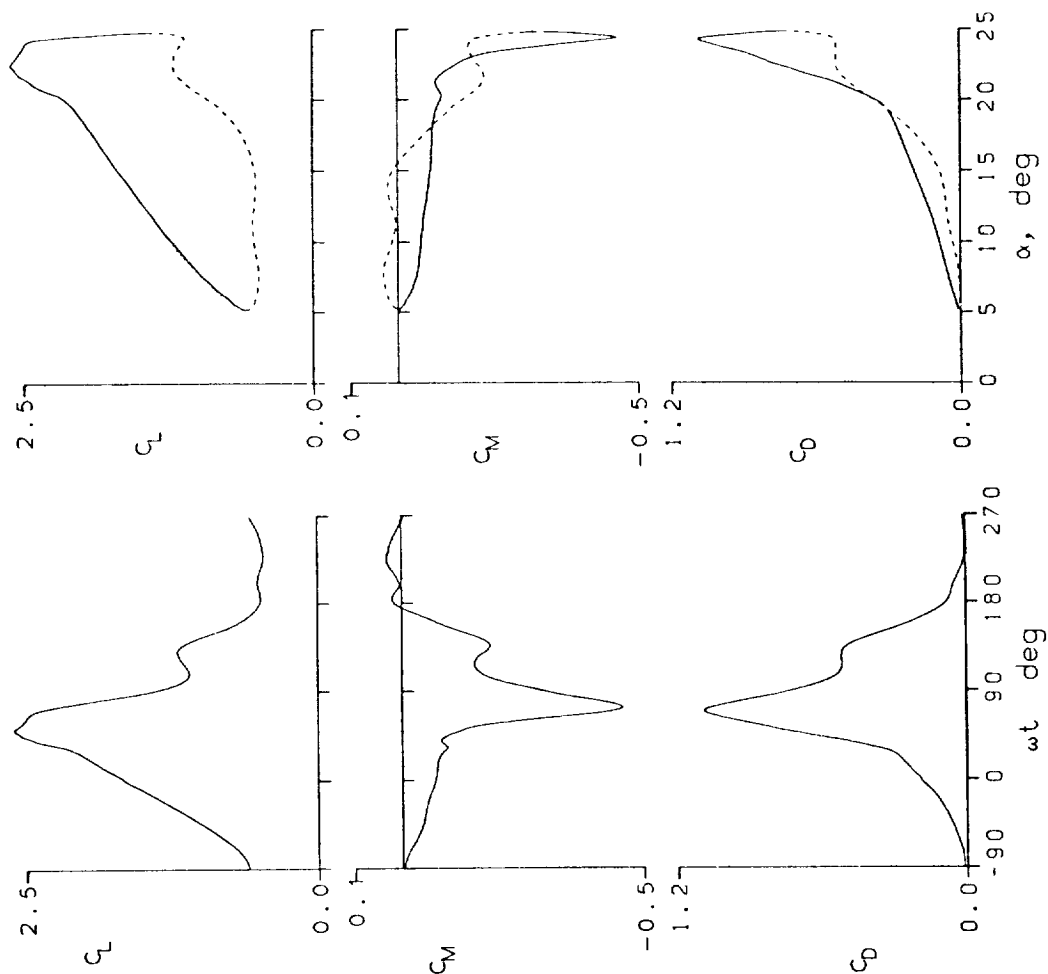


Figure 16.- Continued.

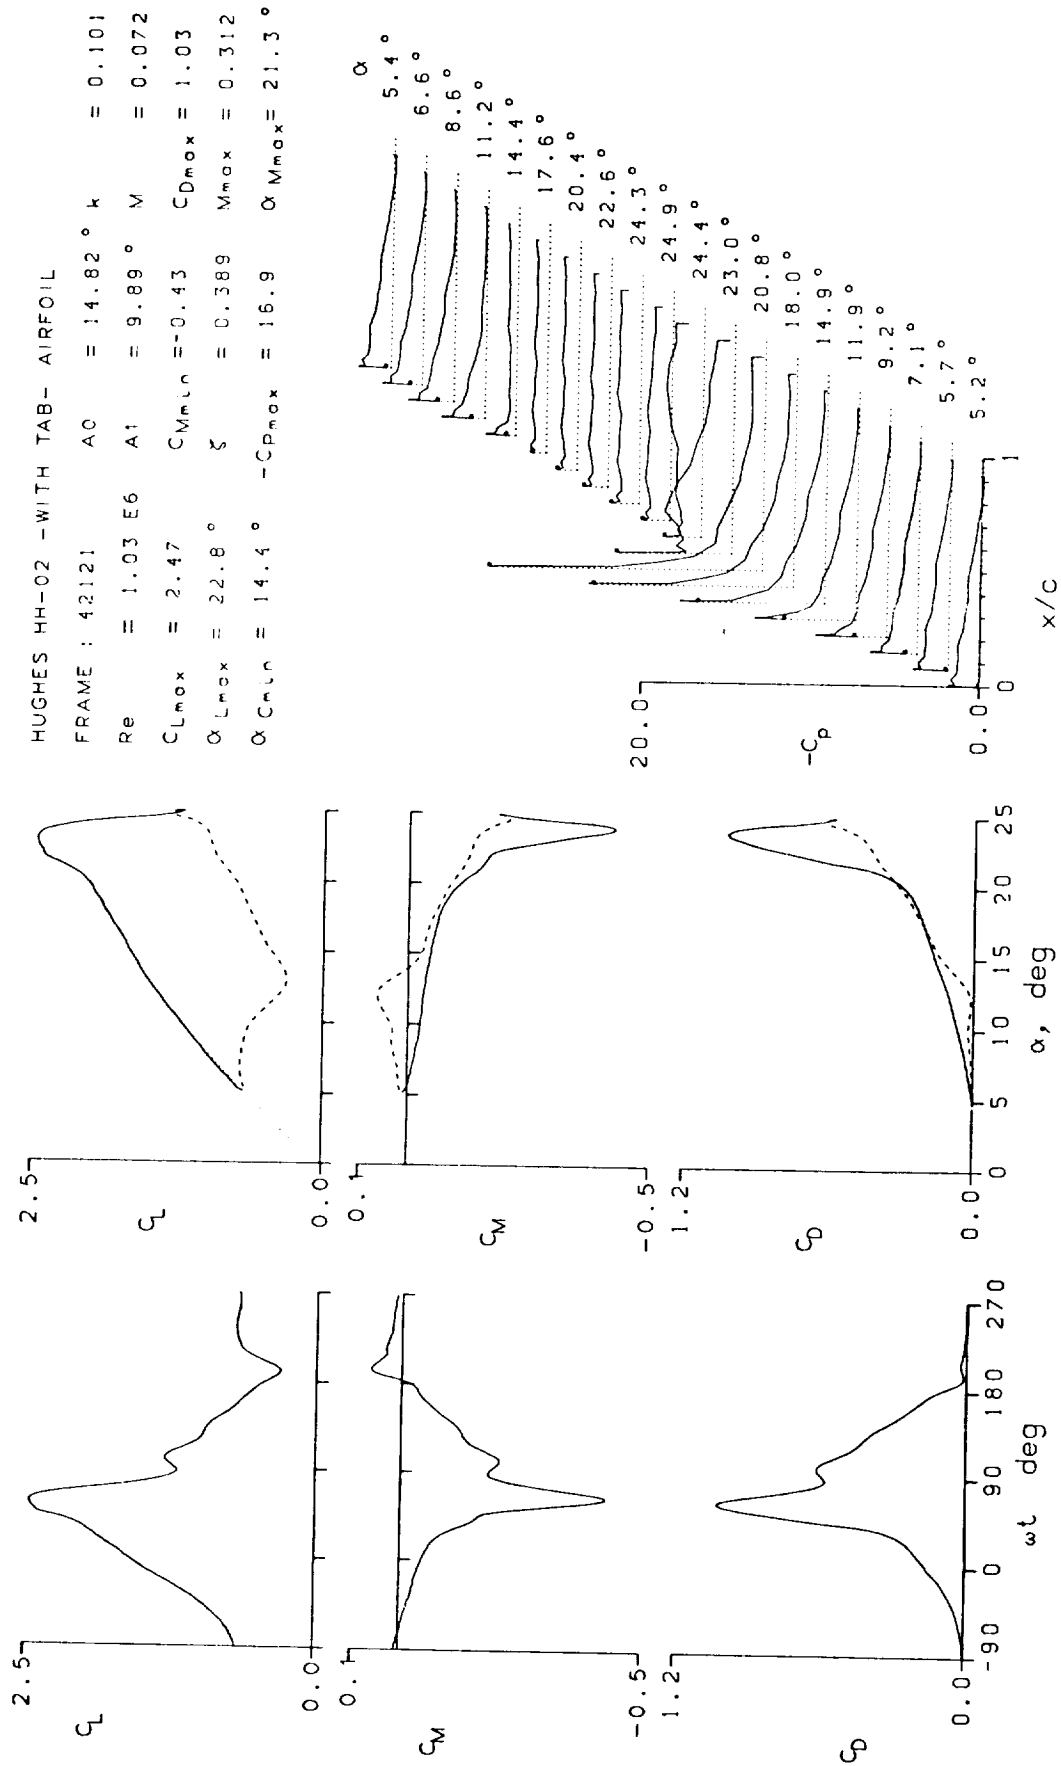


Figure 16.- Continued.

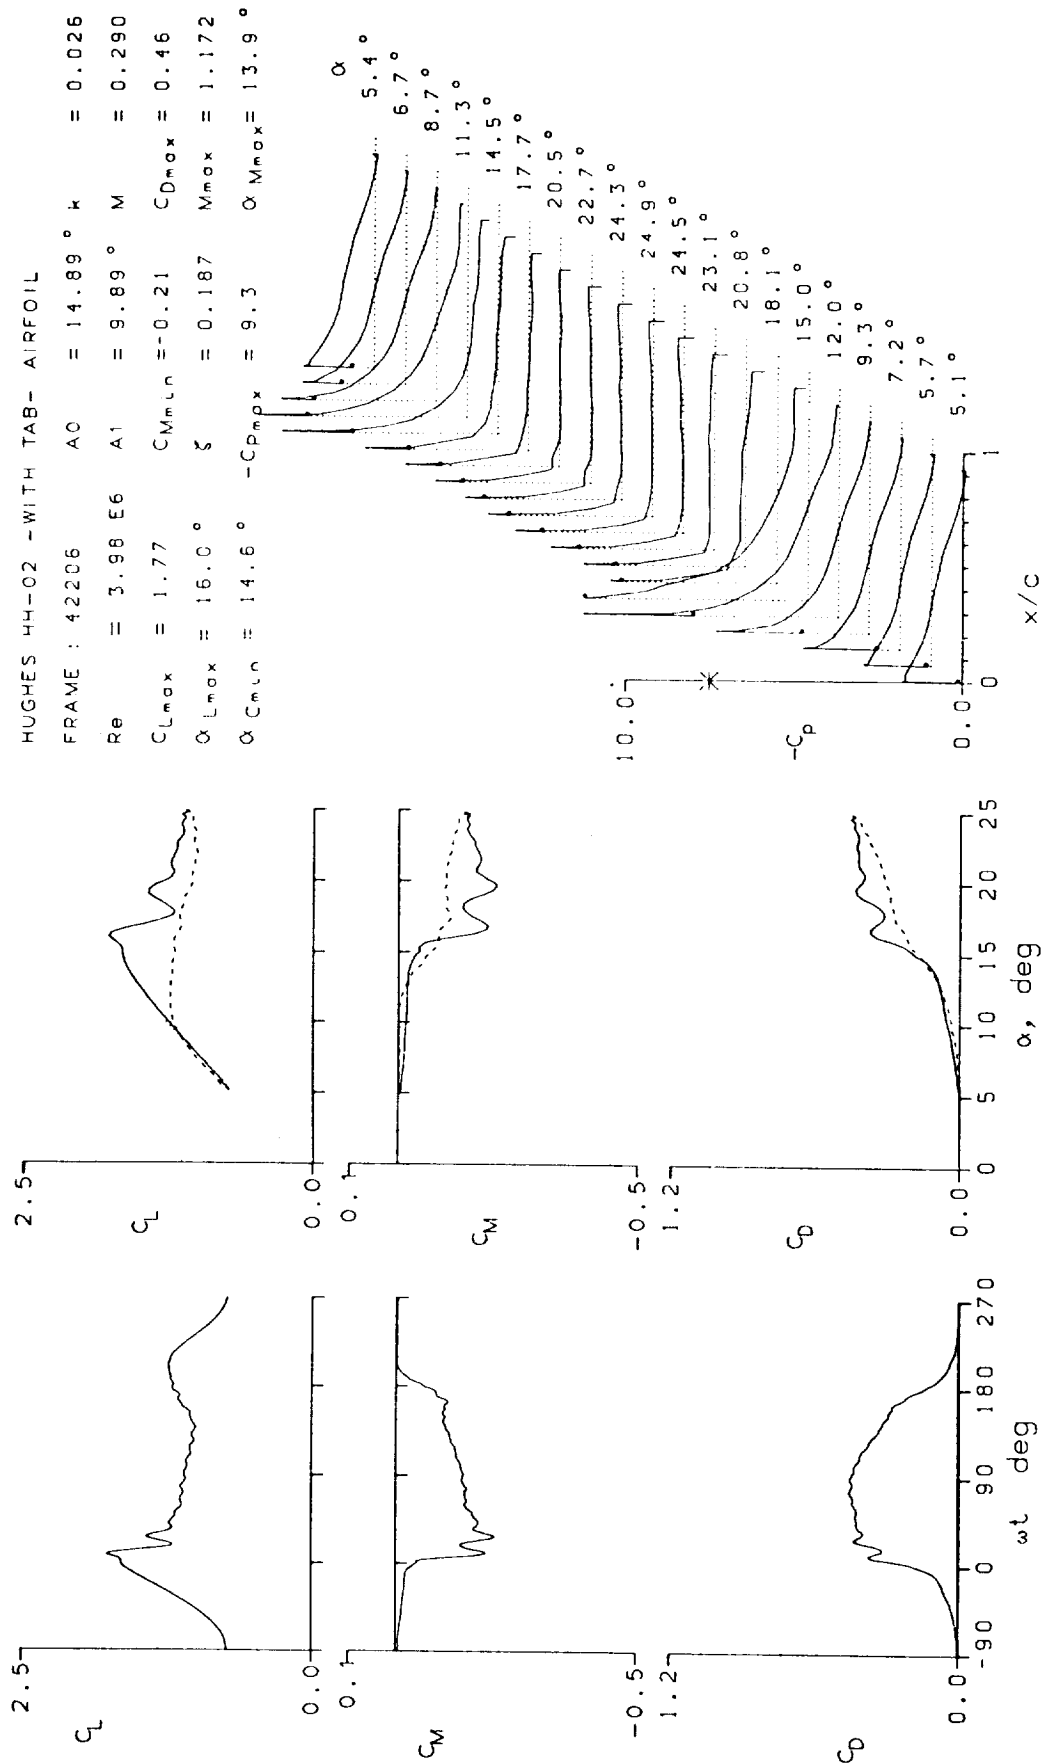


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 42208	A0 = 14.85 °	k = 0.051
Re = 3.98 E6	A1 = 9.89 °	M = 0.292
CLmax = 1.96	CMmin = -0.25	CDmax = 0.49
α Lmax = 17.5 °	ξ = 0.289	Mmax = 1.169
α CMmin = 14.5 °	-CDmax = 9.2	α Mmax = 14.2 °

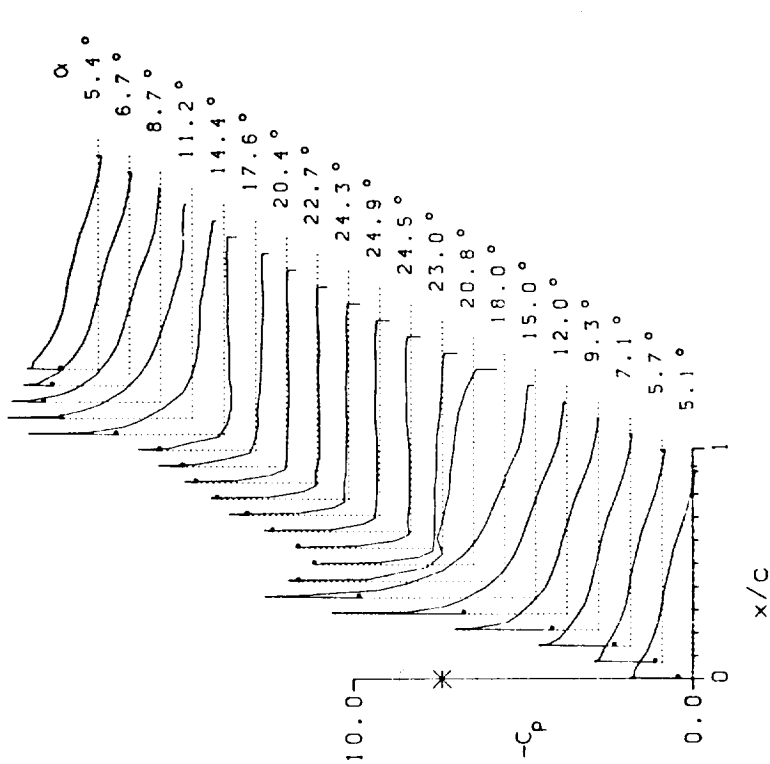
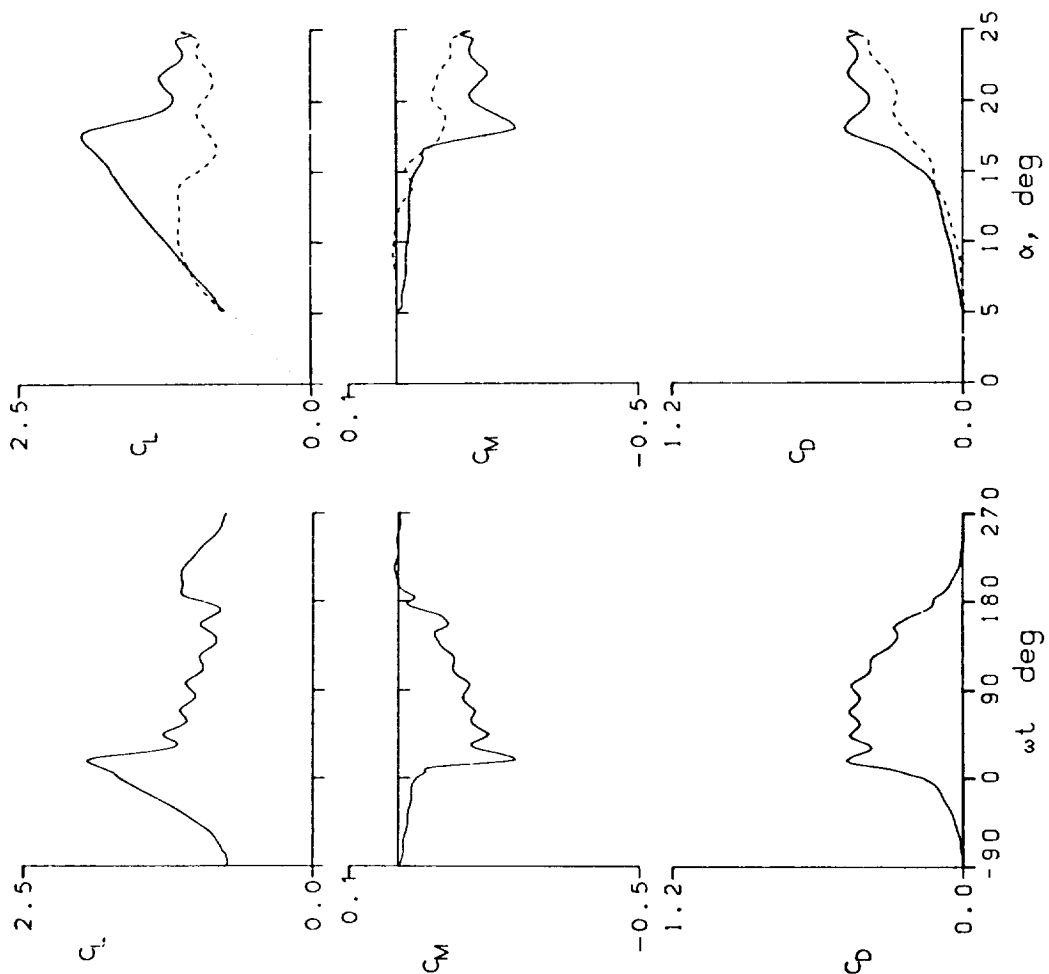


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 42210	A0 = 14.83°	k = 0.103
Re = 3.91 E6	A1 = 9.95°	M = 0.288
CLmax = 2.25	CMmin = -0.36	CDmax = 0.78
αLmax = 20.3°	ζ = 0.543	Mmax = 1.202
αCmin = 14.6°	-CDmax = 9.7	αMmax = 15.2°

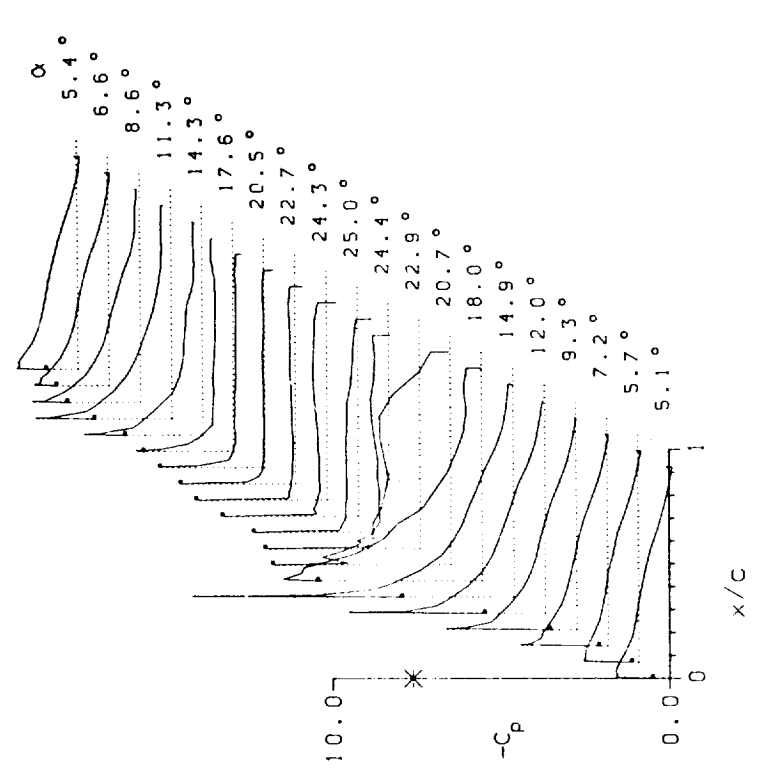
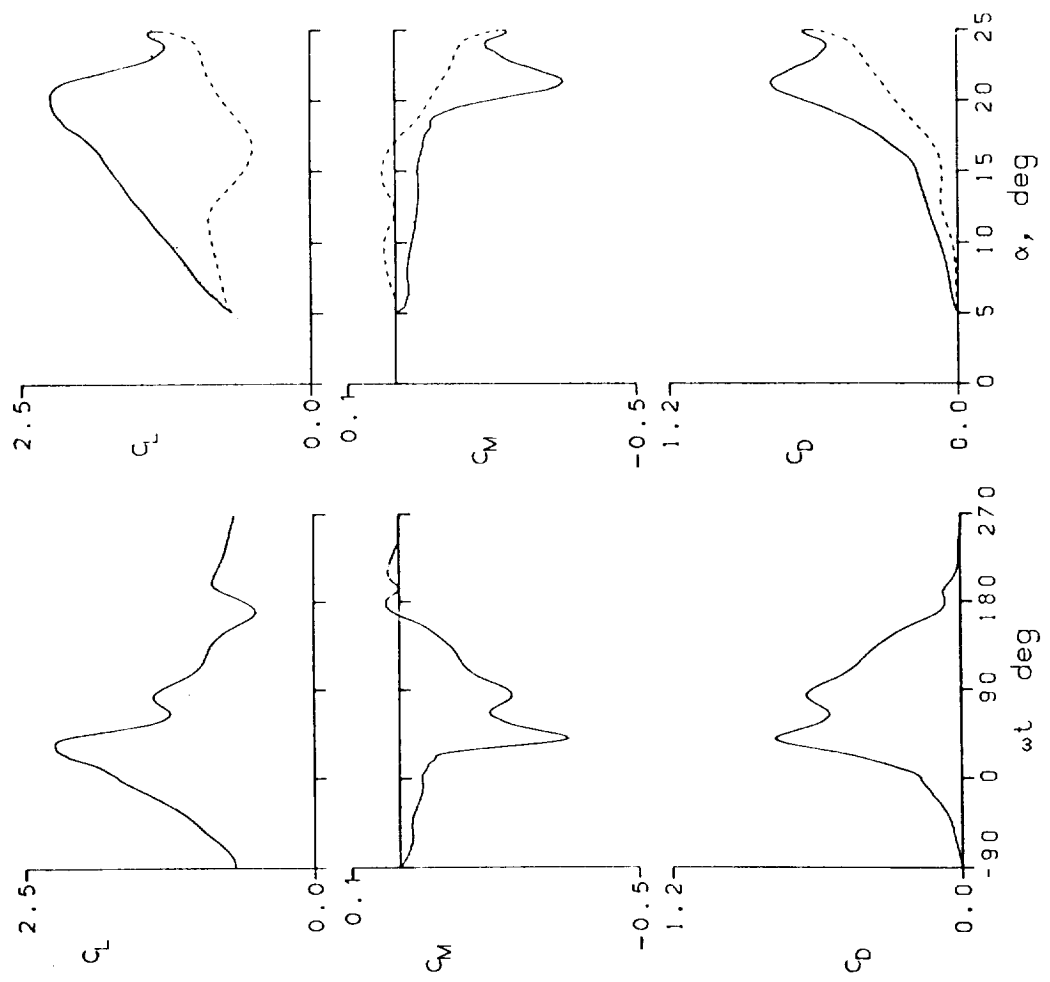


Figure 16.- Continued.

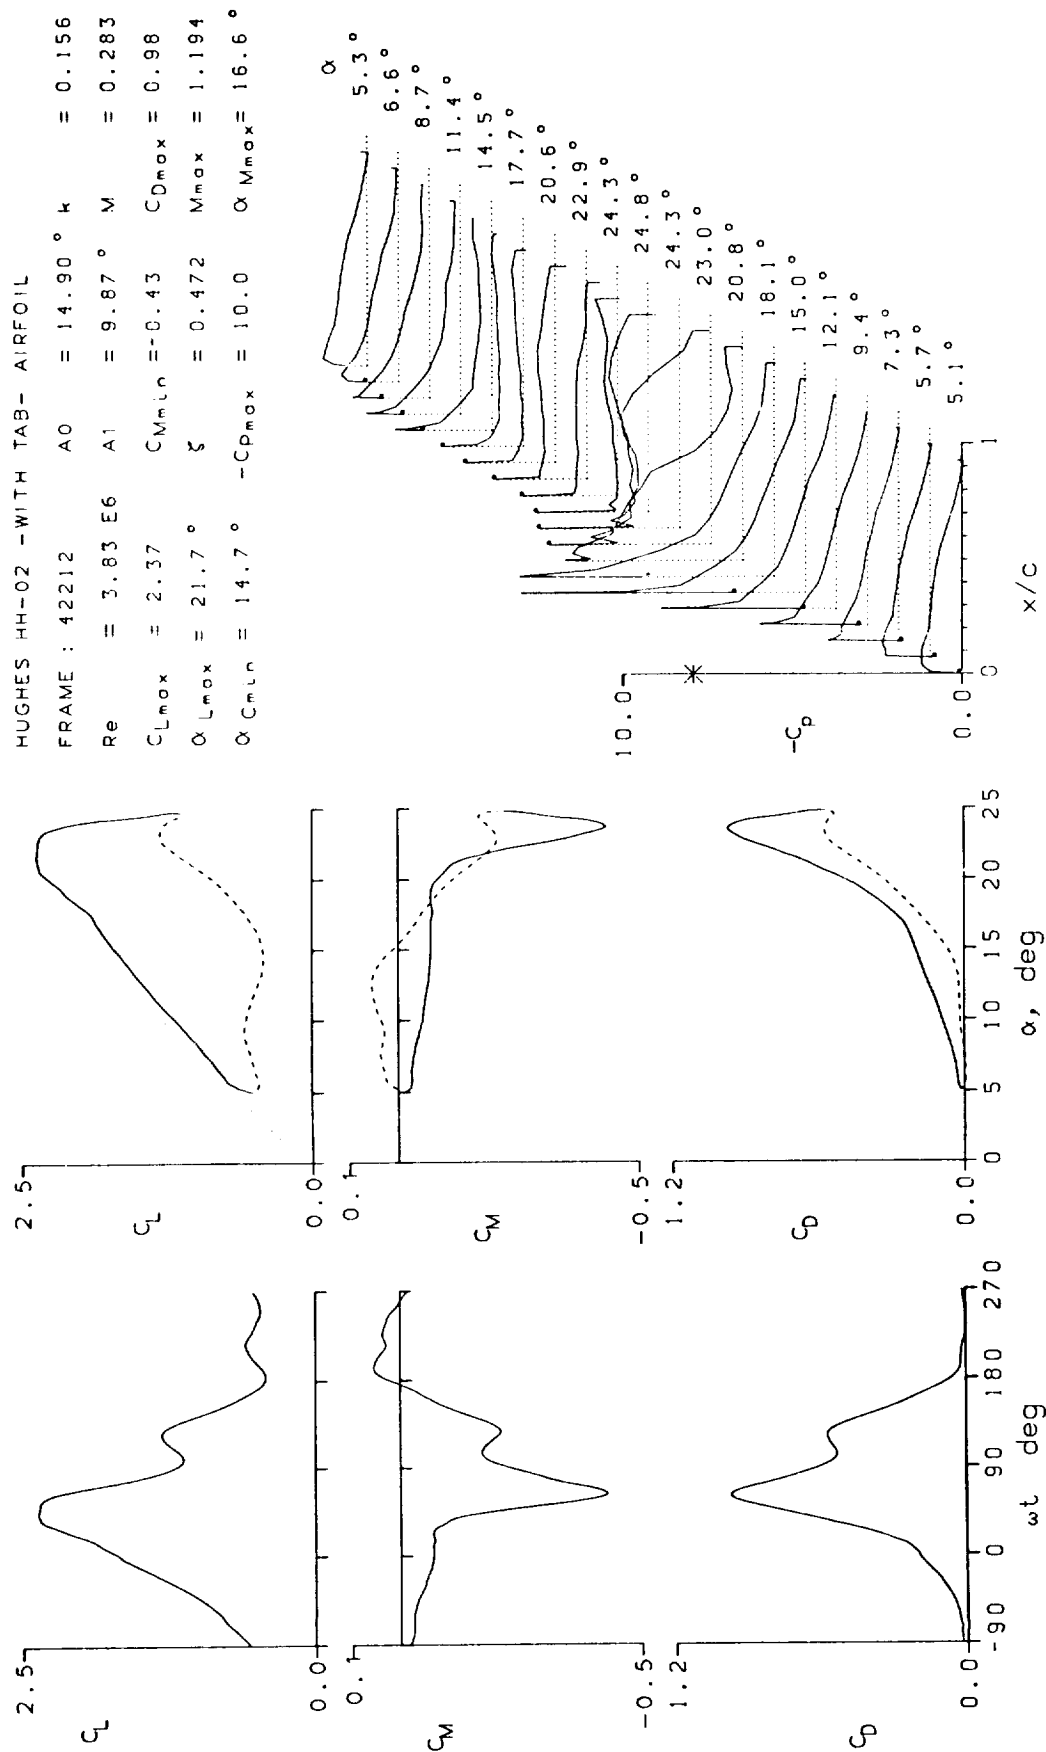
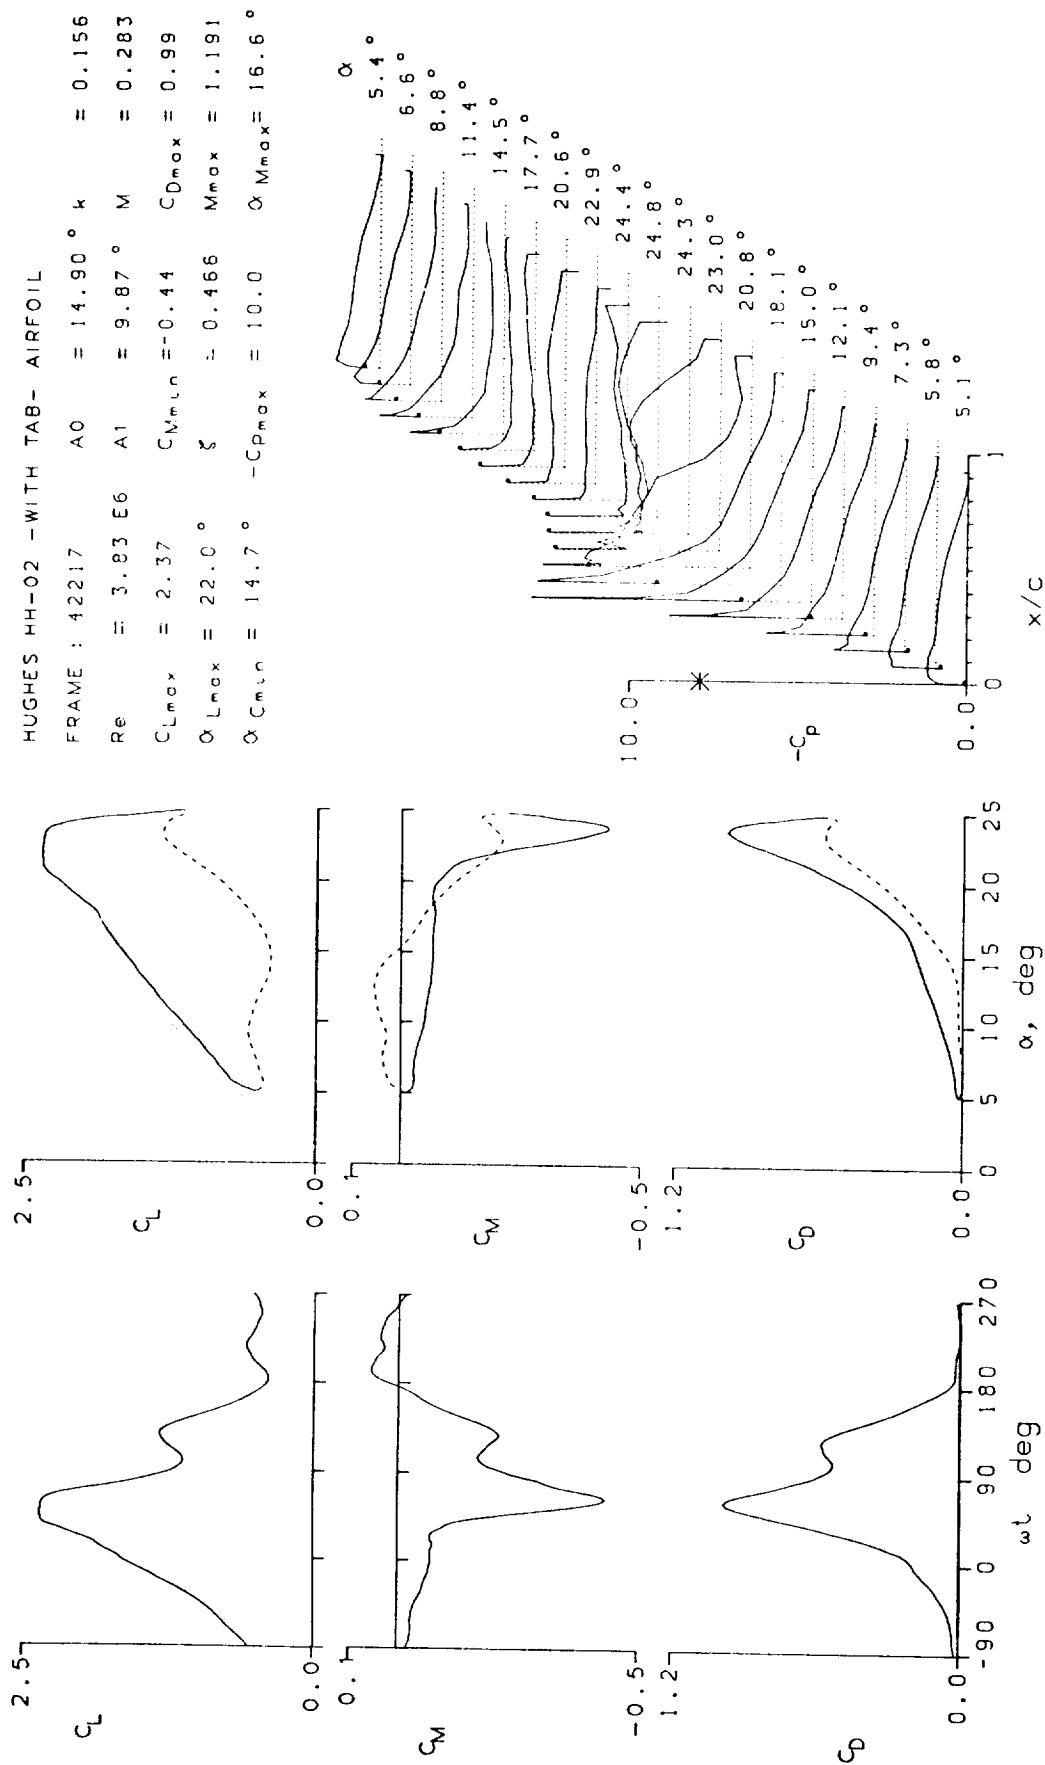


Figure 16.- Continued.



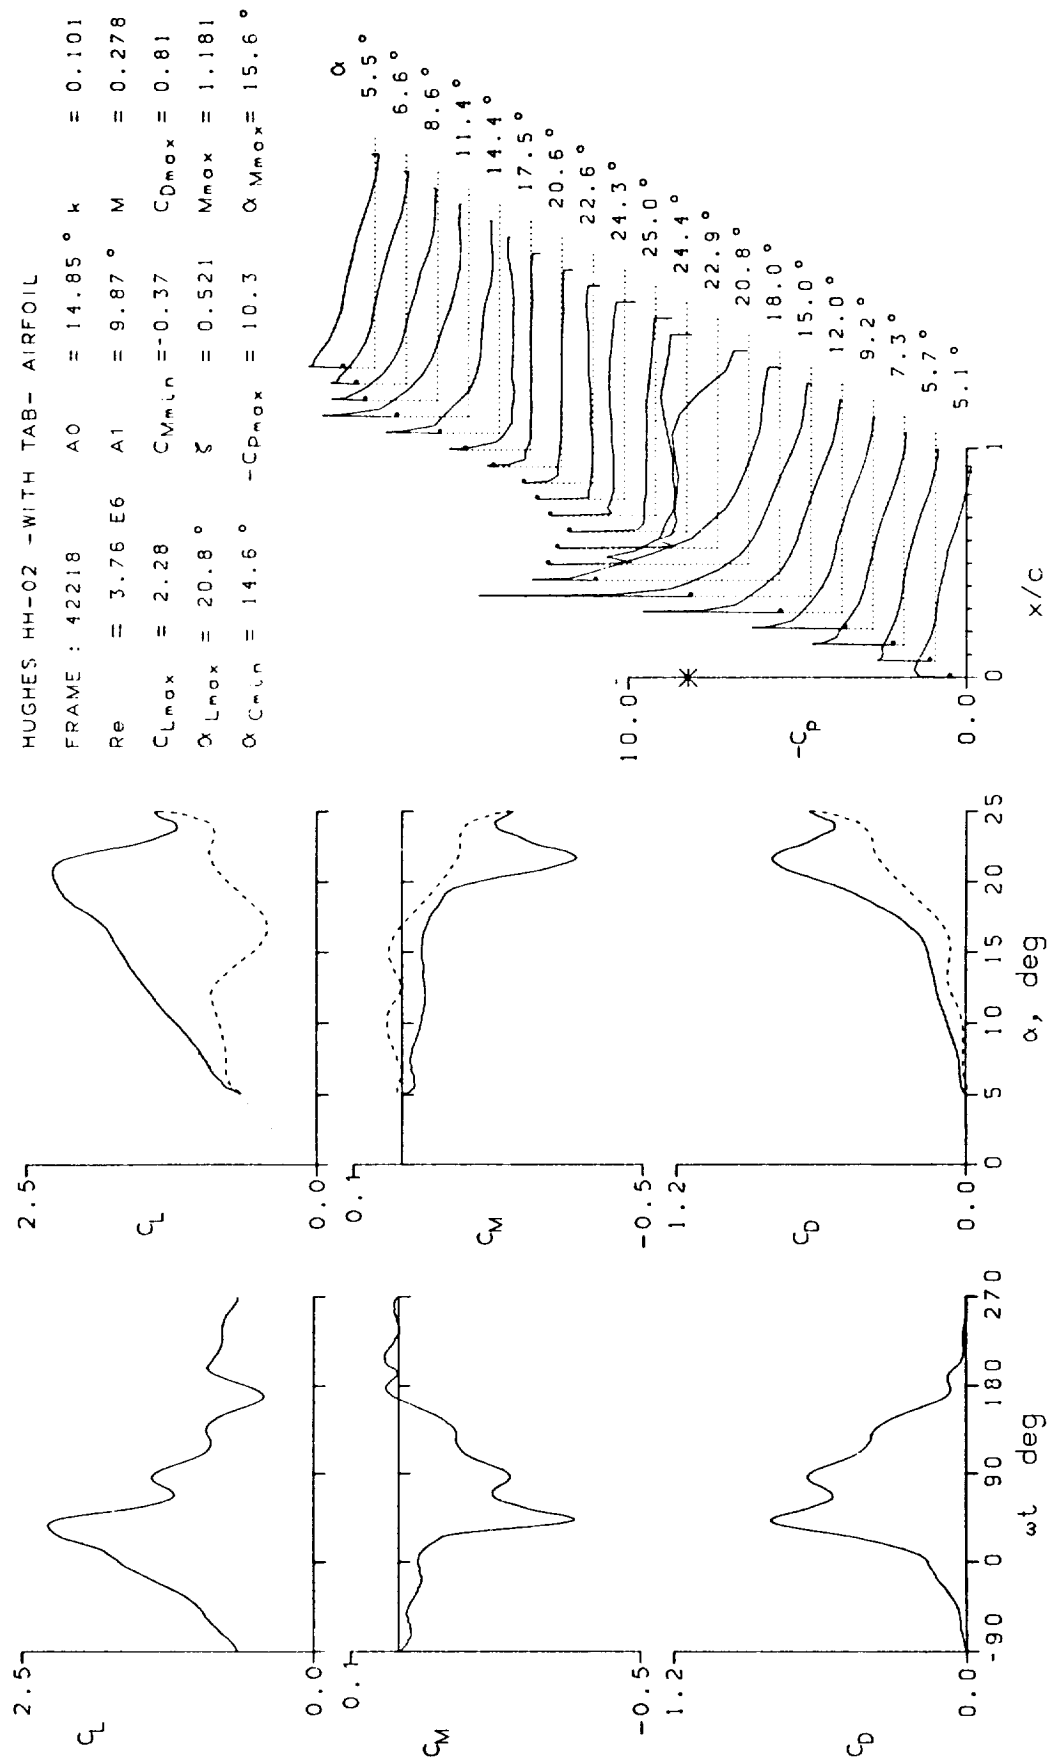


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 42302	A0 = 14.84 °	k = 0.101
Re = 2.53 E6	A1 = 9.89 °	M = 0.183
CLmax = 2.55	CMmin = -0.38	CDmax = 0.95
αLmax = 22.9 °	ξ = 0.299	Mmax = 0.902
αCMmin = 14.5 °	-CDmax = 16.9	αMmax = 20.8 °

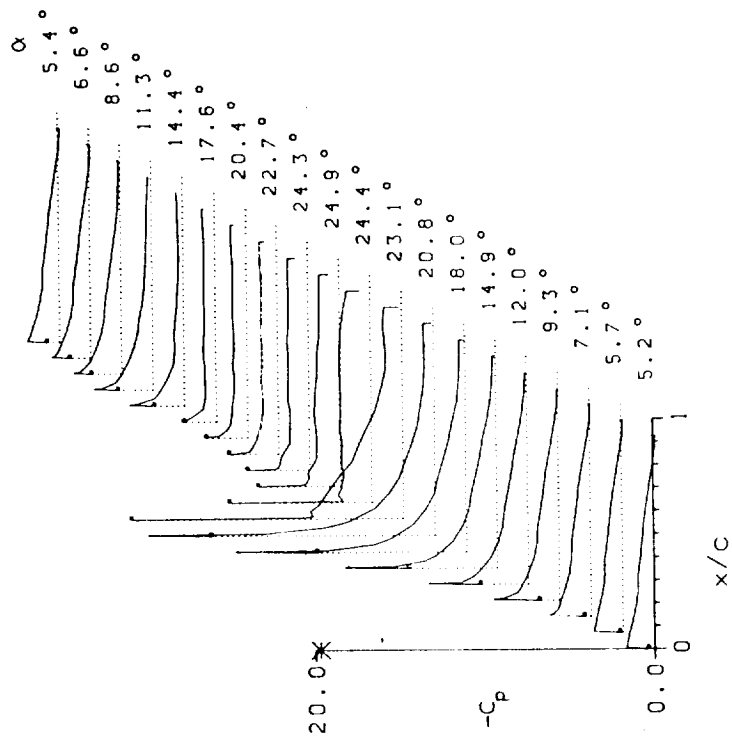
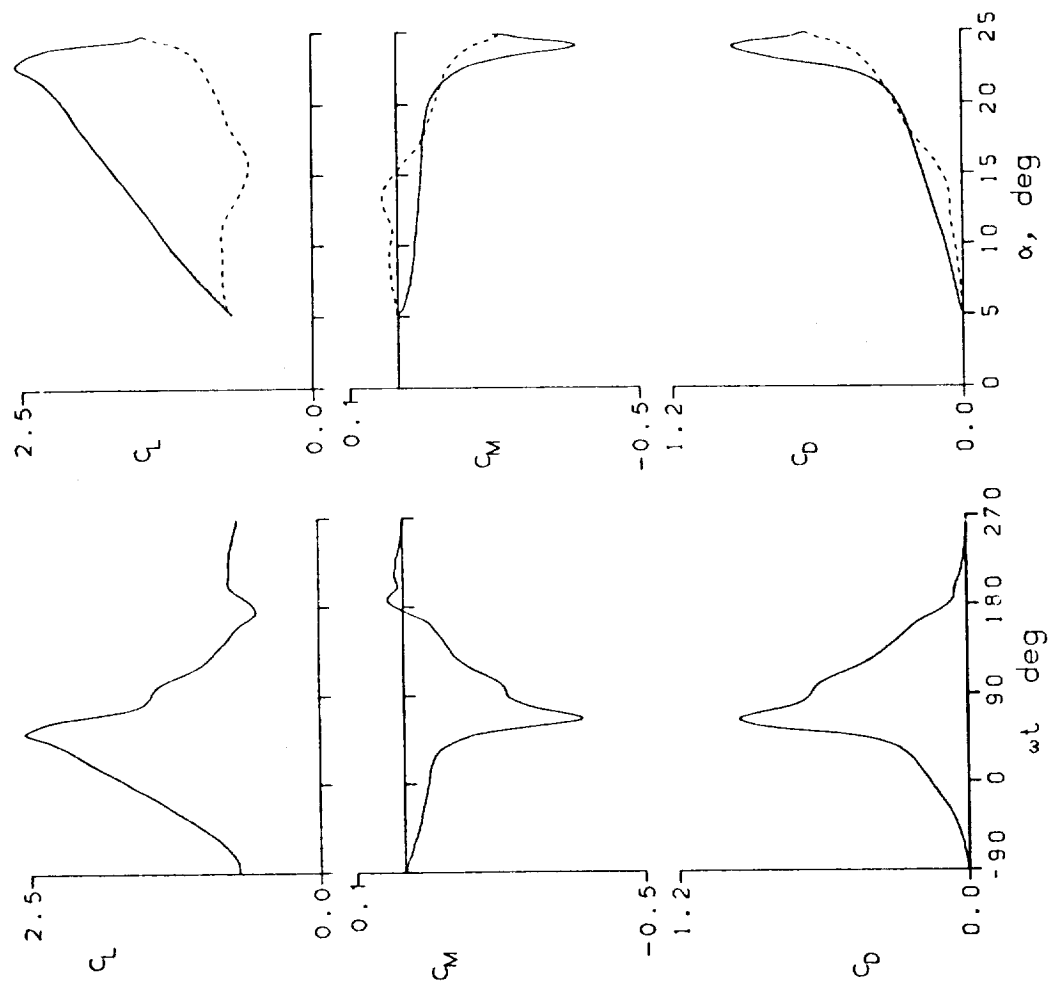


Figure 16.- Continued.

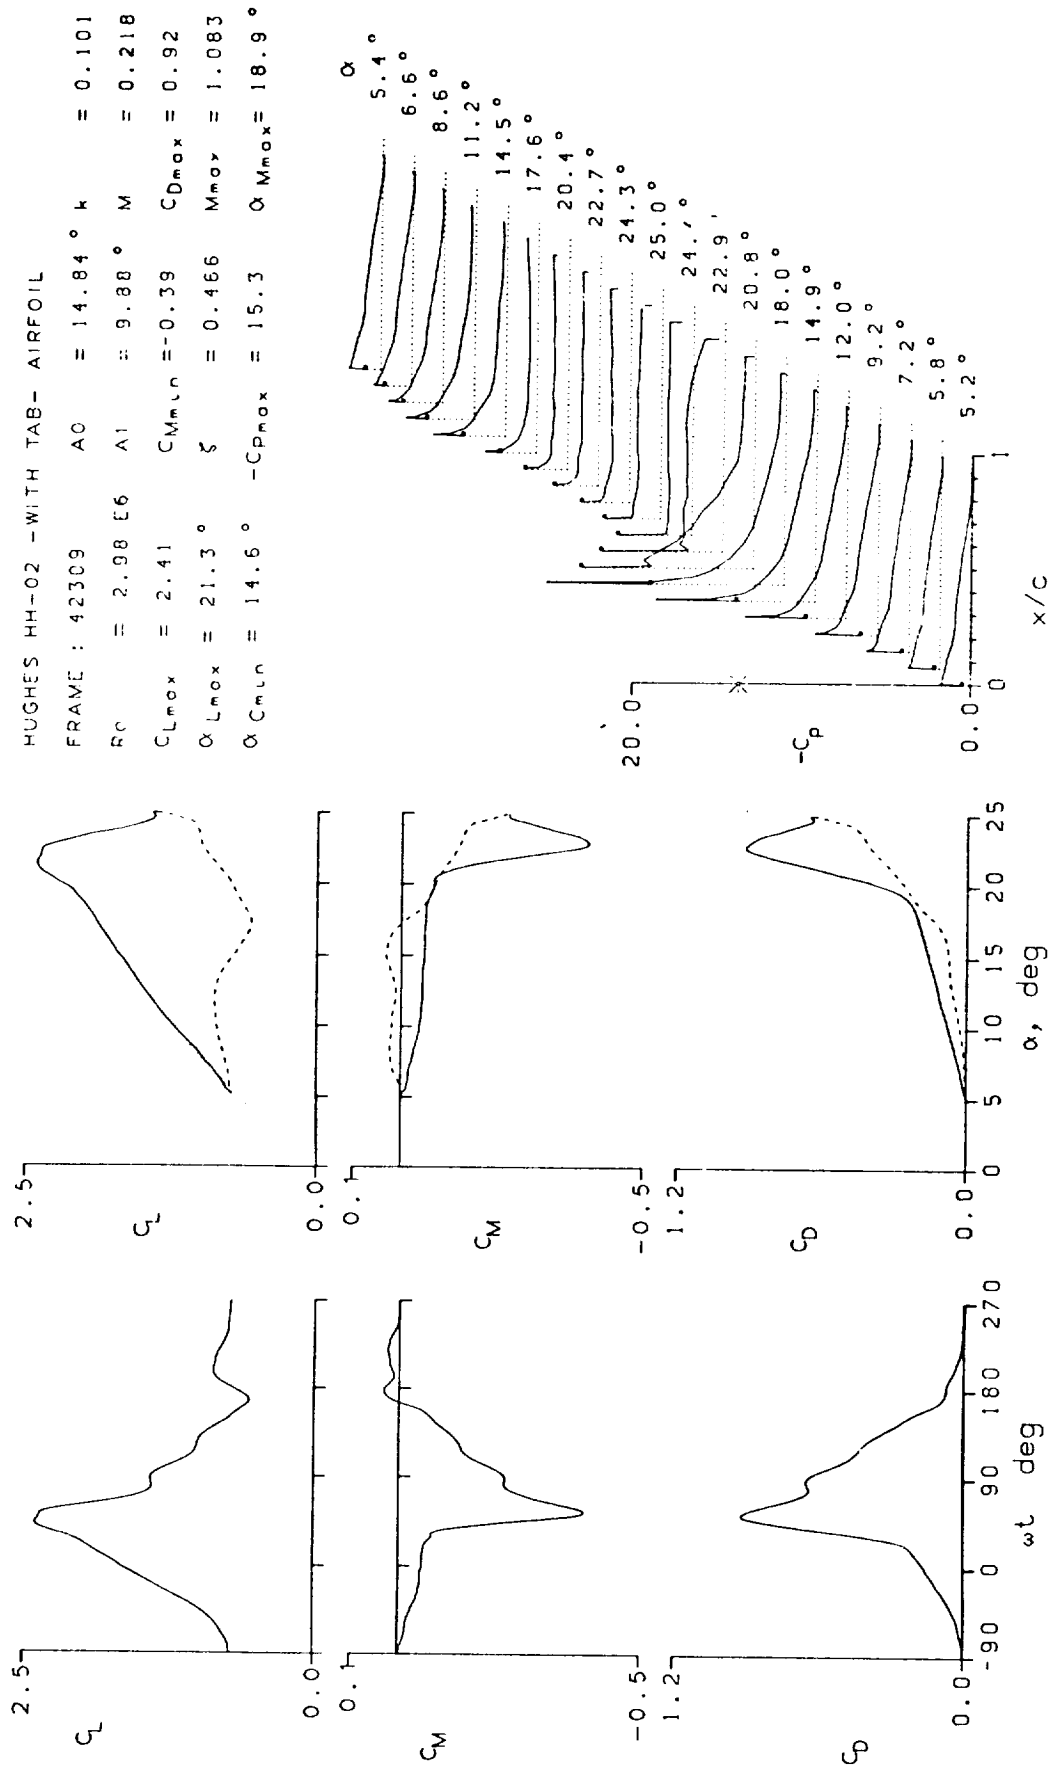


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 42313 $A_0 = 14.86^\circ$ $k = 0.101$
 $Re = 3.33 \text{ E}6$ $A_1 = 9.86^\circ$ $M = 0.246$
 $C_{Lmax} = 2.30$ $C_{Mmin} = -0.38$ $C_{Dmax} = 0.86$
 $\alpha_{Lmax} = 20.1^\circ$ $\xi = 0.487$ $M_{max} = 1.109$
 $\alpha_{Cmin} = 14.5^\circ$ $-C_{pmax} = 12.2$ $\alpha_{Mmax} = 17.5^\circ$



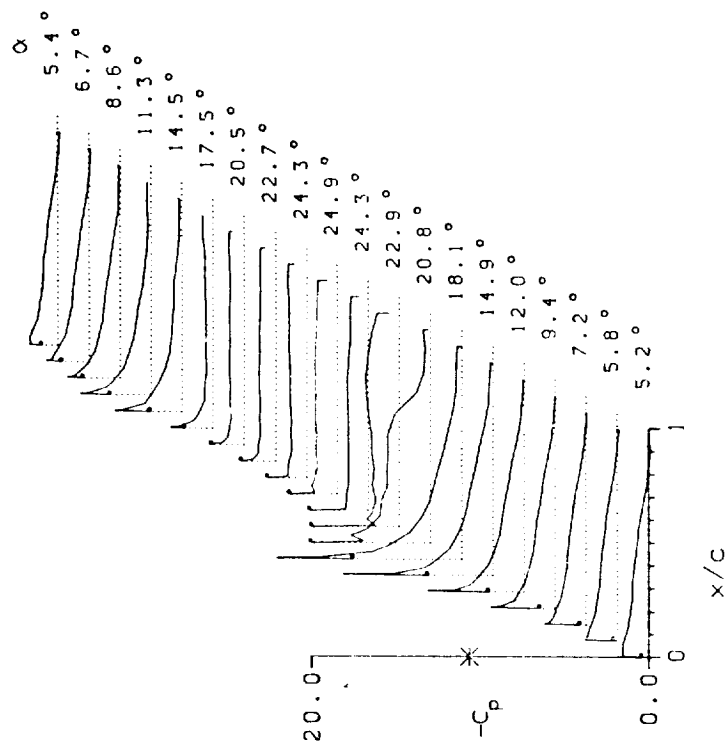


Figure 16.- Continued.

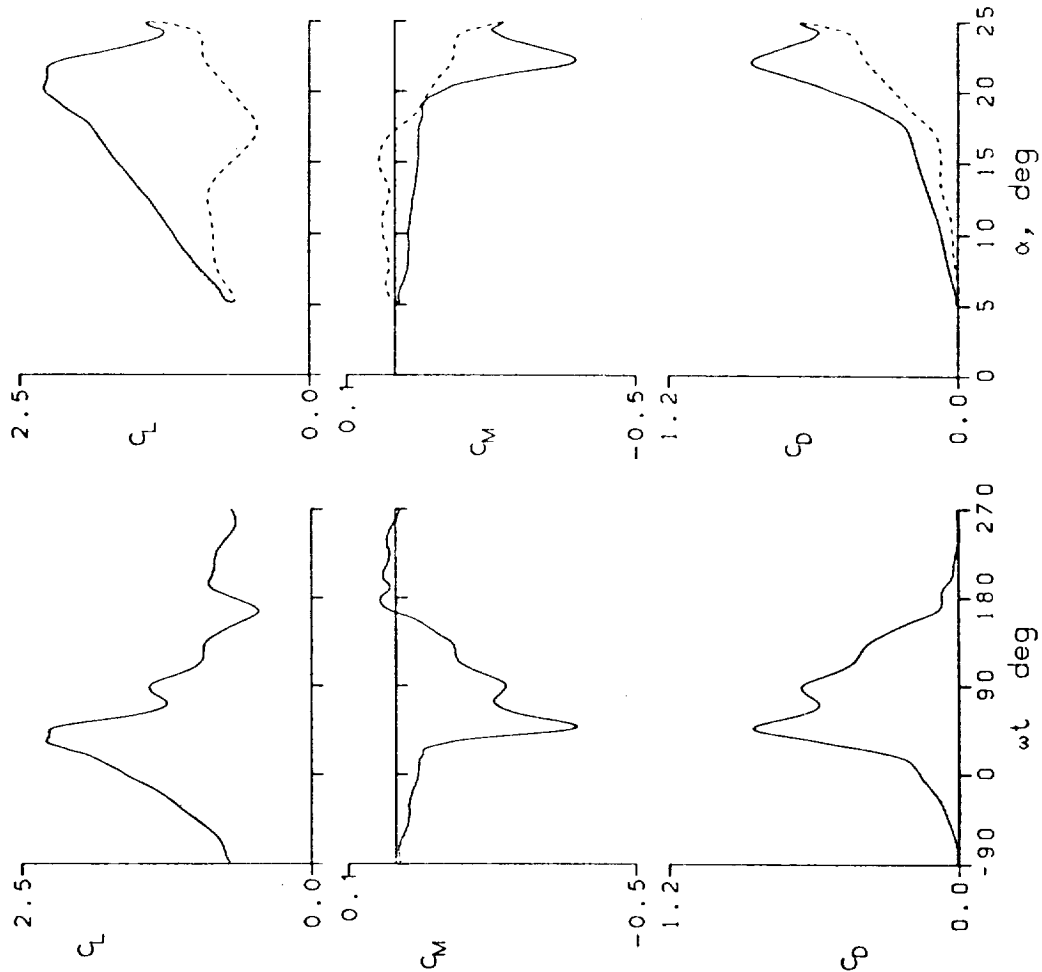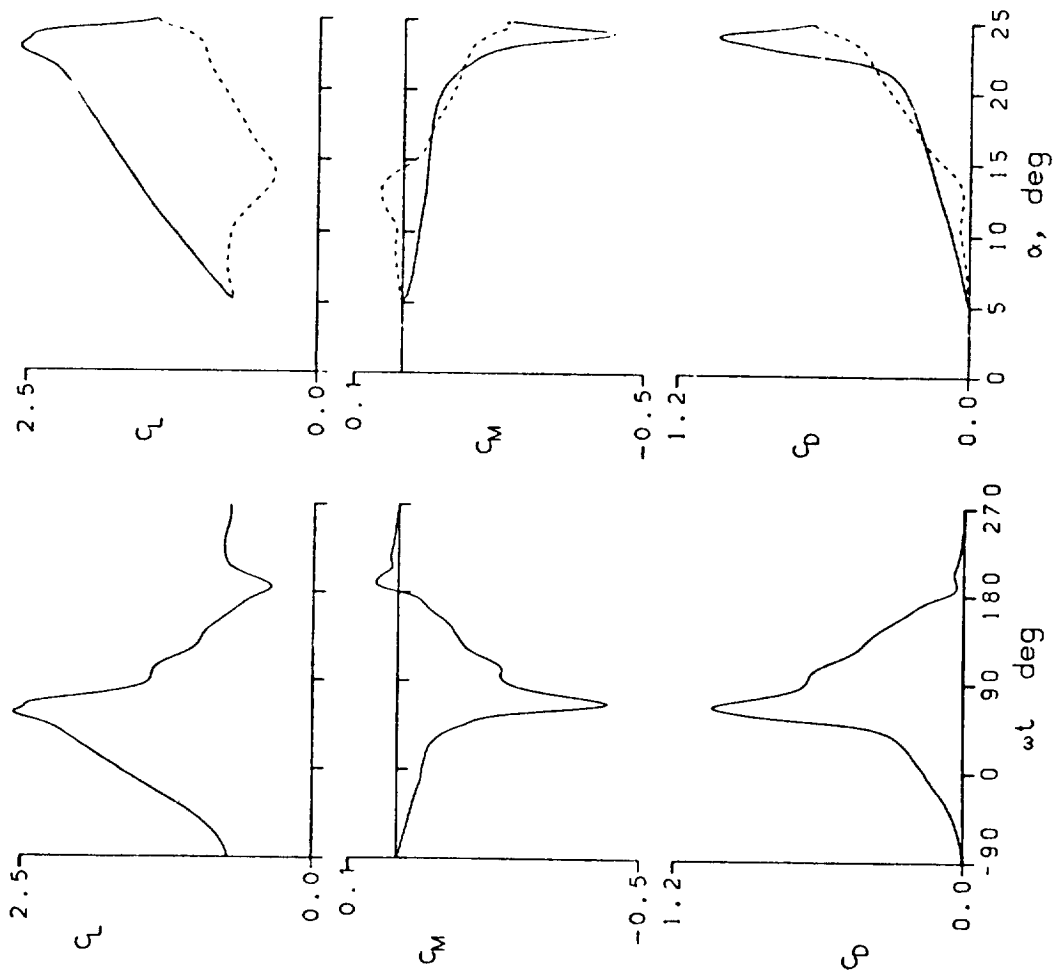

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 42321 $A0 = 14.82^\circ$ $k = 0.101$
 $Re = 1.51 \text{ E}6$ $A1 = 9.84^\circ$ $M = 0.108$
 $C_{Lmax} = 2.58$ $C_{Mmin} = -0.44$ $C_{Dmax} = 1.05$
 $\alpha_{Lmax} = 22.8^\circ$ $\xi = 0.288$ $M_{max} = 0.502$
 $\alpha_{Cmin} = 14.4^\circ$ $-C_{Dmax} = 18.5$ $\alpha_{Mmax} = 22.3^\circ$

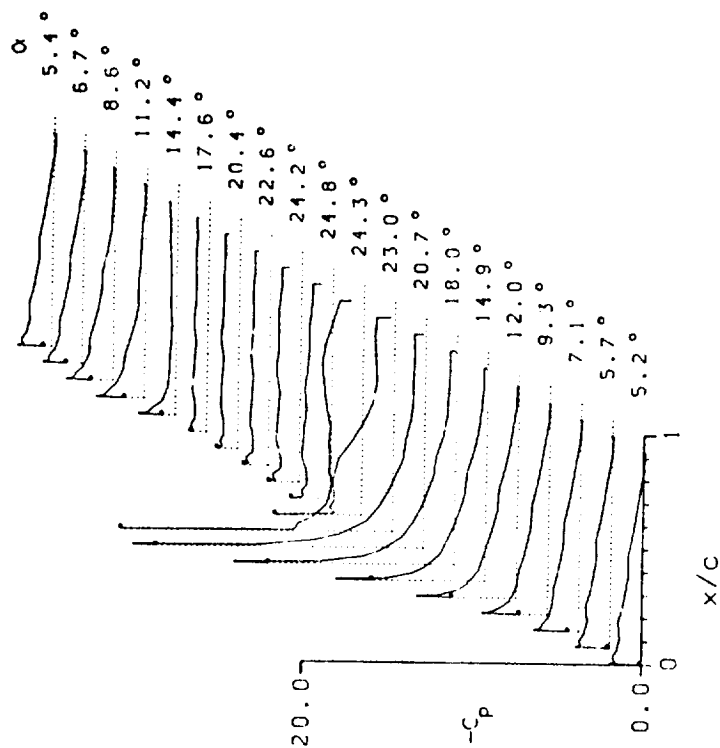


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 43019	A0 = 9.57 °	k = 0.010
Re = 3.90 E6	A1 = 10.04 °	M = 0.297
$C_{L_{max}} = 1.53$	$C_{M_{min}} = -0.12$	$C_{D_{max}} = 0.30$
$\alpha_{L_{max}} = 12.8 °$	$\xi = 0.042$	$M_{max} = 1.177$
$\alpha_{C_{min}} = 9.1 °$	$-C_{D_{max}} = 8.9$	$\alpha_{M_{max}} = 13.2 °$

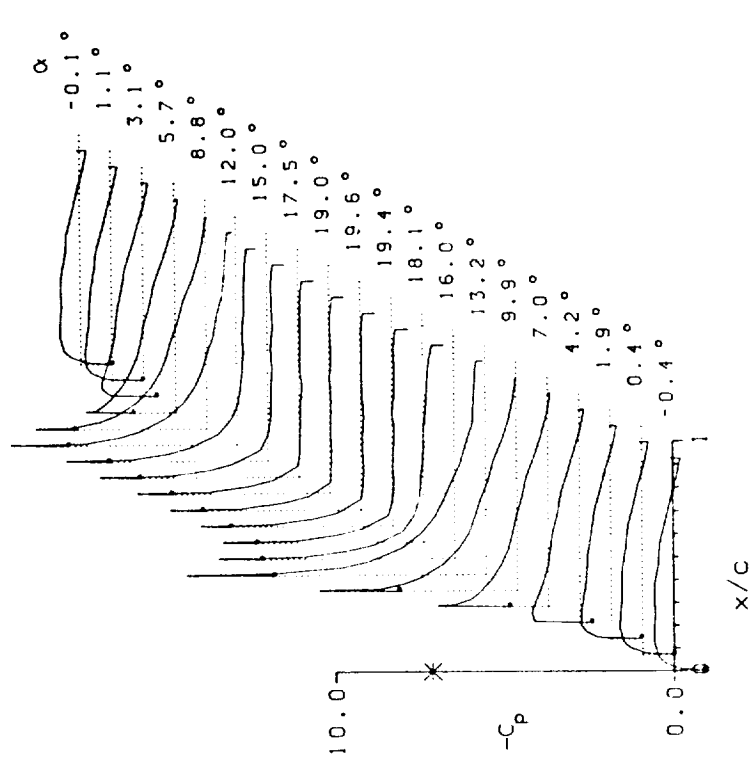
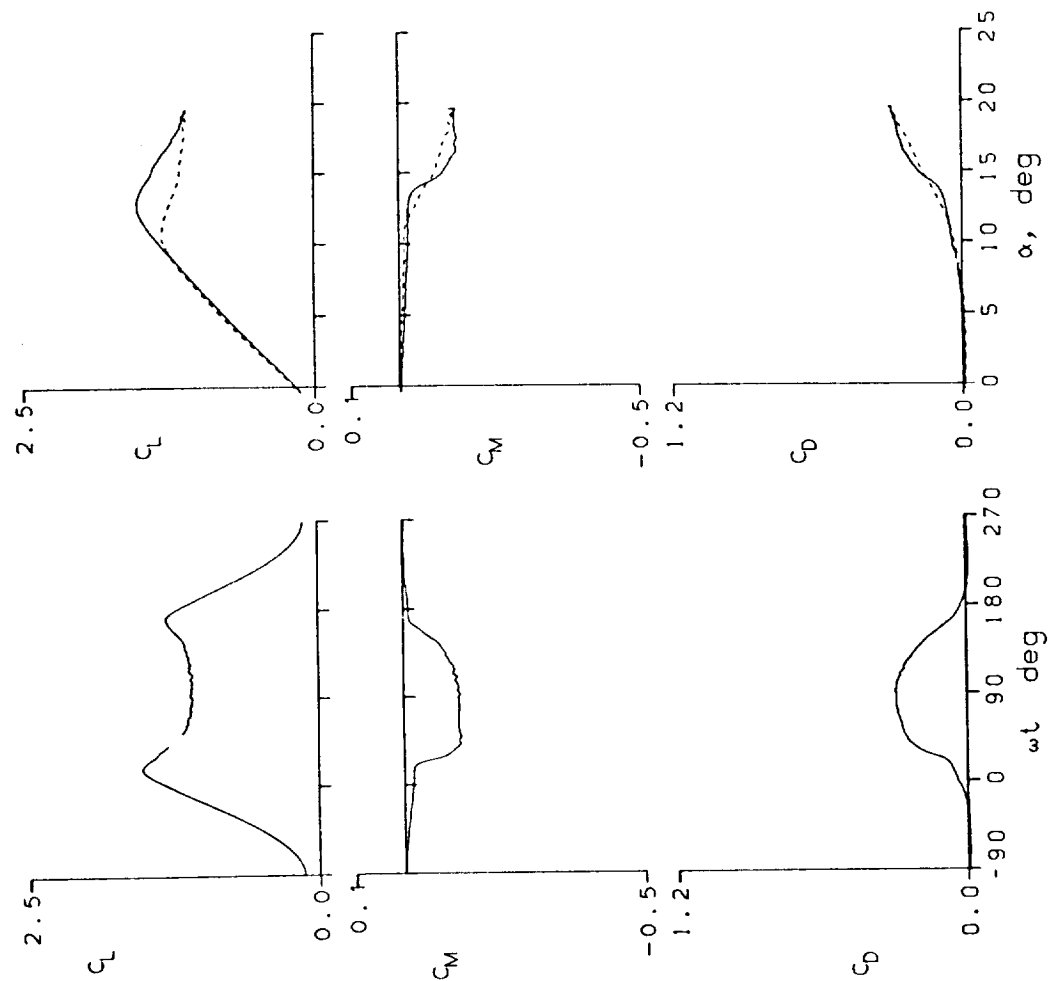


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 43106	A0 = 9.78 °	k = 0.025
Re = 3.93 E6	A1 = 9.90 °	M = 0.301
$C_{Lmax} = 1.64$	$C_{Mmin} = -0.19$	$C_{Dmax} = 0.41$
$\alpha_{Lmax} = 15.6 °$	$\zeta = 0.088$	$M_{max} = 1.206$
$\alpha_{Cmin} = 9.2 °$	$-C_{pmax} = 8.9$	$\alpha_{Mmax} = 13.5 °$

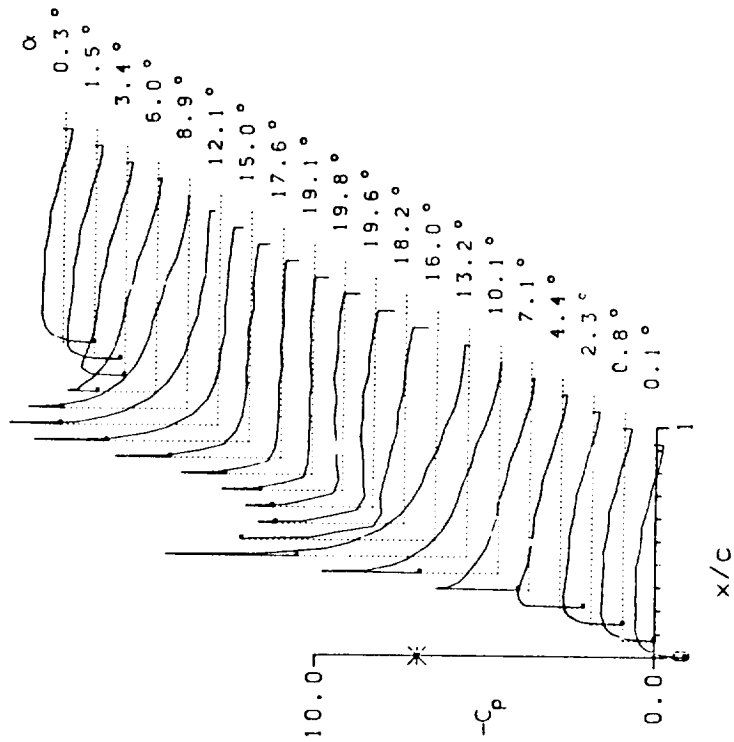
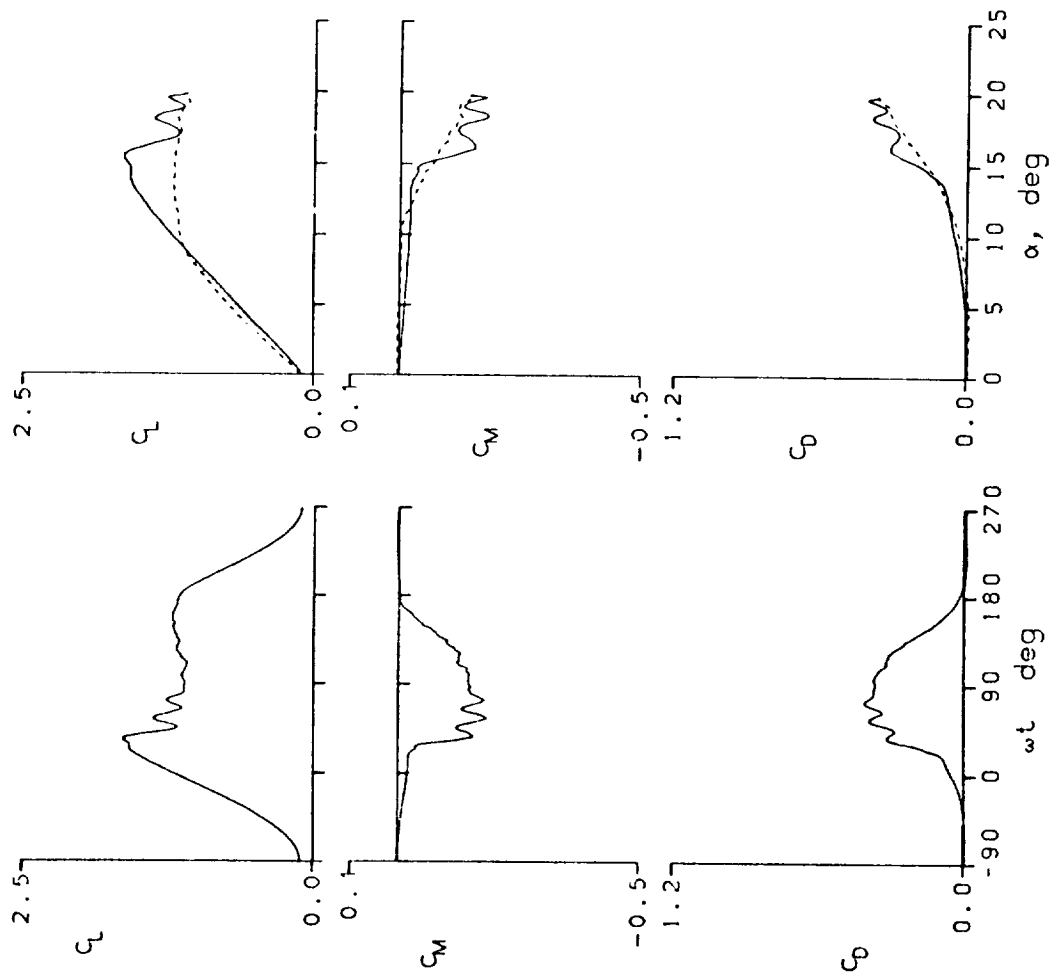


Figure 16.- Continued.

HUGHES HM-02 - WITH TAB- AIRFOIL

FRAME : 43108	A0 = 9.76 °	k = 0.050
Re = 3.93 E6	A1 = 9.91 °	M = 0.302
$C_{Lmax} = 1.92$	$C_{Mmin} = -0.27$	$C_{Dmax} = 0.47$
$\alpha_{Lmax} = 15.8 °$	$\xi = 0.160$	$M_{max} = 1.208$
$\alpha_{Cmin} = 3.2 °$	$-C_{Pmax} = 8.9$	$\alpha_{Mmax} = 13.8 °$

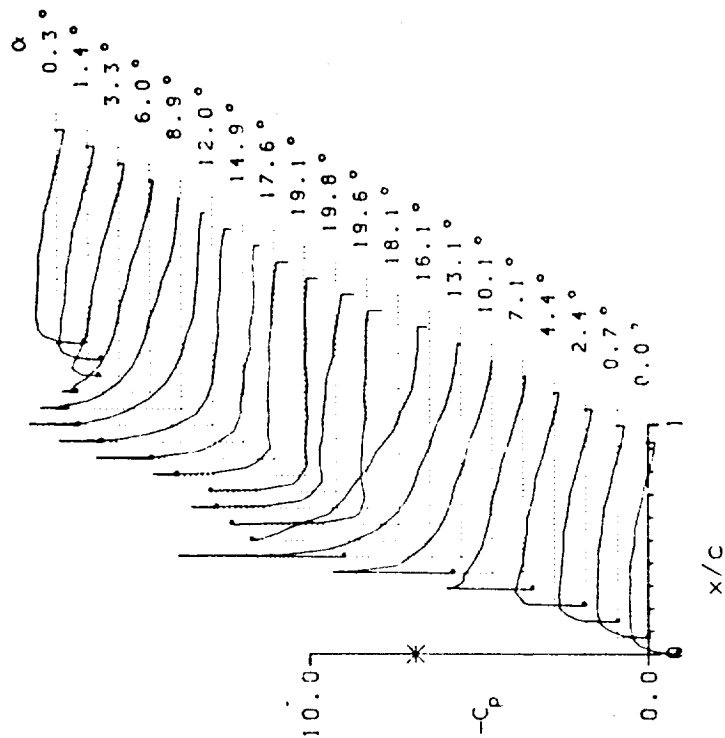
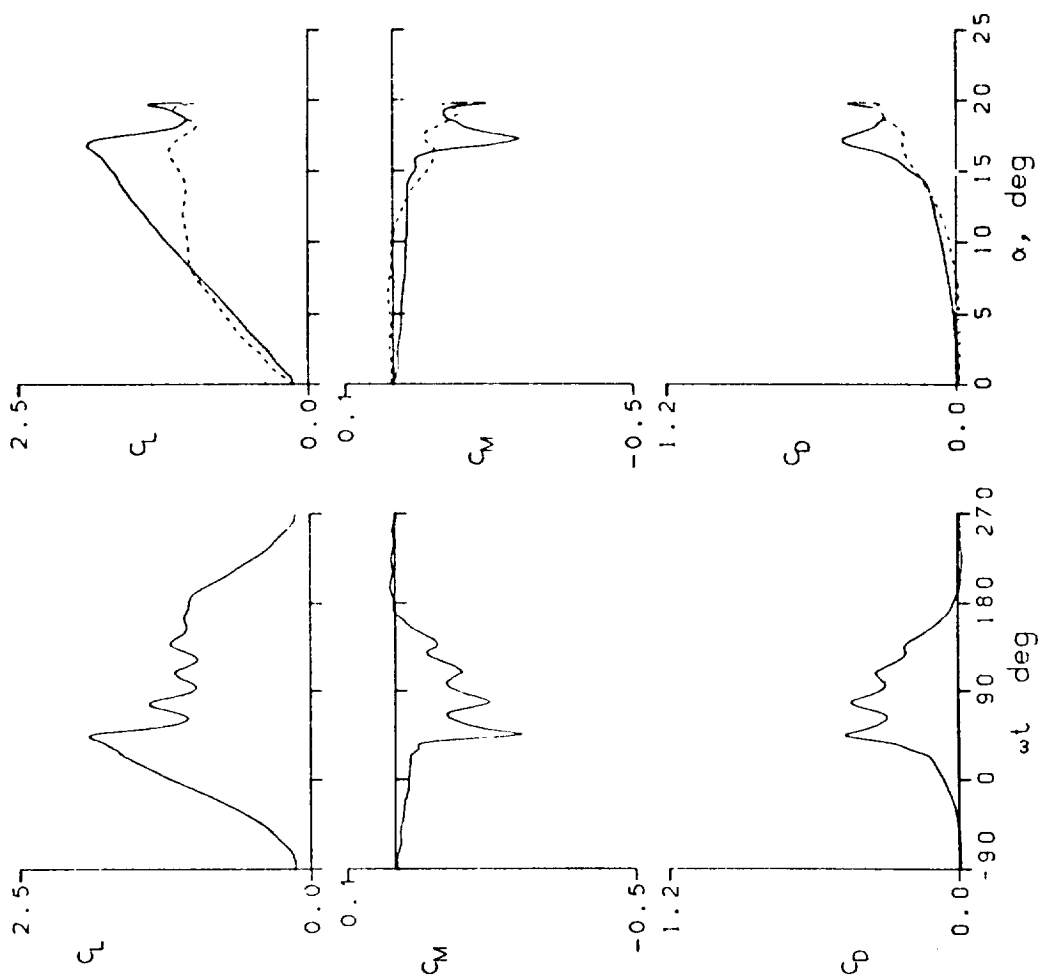


Figure 16.- Continued.

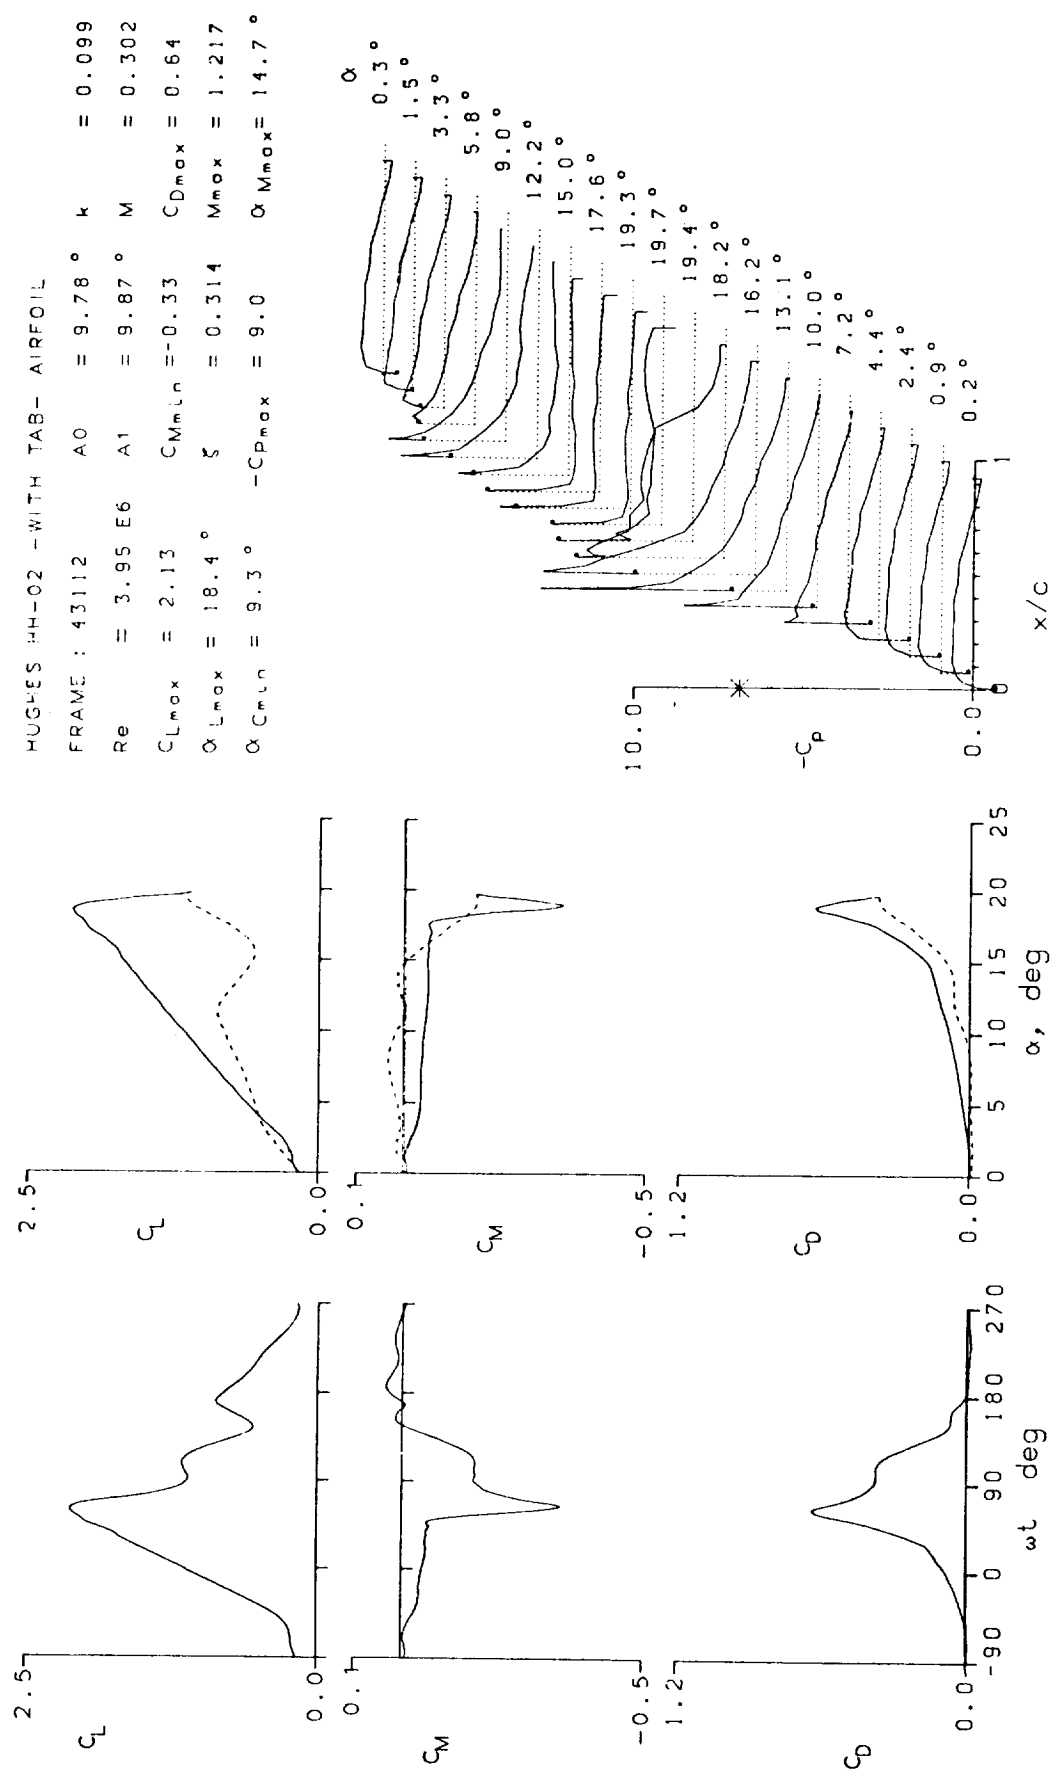


Figure 16.- Continued.

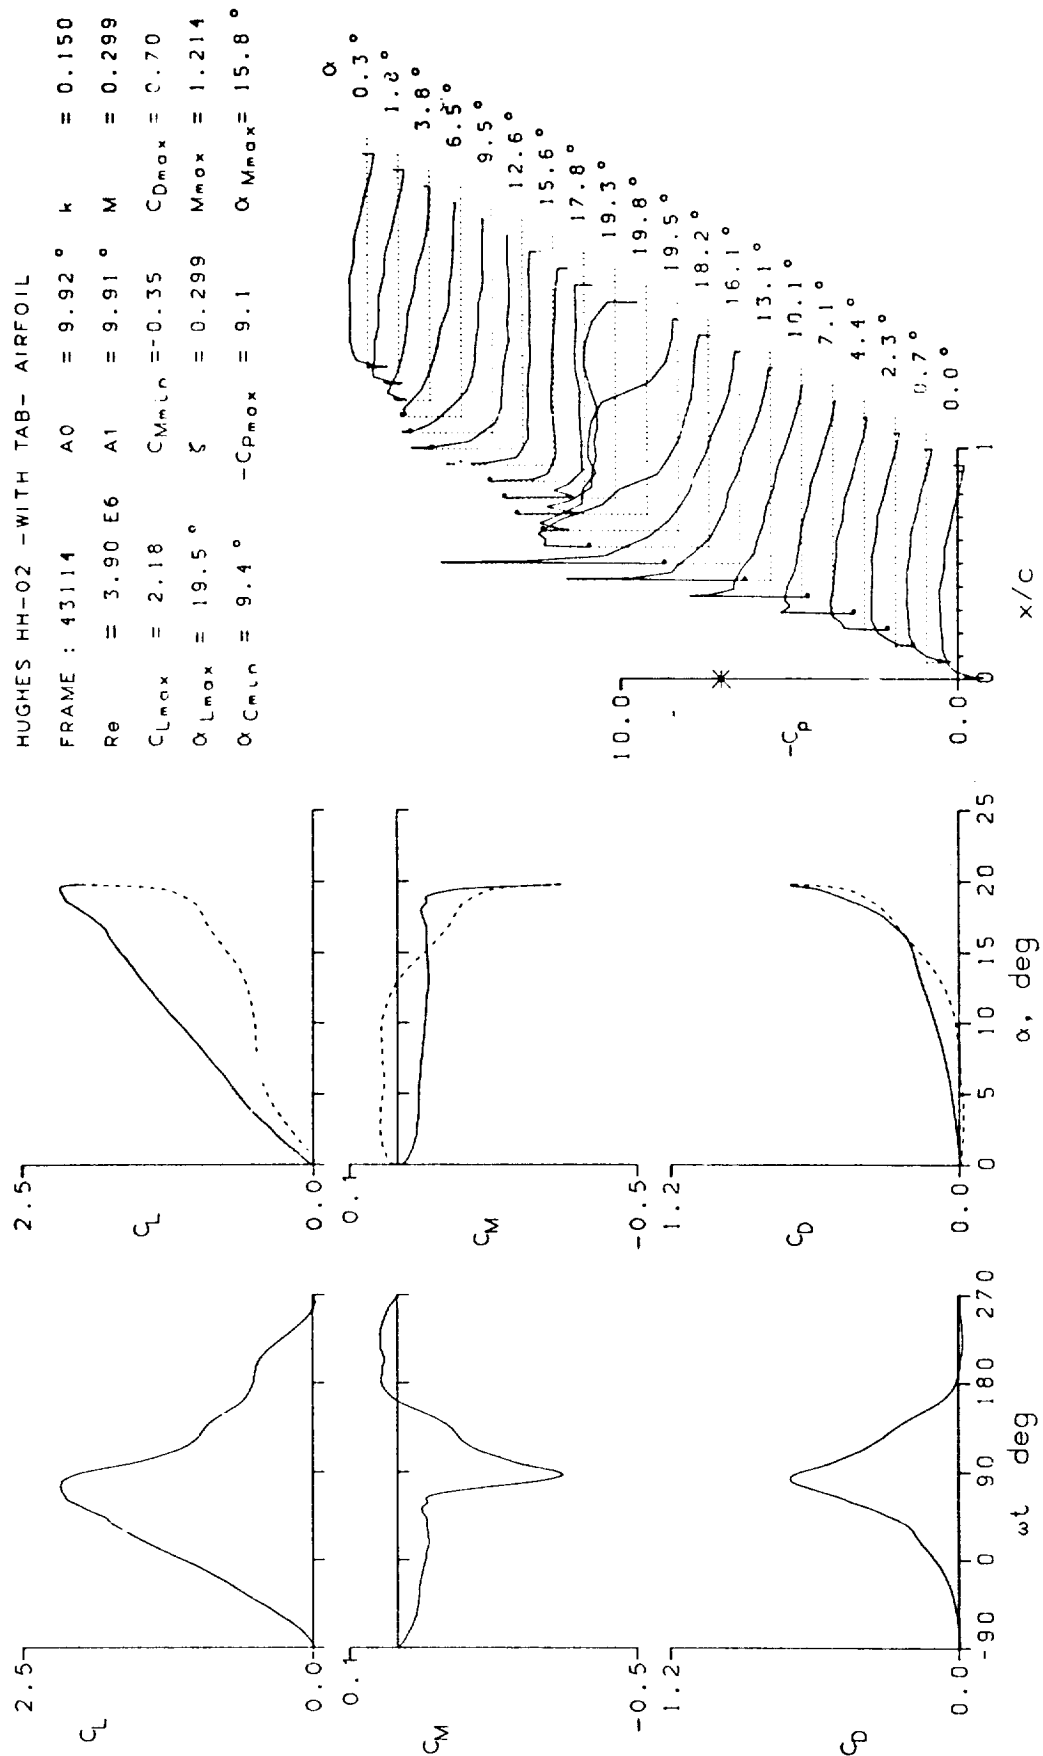


Figure 16.- Continued.

HUGHES HH-02 - WITH TAB- AIRFOIL

FRAME : 43117	A0 = 9.93 °	k = 0.151
Re = 3.89 E6	A1 = 9.90 °	M = 0.297
CLmax = 2.19	CMmin = -0.35	CDmax = 0.70
αLmax = 19.5 °	ξ = 0.319	Mmax = 1.214
αCMmin = 9.4 °	-CDmax = 9.2	αMmax = 15.8 °

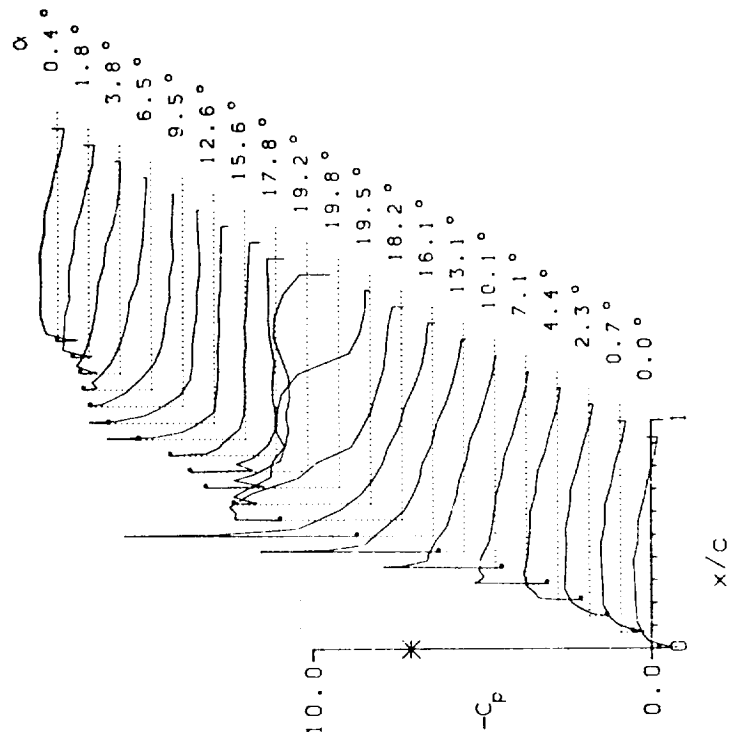
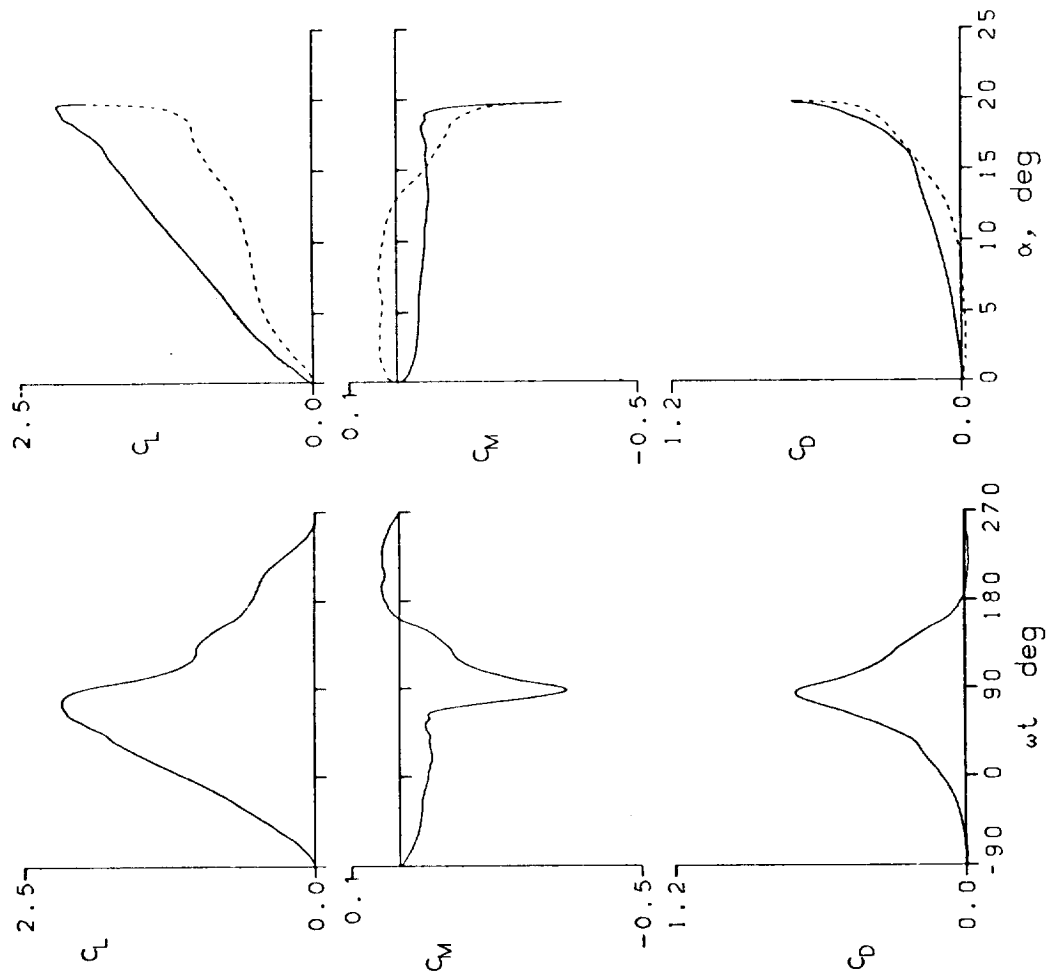


Figure 16.- Continued.

HUGHES H-H-02 - WITH TAB- AIRFOIL

FRAME : 43202	A0 = 3.61 °	k = 0.025
Re = 3.97 E6	A1 = 10.13 °	M = 0.301
CLmax = 1.52	CMmin = -0.05	CDmax = 0.12
αLmax = 13.1 °	ζ = 0.075	Mmax = 1.212
αCmin = 3.1 °	-CDmax = 8.9	αMmax = 13.6 °

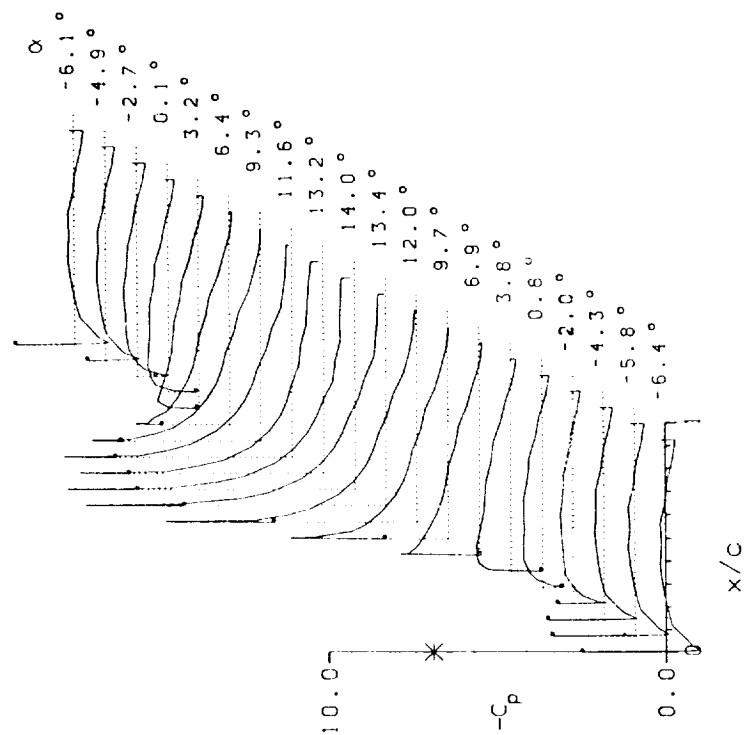
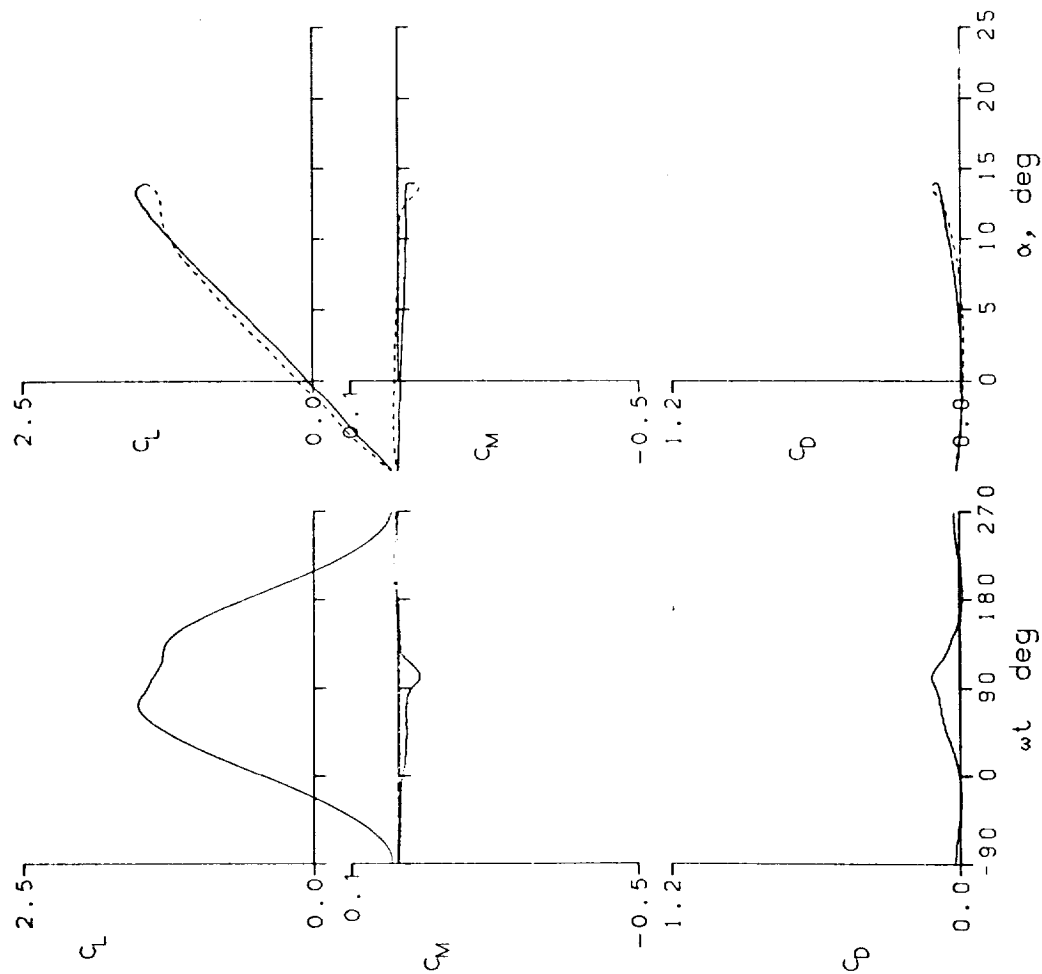


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 43204 $A_0 = 3.62^\circ$ $k = 0.050$
 $Re = 3.96 E6$ $A_1 = 10.12^\circ$ $M = 0.302$
 $C_{Lmax} = 1.58$ $C_{Mmin} = -0.03$ $C_{Dmax} = 0.11$
 $\alpha_{Lmax} = 13.7^\circ$ $\xi = 0.154$ $M_{max} = 1.218$
 $\alpha_{Cmin} = 3.1^\circ$ $-C_{Pmax} = 9.0$ $\alpha_{Mmax} = 13.6^\circ$

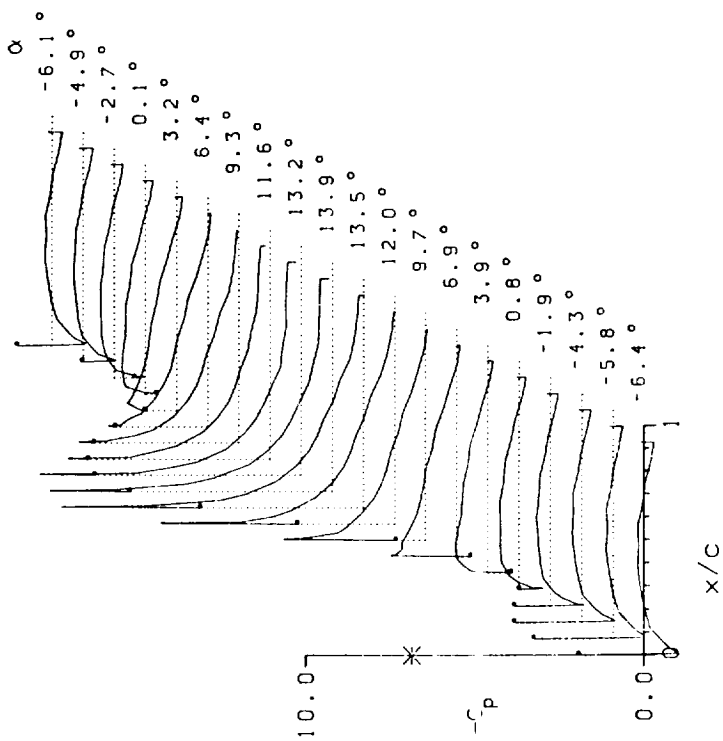
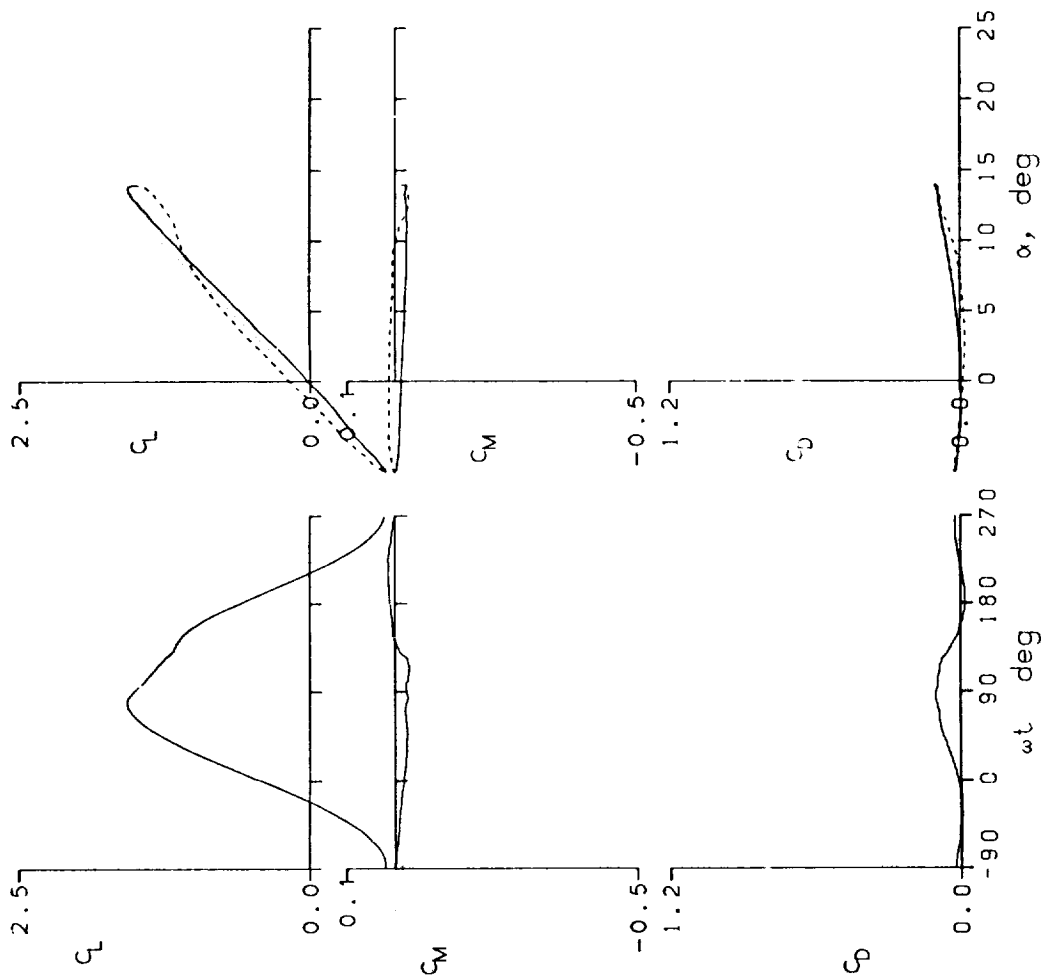


Figure 16.- Continued.

HUGHES -H-02 -WITH TAB- AIRFOIL
 FRAME : 43206 $A_0 = 3.66^\circ$ $k = 0.099$
 $Re = 3.96 \text{ E}6$ $A_1 = 10.10^\circ$ $M = 0.302$
 $C_{Lmax} = 1.61$ $C_{Mmin} = -0.04$ $C_{Dmax} = 0.13$
 $\alpha_{Lmax} = 14.0^\circ$ $\xi = 0.337$ $M_{max} = 1.223$
 $\alpha_{Cmin} = 3.2^\circ$ $-C_{pmax} = 9.0$ $\alpha_{Mmax} = 13.9^\circ$

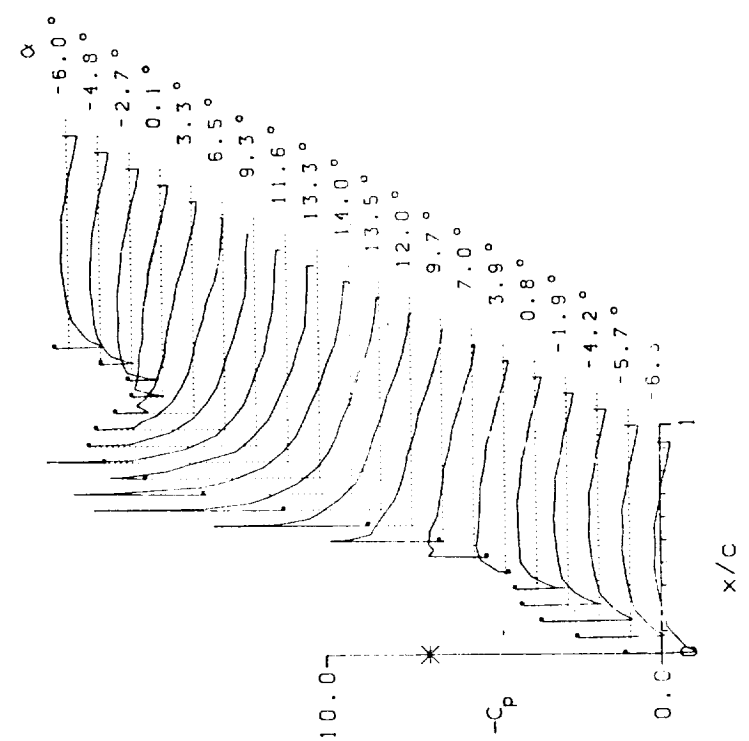
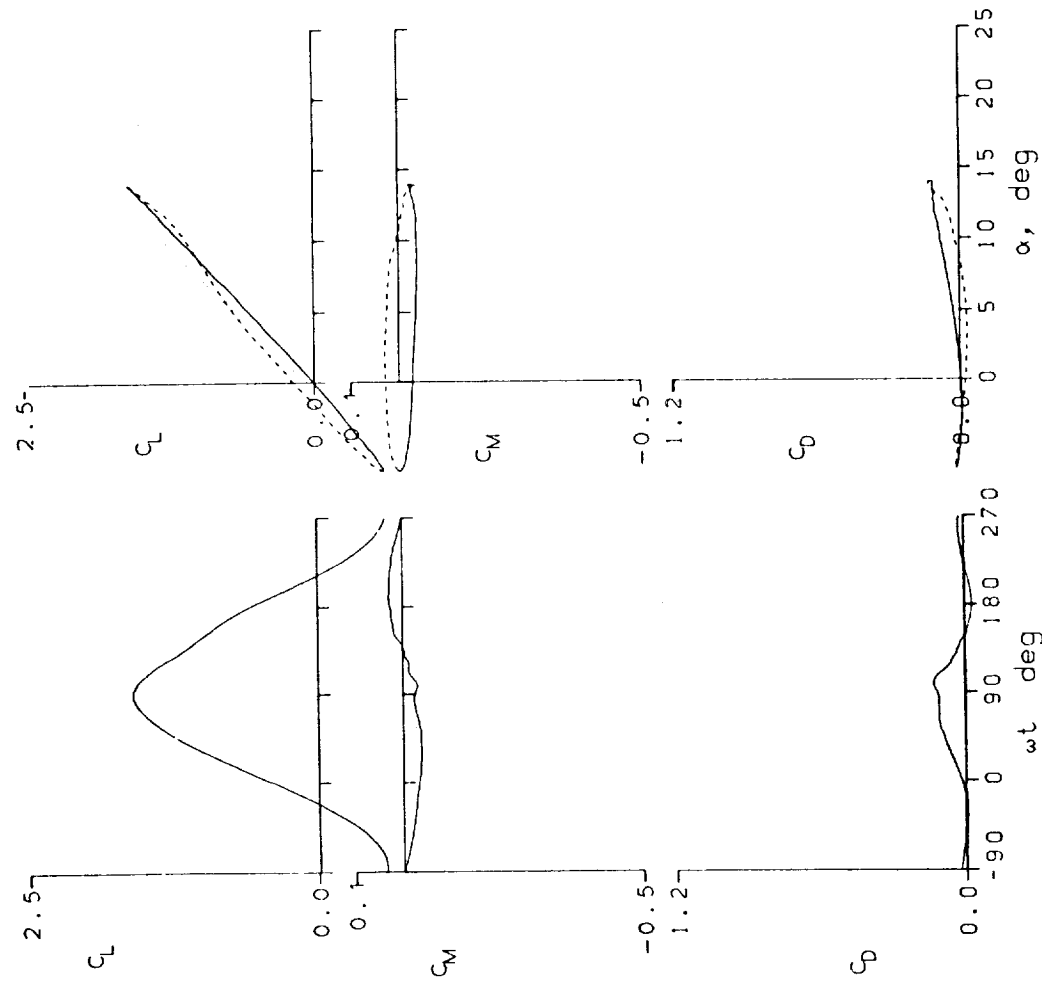


Figure 16.- Continued.

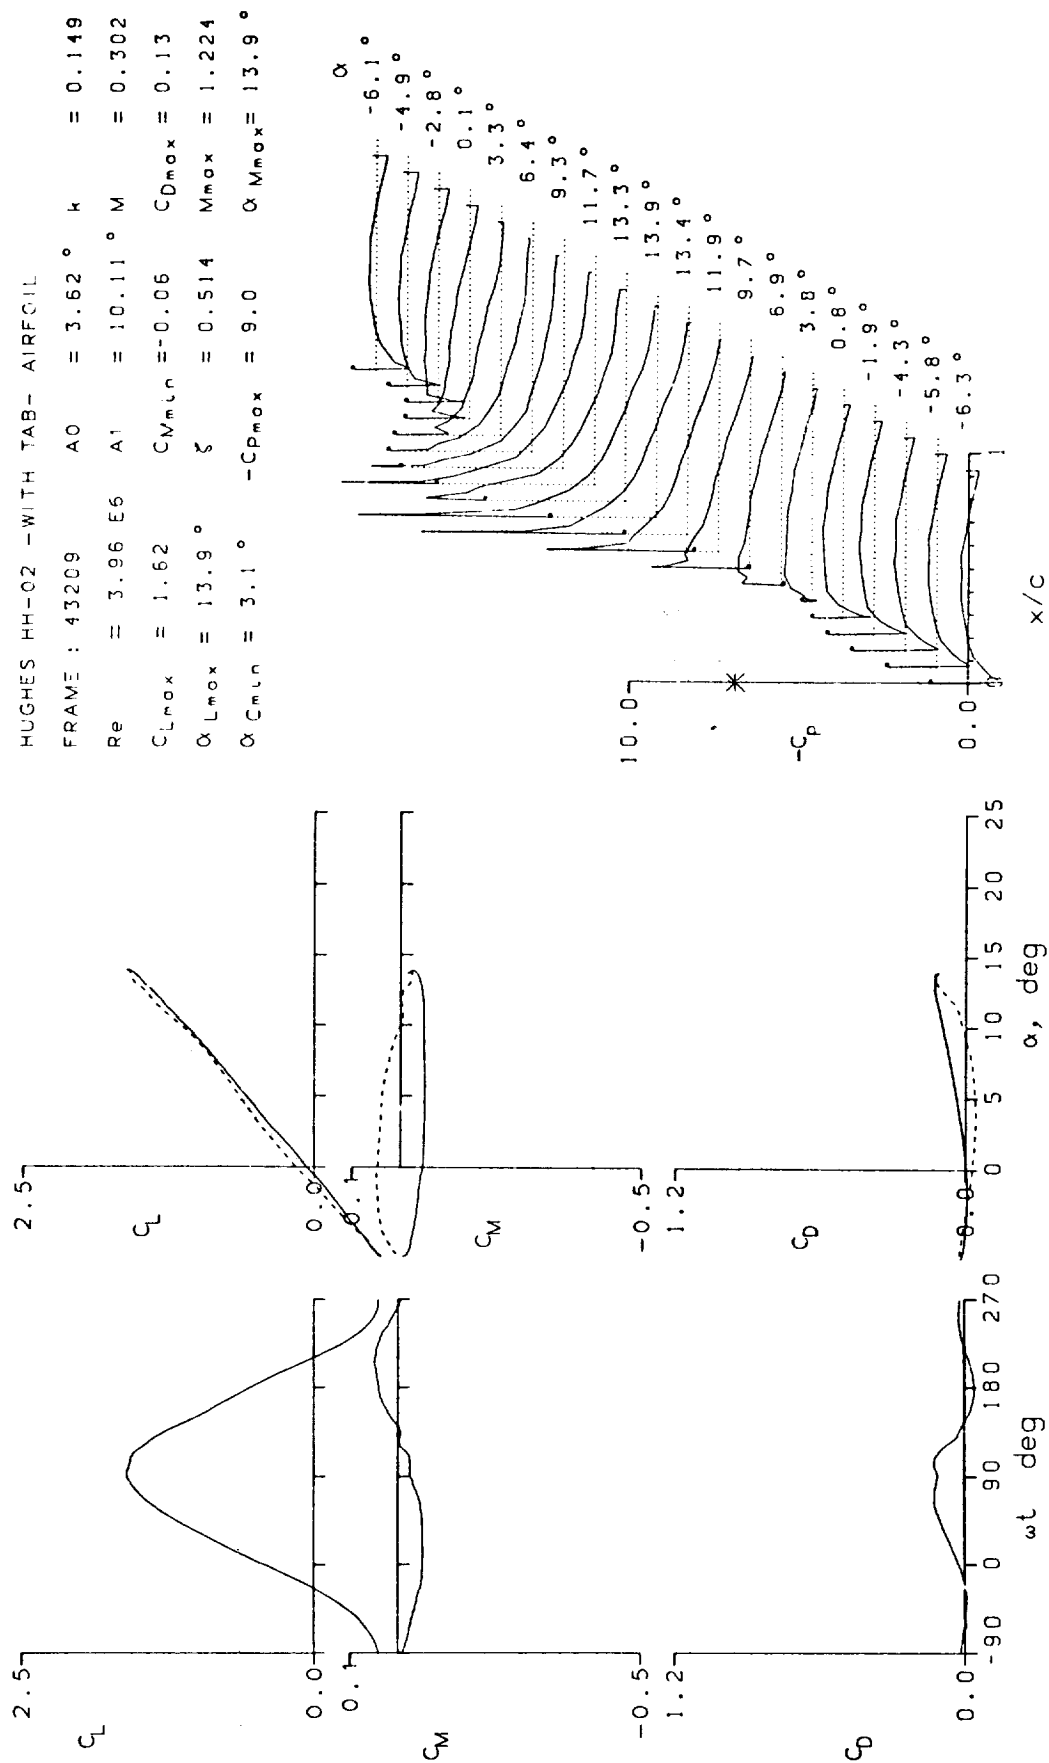


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 43215 A0 = 3.62 ° k = 0.010
 Re = 4.06 E6 A1 = 10.13 ° M = 0.302
 CLmax = 1.51 CMmin = -0.06 CDmax = 0.13
 αLmax = 13.0 ° ζ = 0.029 Mmax = 1.214
 αCMmin = 3.1 ° -CDmax = 8.9 αMmax = 13.5 °

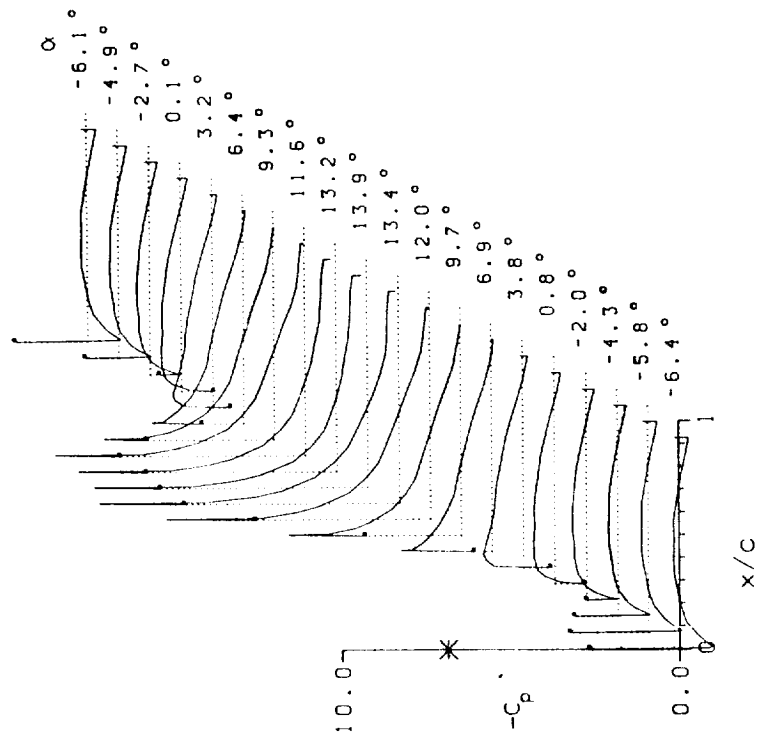
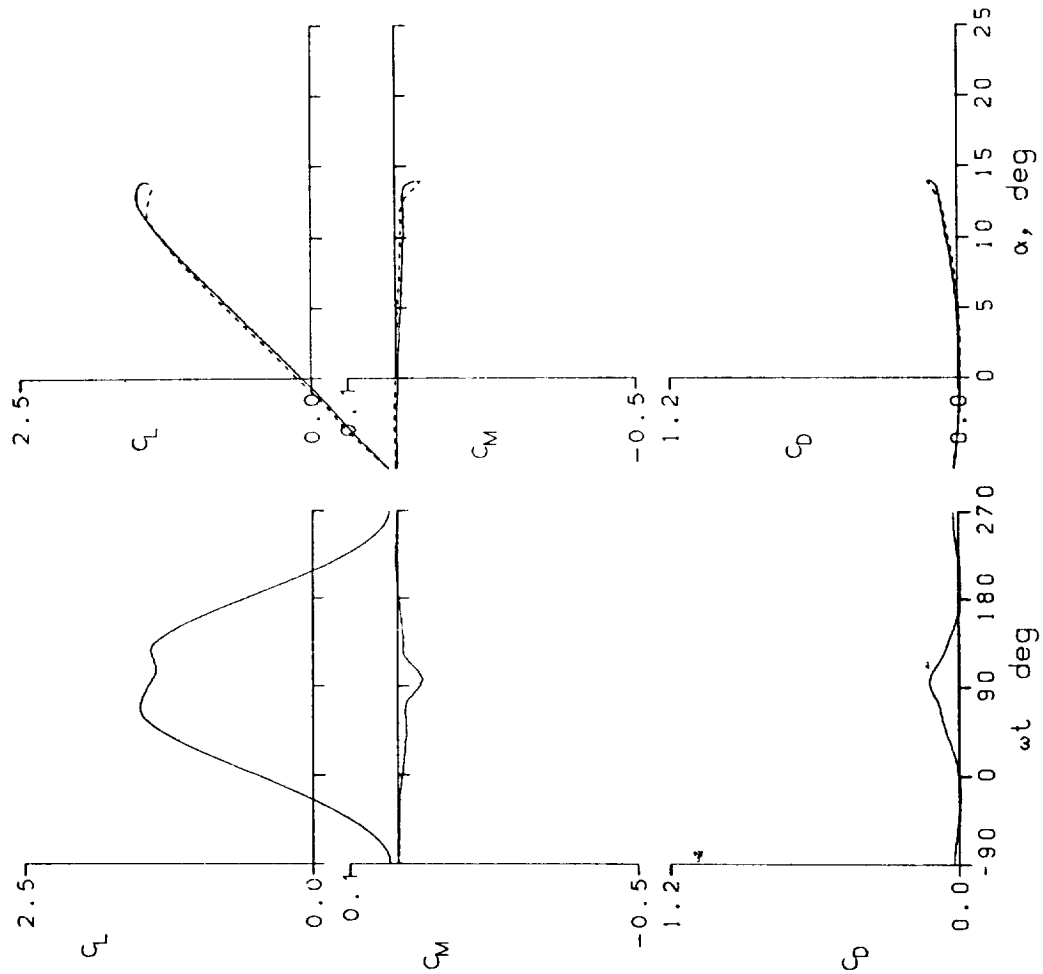


Figure 16.- Continued.

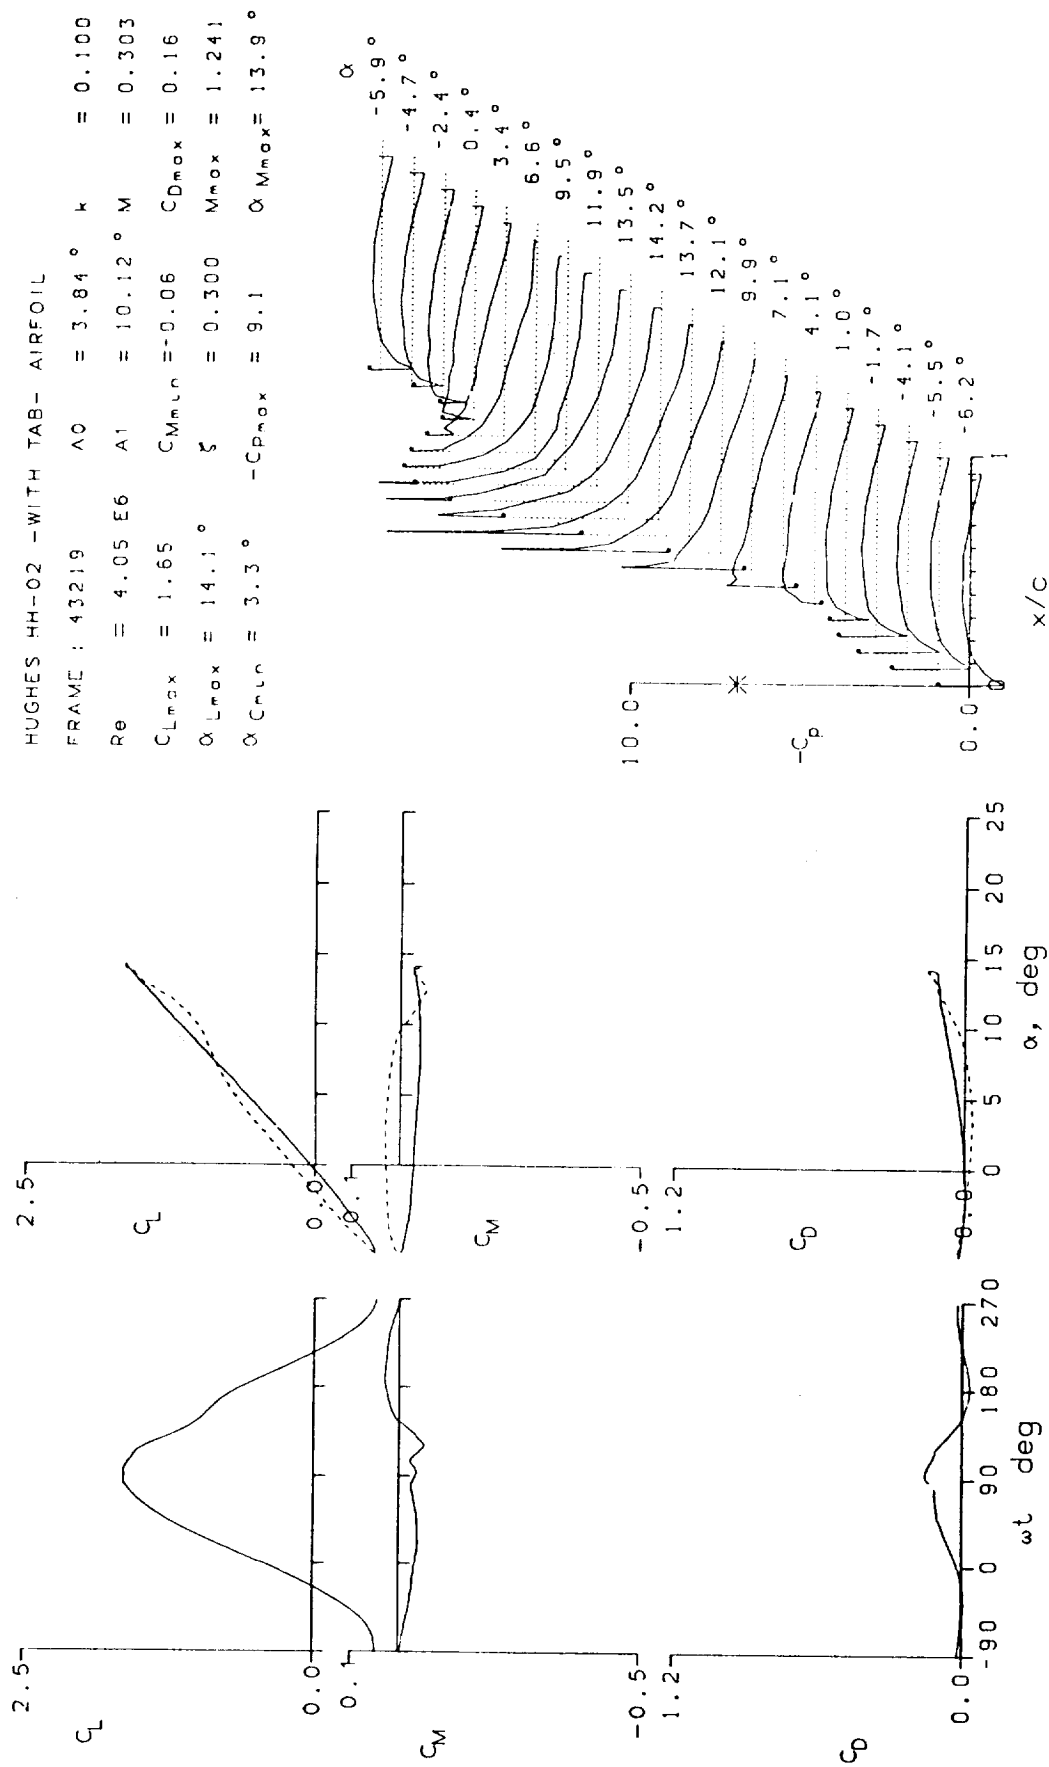


Figure 16.- Continued.

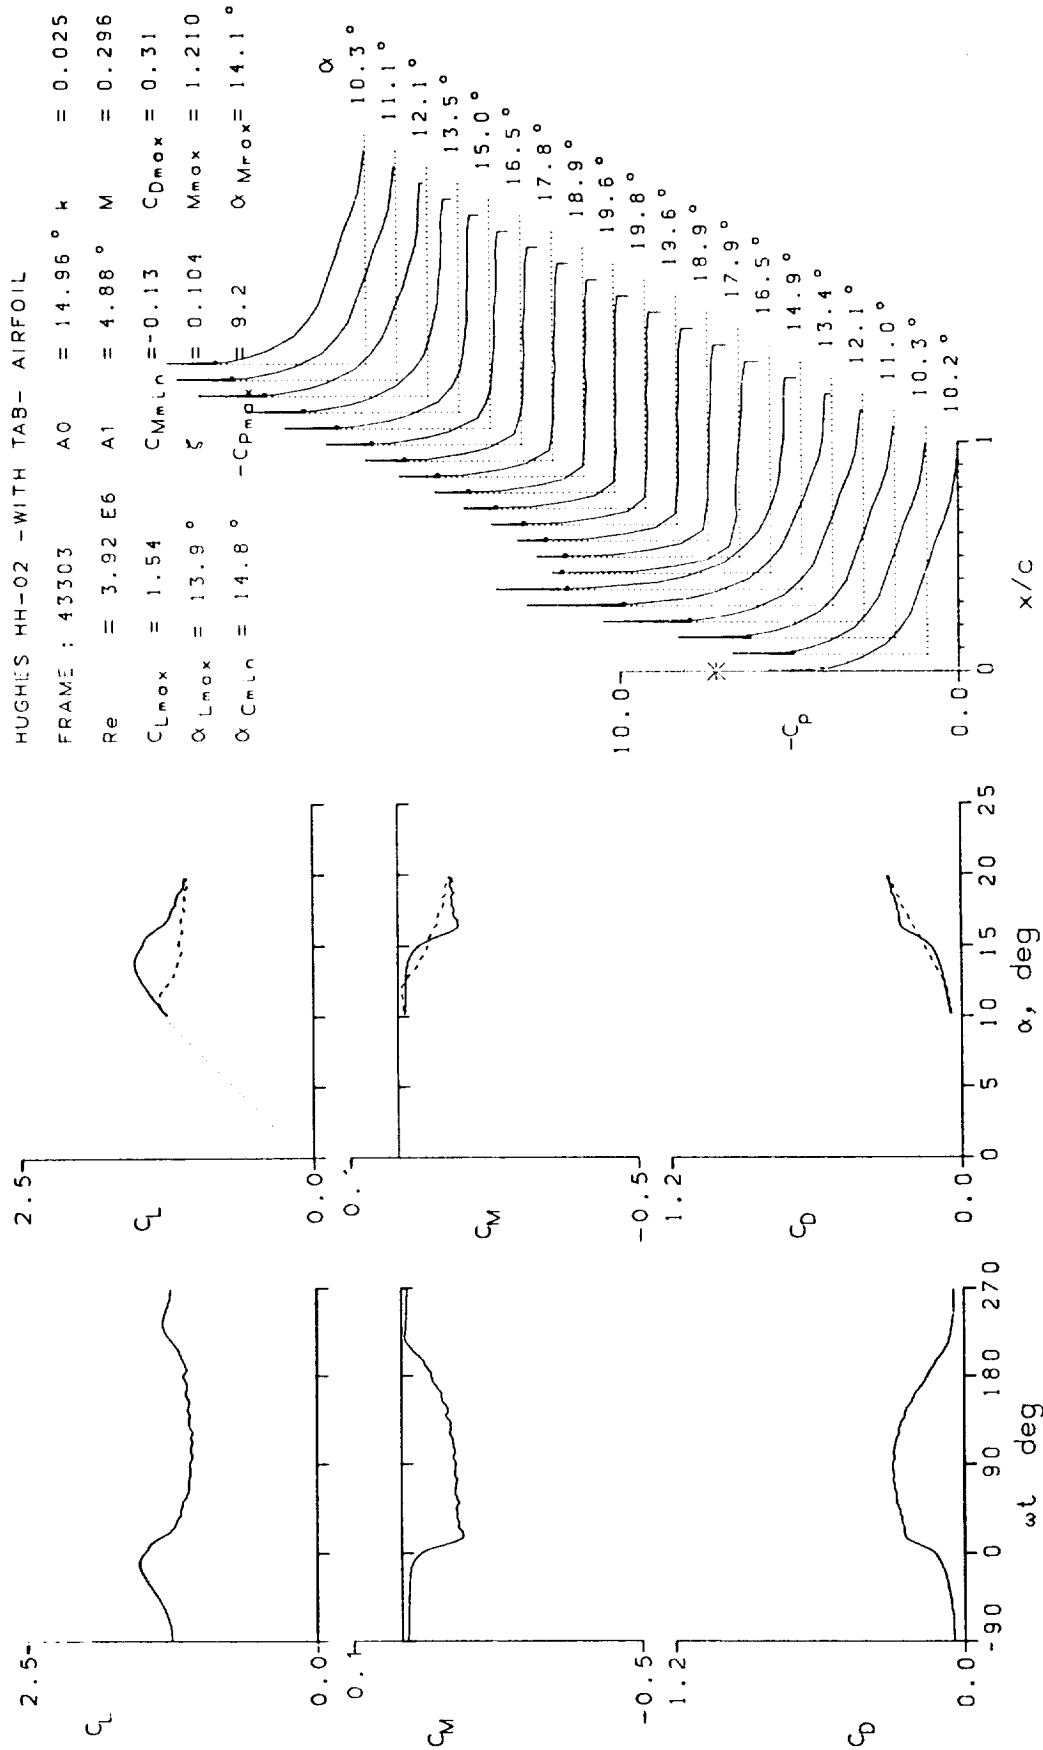


Figure 16.- Continued.

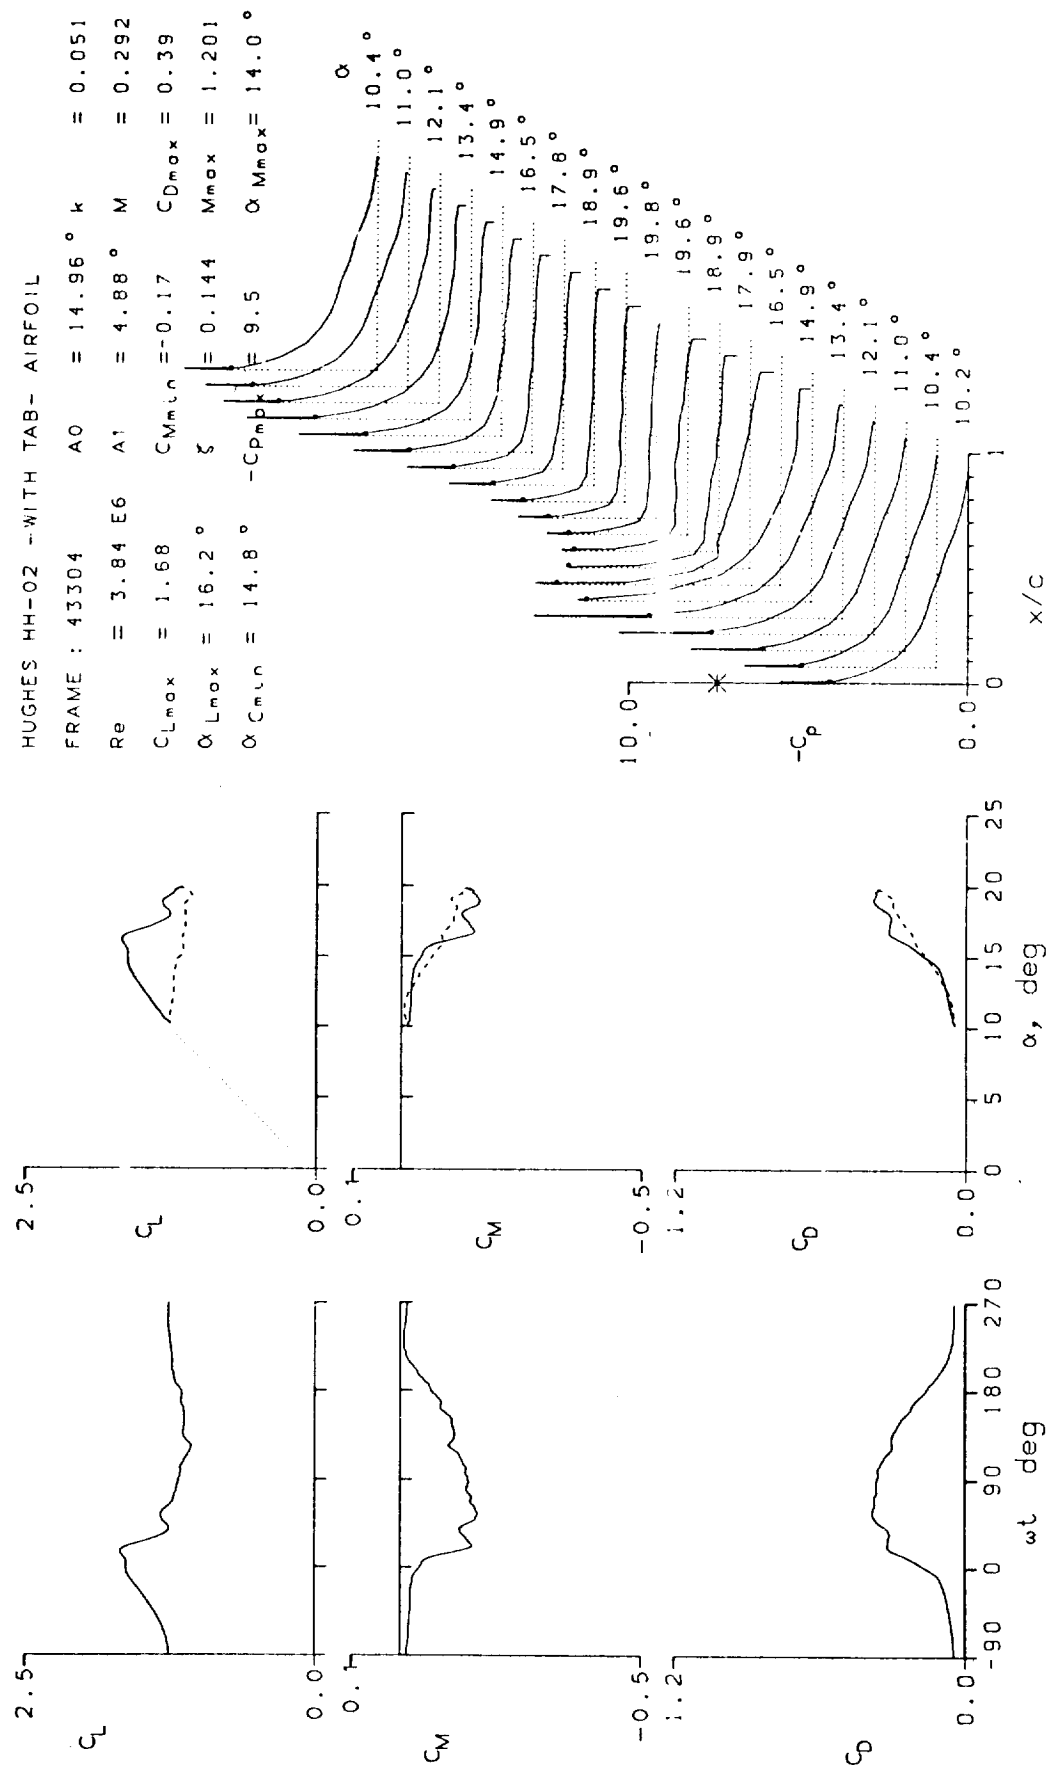


Figure 16.- Continued.

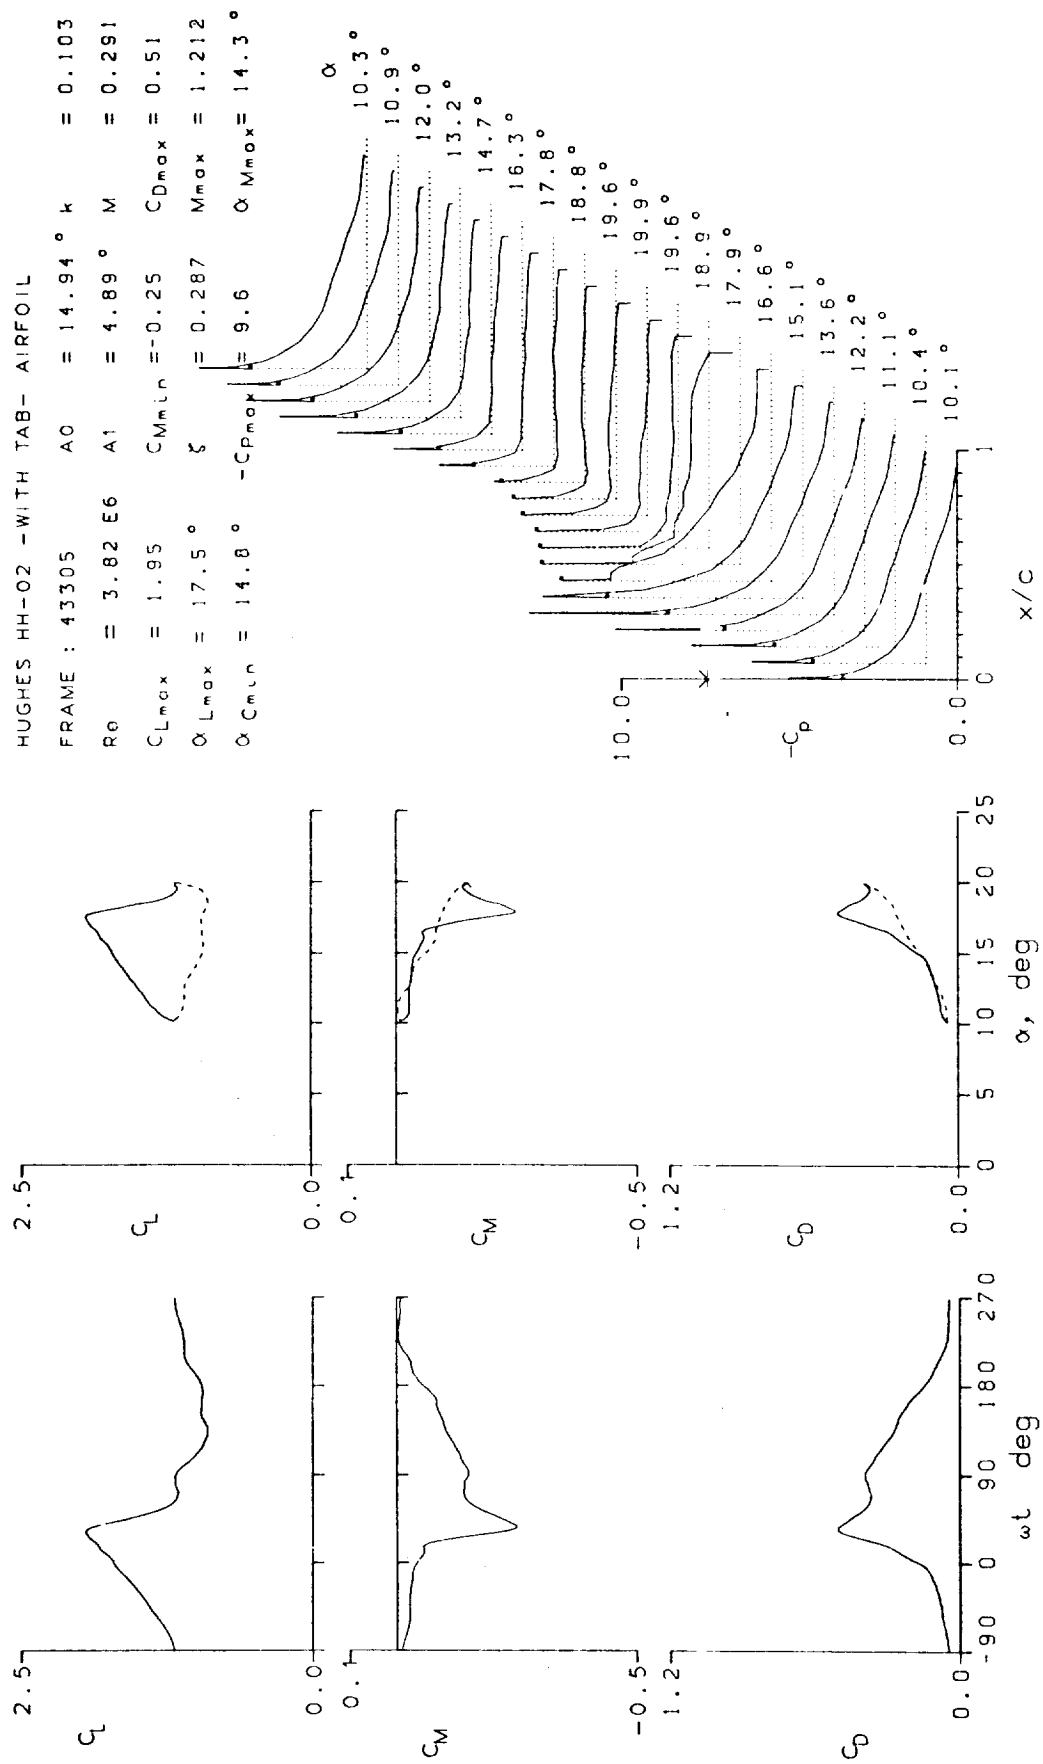


Figure 16.- Continued.

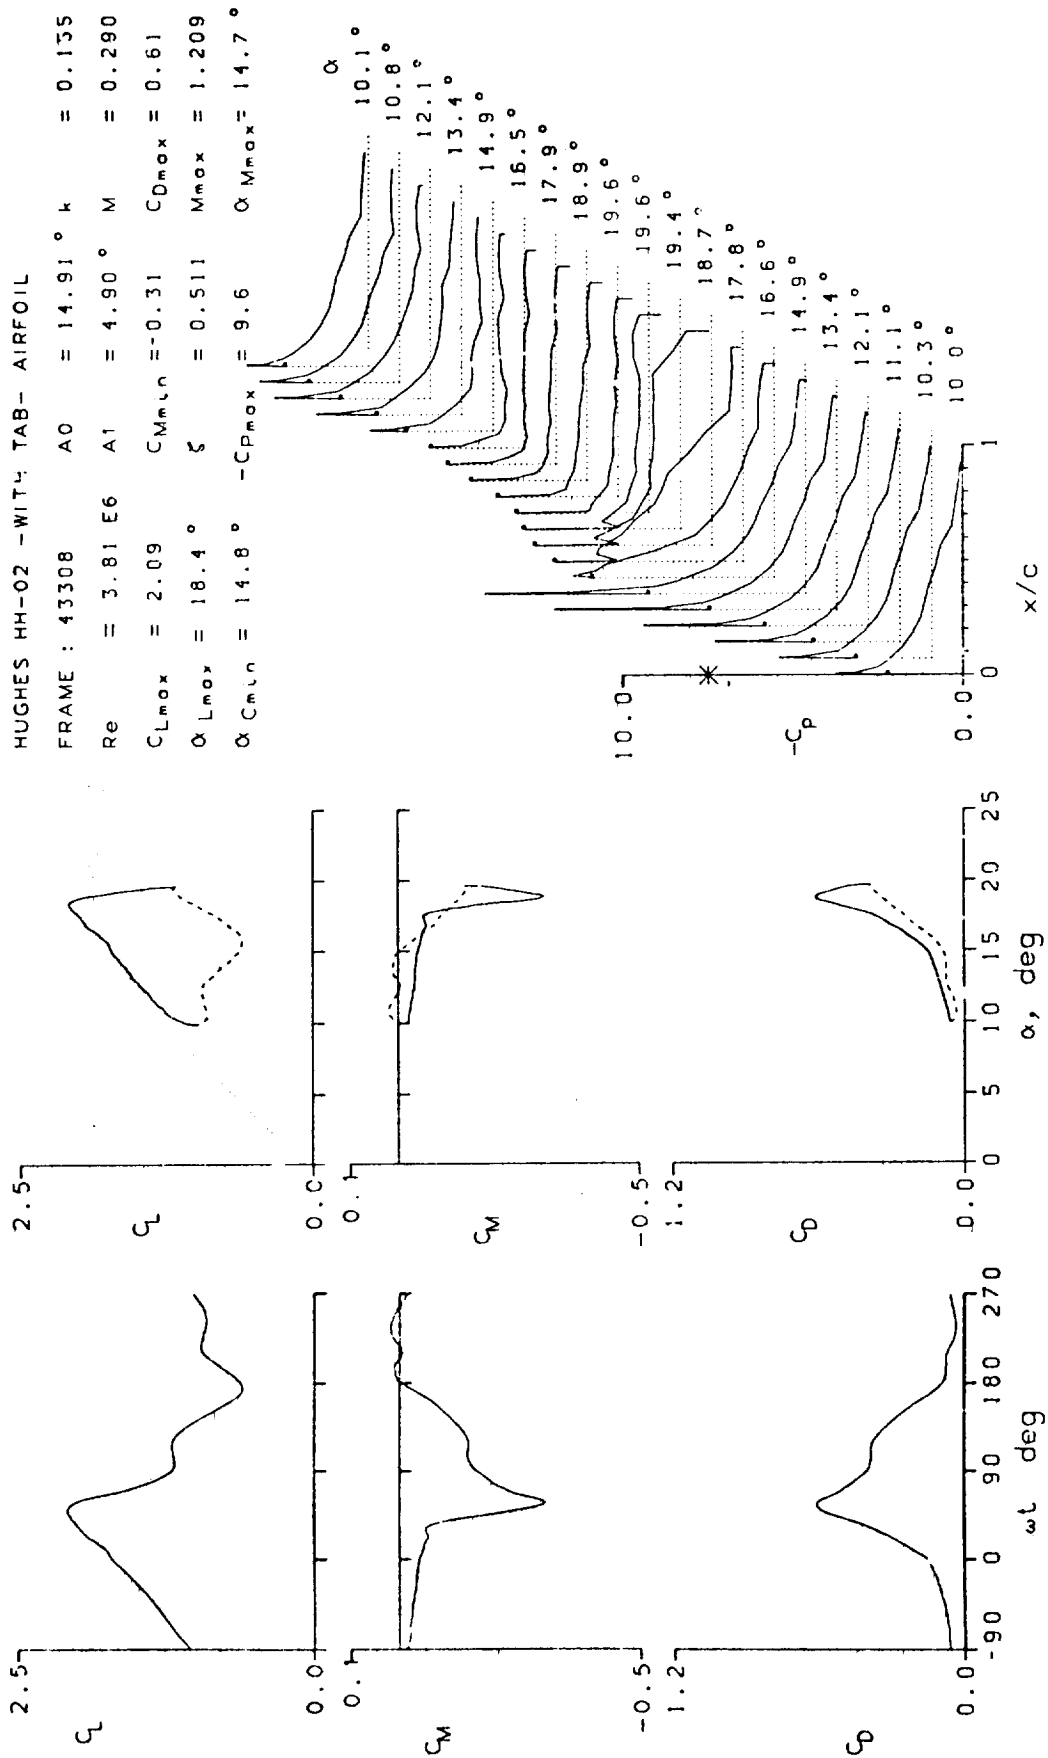


Figure 16.- Continued.


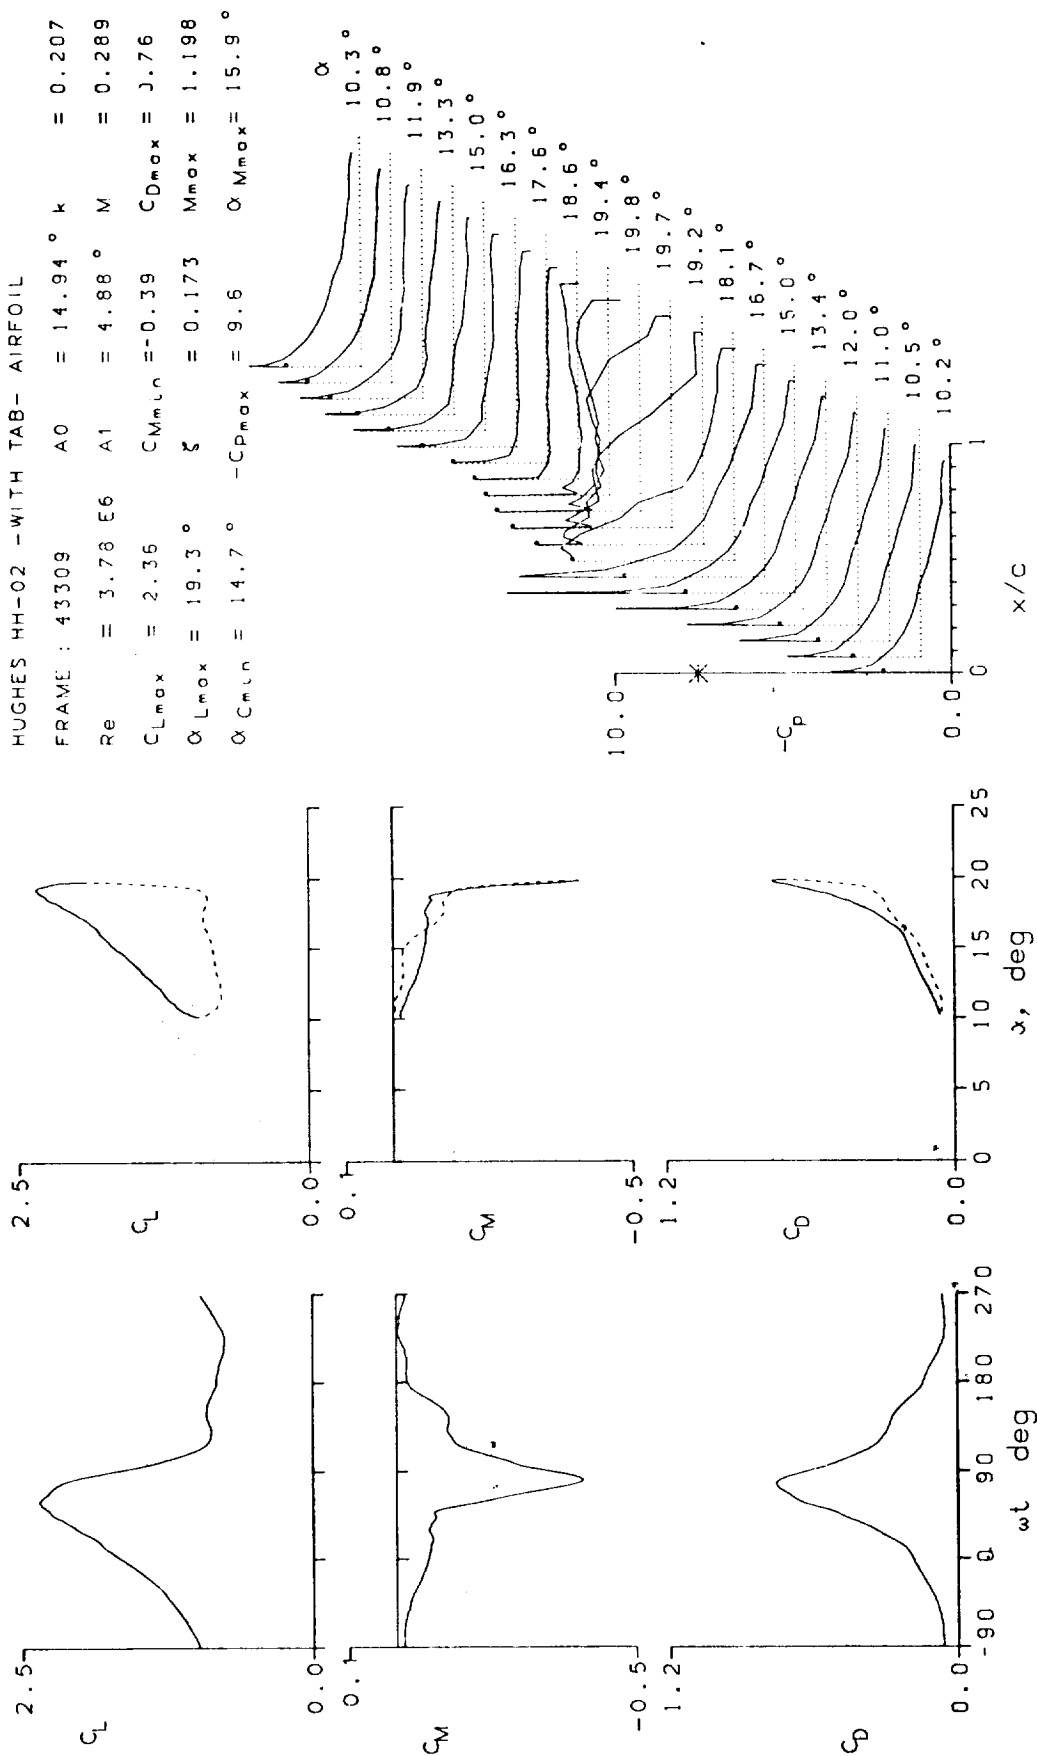


Figure 16.- Continued.

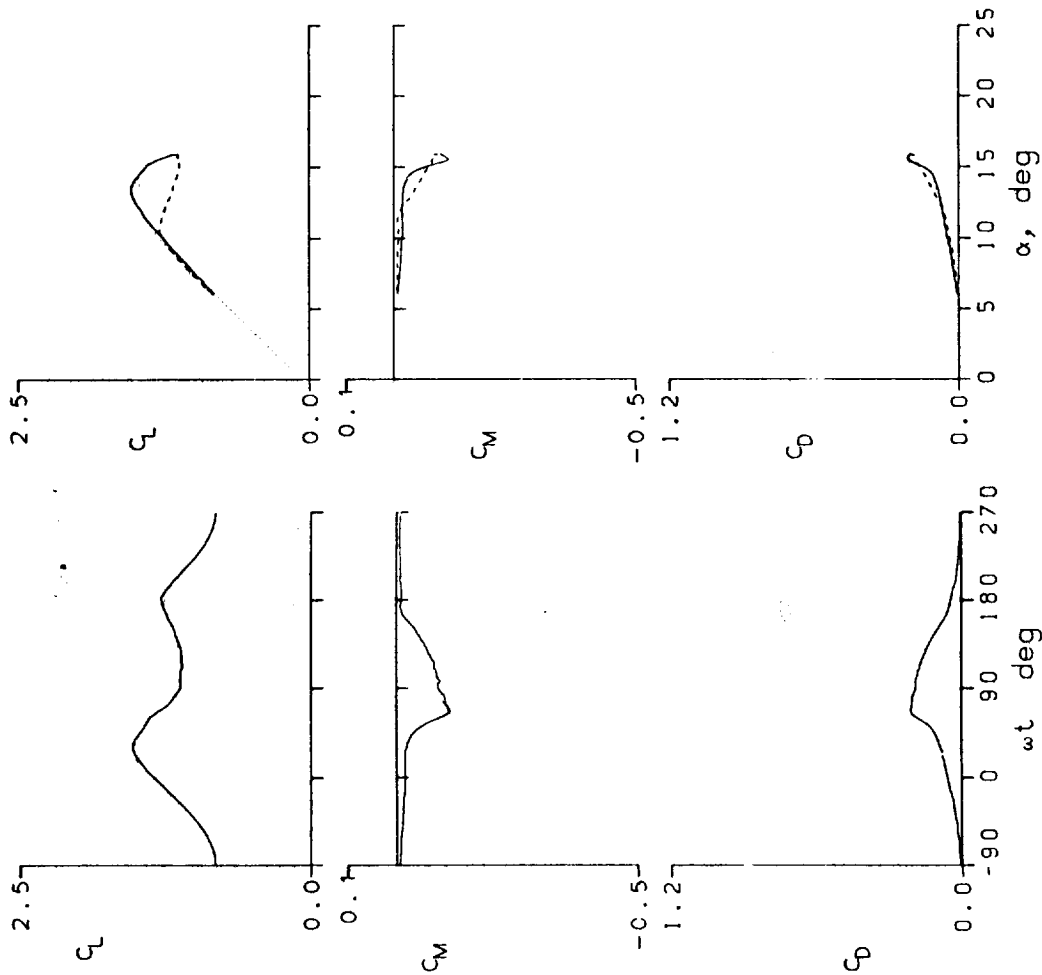

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 43314 $A_0 = 10.89^\circ$ $k = 0.025$
 $Re = 3.93 \text{ E}6$ $A_1 = 4.89^\circ$ $M = 0.302$
 $C_{L_{max}} = 1.54$ $C_{M_{min}} = -0.12$ $C_{D_{max}} = 0.22$
 $\alpha_{L_{max}} = 13.5^\circ$ $\xi = 0.000$ $M_{max} = 1.221$
 $\alpha_{C_{min}} = 10.6^\circ$ $-C_{P_{max}} = 9.40$ $\alpha_{M_{max}} = 13.8^\circ$

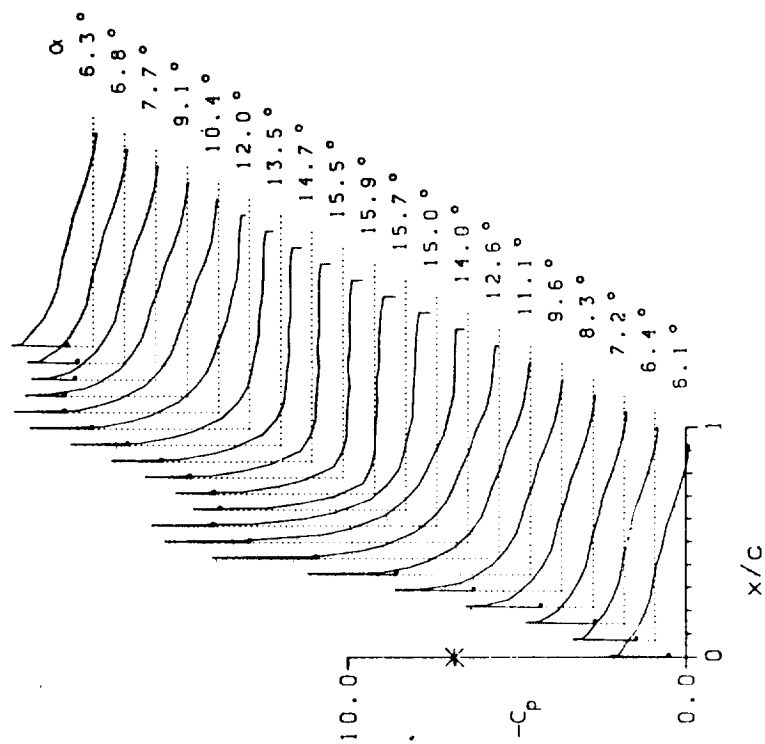


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 43315 $A_0 = 10.90^\circ$ $k = 0.049$
 $Re = 3.92 E6$ $A_1 = 4.91^\circ$ $M = 0.302$
 $C_{Lmax} = 1.59$ $C_{Mmin} = -0.12$ $C_{Dmax} = 0.26$
 $\alpha_{Lmax} = 13.9^\circ$ $\xi = 0.071$ $M_{max} = 1.209$
 $\alpha_{C-min} = 10.0^\circ$ $-C_{Dmax} = 8.9$ $\alpha_{Mmax} = 13.3^\circ$



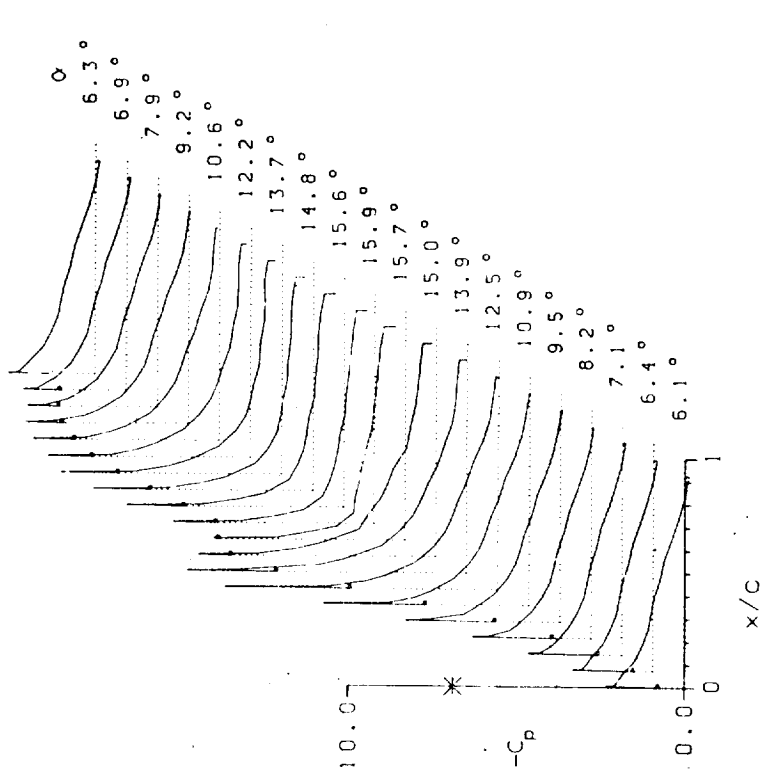


Figure 16.- Continued.

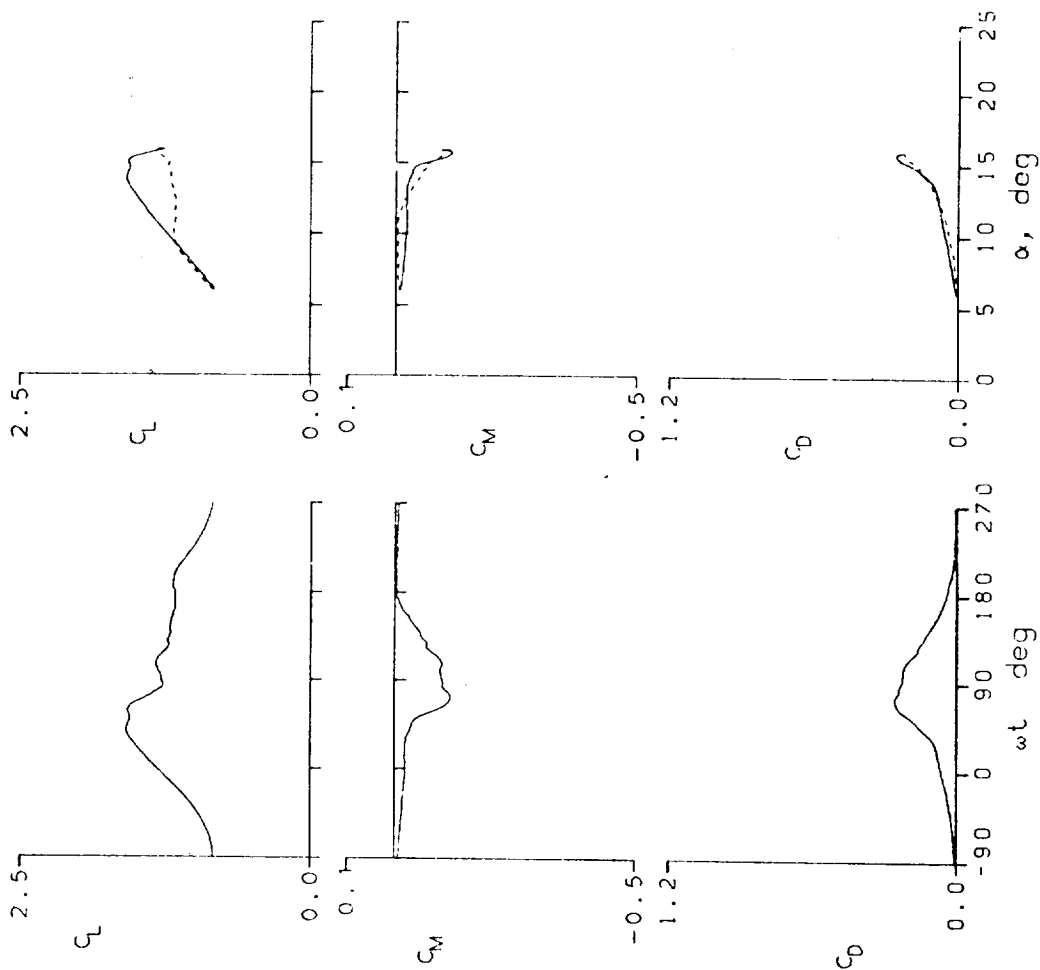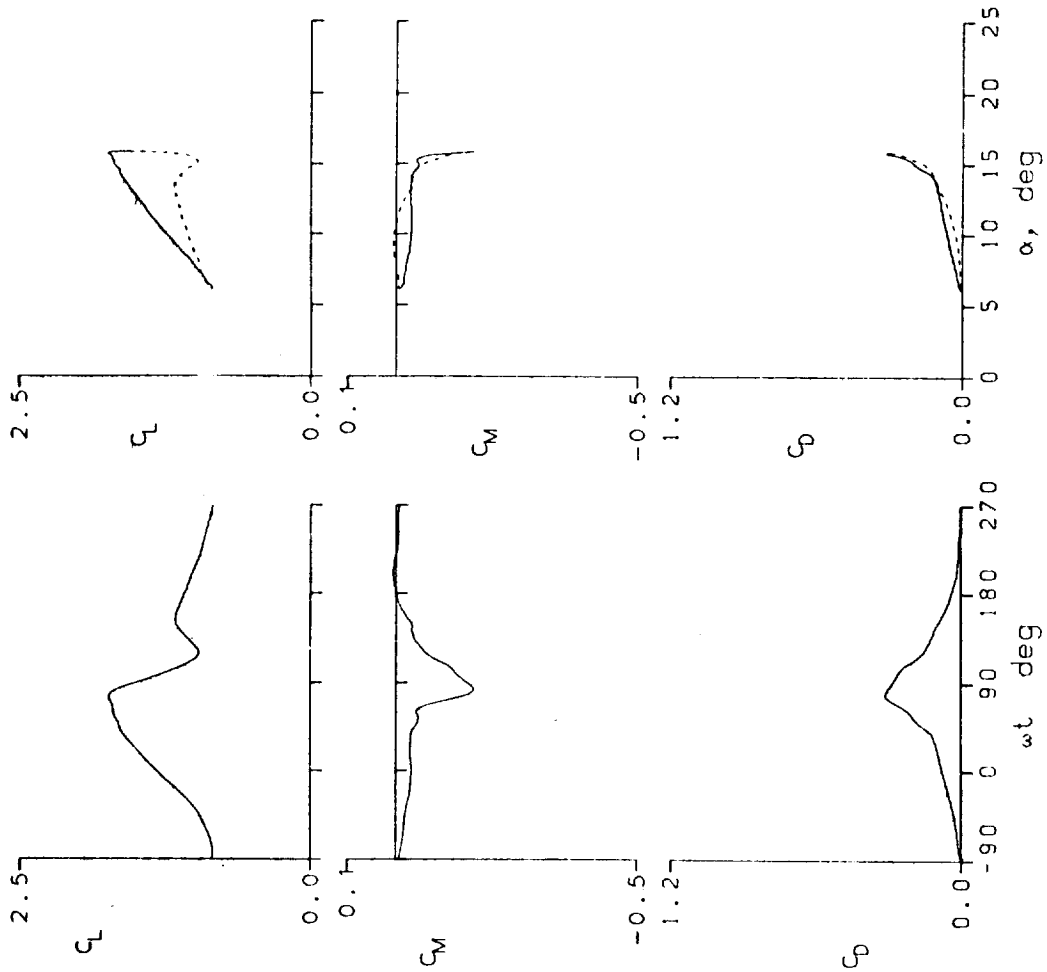

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 43316 $A_0 = 10.91^\circ$ $k = 0.099$
 $Re = 3.91 \times 10^6$ $A_1 = 4.89^\circ$ $M = 0.302$
 $C_{Lmin} = 1.75$ $C_{Mmin} = -0.17$ $C_{Dmax} = 0.32$
 $\alpha_{Lmax} = 15.7^\circ$ $\alpha_{Mmax} = 10.6^\circ$ $\alpha_{Dmax} = 13.8^\circ$
 $\alpha_{Cmin} = 10.6^\circ$ $\alpha_{Cmax} = 9.0^\circ$ $\alpha_{Mmax} = 13.8^\circ$

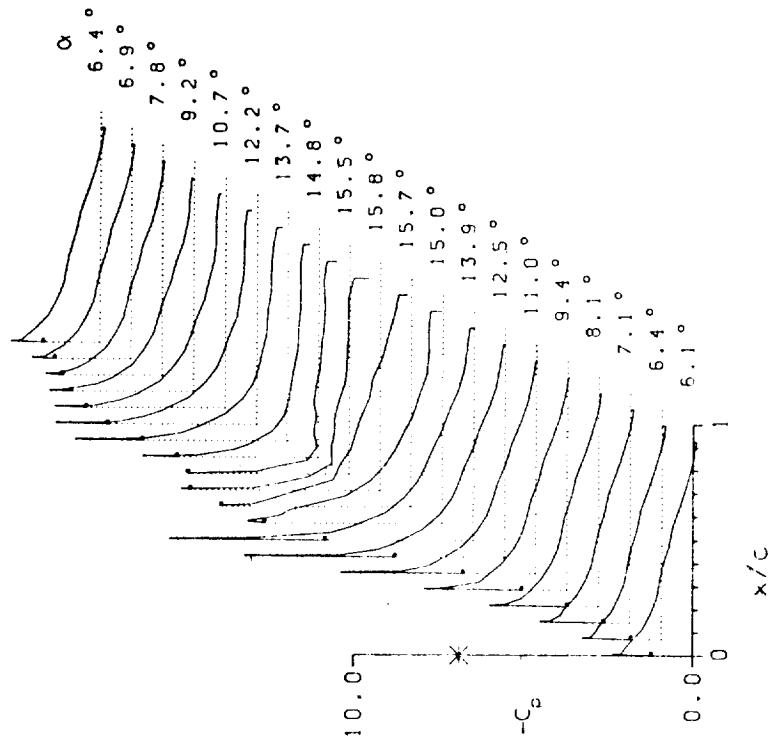


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 44019 $A0 = 9.55^\circ$ $k = 0.010$

$Re = 3.96 \text{ E}6$ $A1 = 5.09^\circ$ $M = 0.301$

$C_{Lmax} = 1.46$ $C_{Mmin} = -0.09$ $C_{Dmax} = 0.17$

$\alpha_{Lmax} = 13.1^\circ$ $\xi = -0.076$ $M_{max} = 1.173$

$\alpha_{Cmin} = 9.4^\circ$ $-C_{pmax} = 8.6$ $\alpha_{Mmax} = 13.3^\circ$

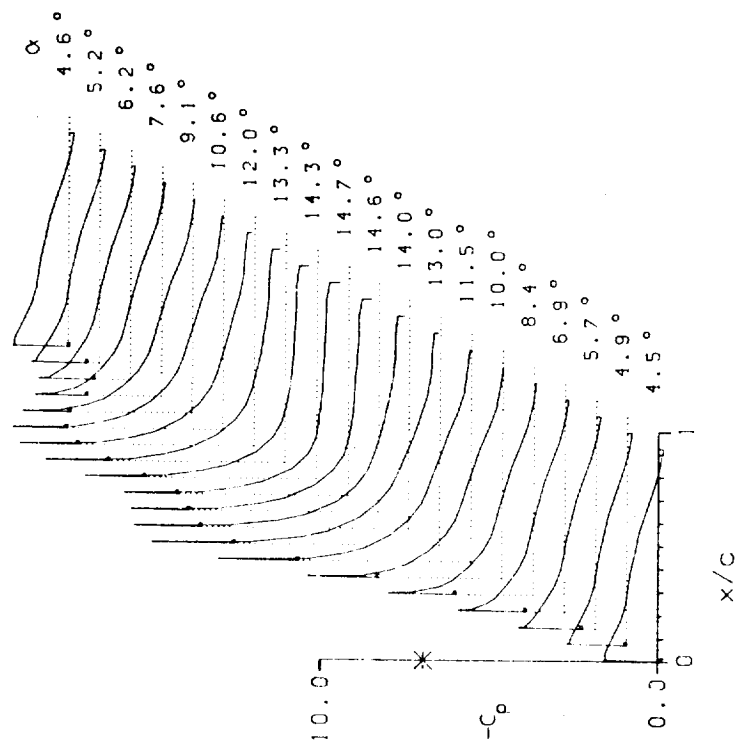
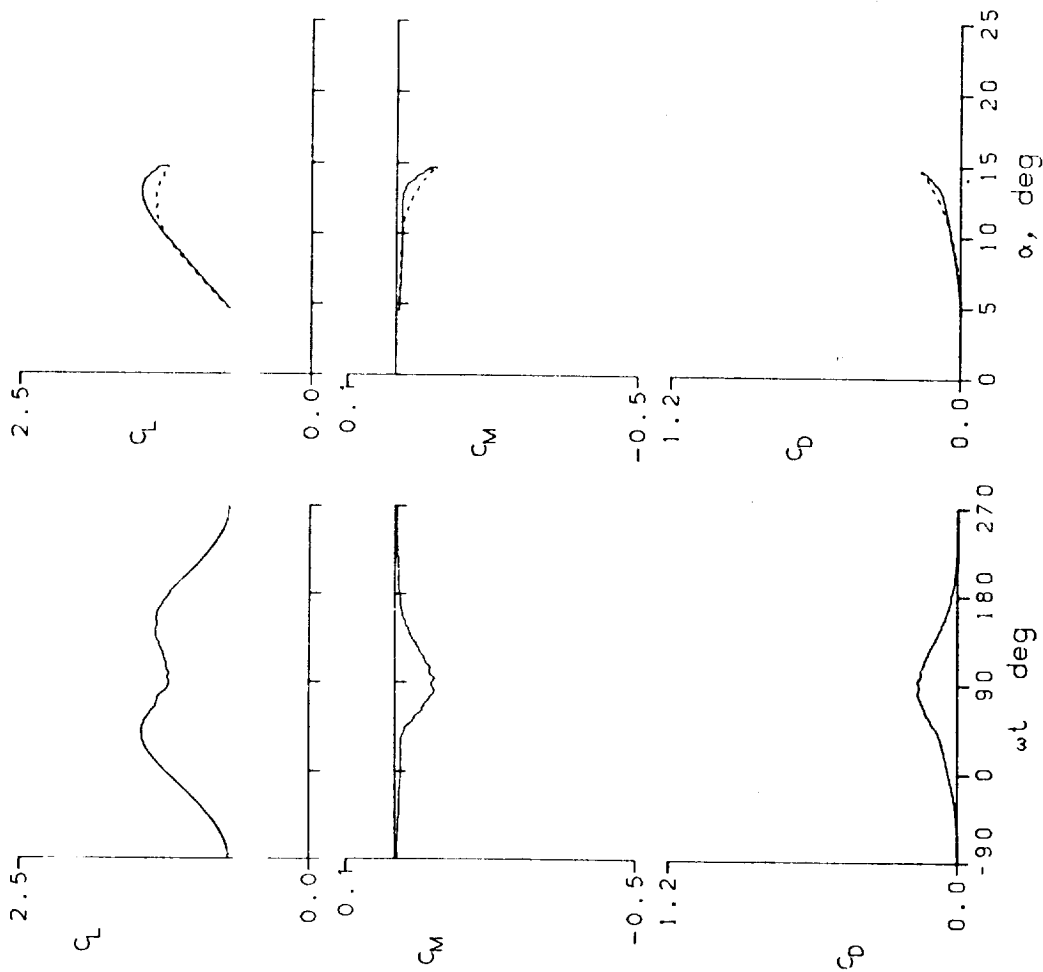


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 44021	A0 = 9.92 °	k = 0.025
Re = 3.95 E6	A1 = 4.91 °	M = 0.302
$C_{Lmax} = 1.53$	$C_{Mmin} = -0.09$	$C_{Dmax} = 0.18$
$\alpha_{Lmax} = 13.4 °$	$\xi = -0.010$	$M_{max} = 1.217$
$\alpha_{Cmin} = 9.7 °$	$-C_{Pmax} = 8.9$	$\alpha_{Mmax} = 13.8 °$

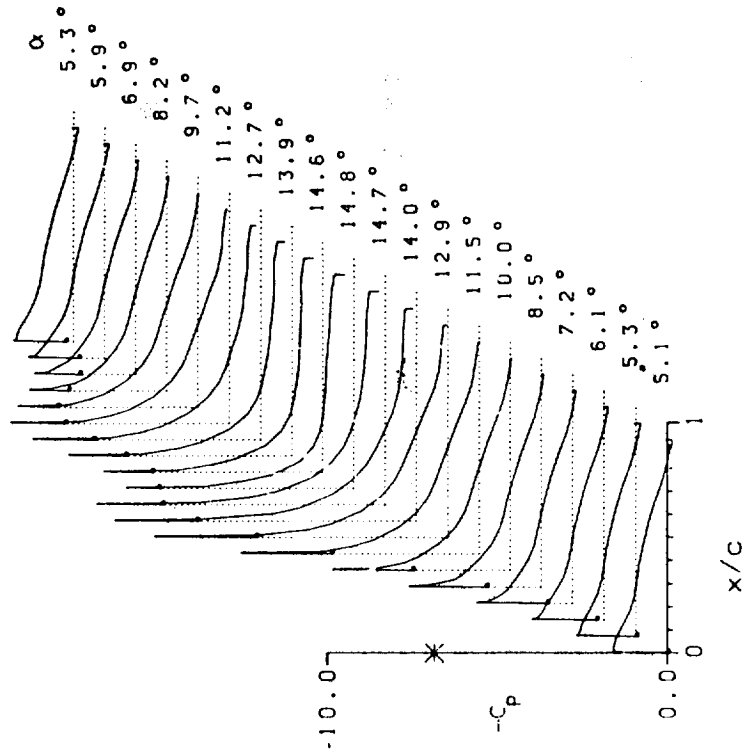
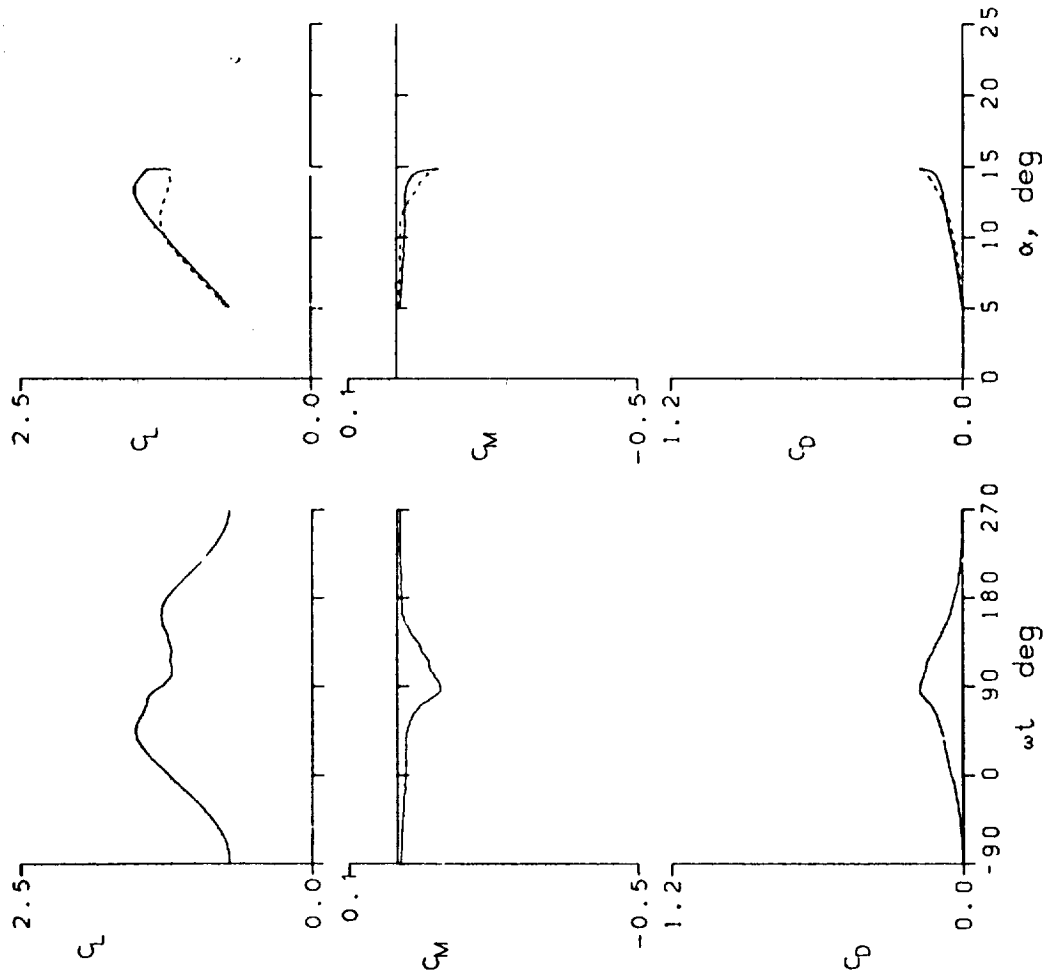


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 44023	A0 = 9.90°	k = 0.050
Re = 3.94 E6	A1 = 4.92°	M = 0.302
CLmax = 1.58	CMmin = -0.08	CDmax = 0.19
αLmax = 13.6°	ξ = 0.081	Mmax = 1.416
αCMmin = 9.7°	-CDmax = 8.9	αMmax = 13.5°

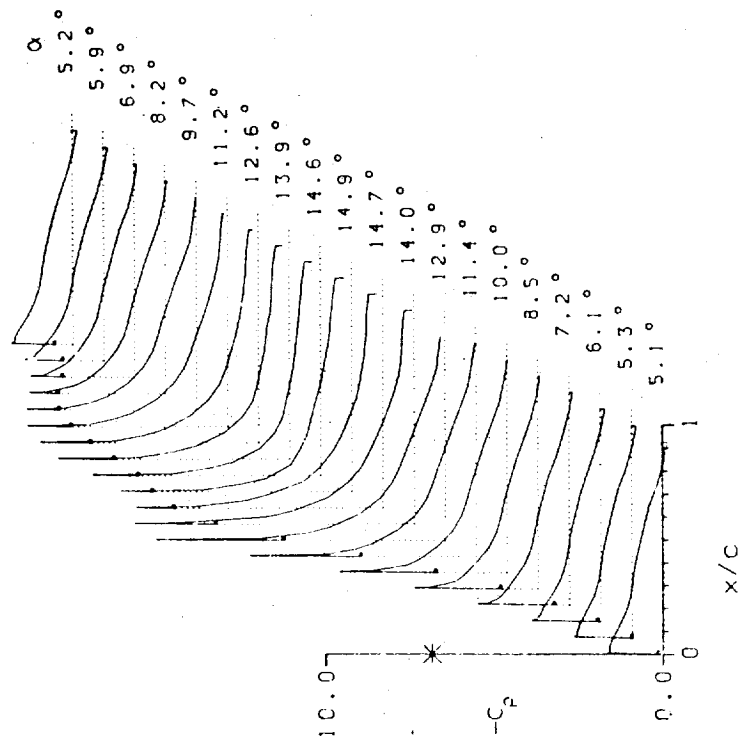
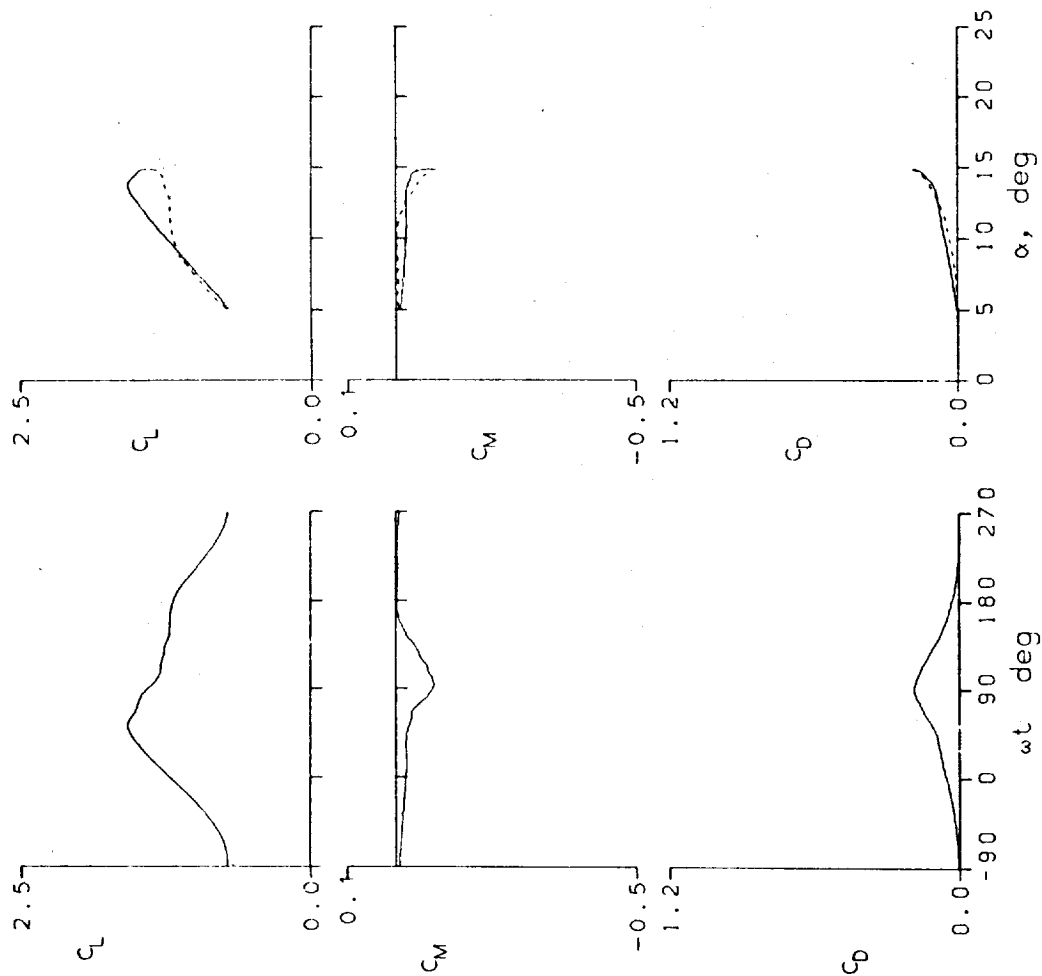


Figure 16.- Continued.

HUGHES HH-02 - WITH TAB- AIRFOIL

FRAME : 44104	A0 = 9.90 °	k = 0.099
Re = 4.00 E6	A1 = 4.90 °	M = 0.303
CLmax = 1.65	CMmin = -0.13	CDmax = 0.25
αLmax = 14.9 °	ξ = 0.104	Mmax = 1.225
αCMmin = 9.6 °	-CDmax = 9.0	αMmax = 13.8 °



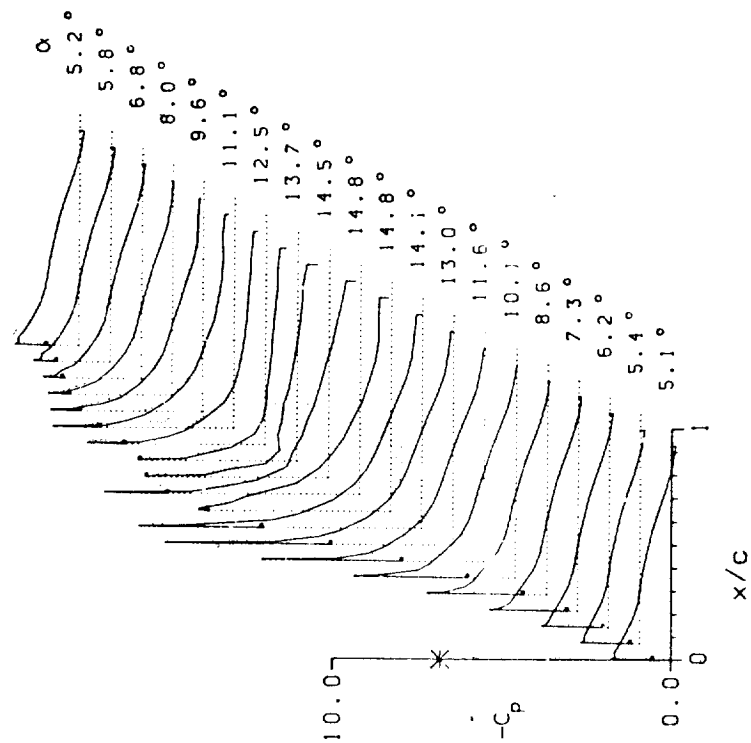


Figure 16.- Continued.

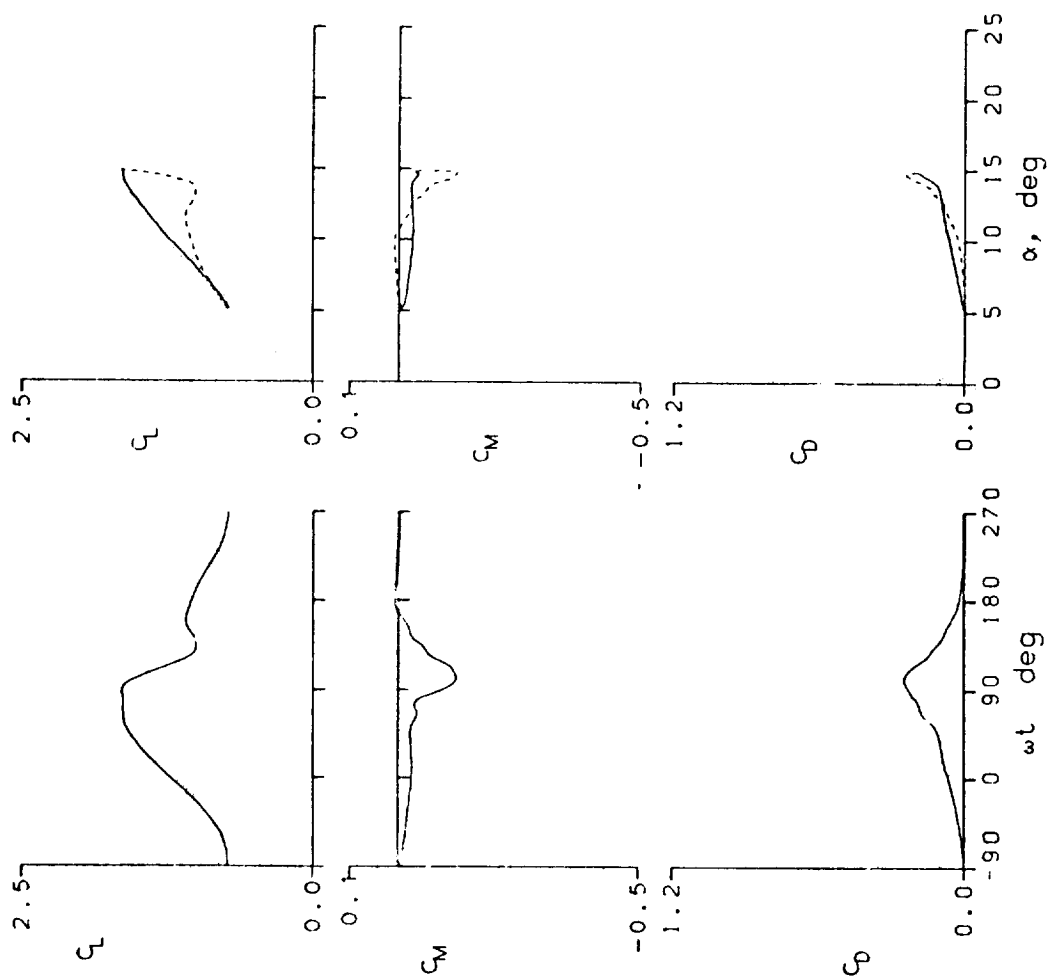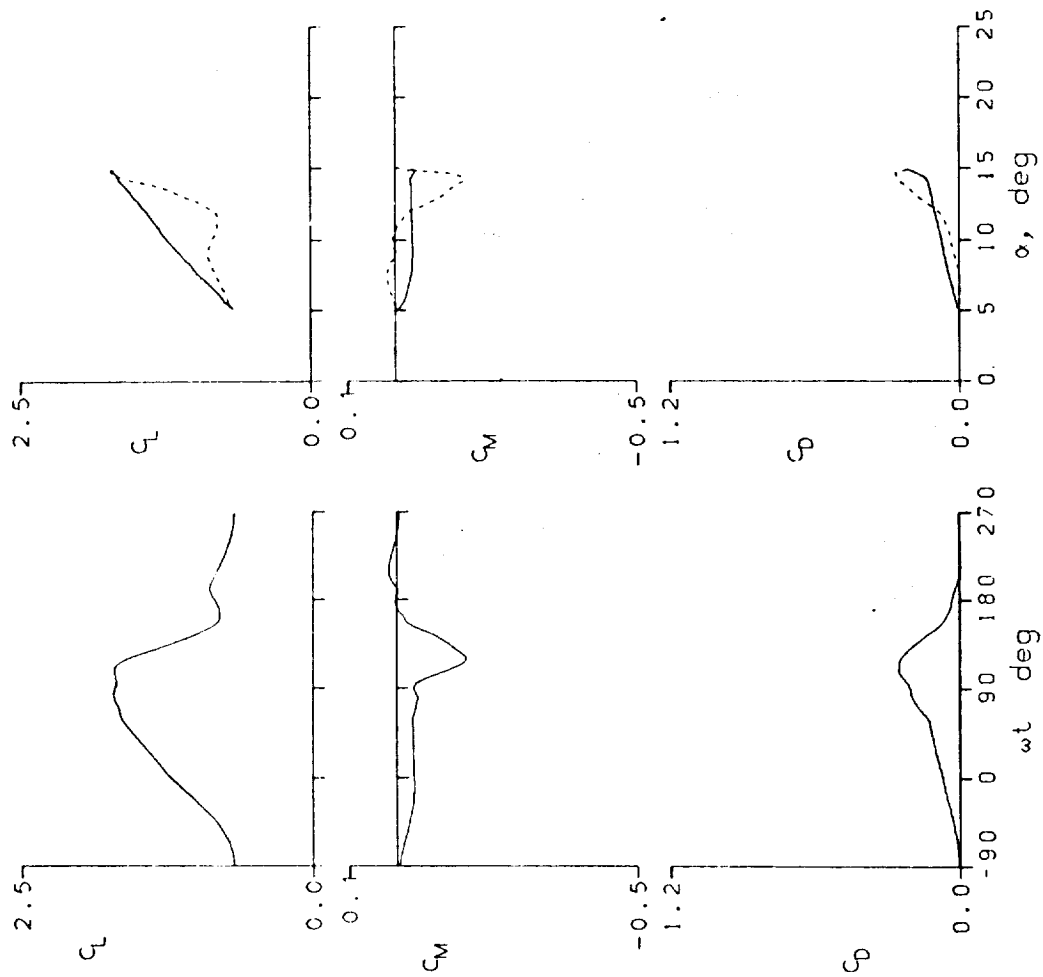

HUGHES HH-02 - WITH TAB- AIRFOIL

FRAME : 44106 $A_0 = 9.93^\circ$ $k = 0.149$

$Re = 3.99 \text{ E}6$ $A_1 = 4.91^\circ$ $M = 0.303$

$C_{Lmax} = 1.72$ $C_{Mmin} = -0.15$ $C_{Dmax} = 0.26$

$\alpha_{1max} = 14.9^\circ$ $\xi = 0.093$ $M_{max} = 1.227$

$\alpha_{Cmin} = 9.7^\circ$ $-C_{Dmax} = 9.0$ $\alpha_{Mmax} = 14.0^\circ$

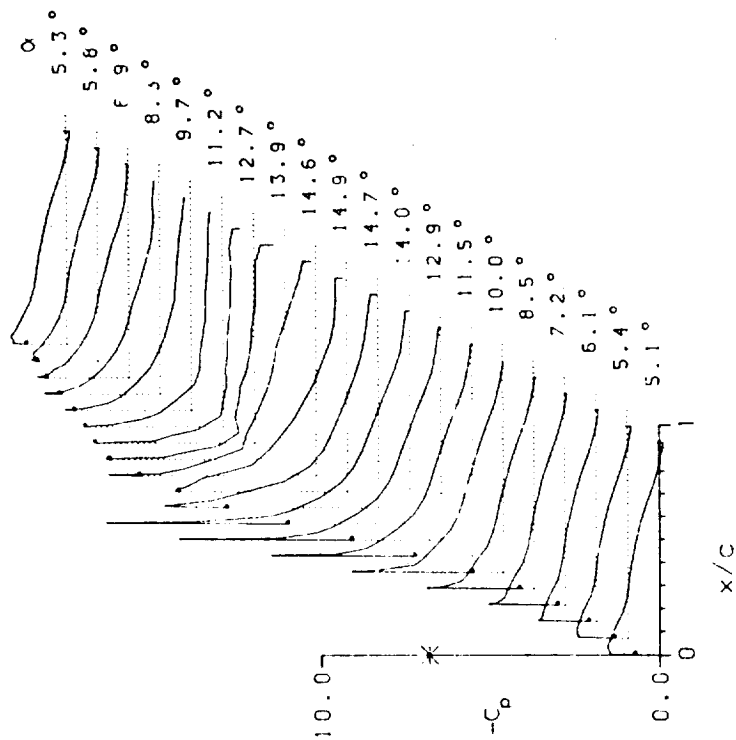


Figure 16.- Continued.

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 44112	A0 = 9.85 °	k = 0.199
Re = 4.00 E6	A1 = 4.90 °	M = 0.303
C _{Lmax} = 1.84	C _{Mmin} = -0.21	C _{Dmax} = 0.32
α _{Lmax} = 14.9 °	ξ = -0.010	M _{max} = 1.221
α _{Cmin} = 9.6 °	-C _{pmax} = 8.9	α _{Mmax} = 14.0 °

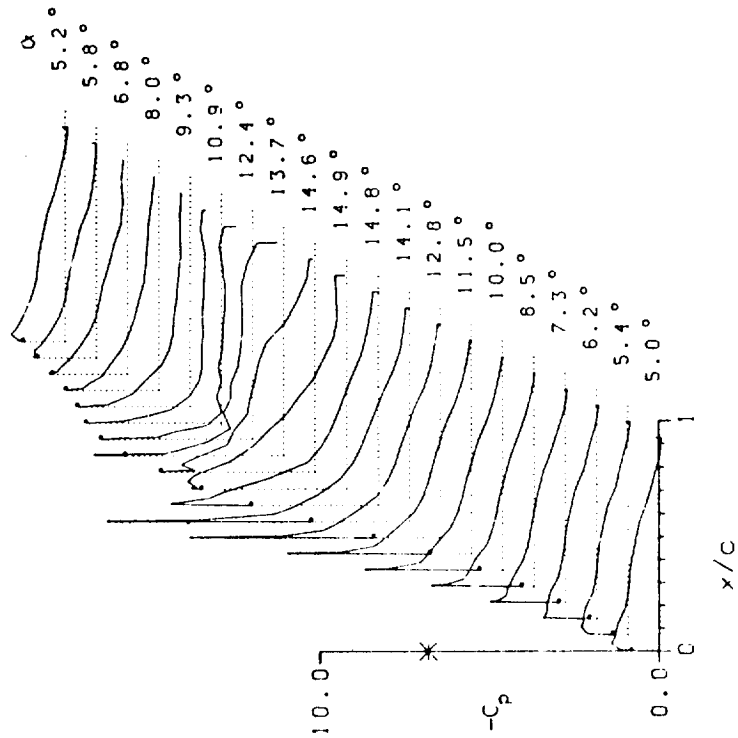
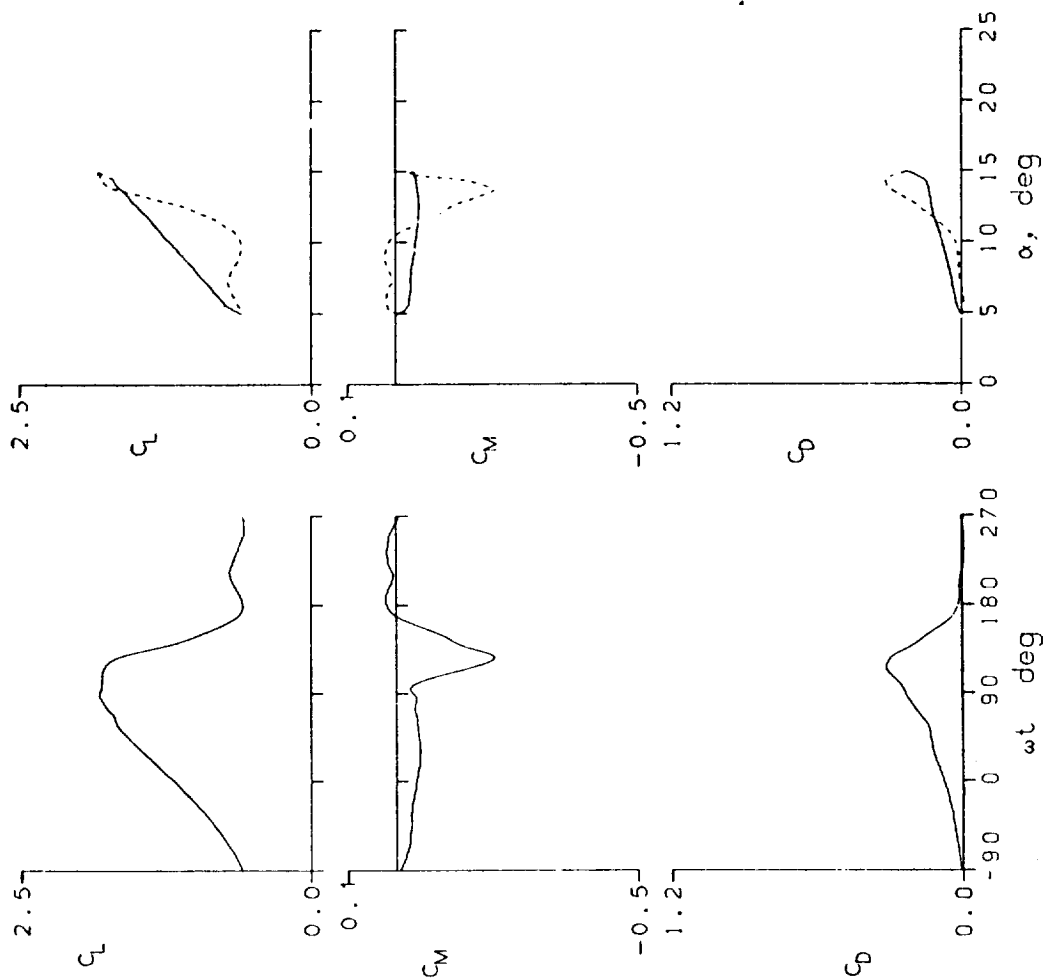


Figure 16.- Continued.

HUGHES HH-02 - WITH TAB- AIRFOIL

FRAME : 44118 $A_0 = 9.89^\circ$ $\kappa = 0.100$

$Re = 4.04 \text{ E}6$ $A_1 = 4.89^\circ$ $M = 0.302$

$C_{Lmax} = 1.67$ $C_{Mmin} = -0.12$ $C_{Dmax} = 0.24$

$\alpha_{Lmax} = 14.9^\circ$ $\zeta = 0.179$ $M_{max} = 1.241$

$\alpha_{Cmin} = 9.7^\circ$ $-C_{Dmax} = 9.2$ $\alpha_{Mmax} = 13.8^\circ$

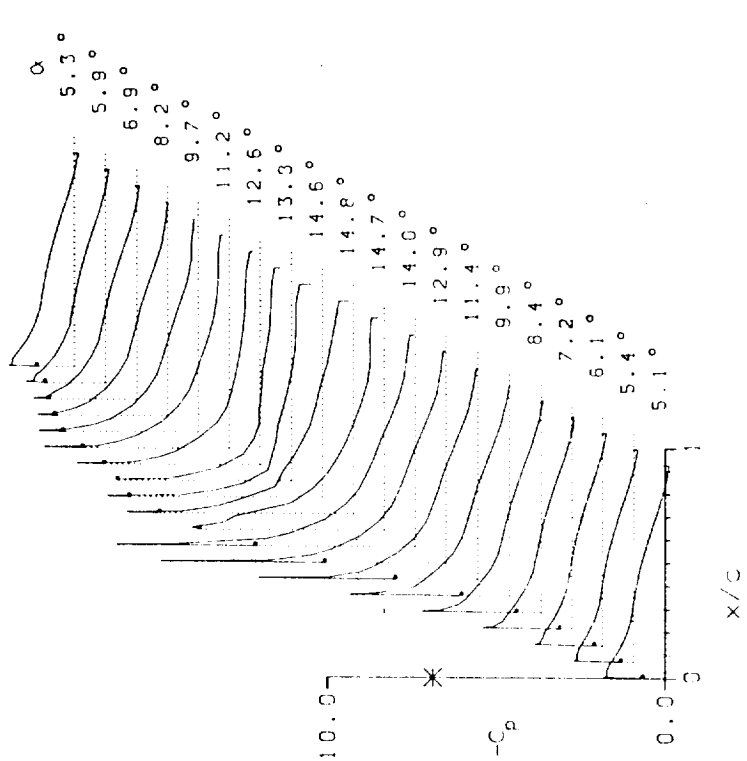
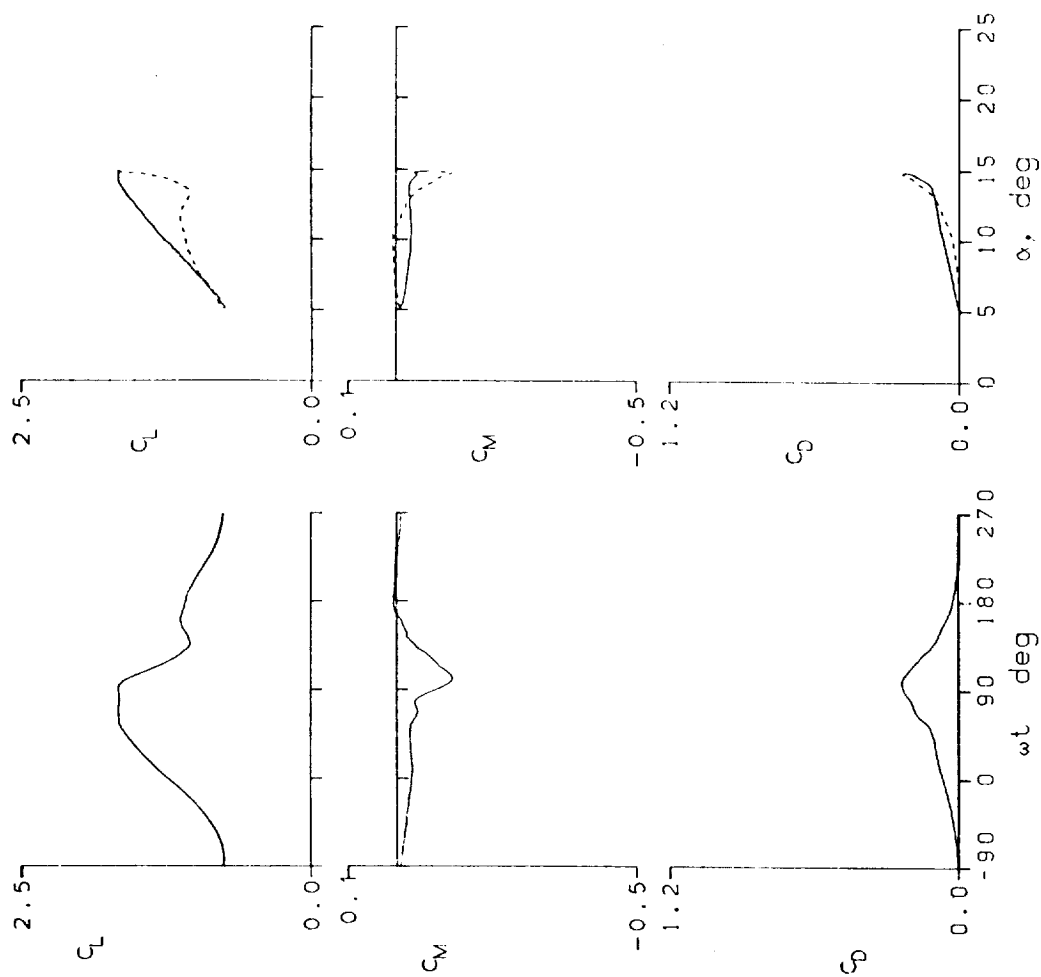


Figure 16.- Continued.

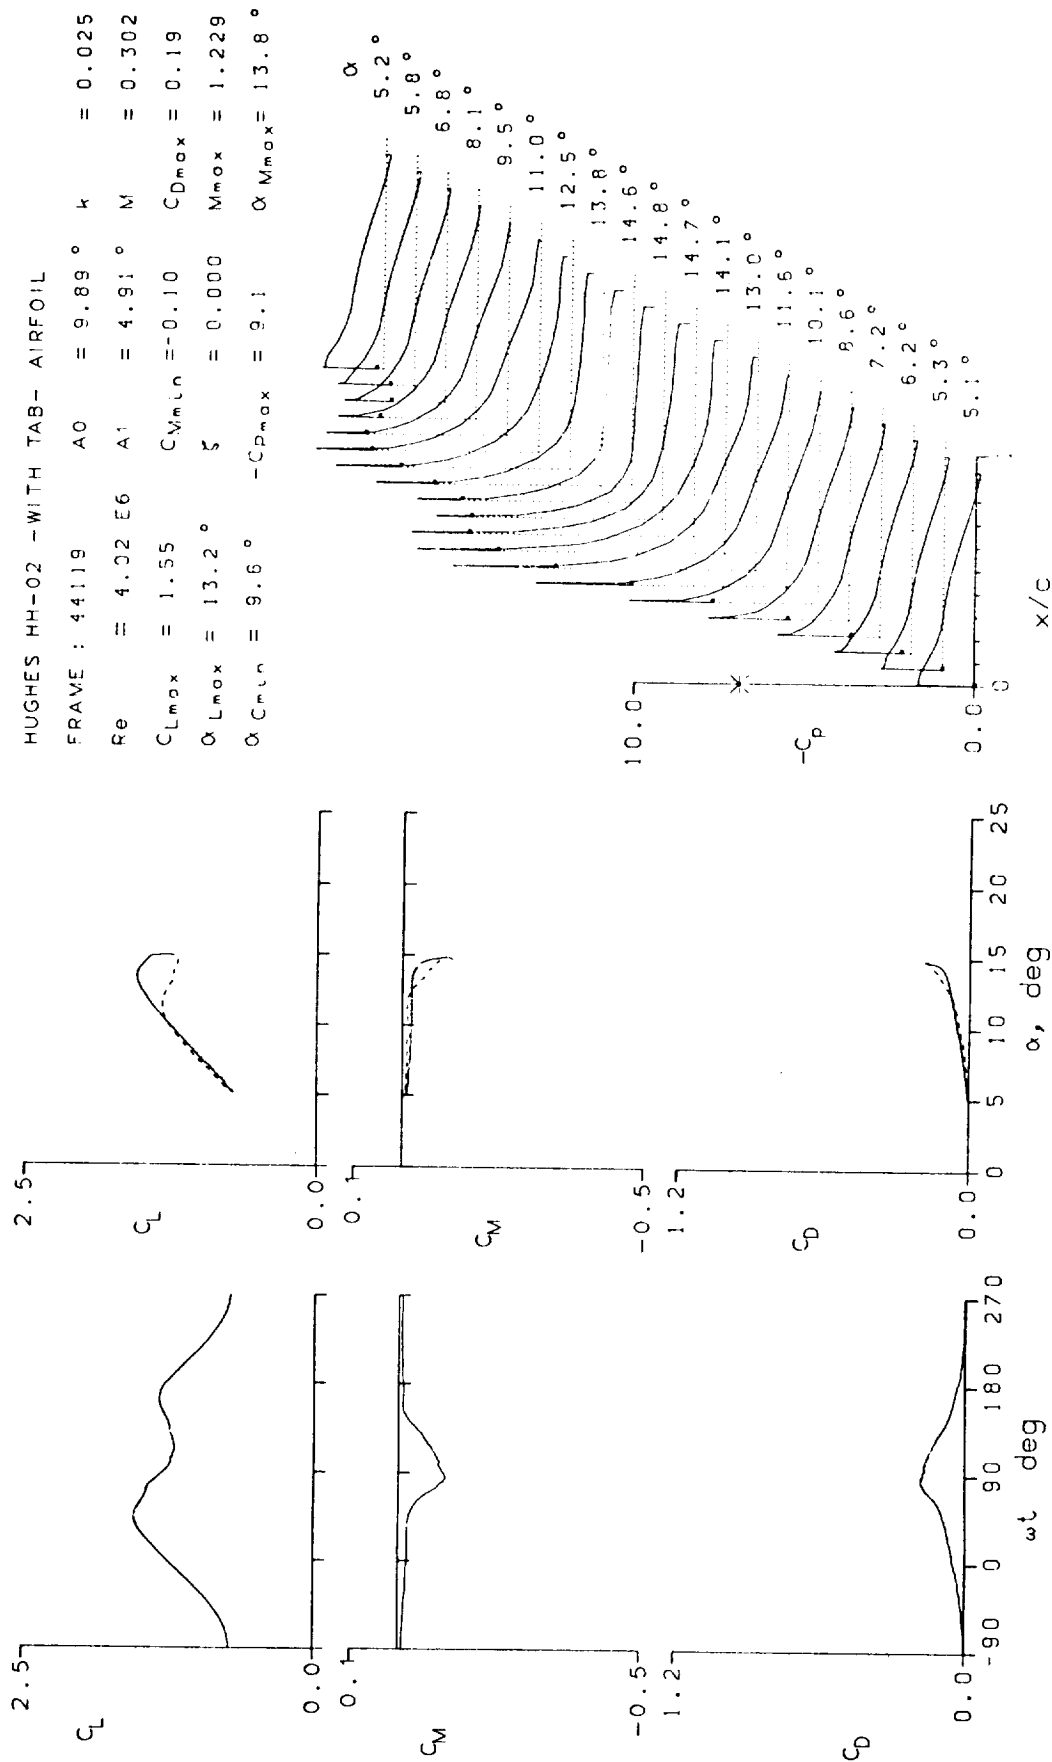


Figure 16.- Continued.


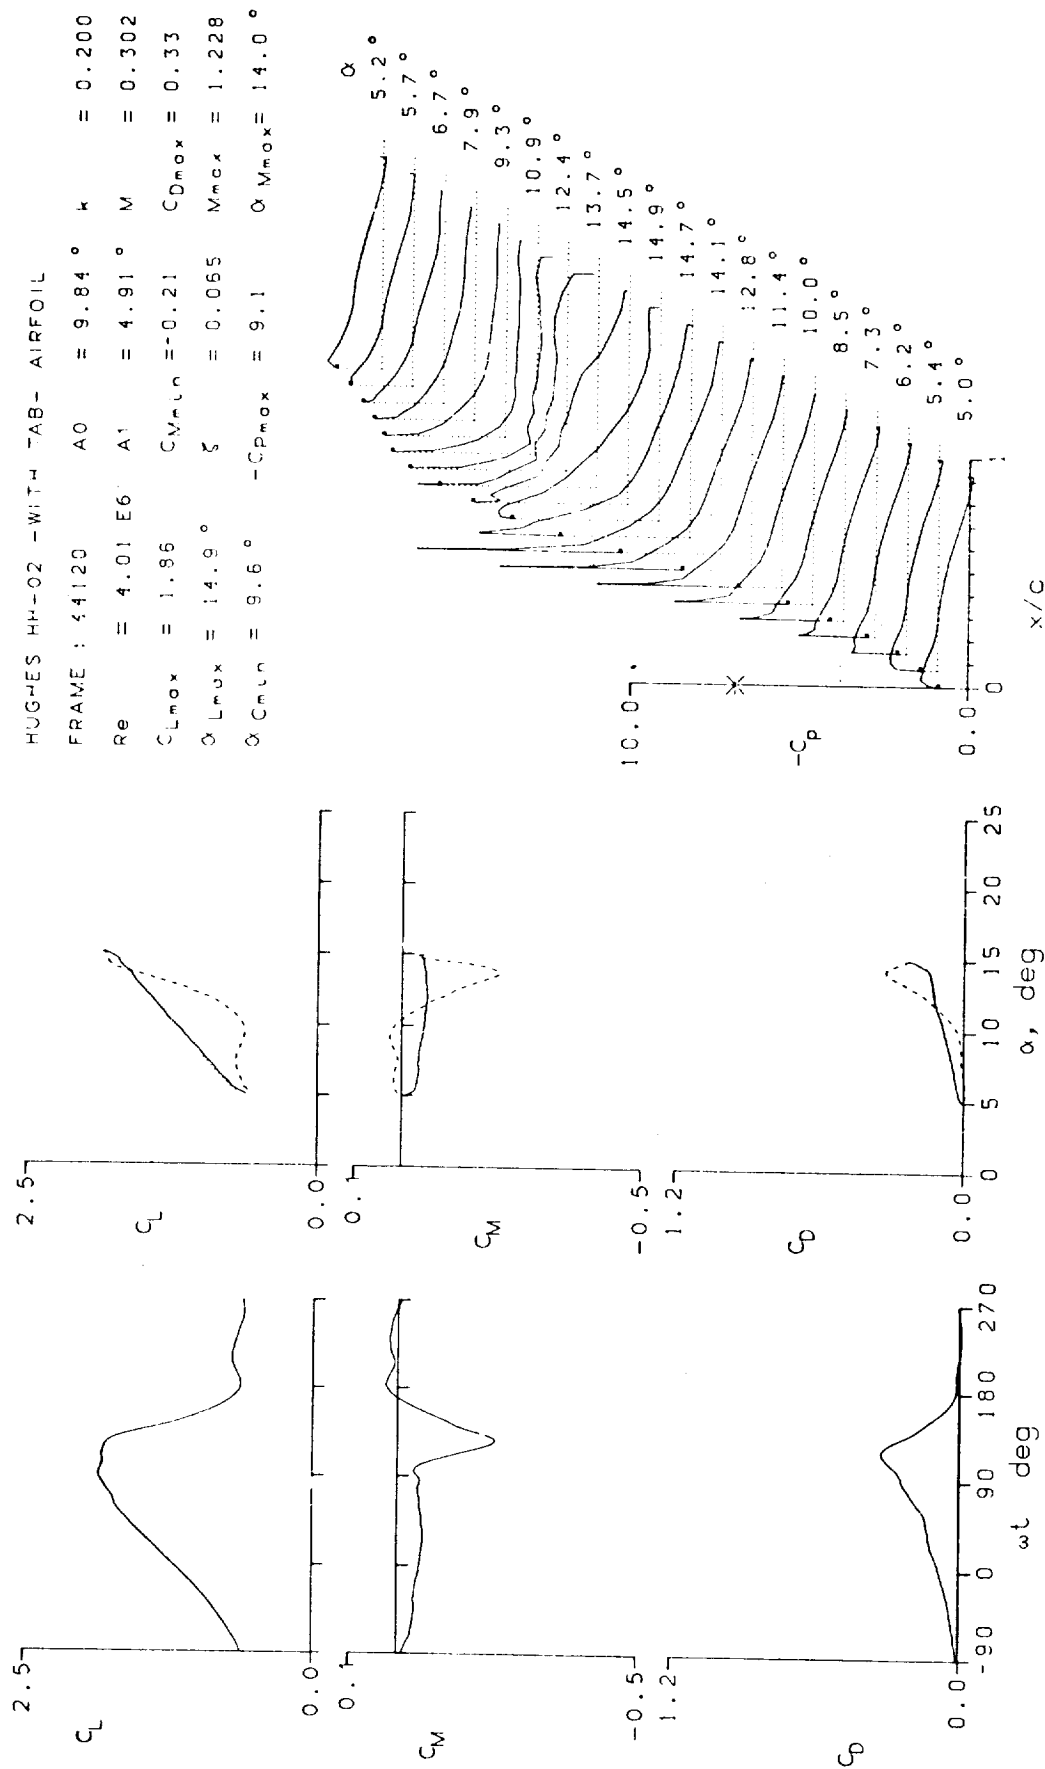


Figure 16.- Continued.

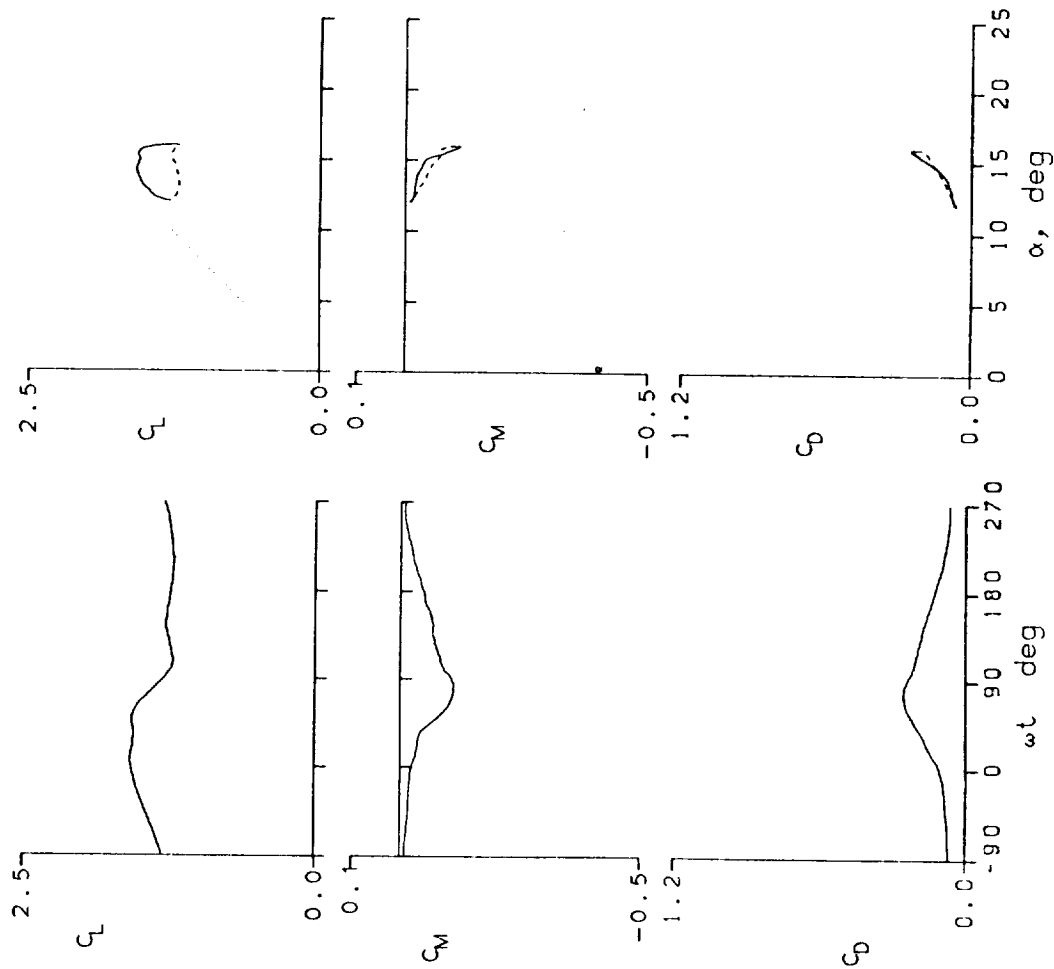

HUGHES HH-02 -WITH TAB- AIRFOIL
 FRAME : 44202 $A_0 = 14.02^\circ$ $k = 0.100$
 $Re = 4.00 \text{ E}6$ $A_1 = 1.98^\circ$ $M = 0.301$
 $C_{L_{max}} = 1.59$ $C_{M_{min}} = -0.12$ $C_{D_{max}} = 0.26$
 $\alpha_{L_{max}} = 14.1^\circ$ $\xi = -0.288$ $M_{max} = 1.226$
 $\alpha_{C_{L_{max}}} = 14.0^\circ$ $-C_{D_{min}} = 9.1$ $\alpha_{M_{max}} = 13.7^\circ$

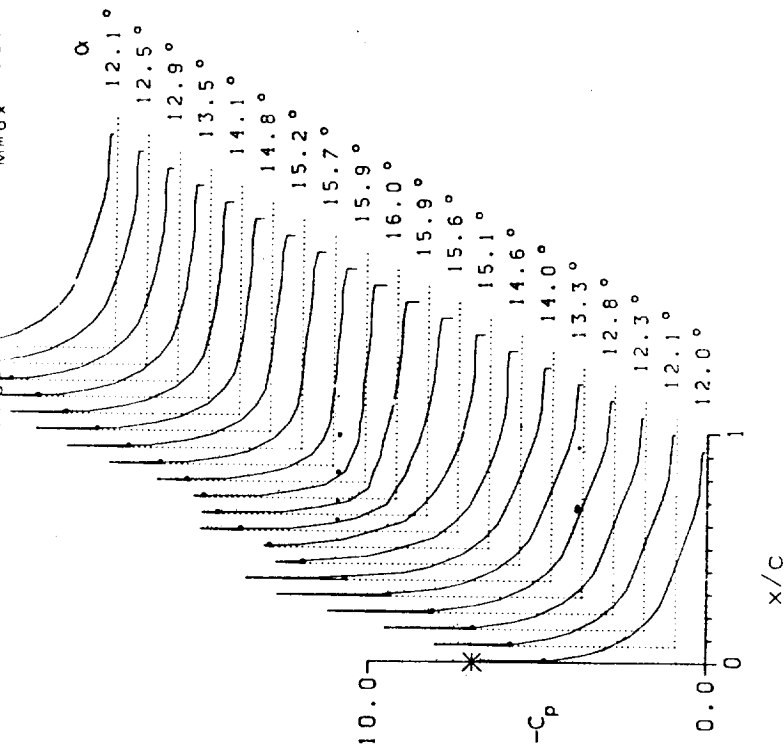


Figure 16.- Continued.

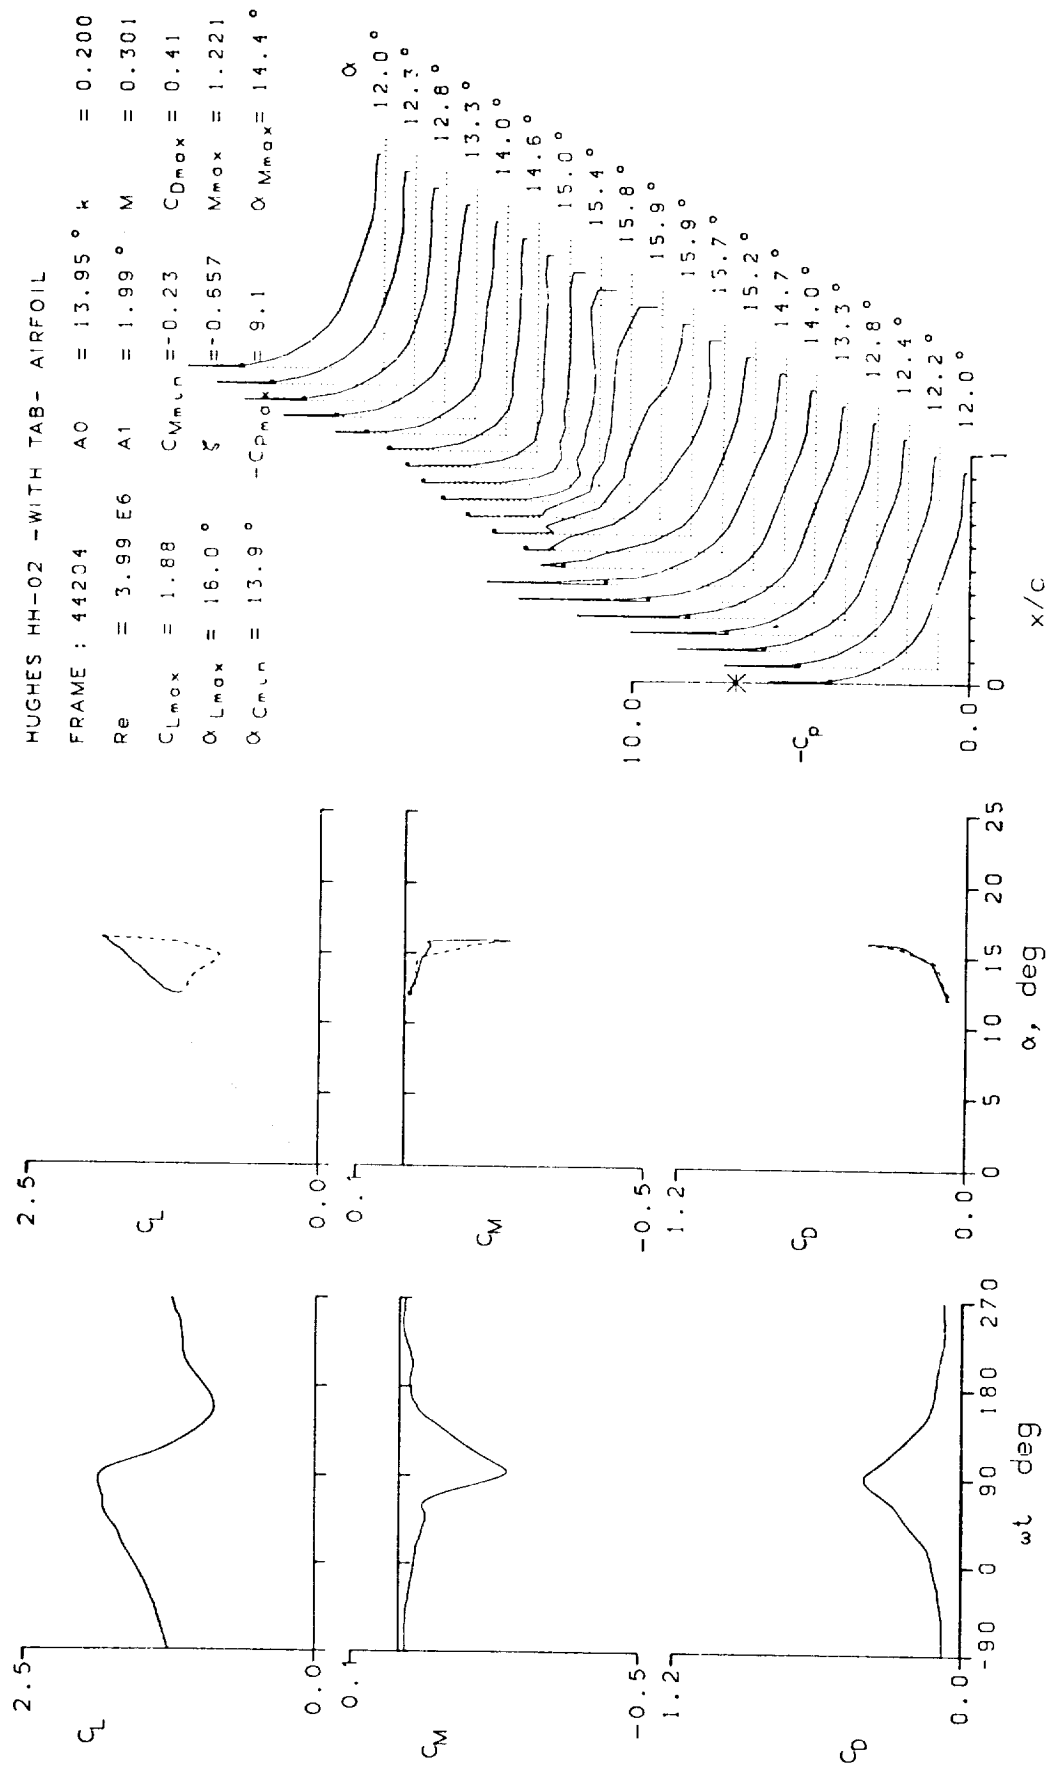


Figure 16.- Continued.

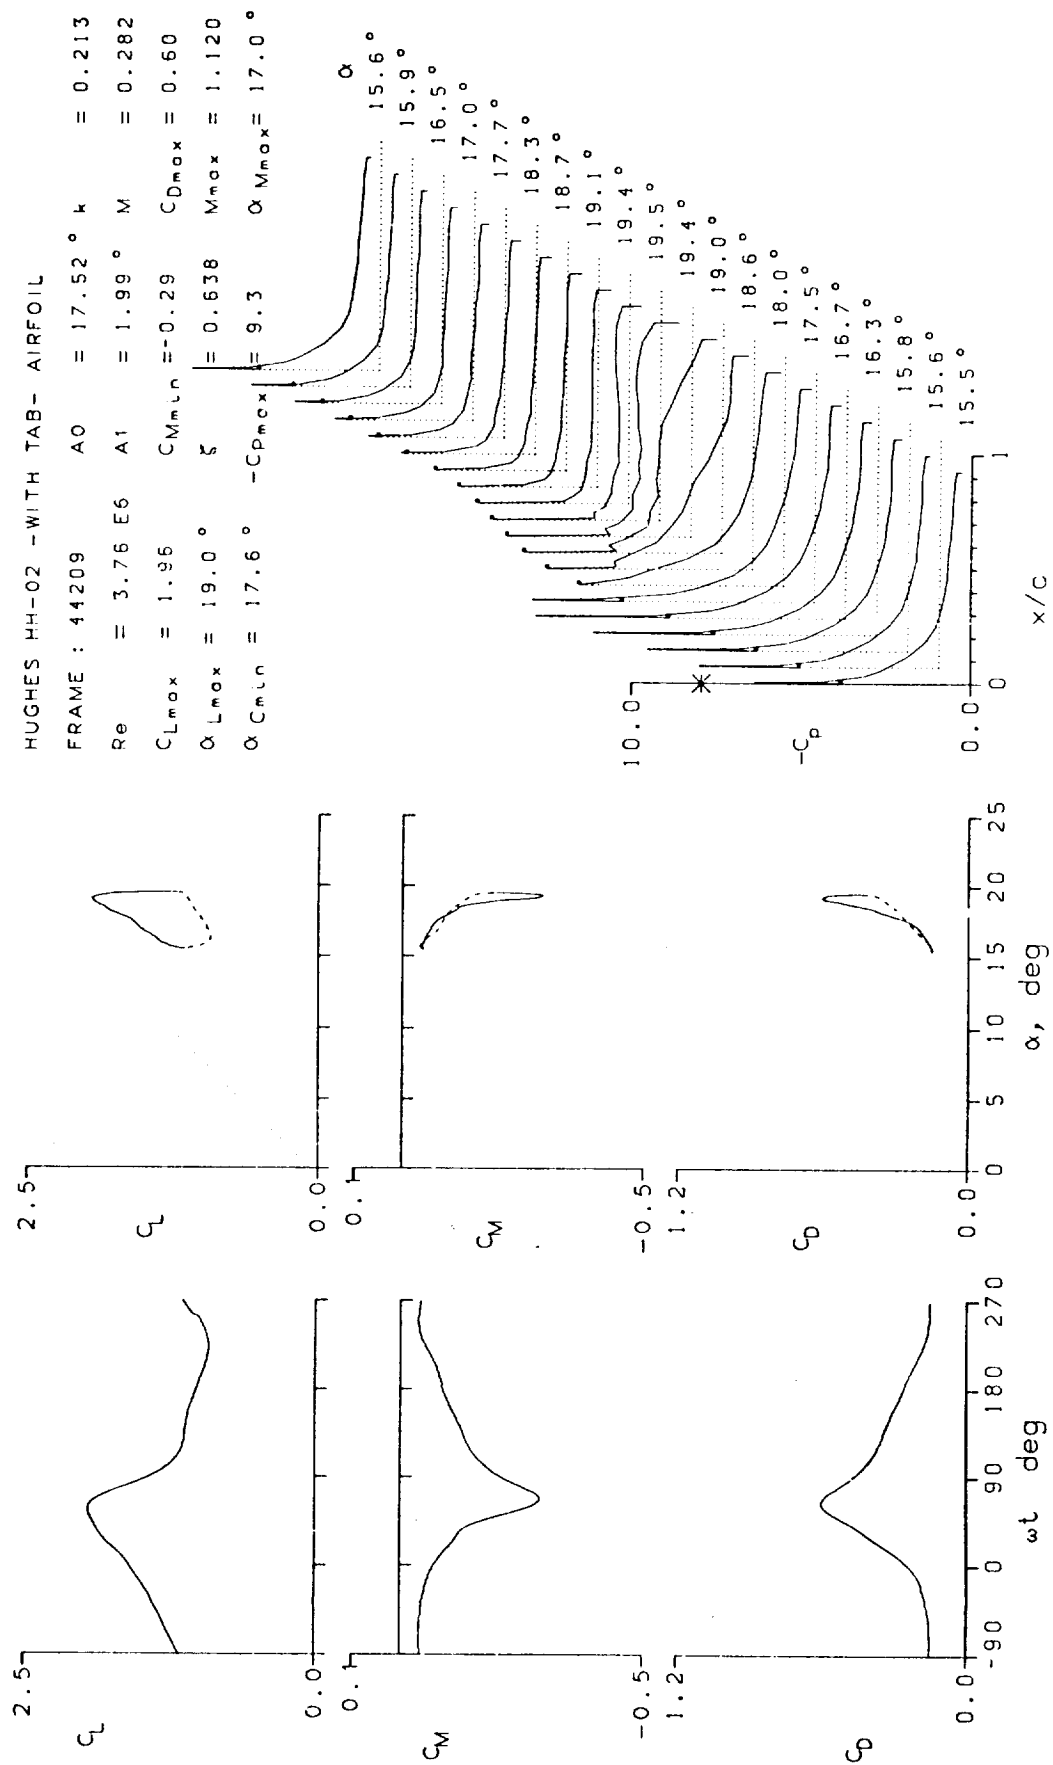


Figure 16.- Continued.

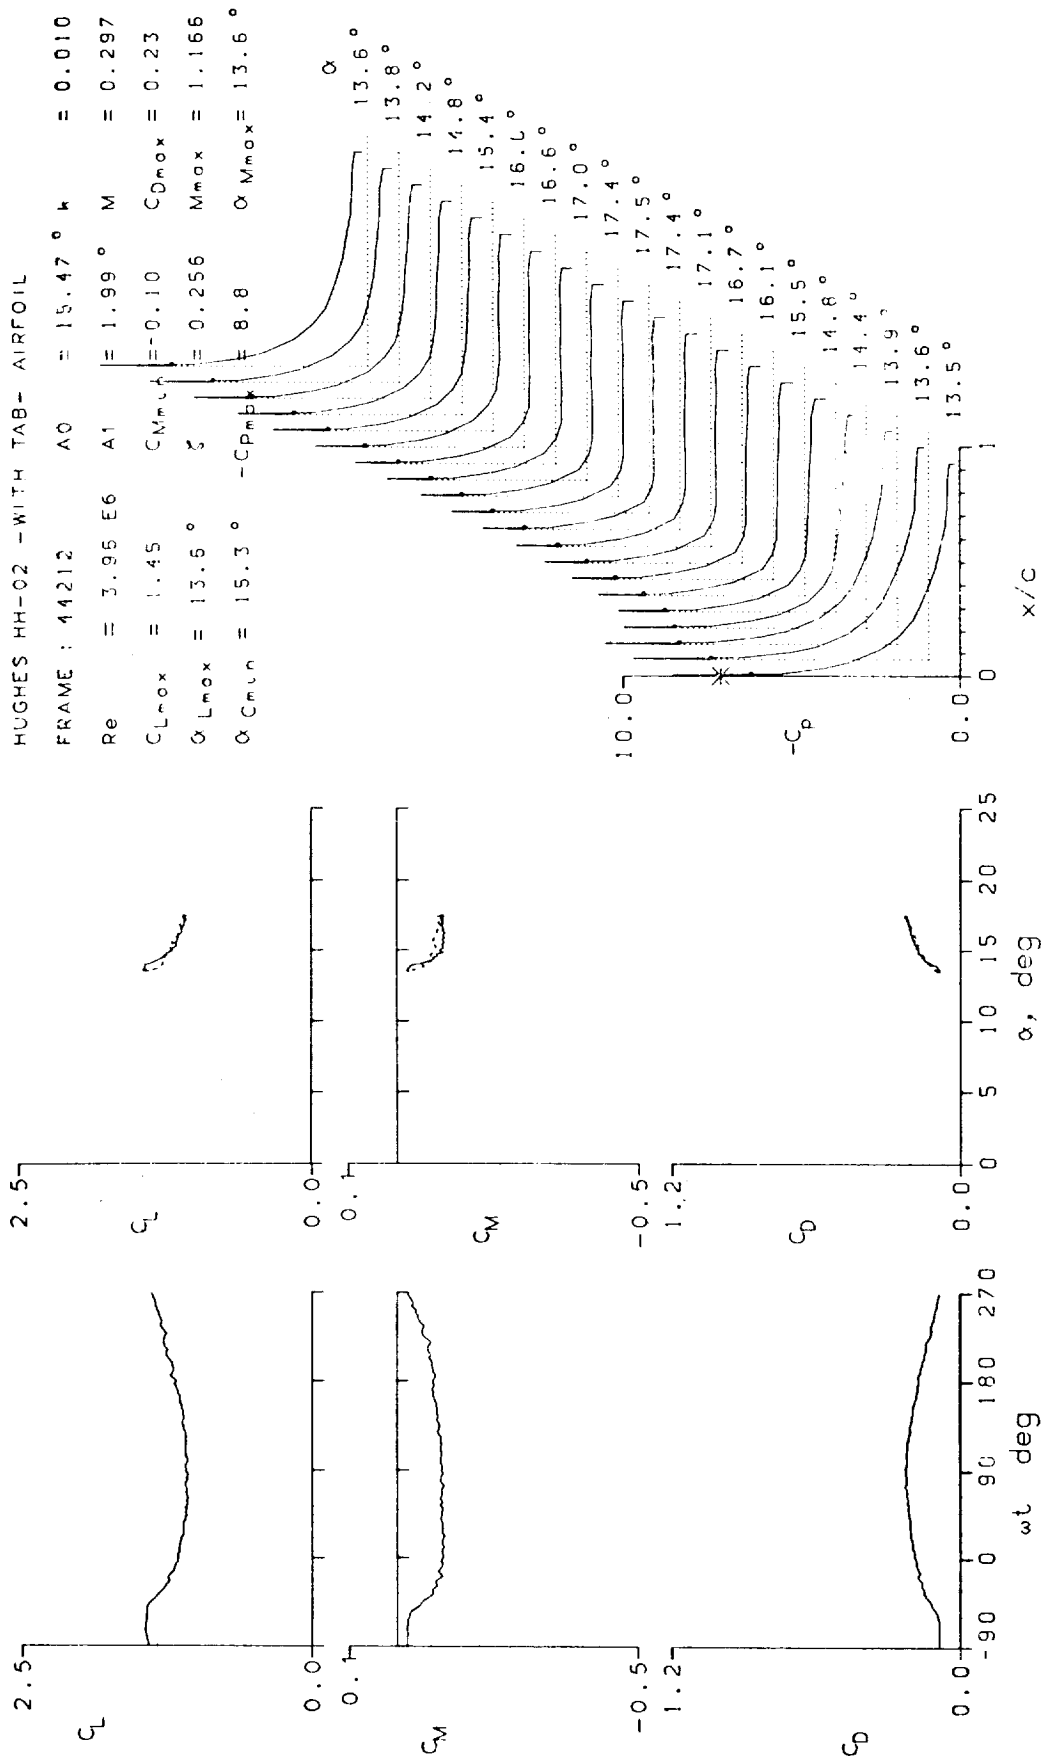


Figure 16.- Continued.

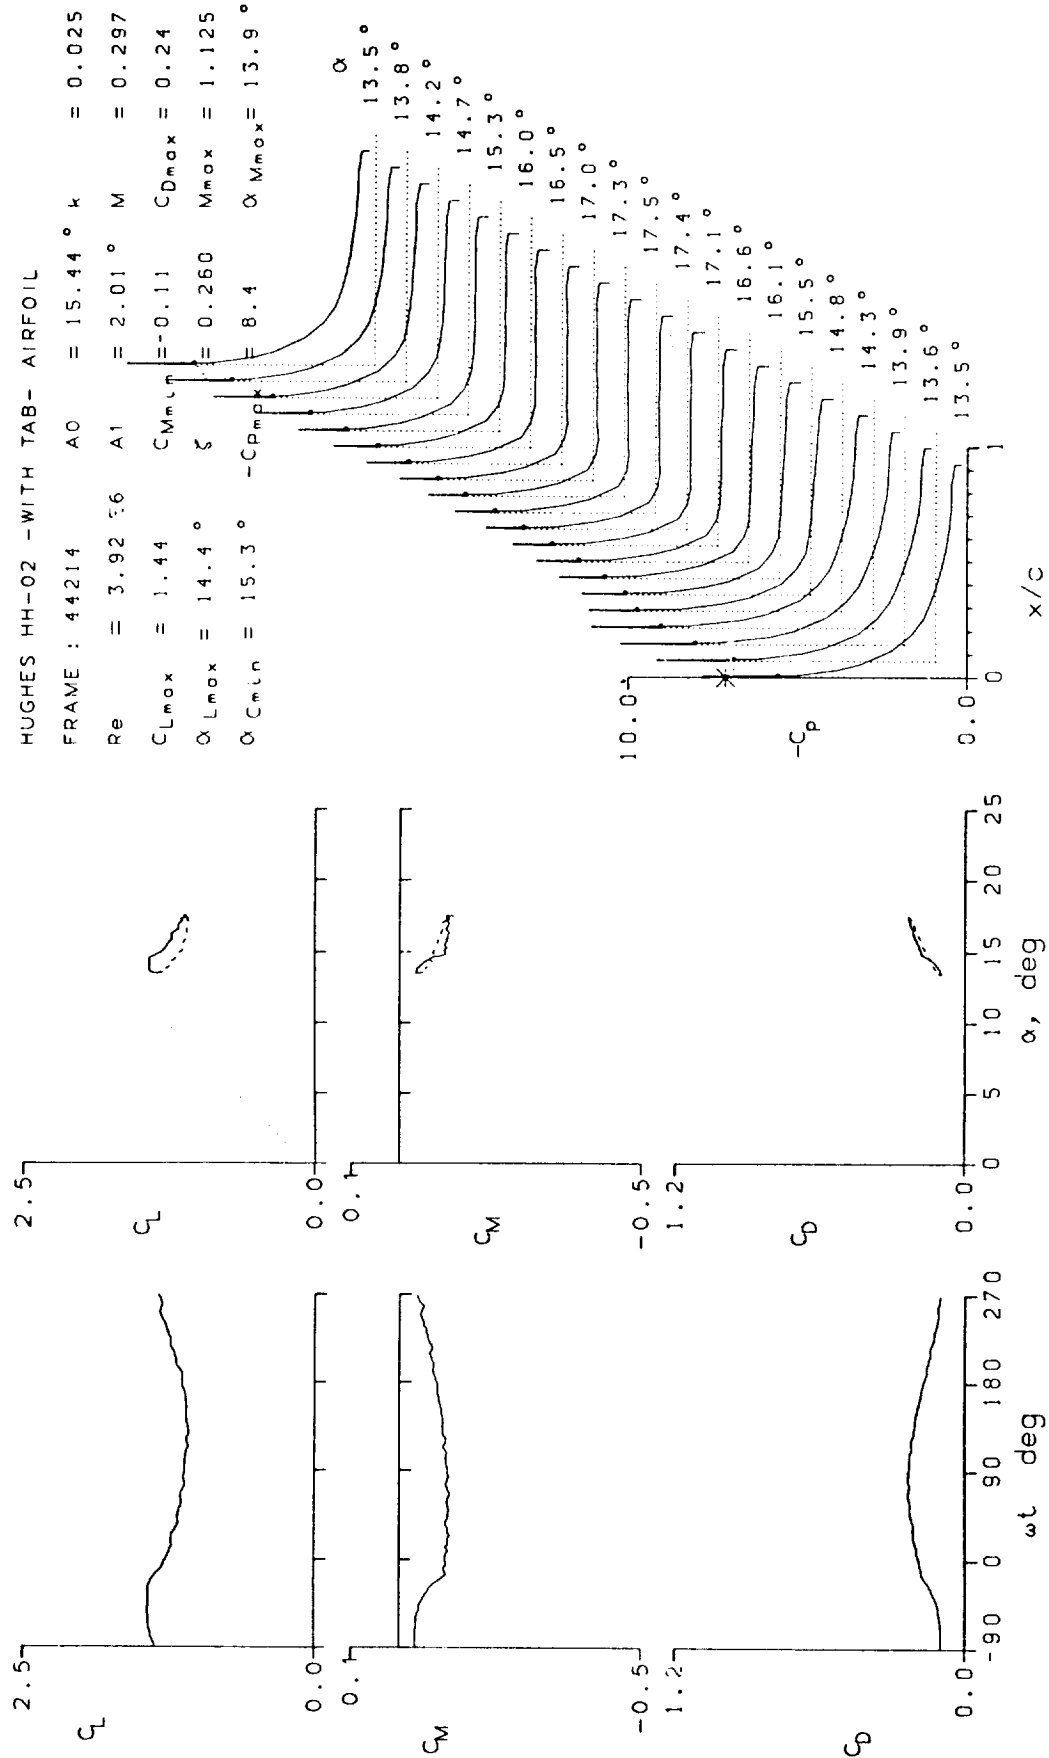


Figure 16.- Continued.

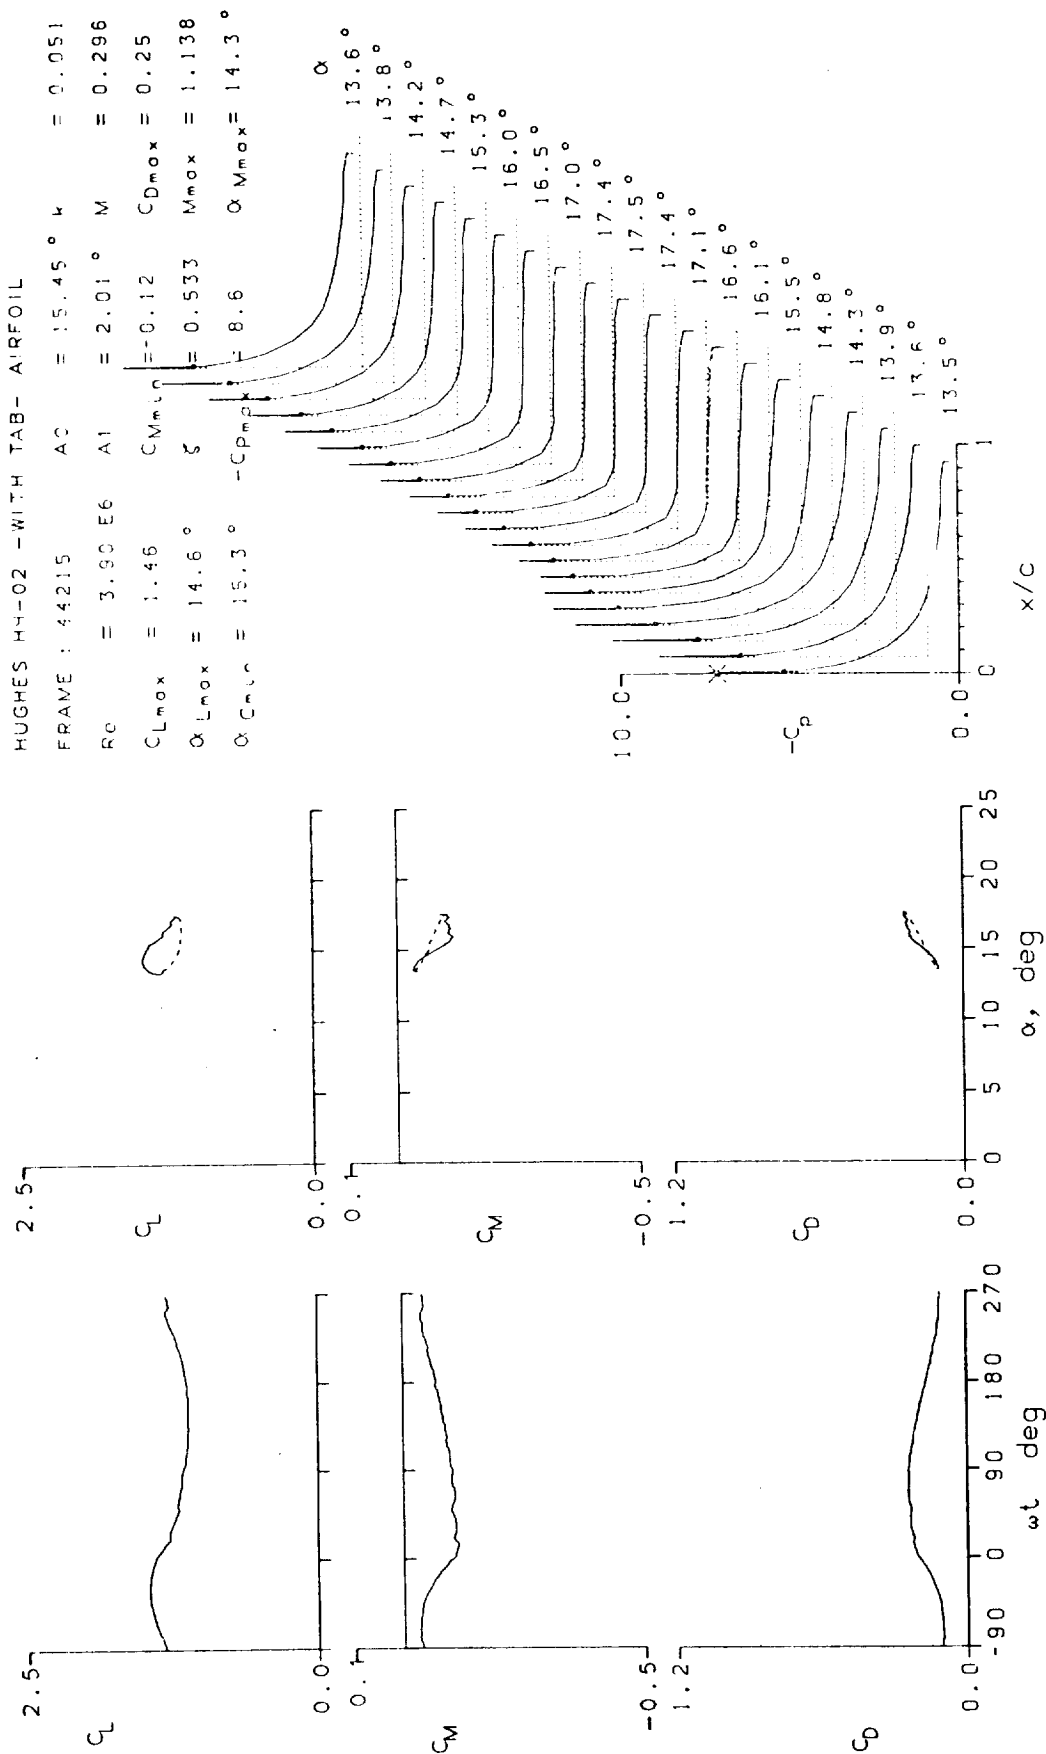


Figure 16.- Continued.


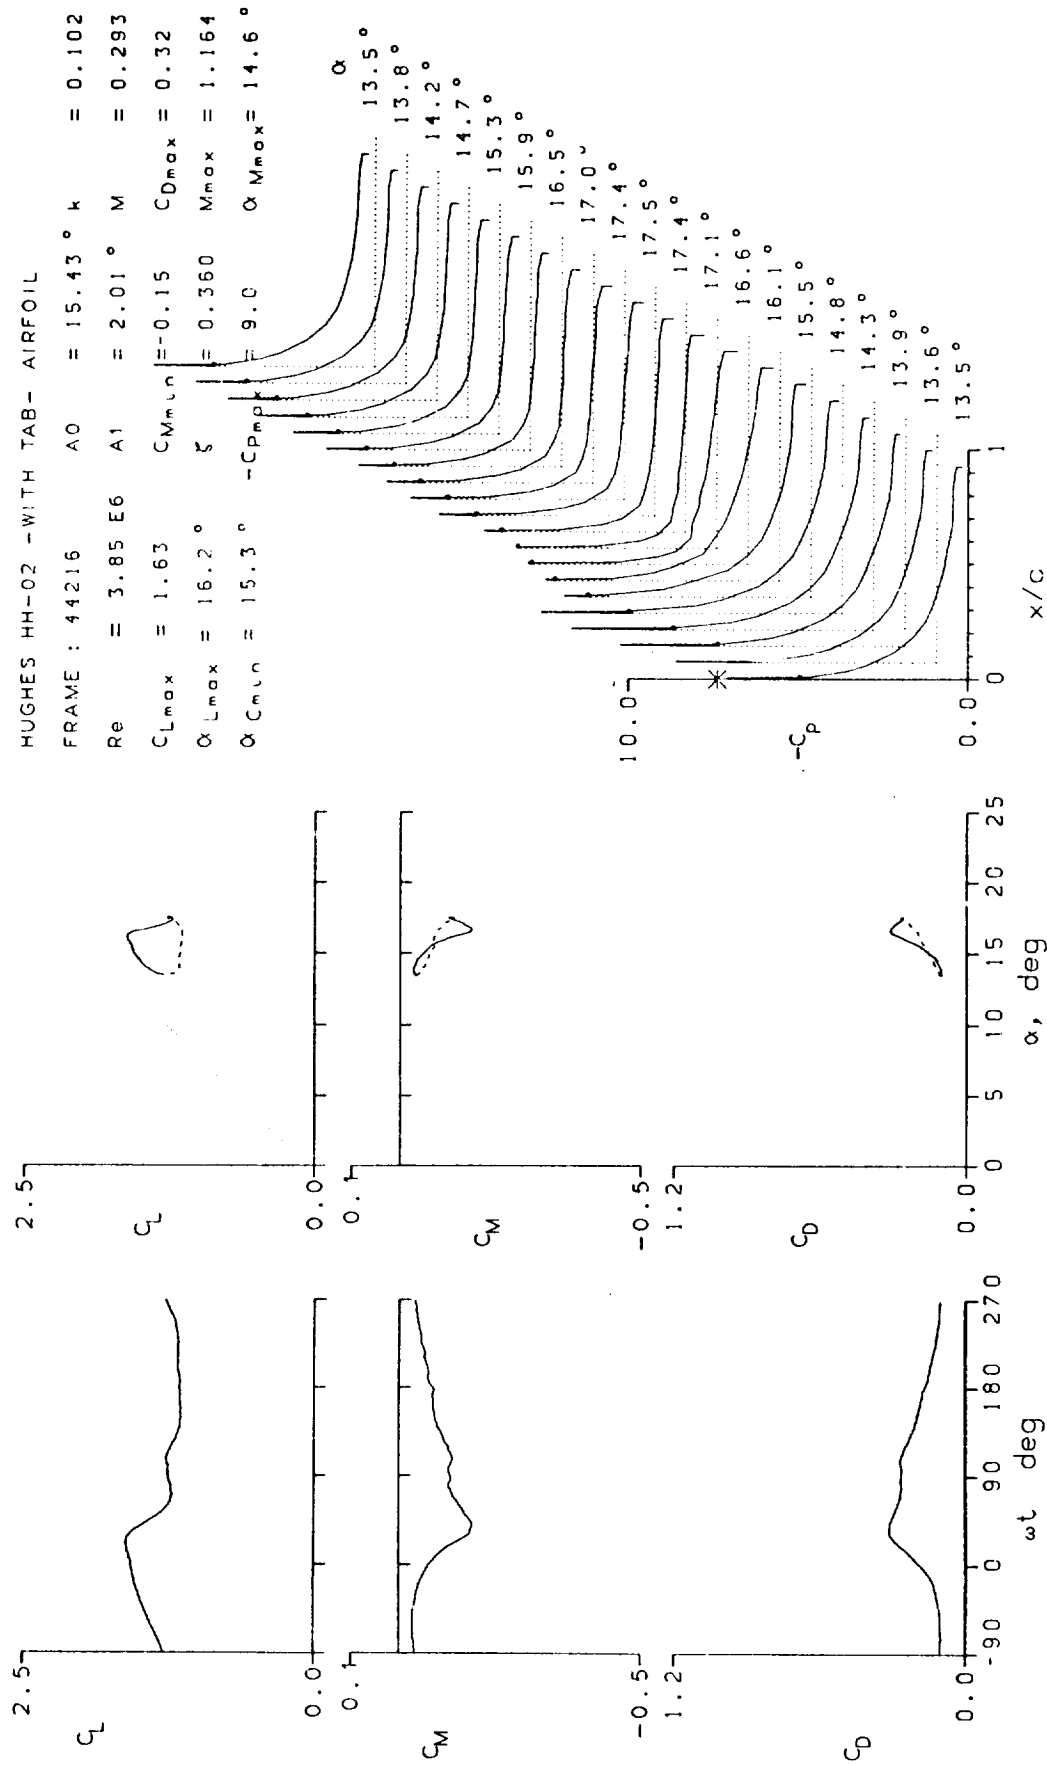


Figure 16.- Continued.

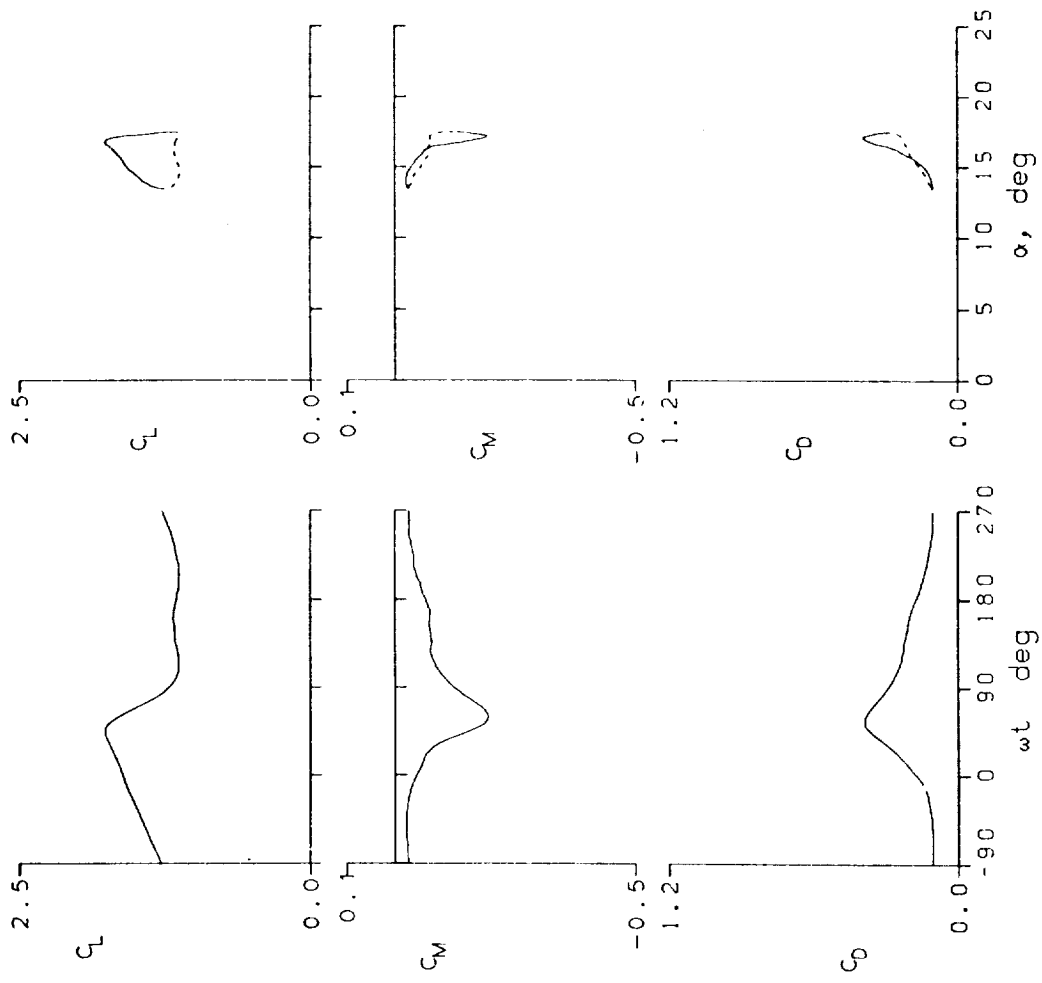

HUGHES HH-02 -WITH TAB- AIRFOIL

FRAME : 44217 $A_0 = 15.44^\circ$ $k = 0.154$

$Re = 3.83 \text{ E}6$ $A_1 = 2.01^\circ$ $M = 0.291$

$C_{Lmax} = 1.77$ $C_{Mmin} = -0.20$ $C_{Dmax} = 0.39$

$\alpha_{Lmax} = 15.7^\circ$ $\xi = 0.326$ $M_{max} = 1.170$

$\alpha_{Cmin} = 15.3^\circ$ $-C_{Dmax} = 9.2$ $\alpha_{Mmax} = 14.8^\circ$

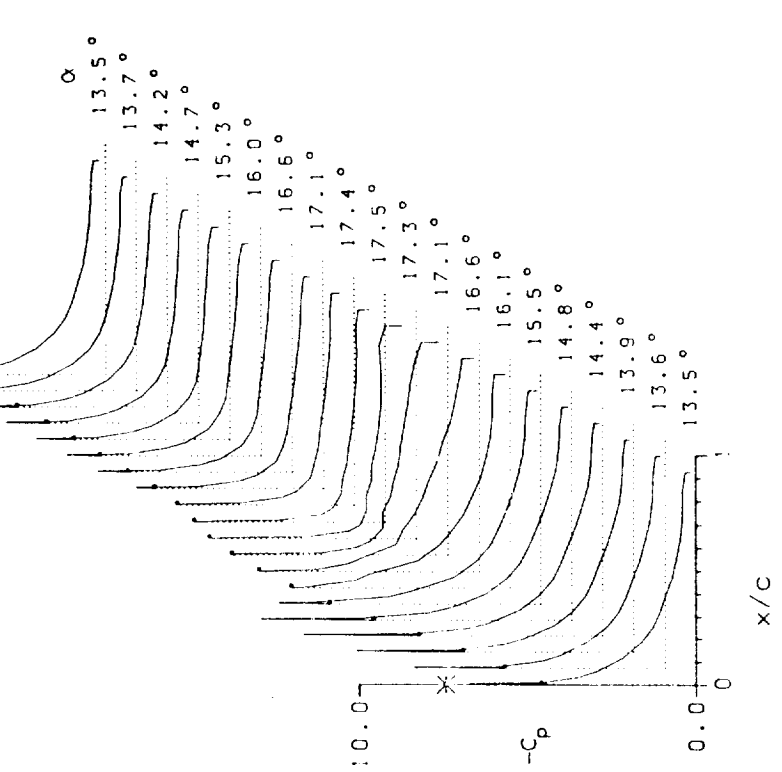


Figure 16.- Continued.

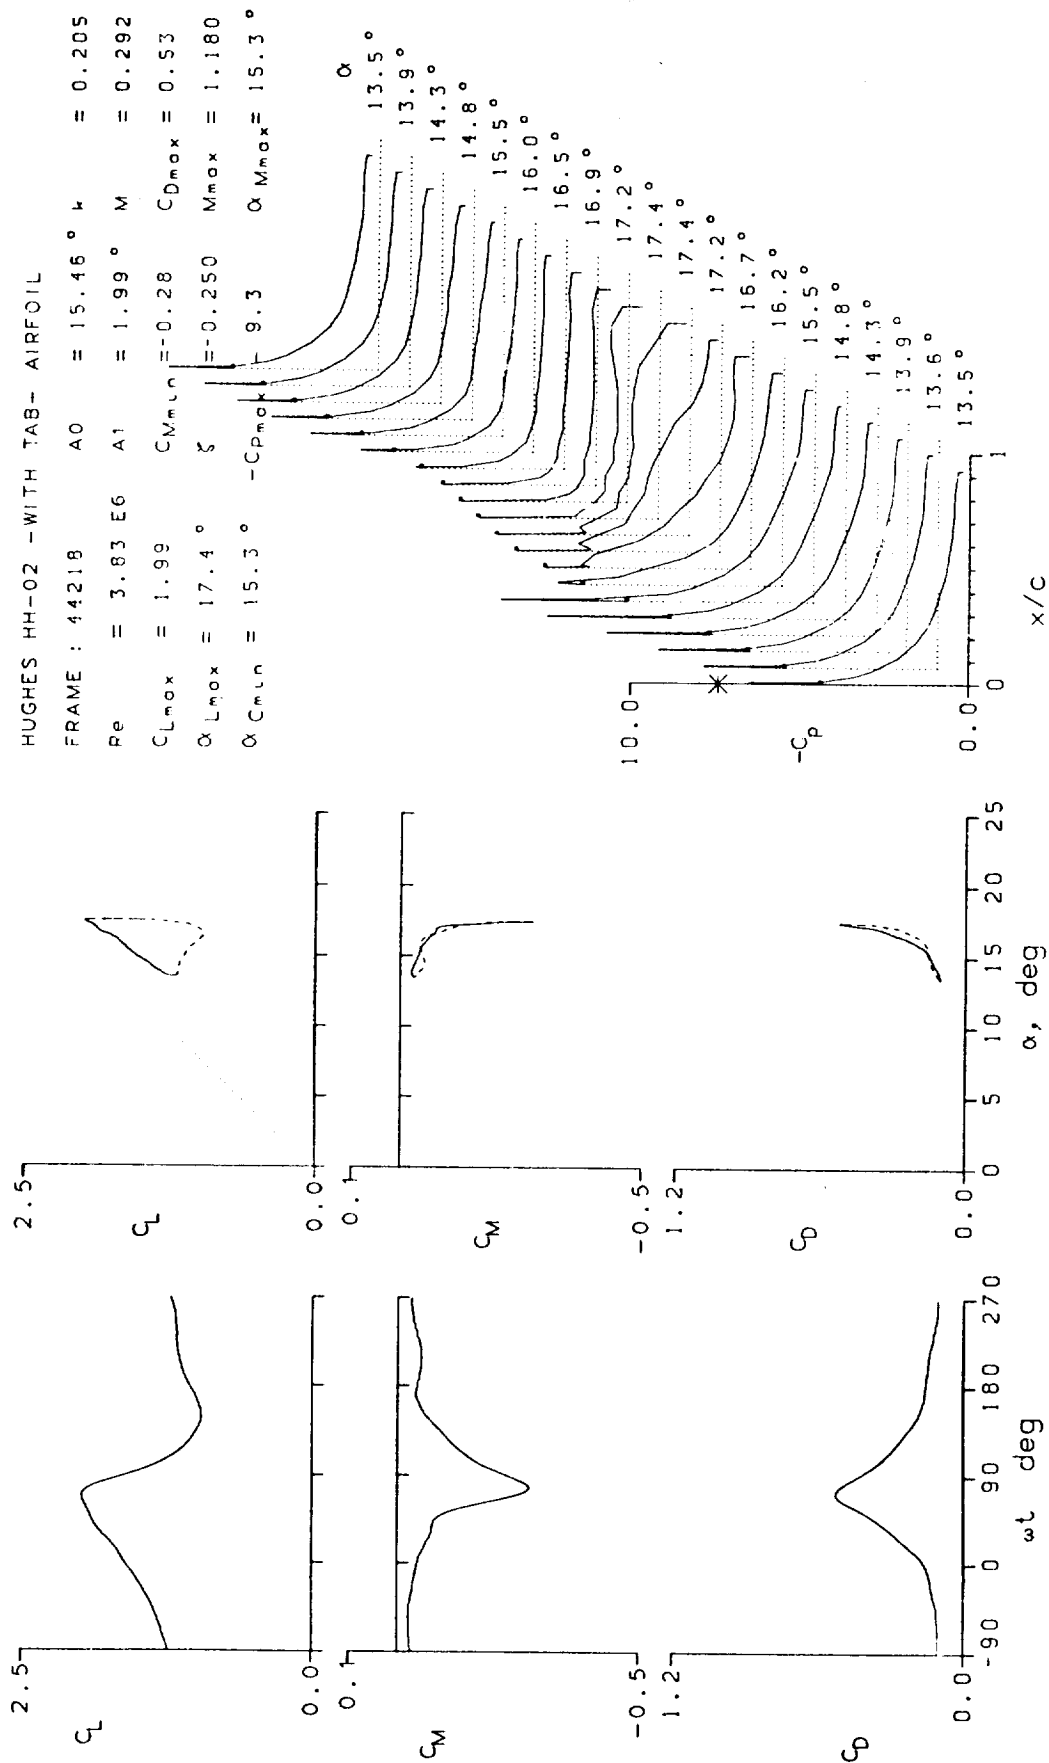


Figure 16.- Continued.

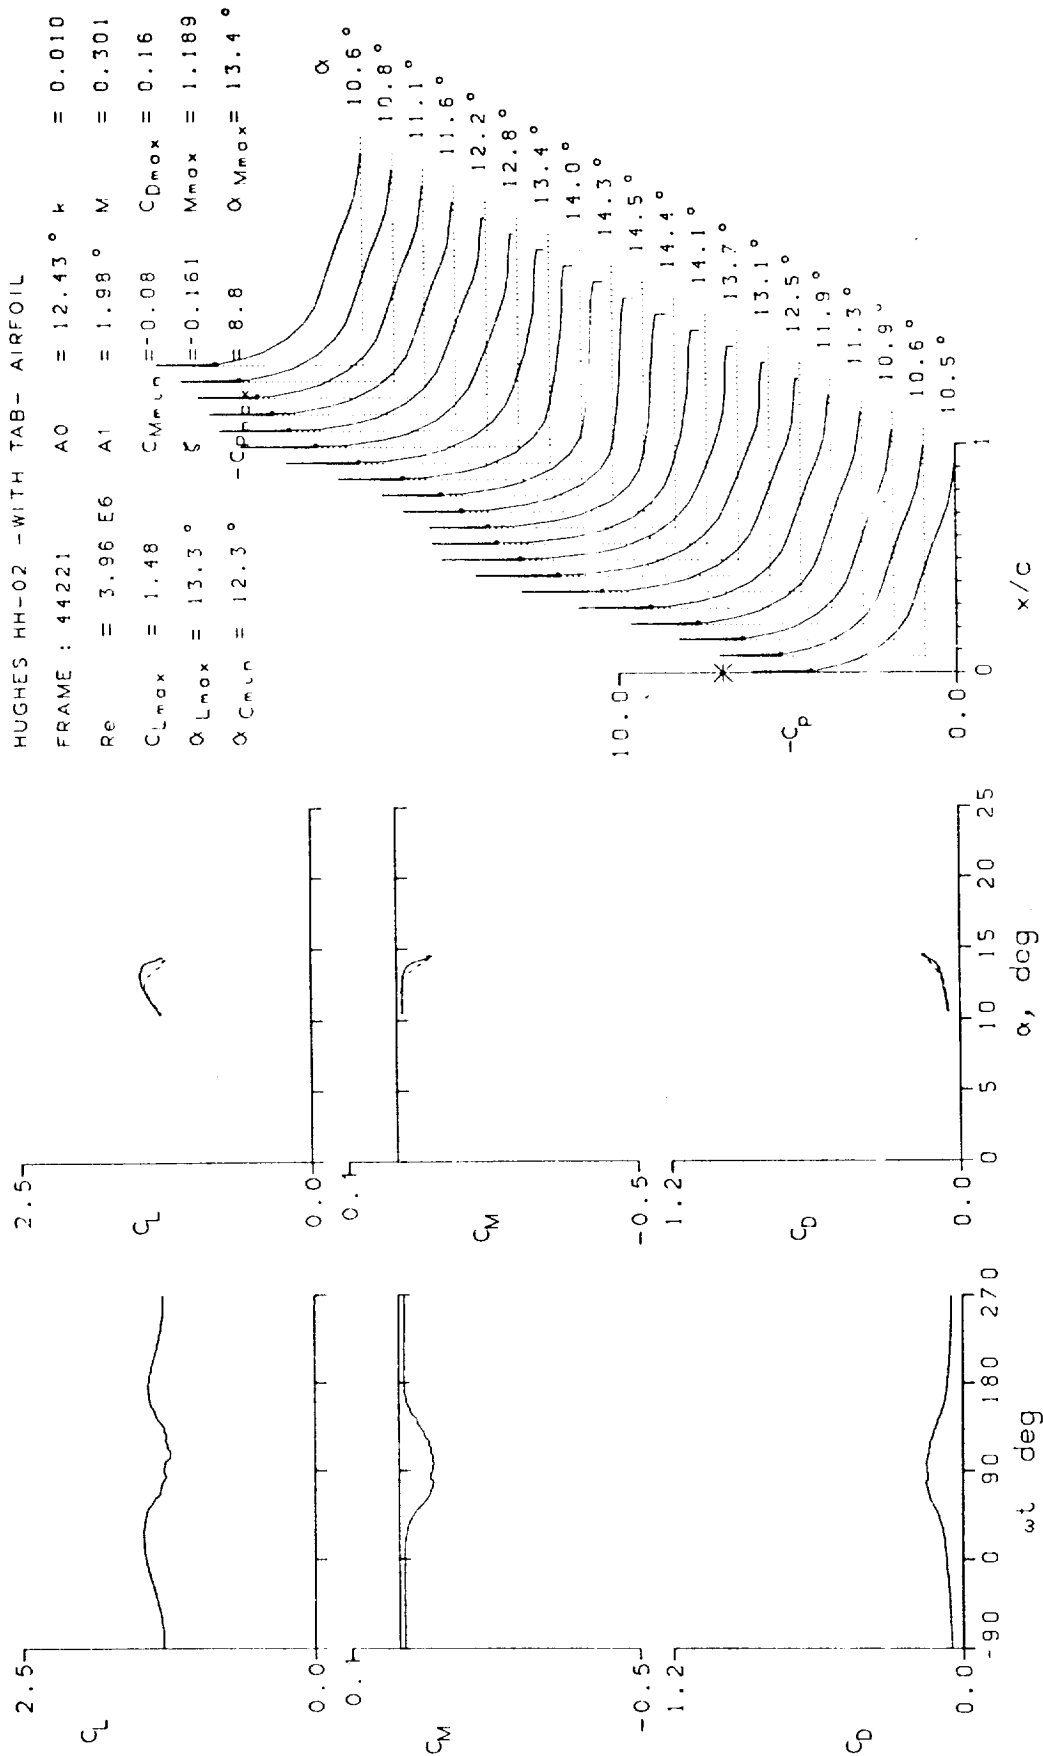


Figure 16.- Cont inued.

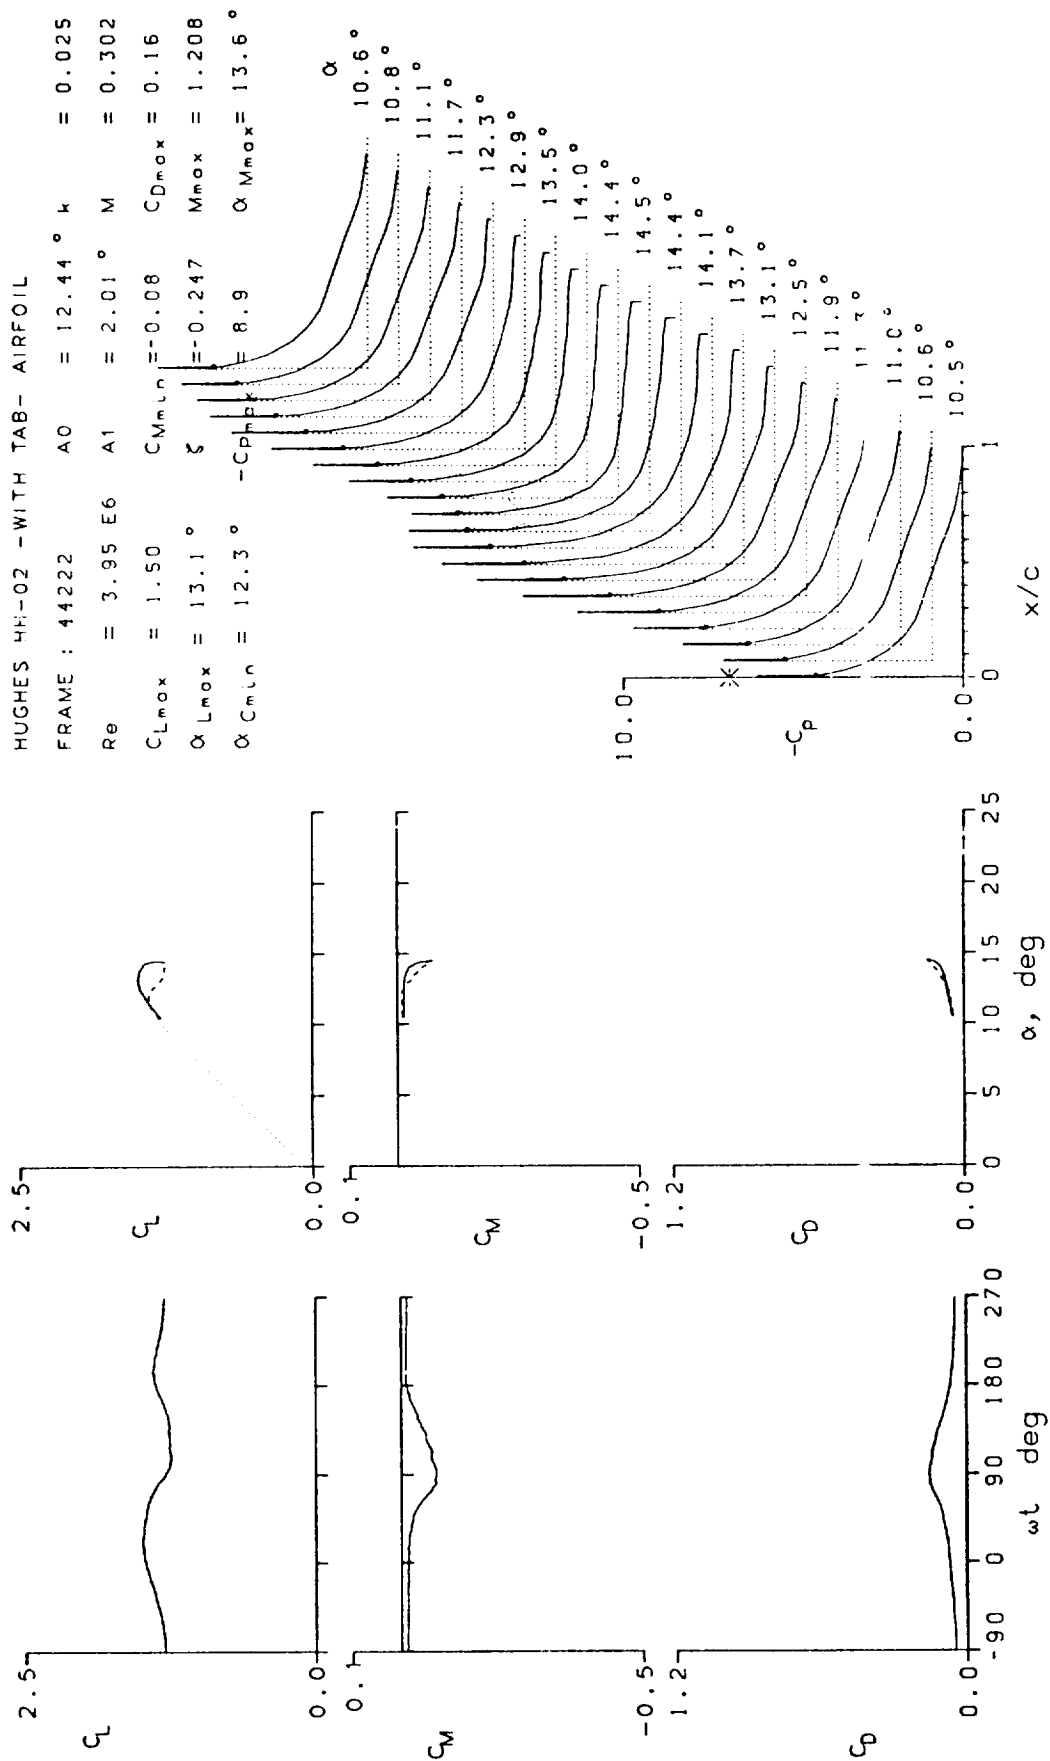


Figure 16.- Continued.

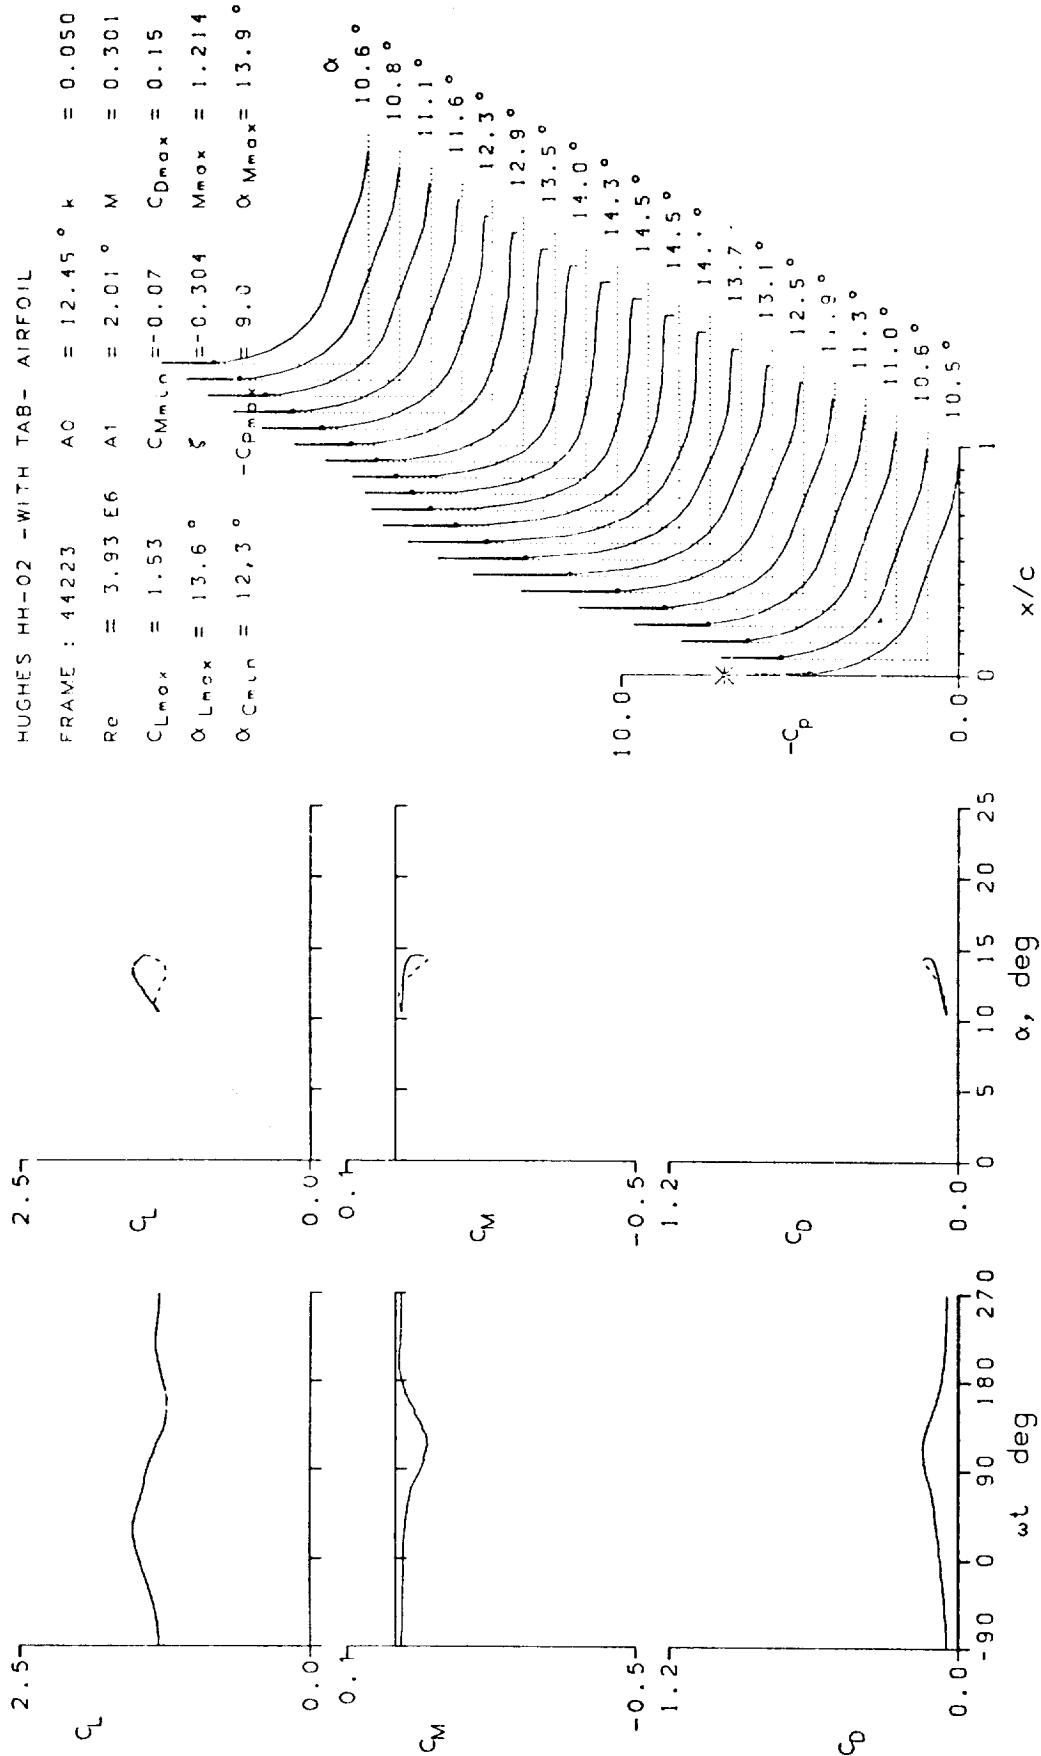


Figure 16.- Continued.

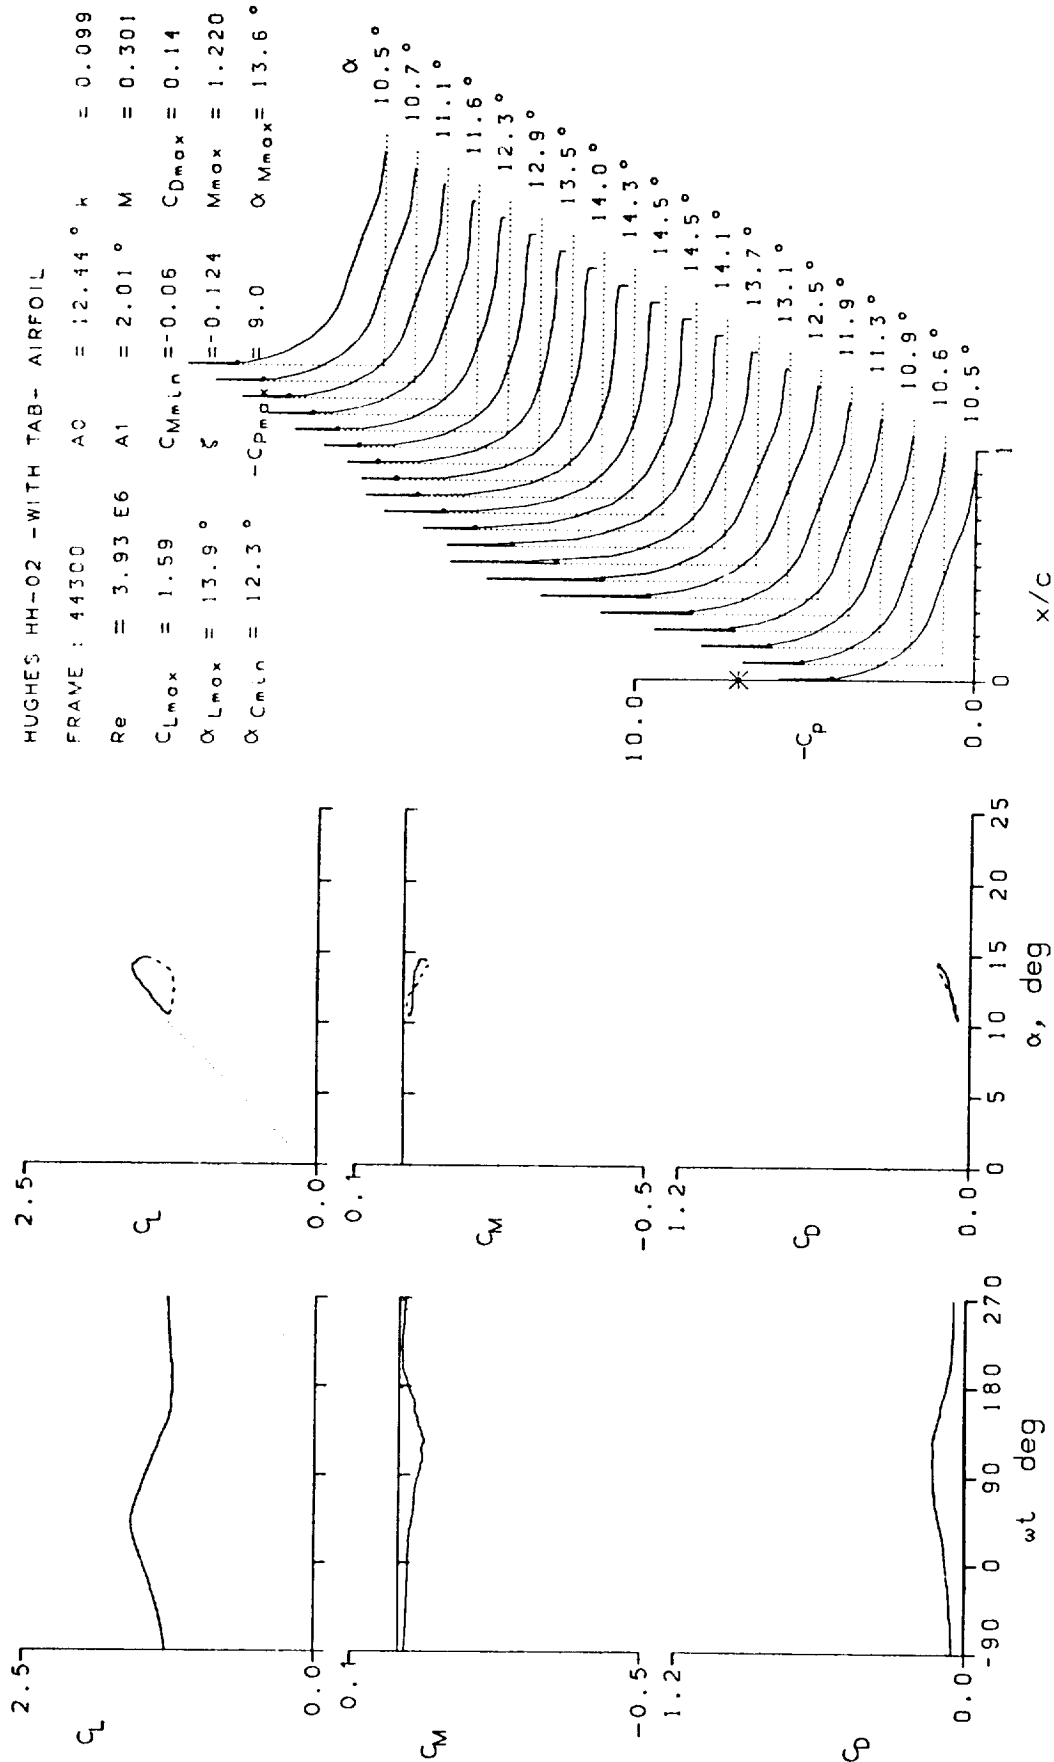


Figure 16.- Continued.

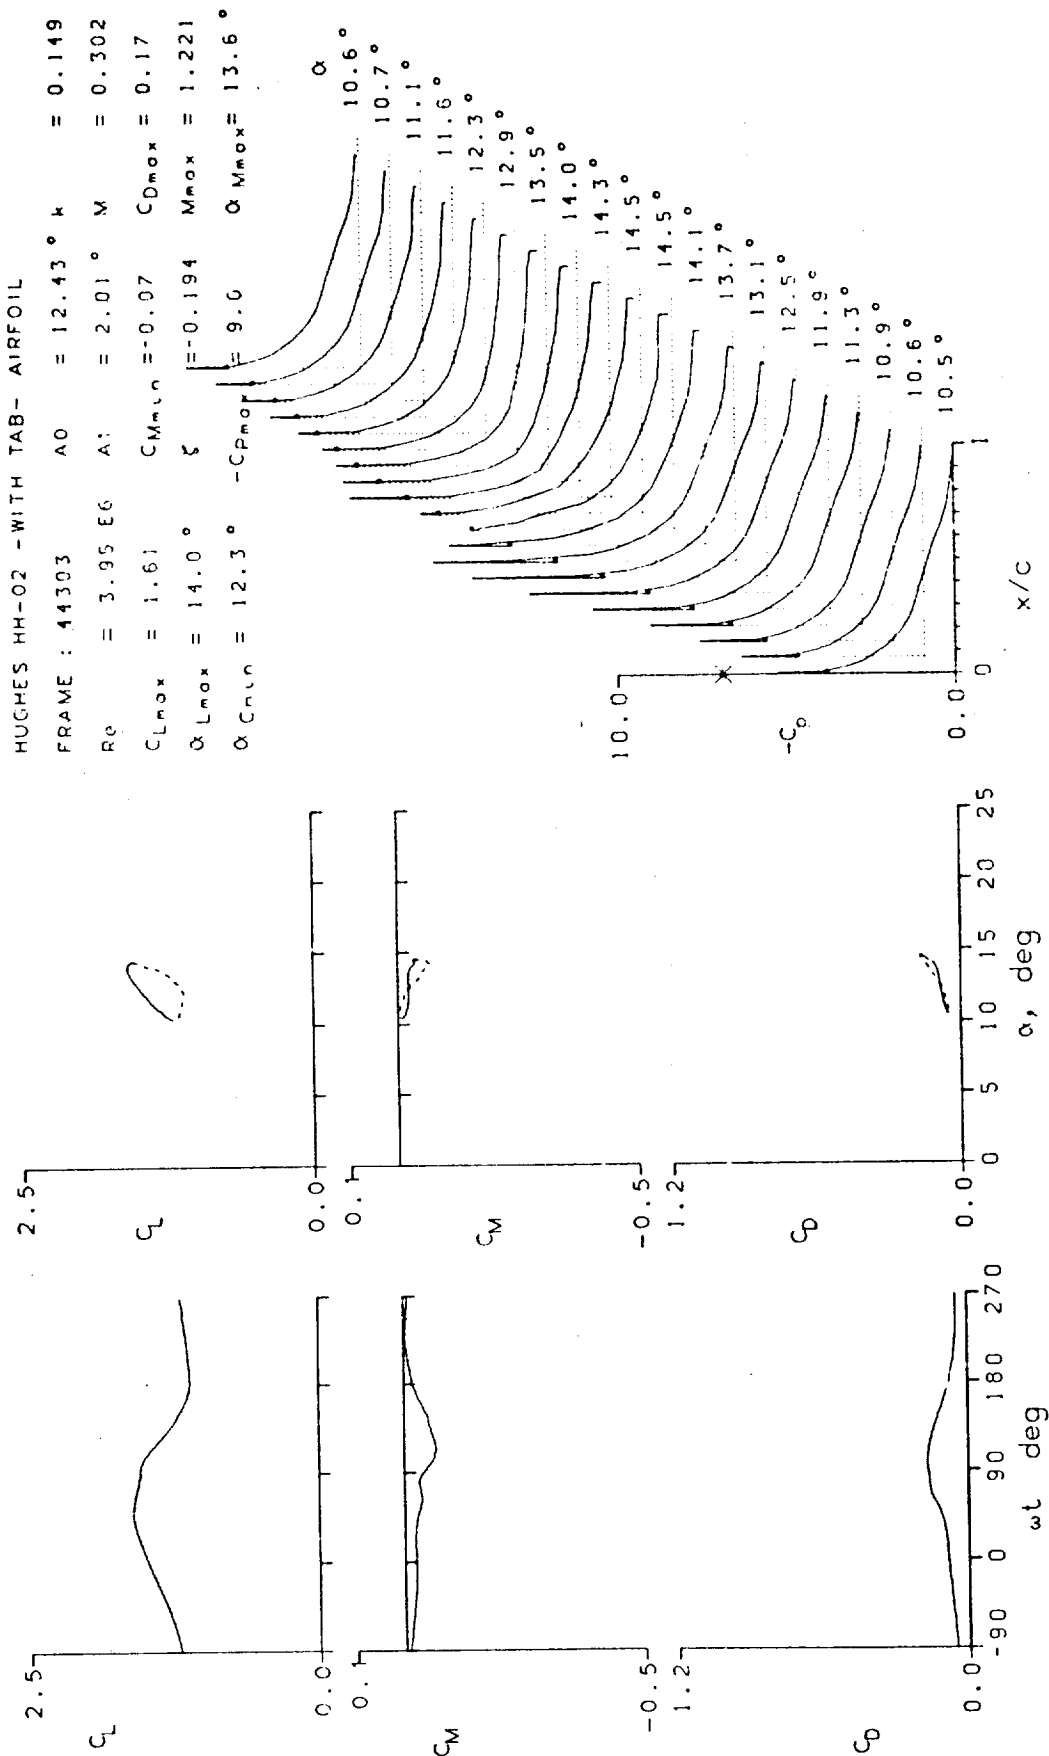


Figure 16.- Continued.

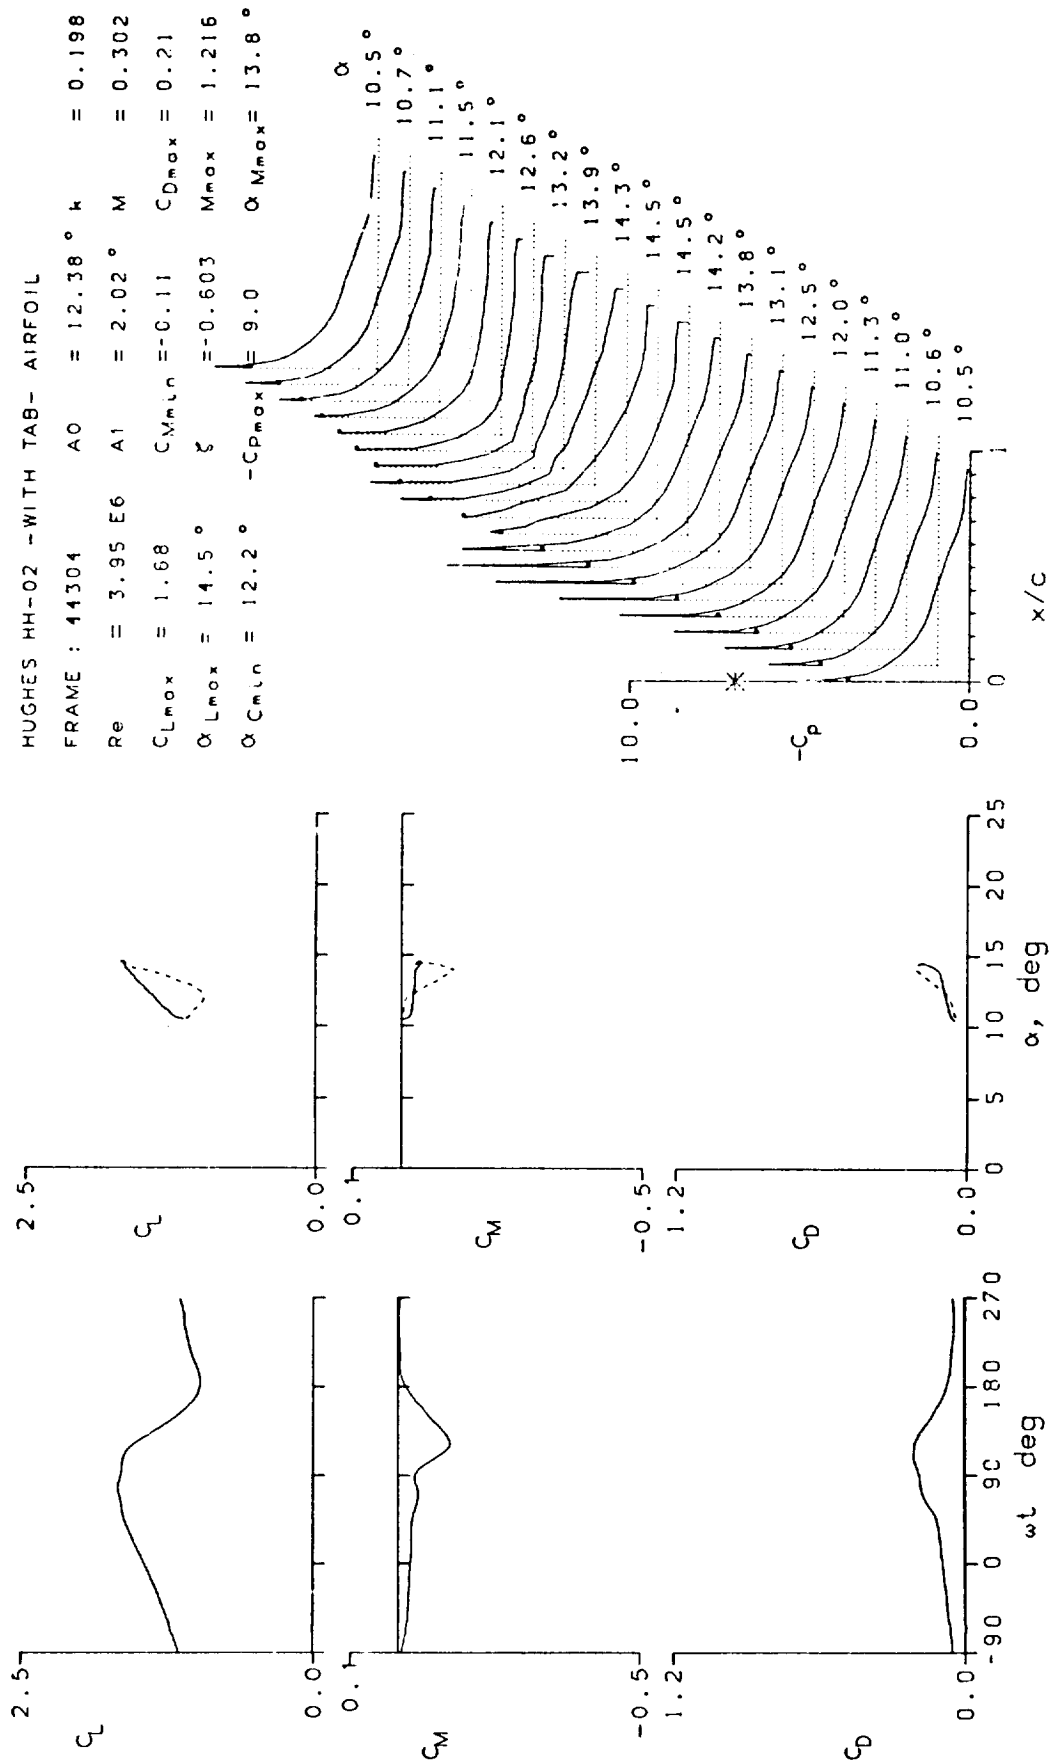


Figure 16.- Concluded.

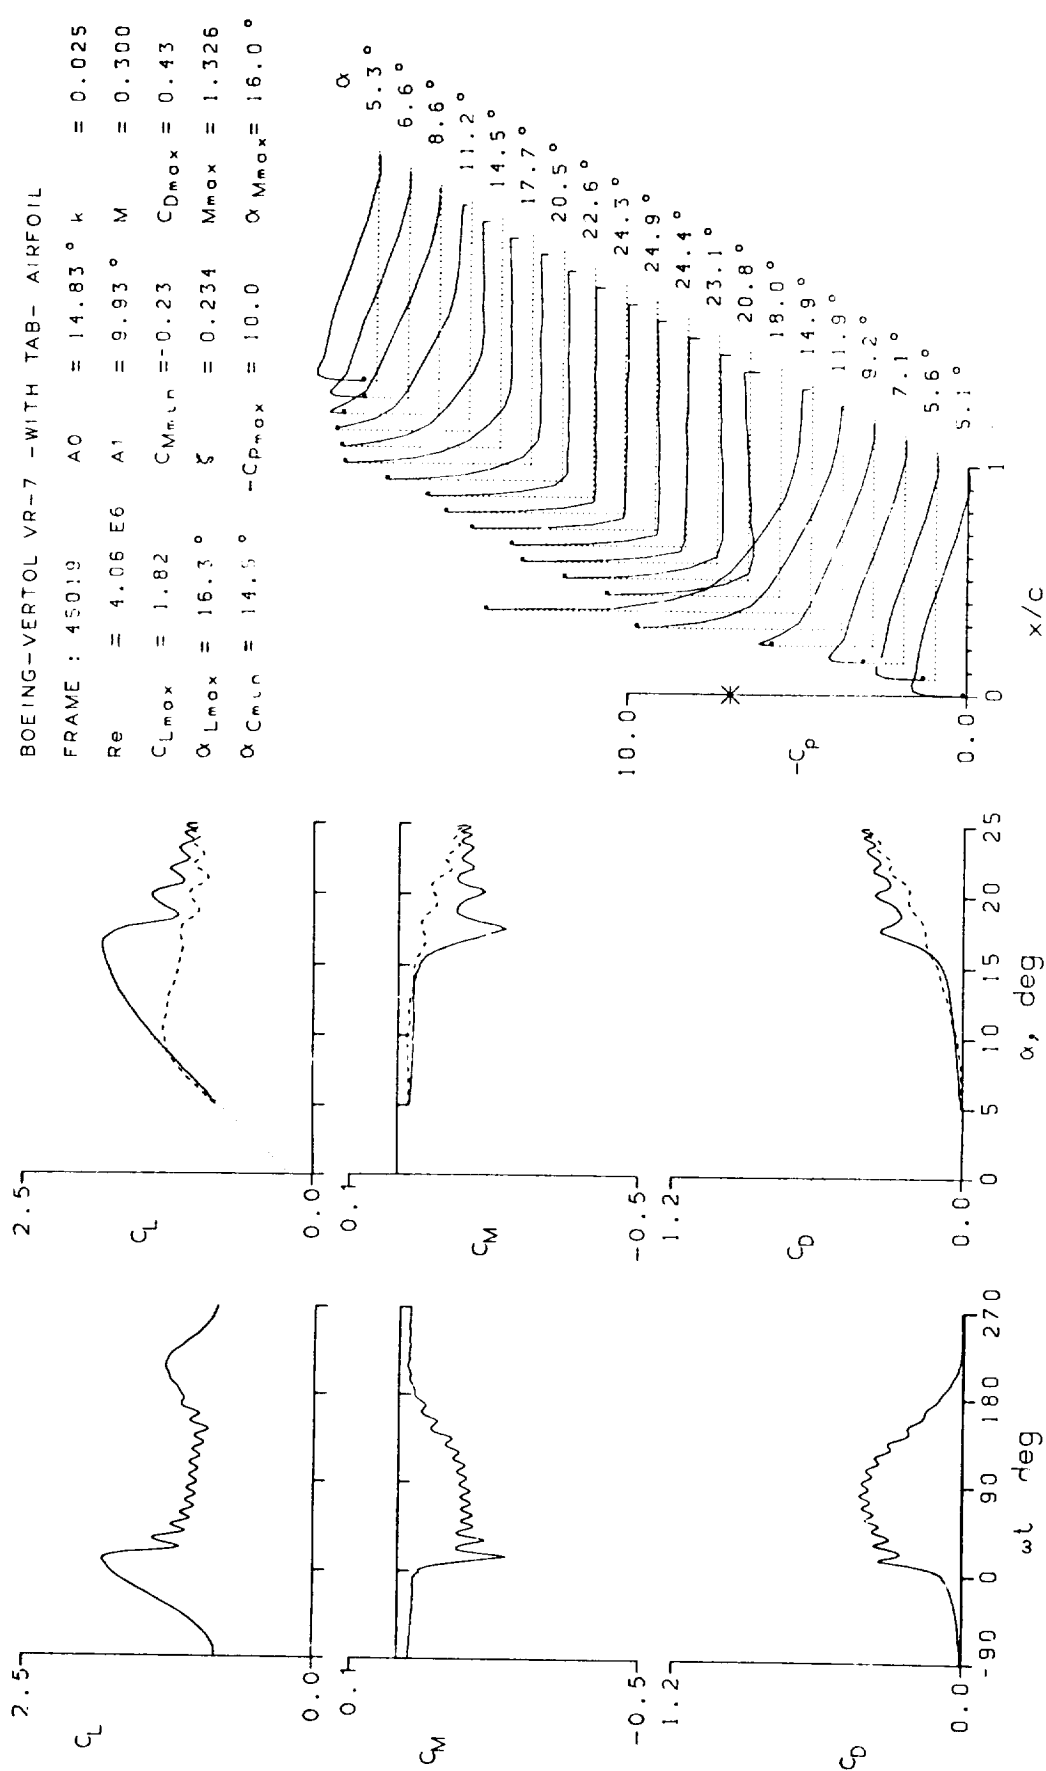


Figure 17.- Dynamic data for Vertol VR-7 airfoil.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 4502:	A0 = 14.84 °	k = 0.051
Re = 3.94 E6	A1 = 9.90 °	M = 0.292
CLmax = 2.11	CMmin = -0.25	CDmax = 0.46
αLmax = 18.1 °	ξ = 0.278	Mmax = 1.473
αCMmin = 14.5 °	-CPmax = 11.7	αMmax = 17.8 °

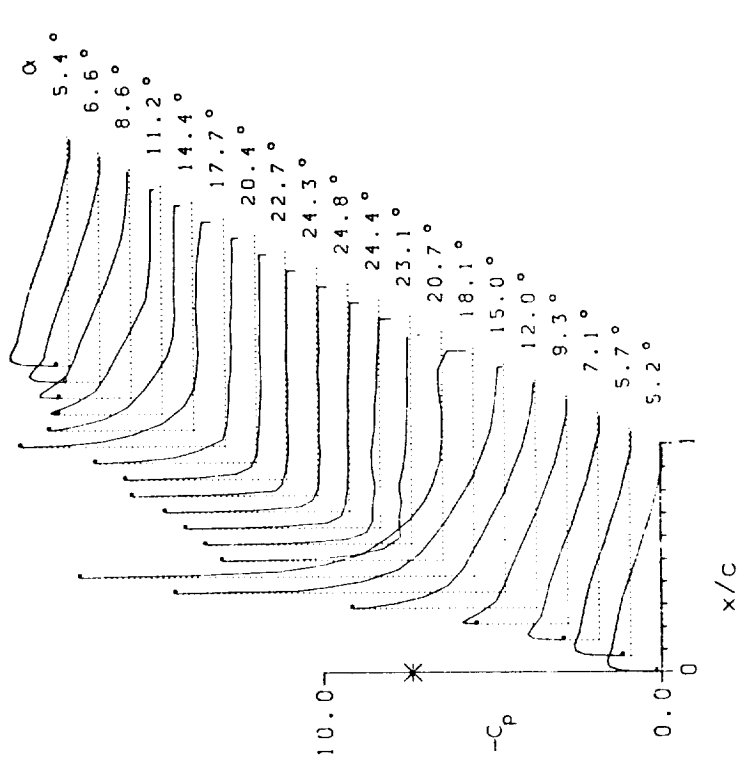
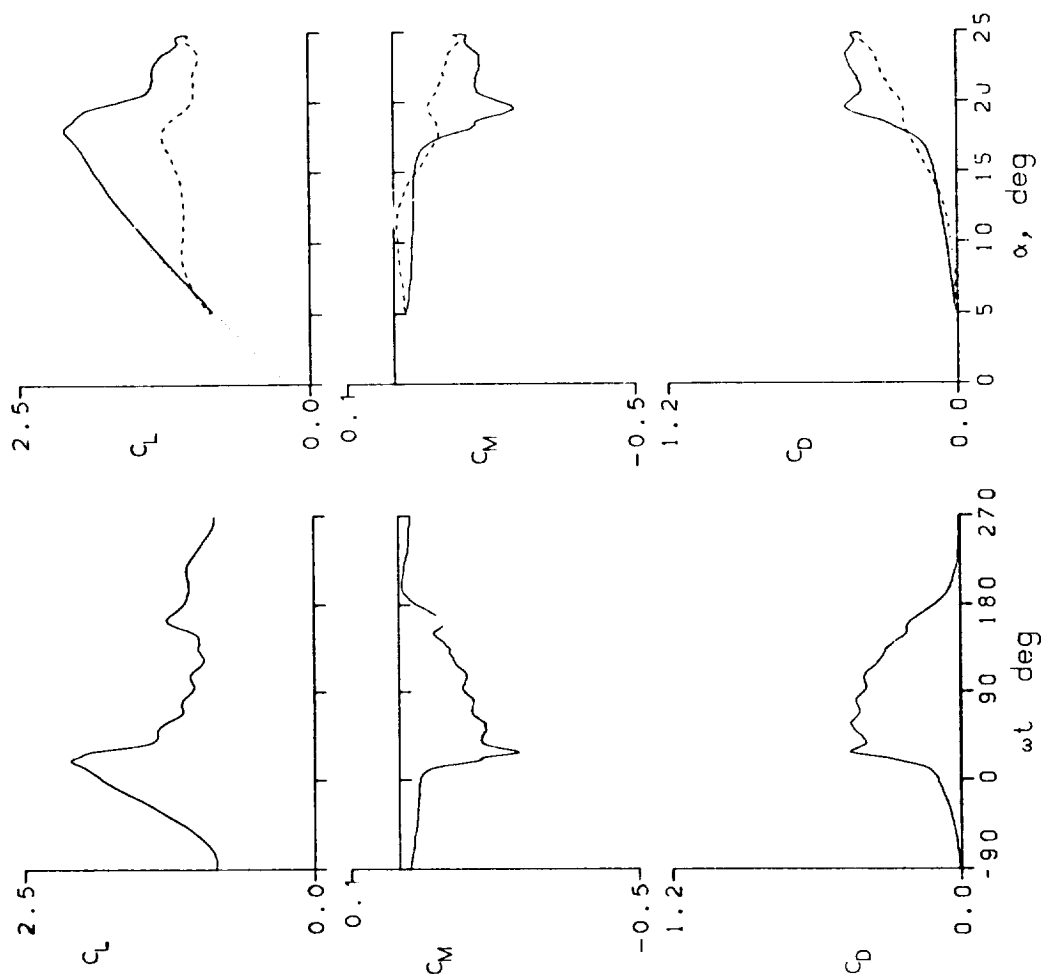


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45023	A0 = 14.82 °	k = 0.101
Re = 3.93 E6	A1 = 9.86 °	M = 0.293
CLmax = 2.33	CMmin = -0.40	CDmax = 0.82
αLmax = 20.9 °	ξ = 0.496	Mmax = 1.502
αCmin = 14.7 °	-CPmax = 11.8	αMmax = 18.0 °

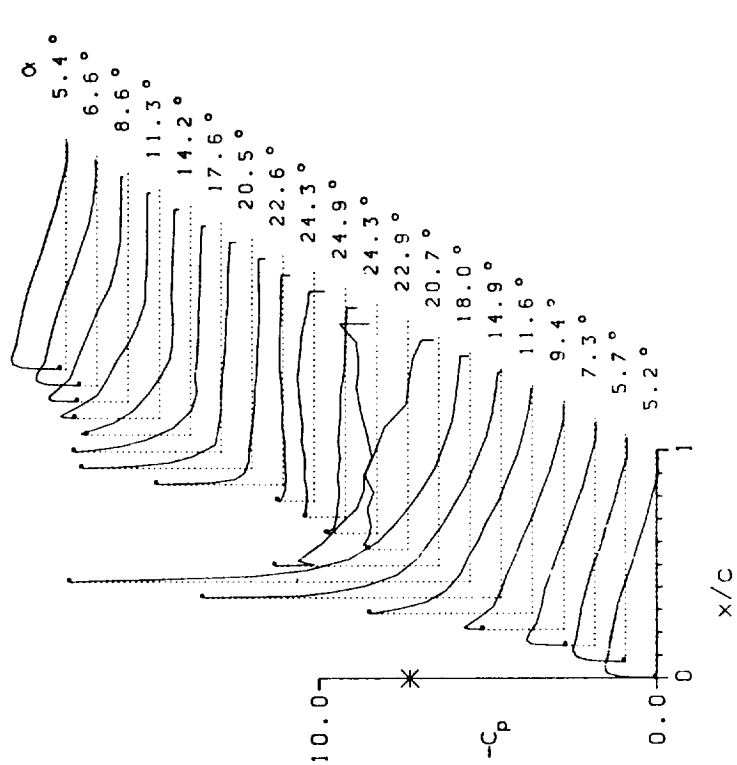
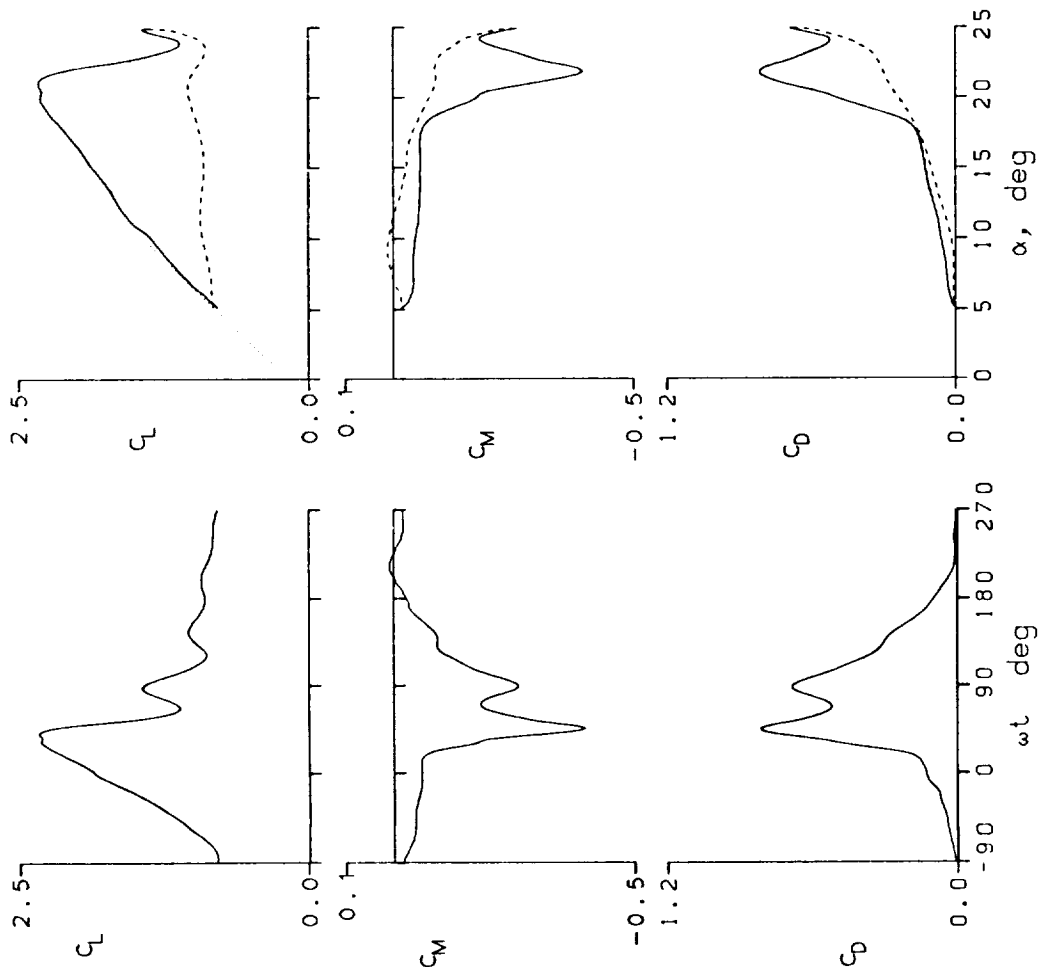


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45101	A0 = 14.89 °	k = 0.155
Re = 3.82 E6	A1 = 9.85 °	M = 0.285
CLmax = 2.49	CMmin = -0.50	CDmax = 1.04
αLmax = 23.0 °	ζ = 0.450	Mmax = 1.489
αCMln = 14.7 °	-CDmax = 12.4	αMmax = 18.9 °

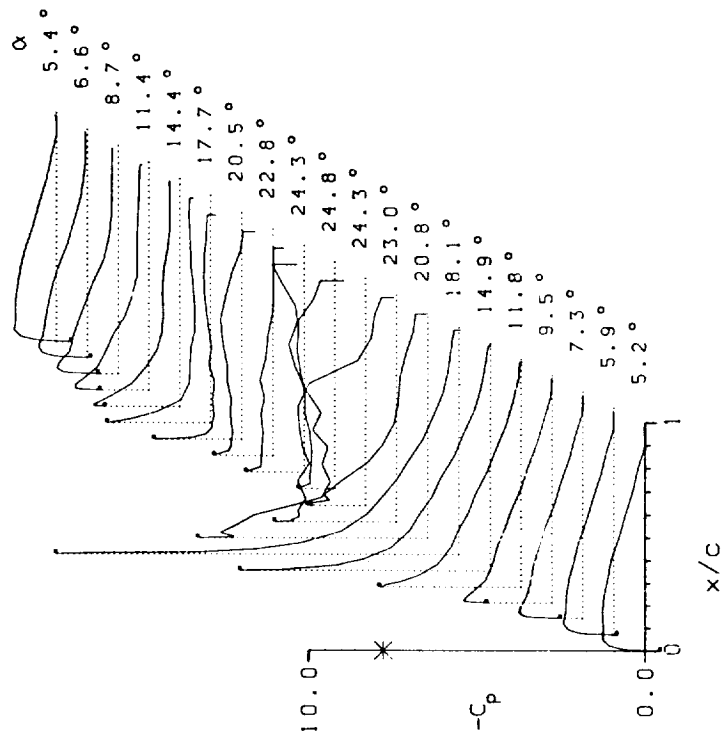
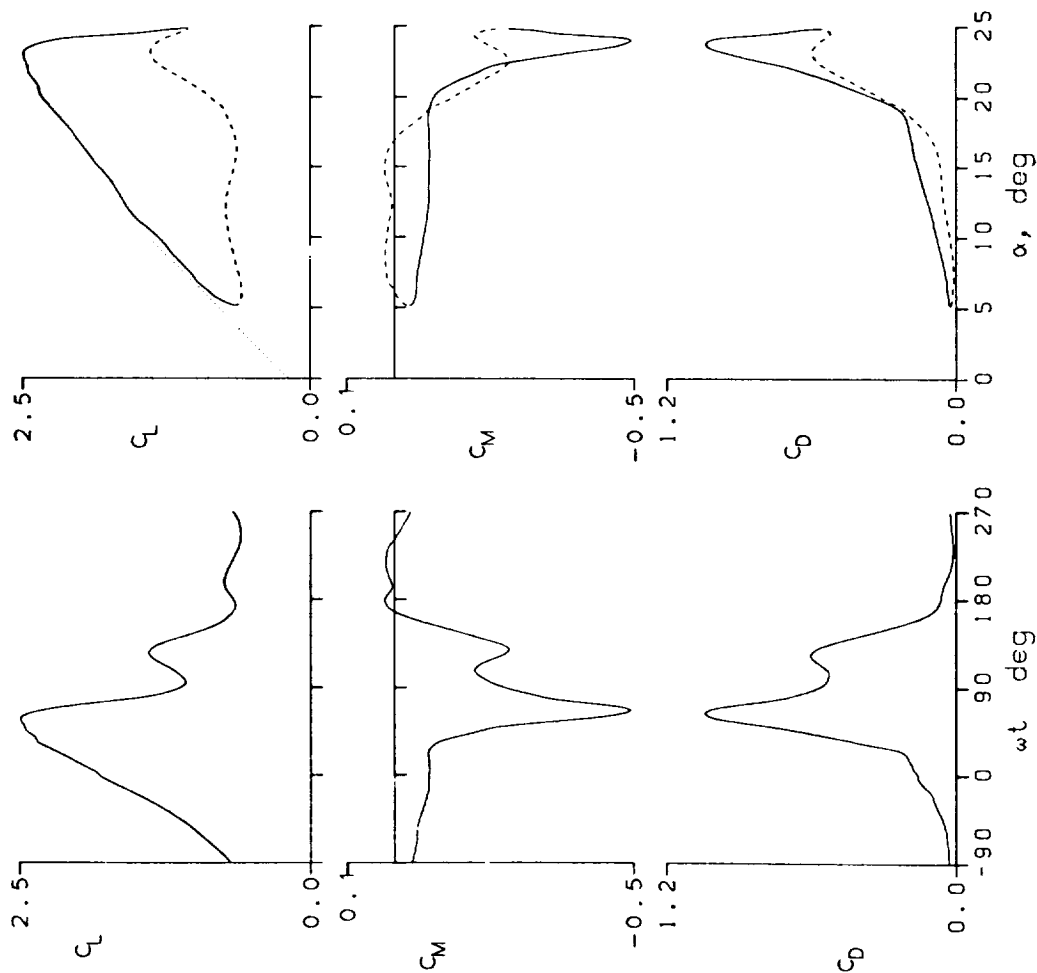


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45109	A0 = 9.91 °	k = 0.010
Re = 4.03 E6	A1 = 9.89 °	M = 0.301
$C_{Lmax} = 1.66$	$C_{Mmin} = -0.11$	$C_{Dmax} = 0.26$
$\alpha_{Lmax} = 14.1 °$	$\xi = 0.043$	$M_{max} = 1.151$
$\alpha_{Cmin} = 9.4 °$	$-C_{Dmax} = 8.4$	$\alpha_{Mmax} = 14.4 °$

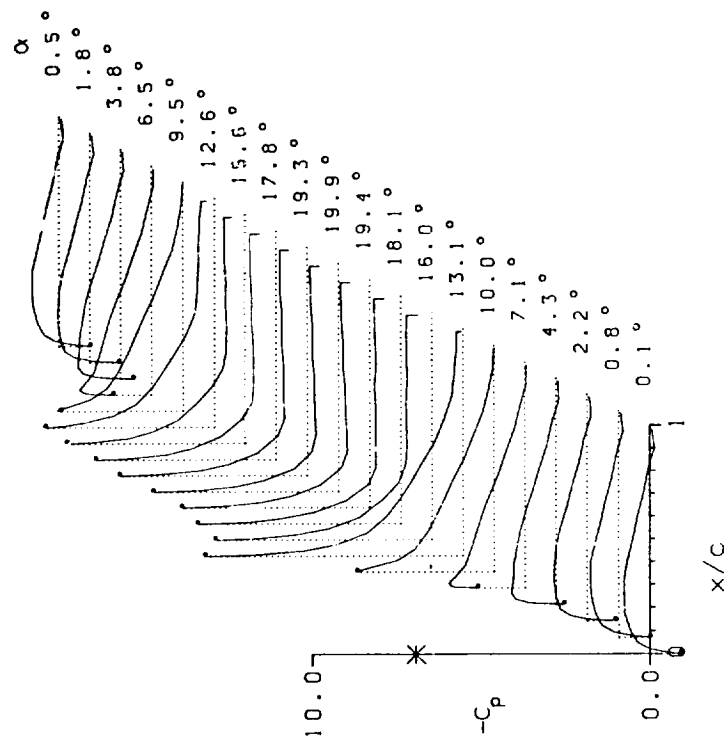
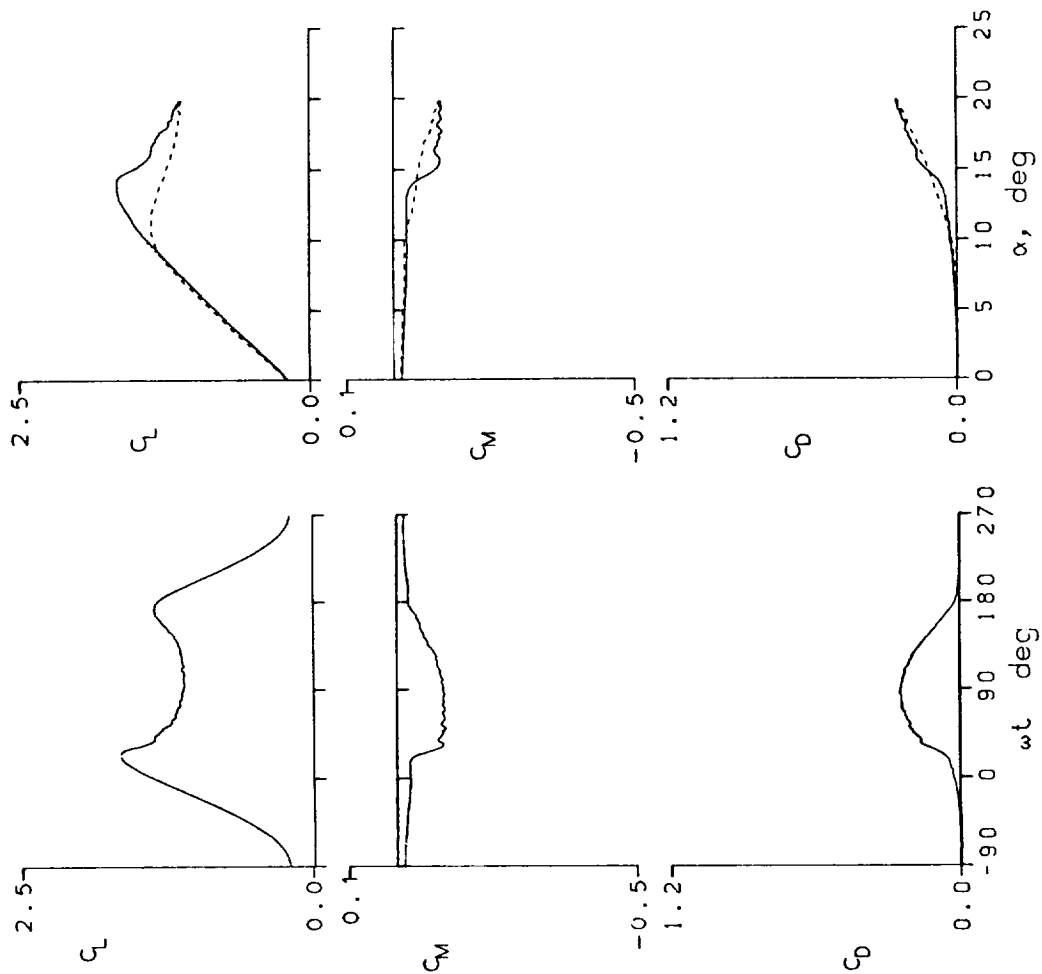


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45111	A0 = 9.76 °	k = 0.025
Re = 4.01 E6	A1 = 9.91 °	M = 0.301
CLmax = 1.78	CMmin = -0.20	CDmax = 0.30
αLmax = 15.8 °	ξ = 0.146	Mmax = 1.304
αCmin = 9.2 °	-CPmax = 9.8	αMmax = 15.8 °

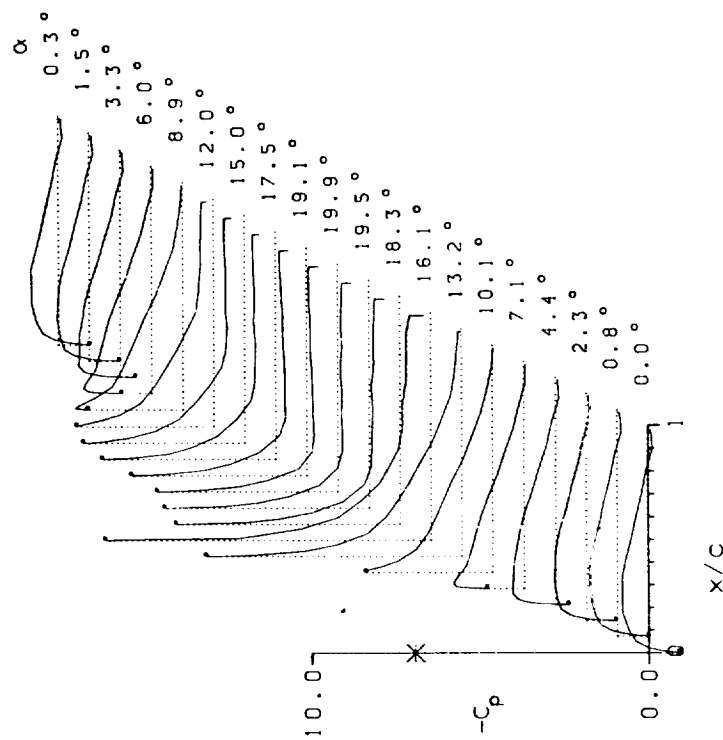
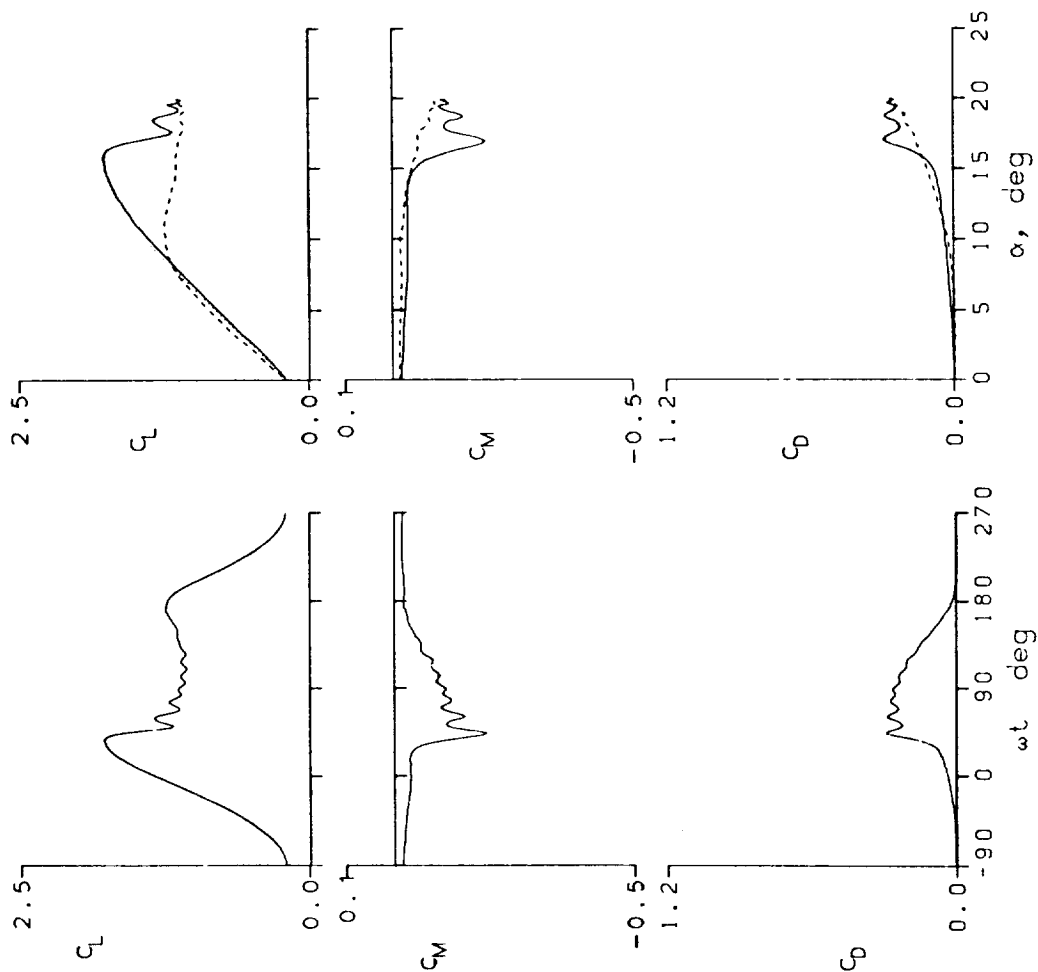


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45113	A0 = 9.72 °	k = 0.050
Re = 4.01 E6	A1 = 9.92 °	M = 0.301
CLmax = 2.01	CMmin = -0.21	CDmax = 0.36
α Lmax = 17.3 °	ζ = 0.157	Mmax = 1.449
α Cmin = 9.1 °	-CDmax = 10.8	α Mmax = 17.0 °

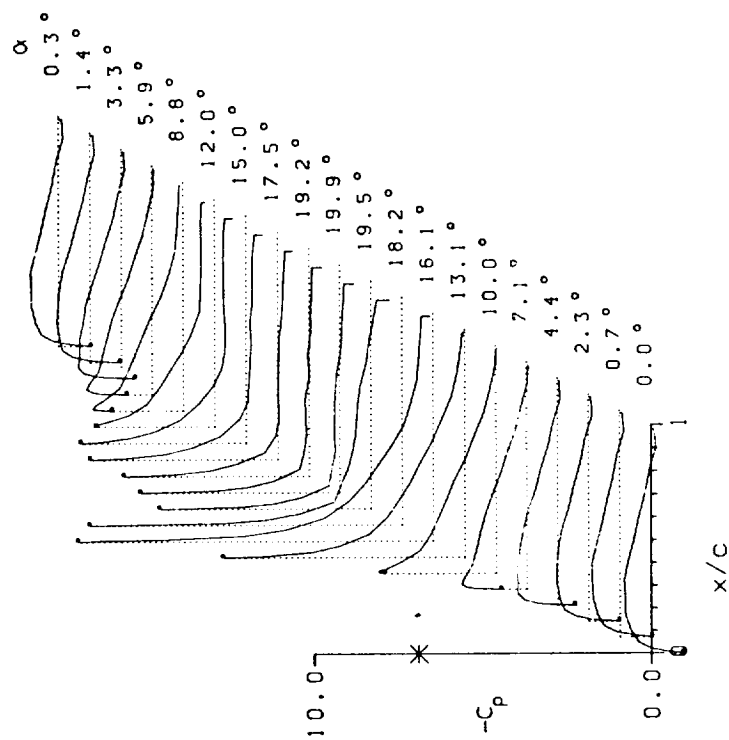
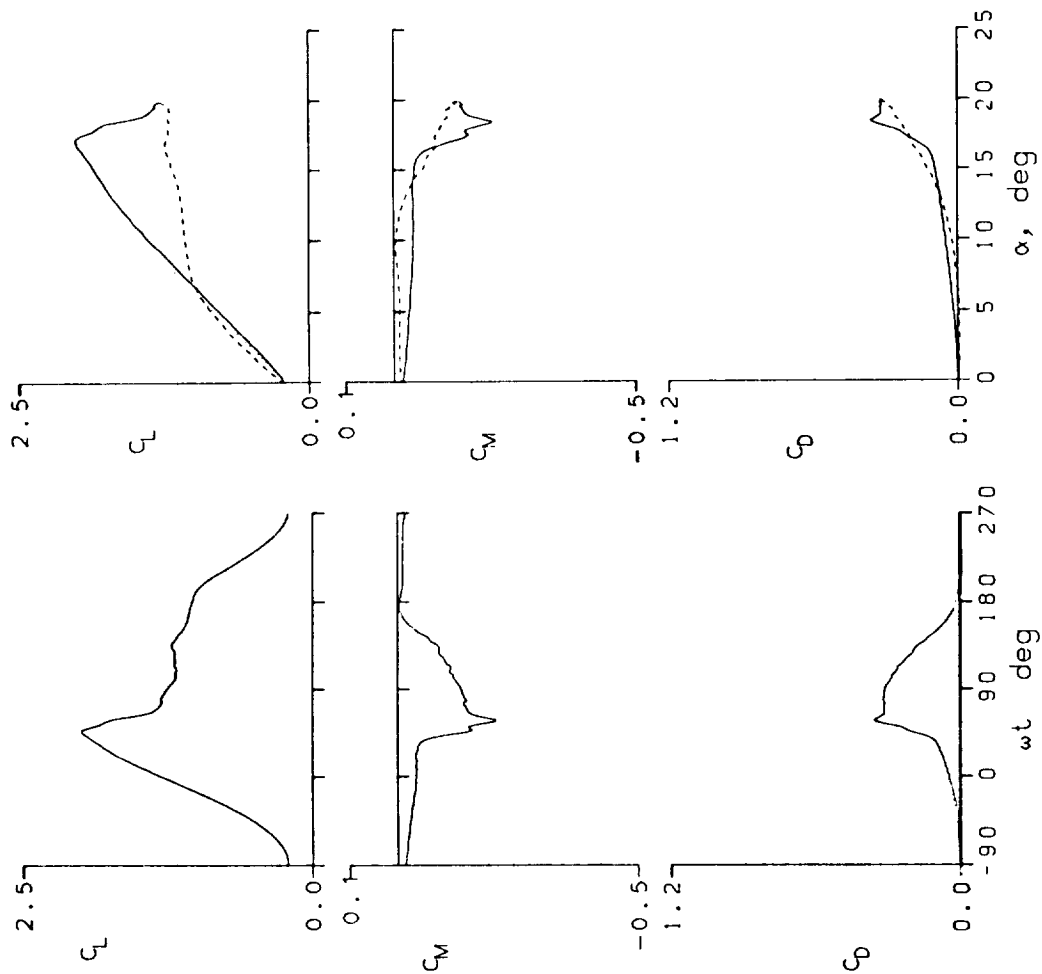


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45117 $A_0 = 9.75^\circ$ $k = 0.100$

$Re = 4.02 \text{ E}6$ $A_1 = 9.88^\circ$ $M = 0.301$

$C_{Lmax} = 2.21$ $C_{Mmin} = -0.33$ $C_{Dmax} = 0.65$

$\alpha_{Lmax} = 18.5^\circ$ $\xi = 0.228$ $M_{max} = 1.489$

$\alpha_{Cmin} = 9.1^\circ$ $-C_{Dmax} = 11.1$ $\alpha_{Mmax} = 17.3^\circ$

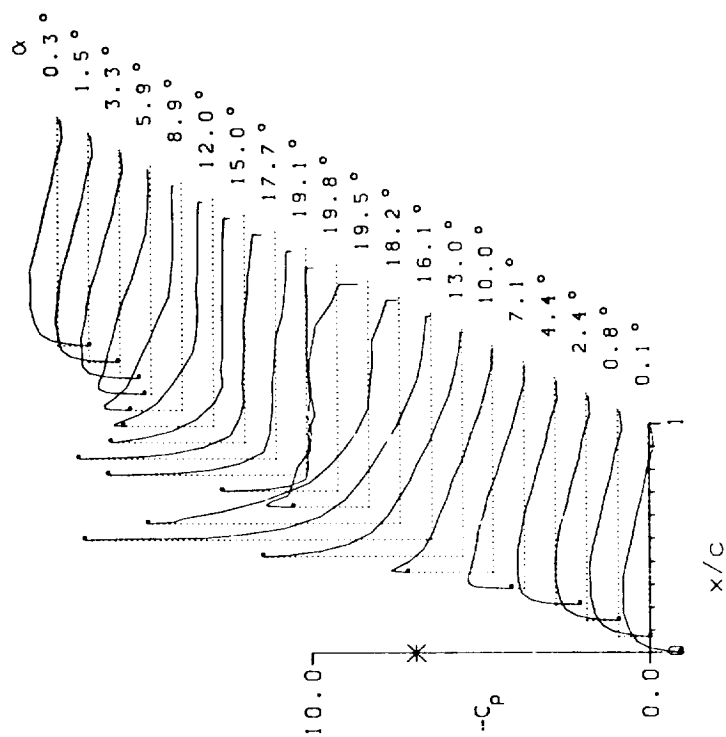
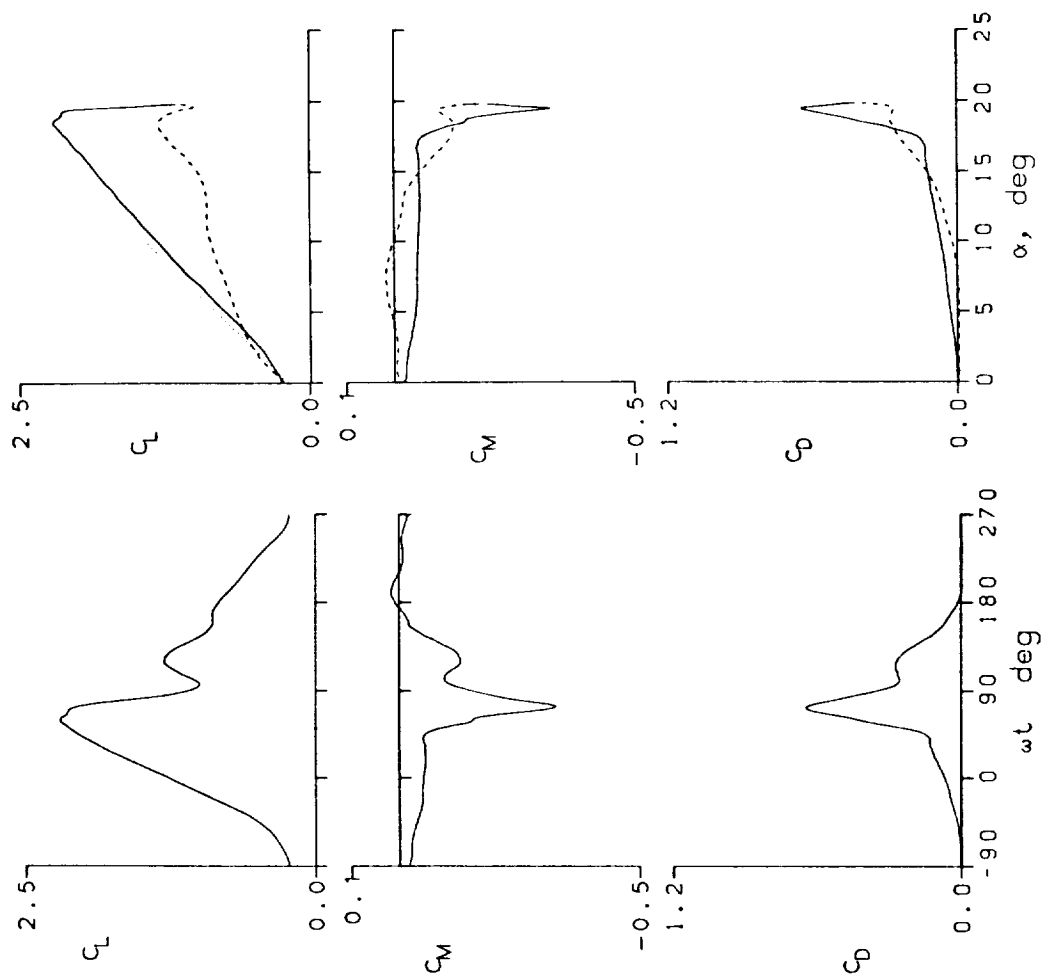


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45119	A0 = 9.81 °	k = 0.150
Re = 4.02 E6	A1 = 9.91 °	M = 0.302
CLmax = 2.30	CMmin = -0.40	CDmax = 0.76
α Lmax = 19.4 °	ζ = 0.259	Mmax = 1.495
α Cmin = 9.2 °	-CPmax = 11.1	α Mmax = 17.9 °

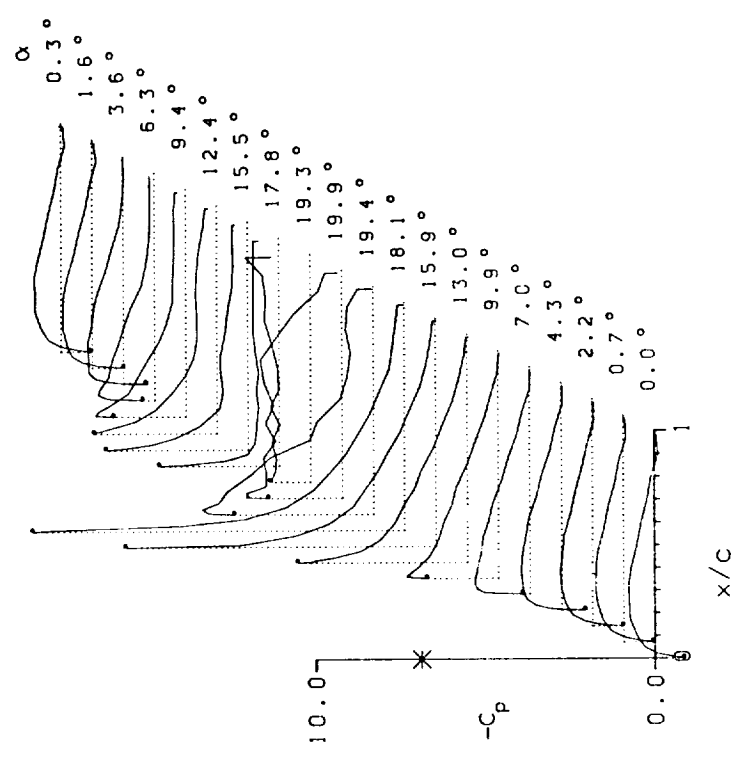
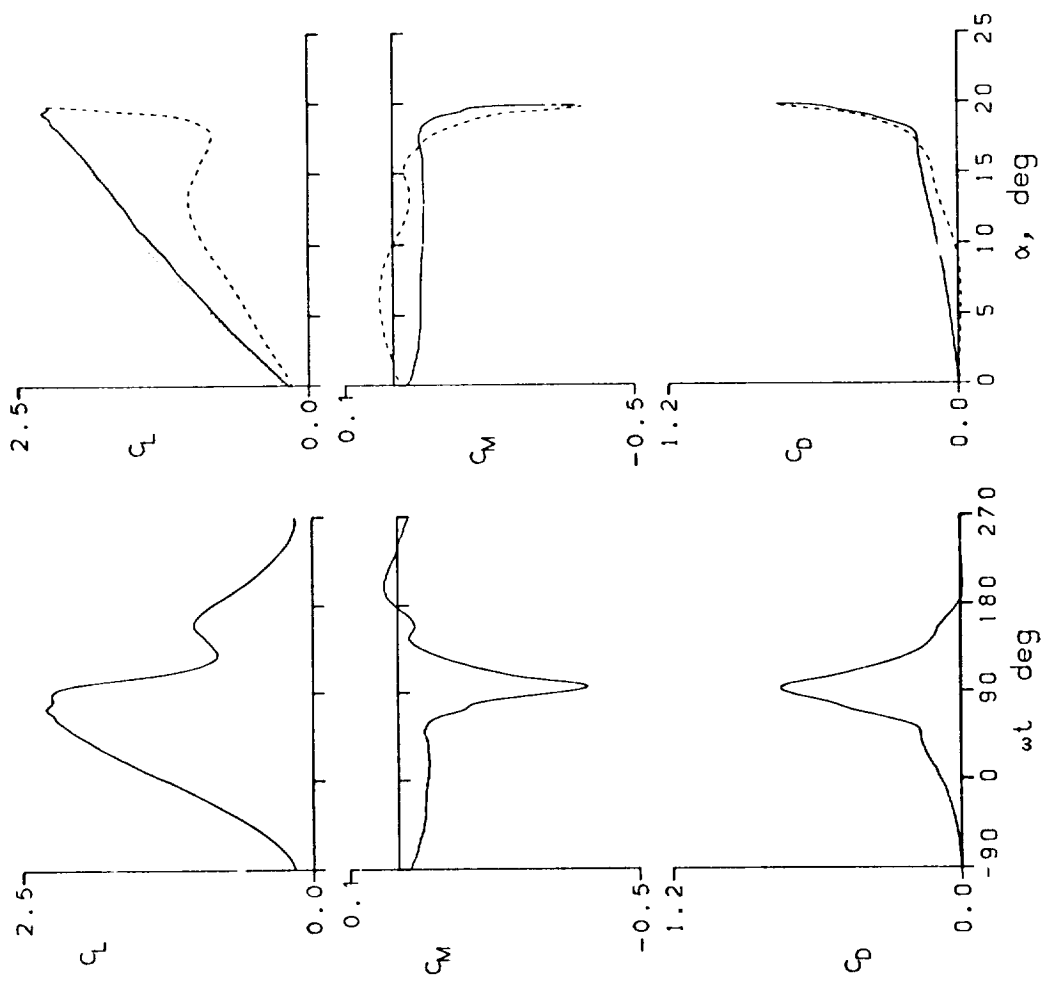


Figure 17.- Continued.

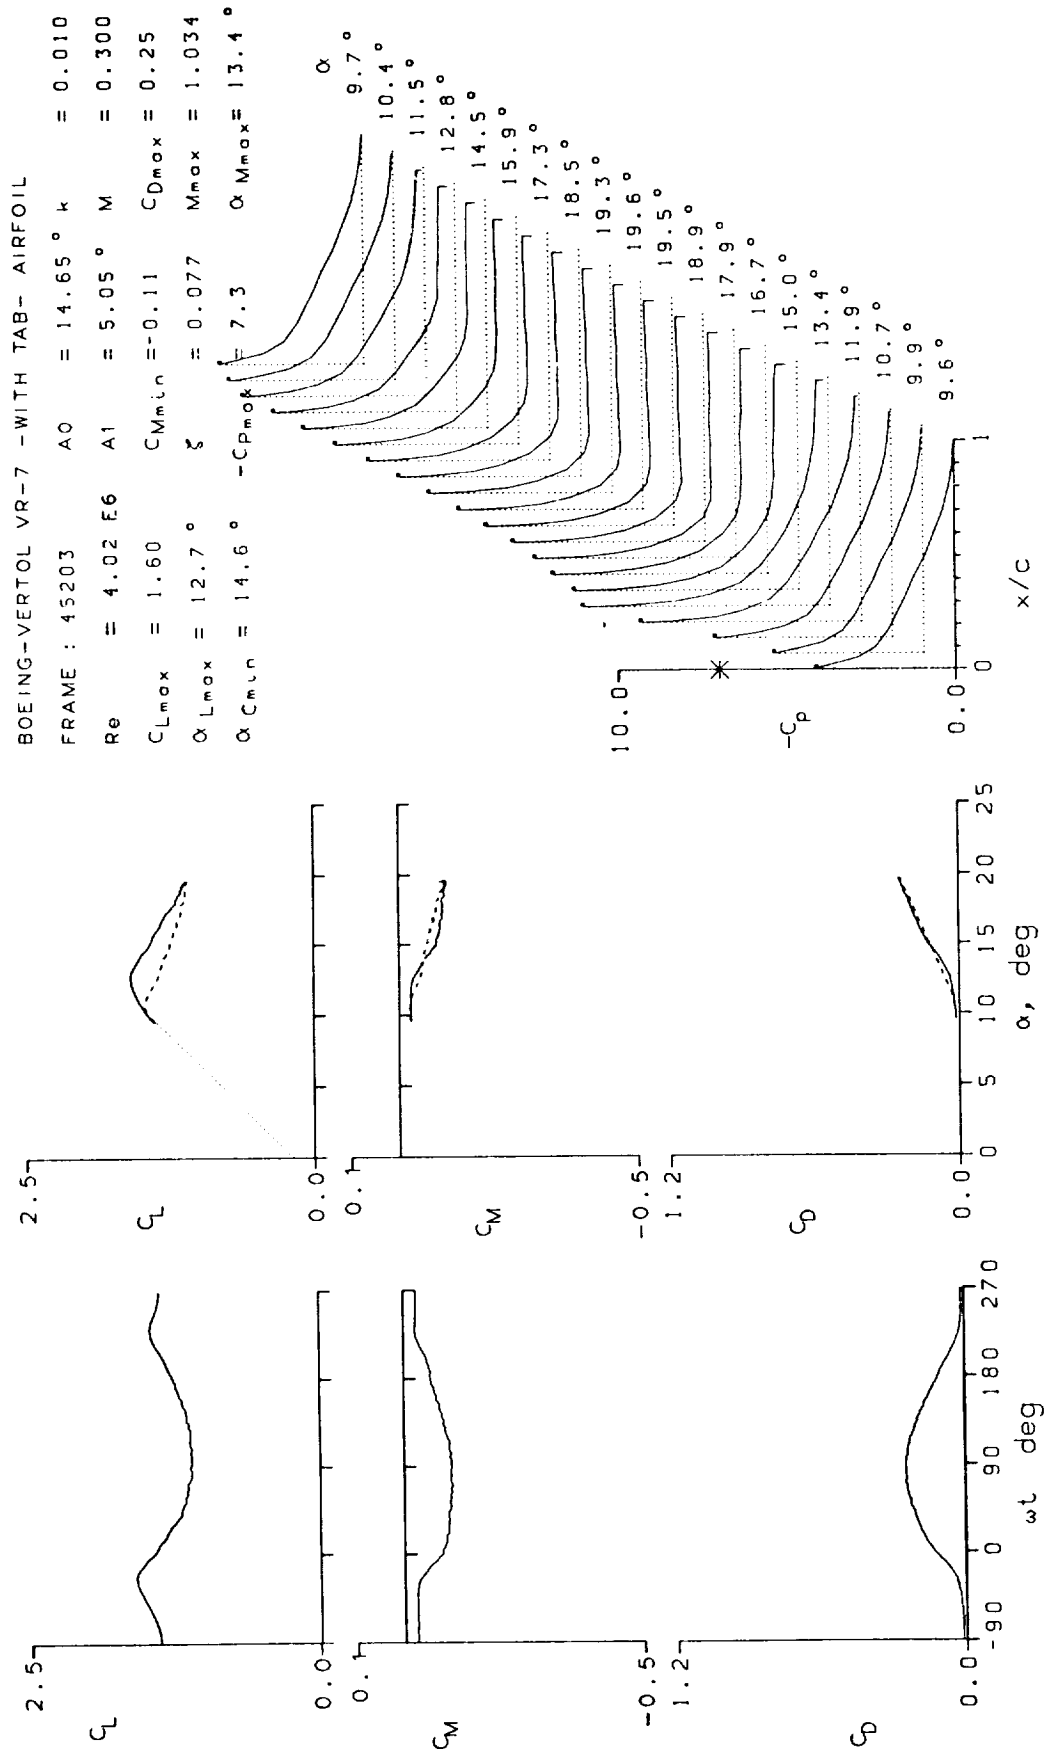


Figure 17.- Continued.

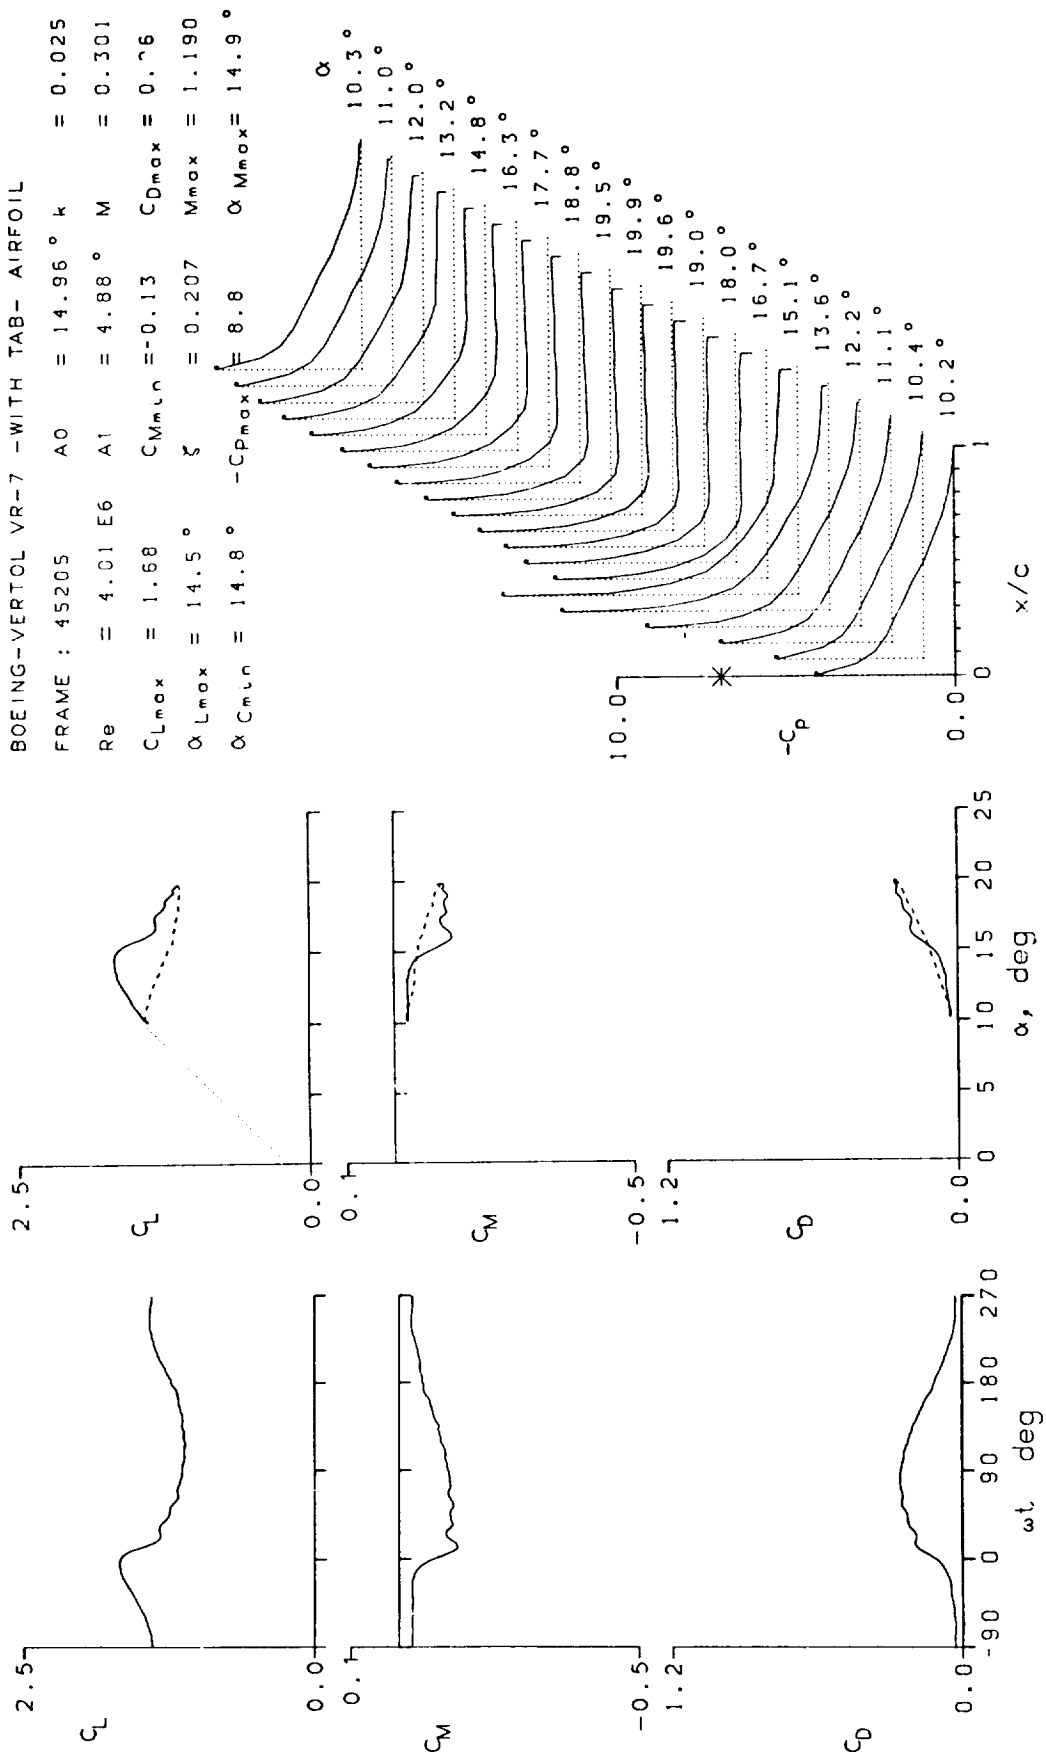


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TA3- AIRFOIL

FRAME : 45207	A0 = 14.98 °	k = 0.050
Re = 4.01 E6	A1 = 4.89 °	M = 0.301
CLmax = 1.82	CMmin = -0.22	CDmax = 0.34
α Lmax = 16.3 °	ξ = 0.515	Mmax = 1.326
α Cmin = 14.8 °	-CPmax = 9.9	α Mmax = 16.1 °

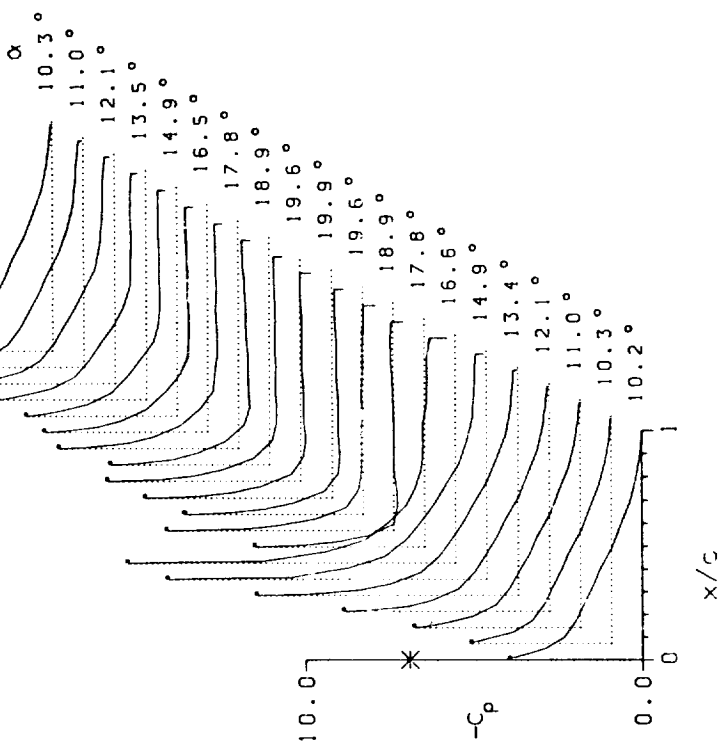
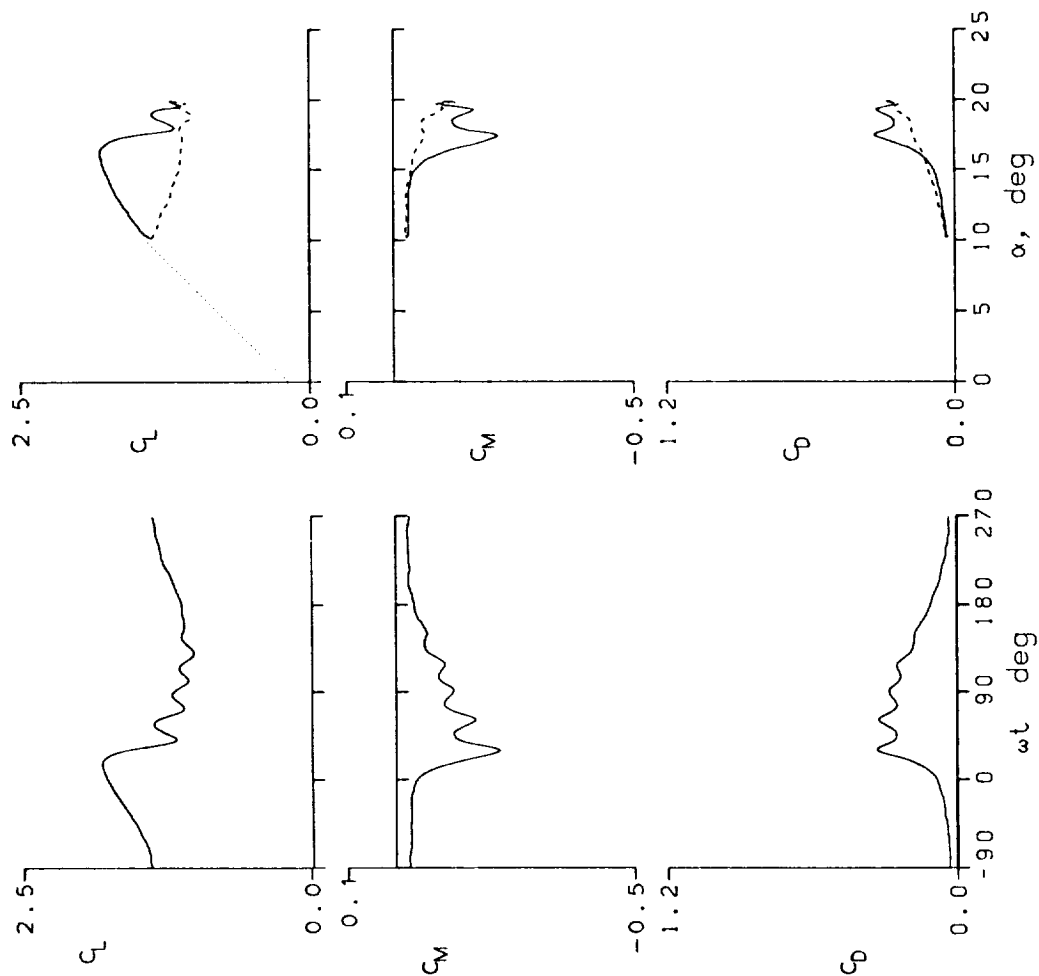


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45209	A0 = 14.96 °	k = 0.100
Re = 3.99 E6	A1 = 4.89 °	M = 0.300
CLmax = 2.07	CMmin = -0.25	CDmax = 0.44
αLmax = 17.6 °	ξ = 0.339	Mmax = 1.460
αCmin = 14.8 °	-CPmax = 11.0	αMmax = 17.5 °

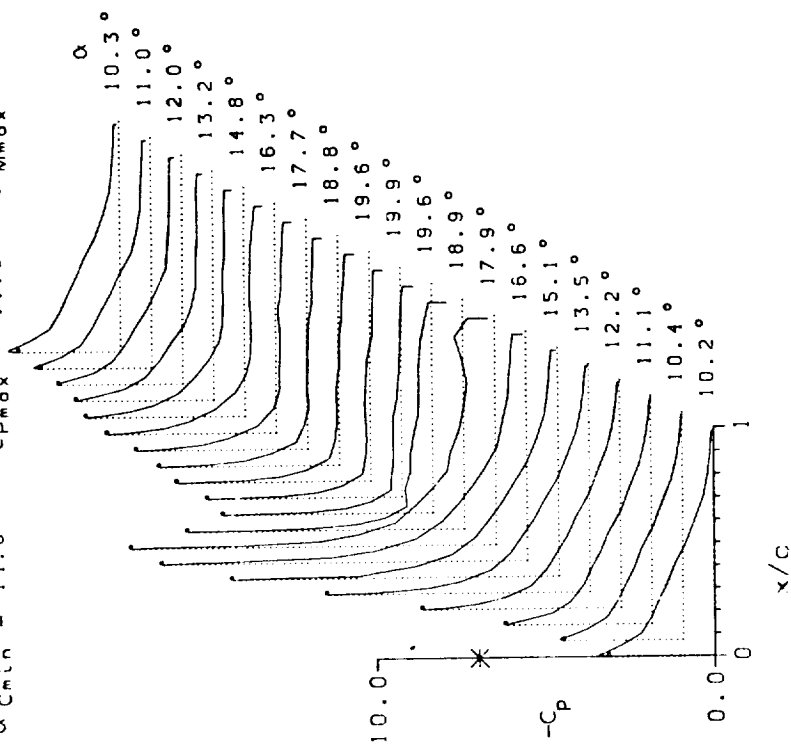
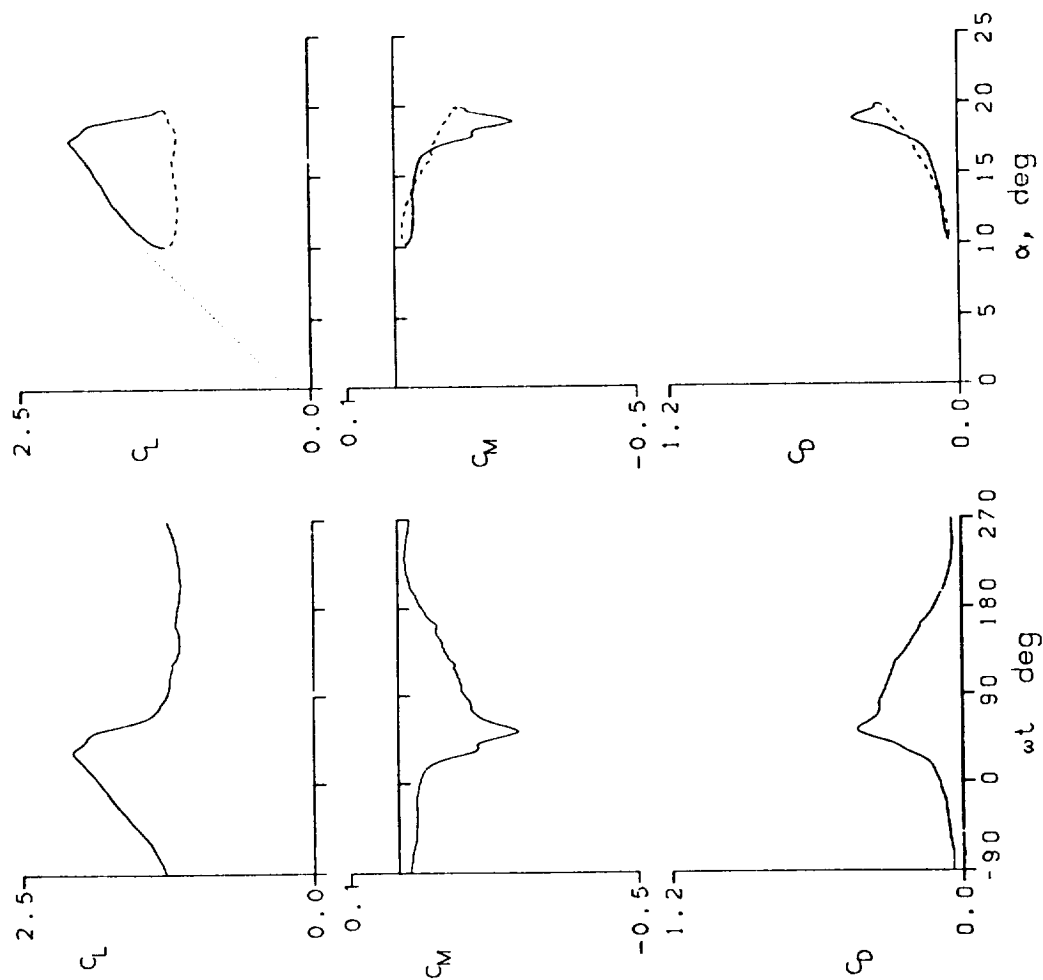


Figure 17.- Continued.

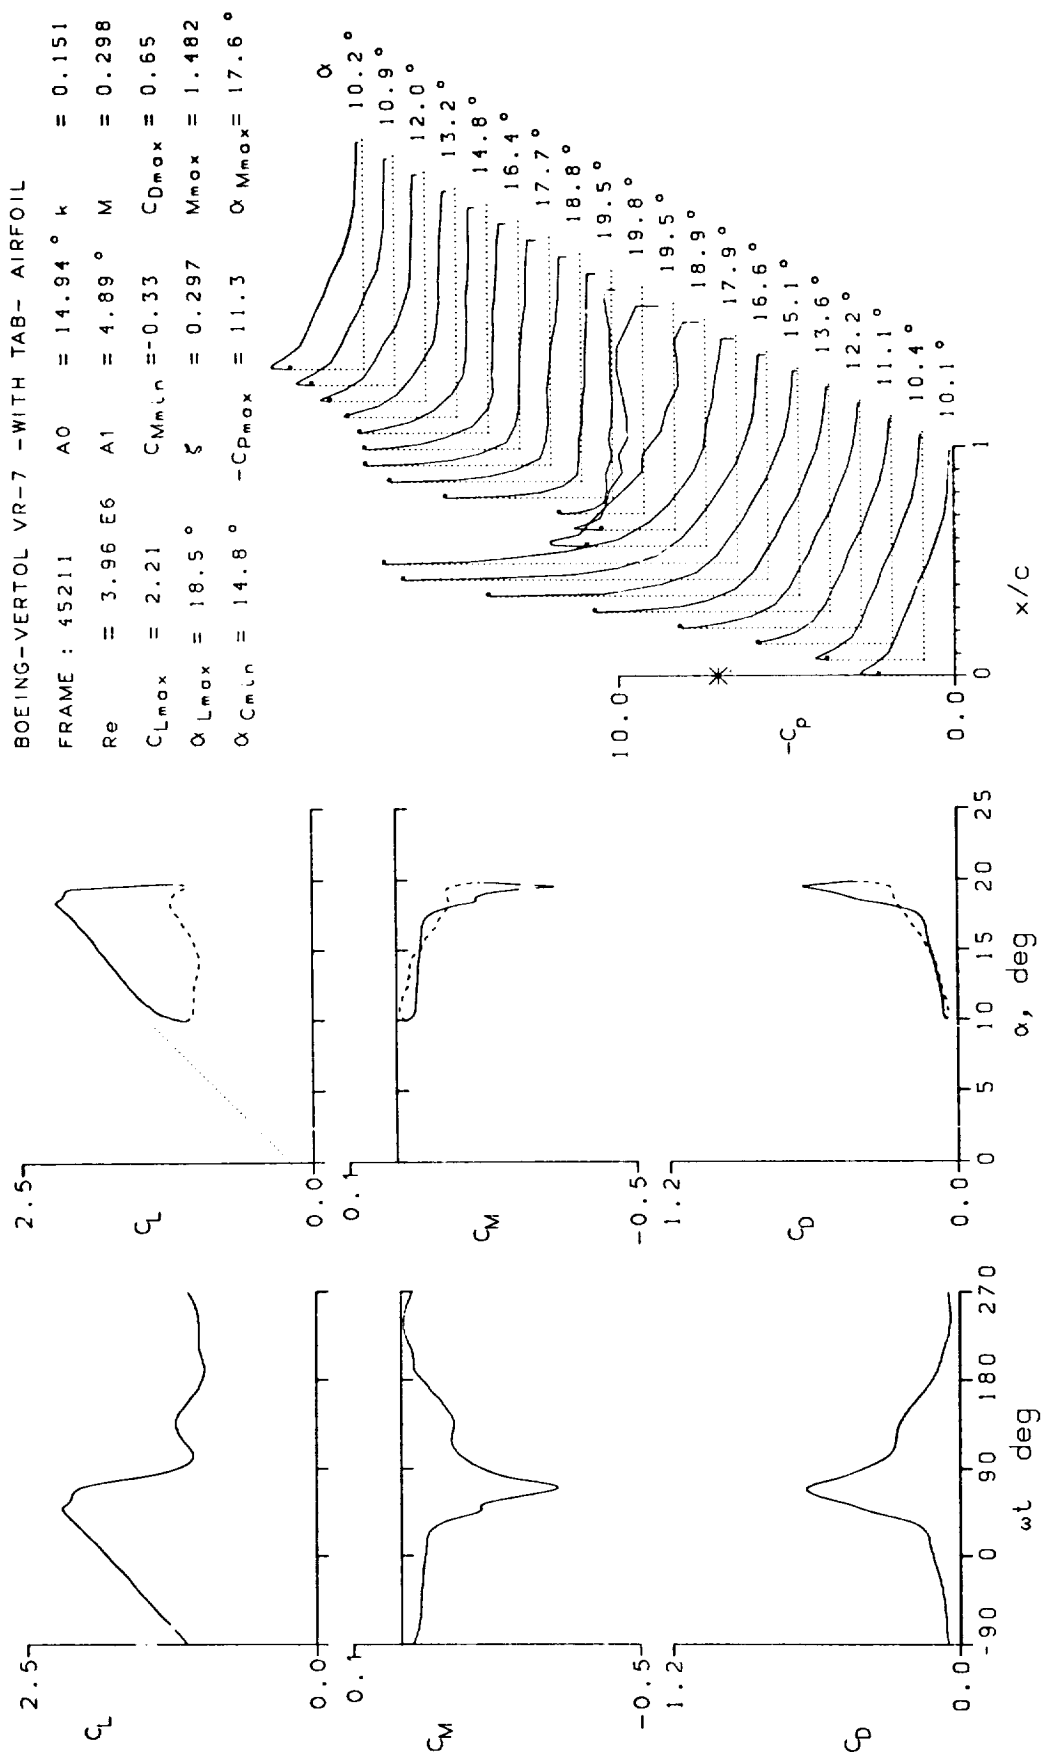


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45213 $A_0 = 14.98^\circ$ $k = 0.204$

$Re = 3.91 \text{ E}6$ $A_1 = 4.88^\circ$ $M = 0.295$

$C_{Lmax} = 2.33$ $C_{Mmin} = -0.42$ $C_{Dmax} = 0.77$

$\alpha_{Lmax} = 18.9^\circ$ $\xi = 0.240$ $M_{max} = 1.484$

$\alpha_{Cmin} = 14.8^\circ$ $-C_{Pmax} = 11.6$ $\alpha_{Mmax} = 17.5^\circ$

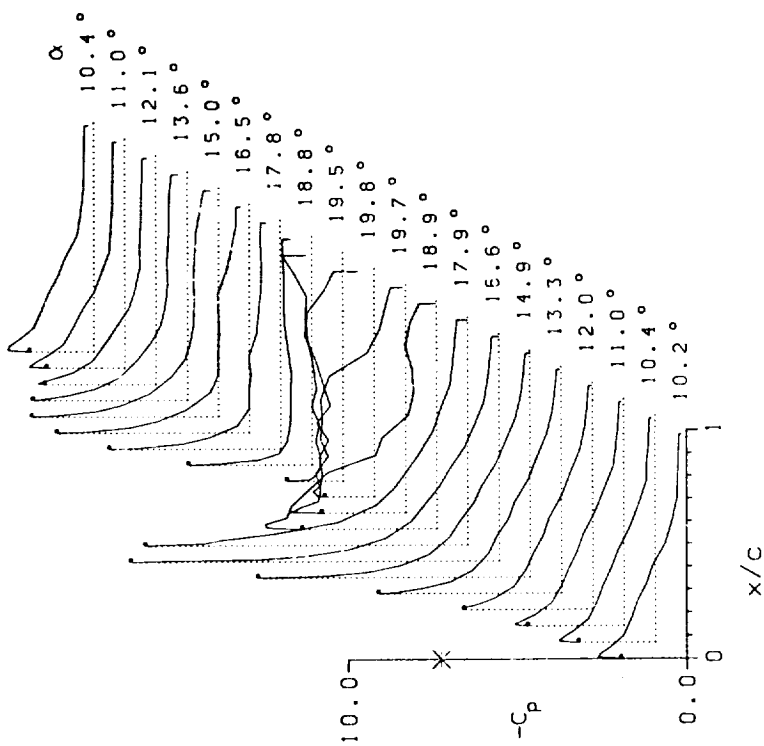
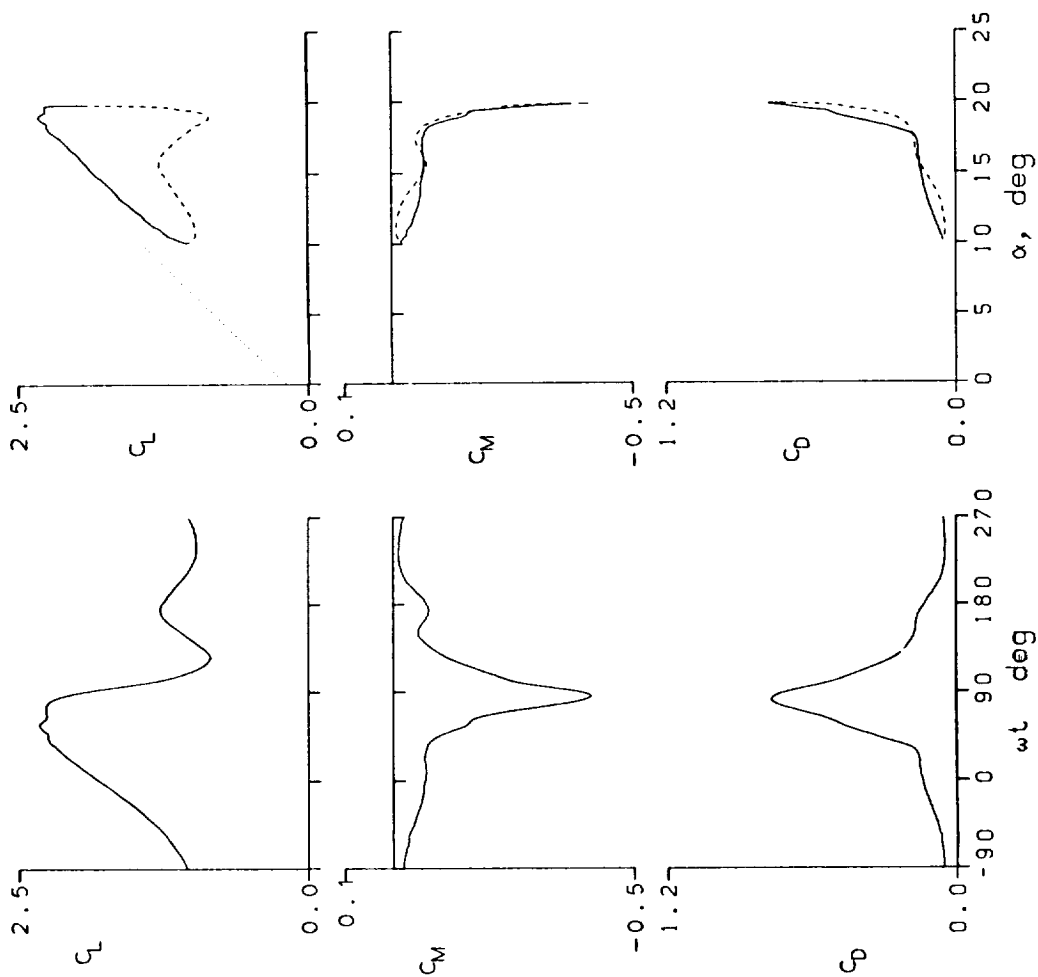


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45221	A0 = 9.90 °	k = 0.025
Re = 4.05 E6	A1 = 4.91 °	M = 0.302
CLmax = 1.65	CMmin = -0.09	CDmax = 0.14
αLmax = 13.8 °	ξ = 0.008	Mmax = 1.134
αCmin = 9.6 °	-CPmax = 8.2	αMmax = 14.2 °



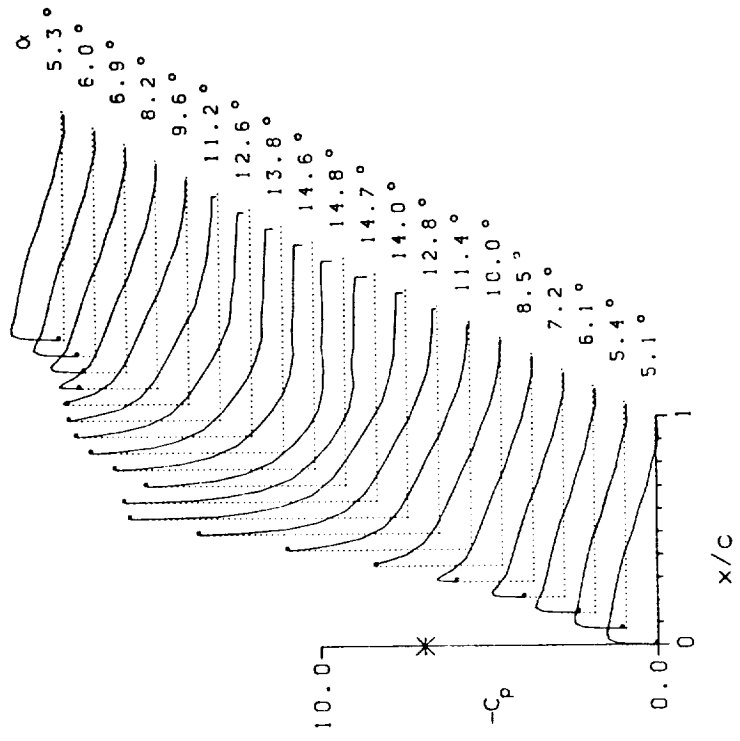


Figure 17.- Continued.

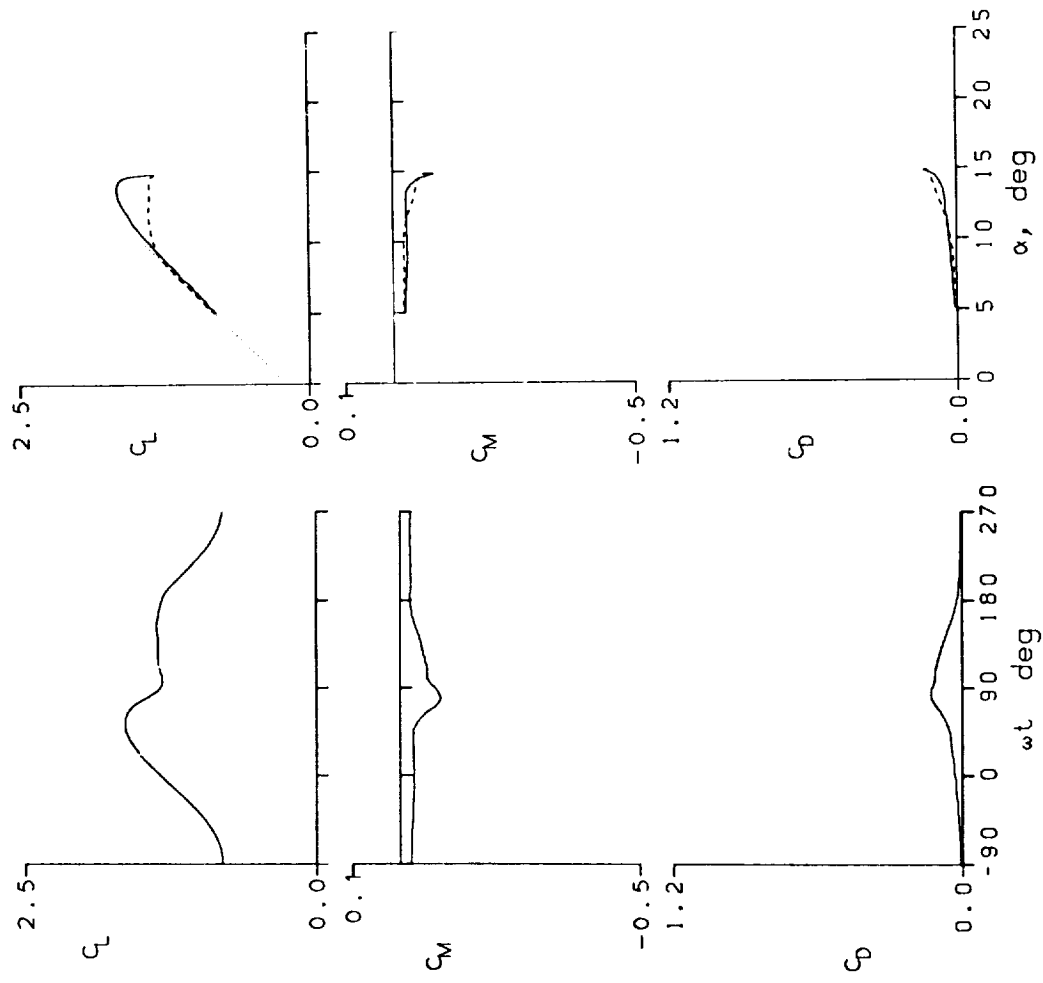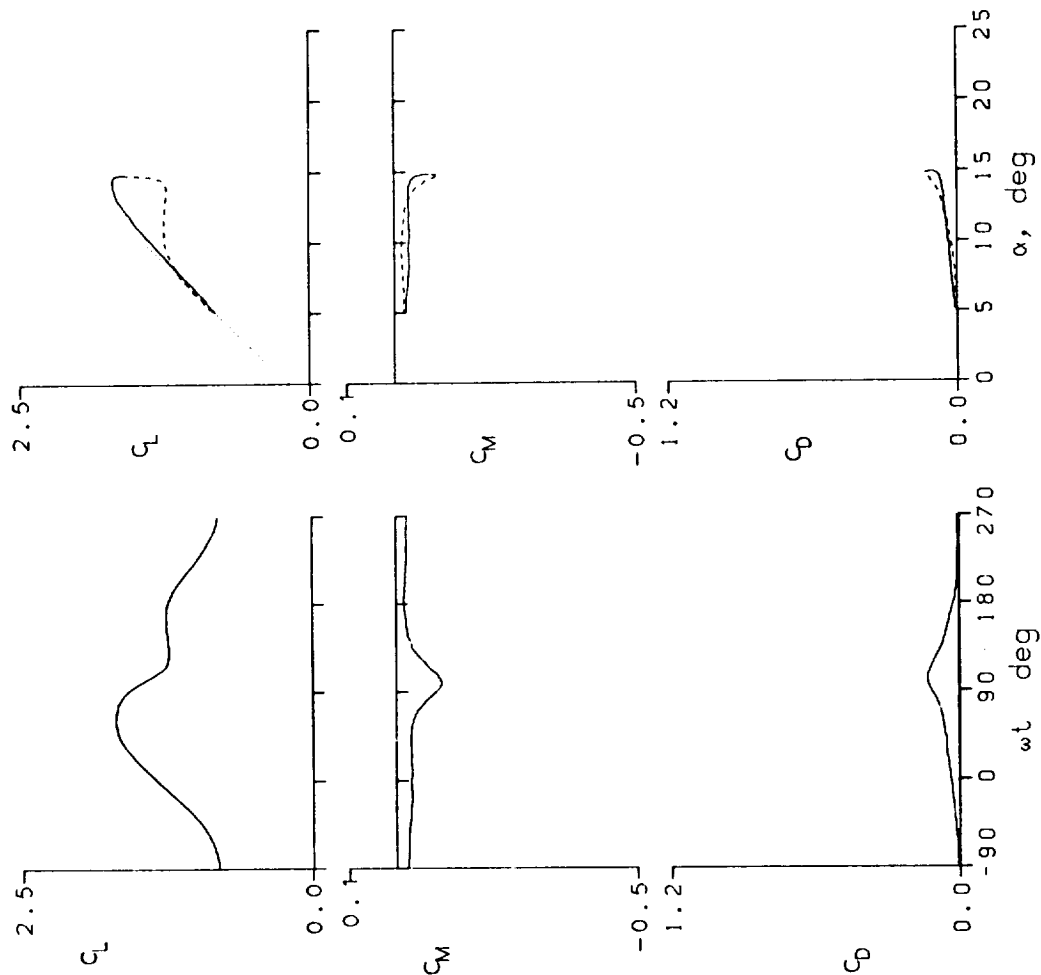

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45223 $A_0 = 9.89^\circ$ $k = 0.050$

$Re = 4.03 \text{ E}6$ $A_1 = 4.91^\circ$ $M = 0.301$

$C_{Lmax} = 1.70$ $C_{Mmin} = -0.10$ $C_{Dmax} = 0.14$

$\alpha_{Lmax} = 14.3^\circ$ $\xi = 0.070$ $M_{max} = 1.219$

$\alpha_{Cmin} = 9.6^\circ$ $-C_{Dmax} = 9.0$ $\alpha_{Mmax} = 14.7^\circ$


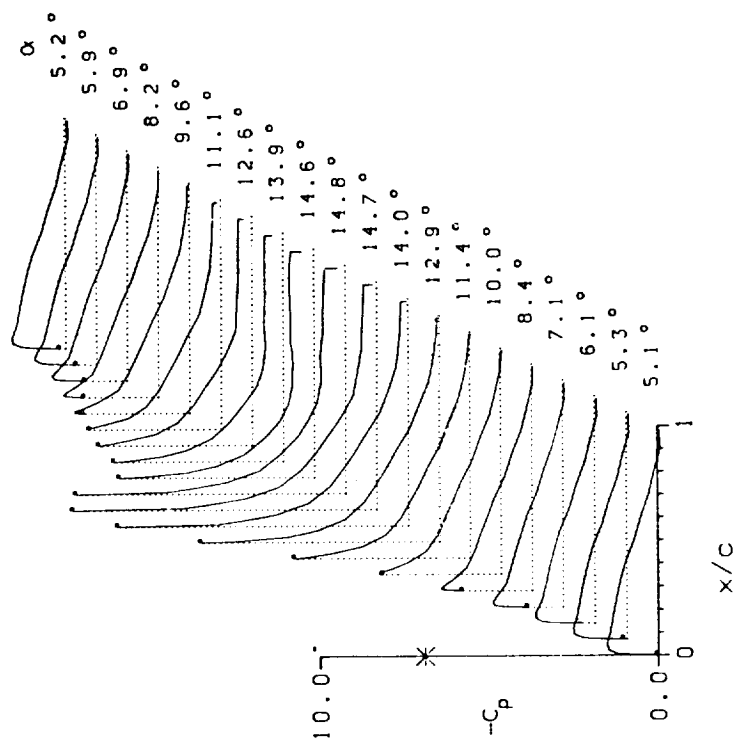


Figure 17.- Continued.

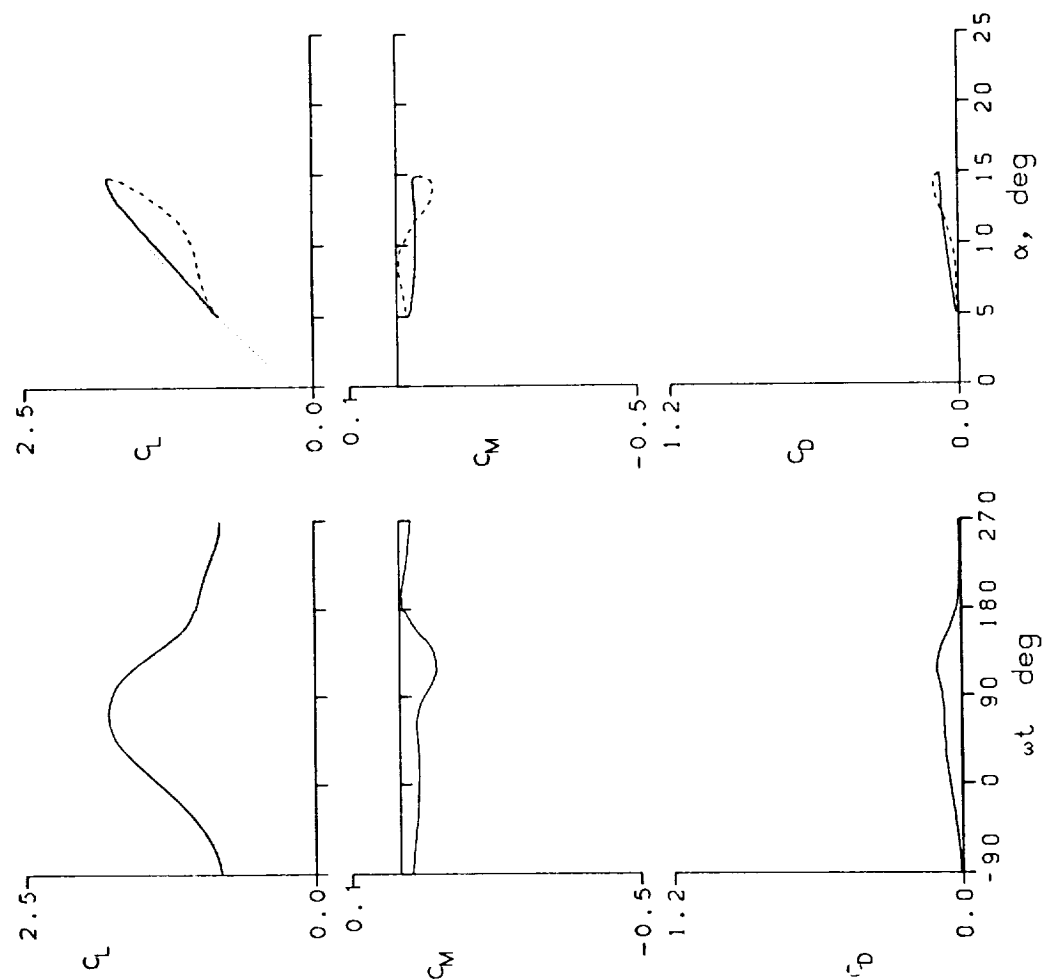

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 45300 $A_0 = 9.89^\circ$ $k = 0.100$
 $Re = 4.03 \times 10^6$ $A_1 = 4.91^\circ$ $M = 0.301$
 $C_{L_{max}} = 1.78$ $C_{M_{min}} = -0.08$ $C_{D_{max}} = 0.10$
 $\alpha_{L_{max}} = 14.7^\circ$ $\zeta = 0.084$ $M_{max} = 1.296$
 $\alpha_{C_{min}} = 9.6^\circ$ $-C_{D_{max}} = 9.7$ $\alpha_{M_{max}} = 14.8^\circ$

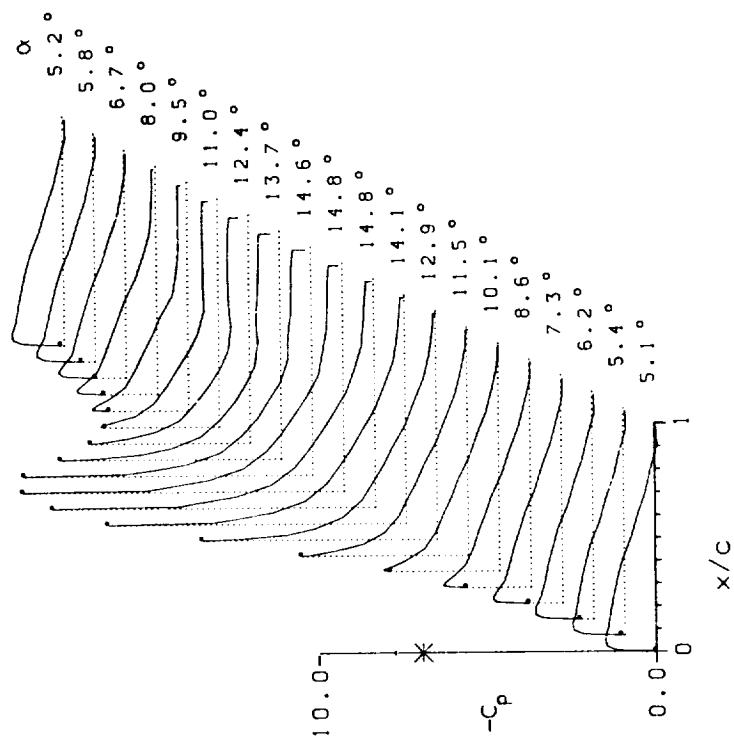


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 45302	A0 = 9.90 °	k = 0.150
Re = 4.03 E6	A1 = 4.90 °	M = 0.302
CLmax = 1.83	CMmin = -0.06	CDmax = 0.08
αLmax = 14.8 °	ξ = 0.230	Mmax = 1.346
αCmin = 9.6 °	-CPmax = 10.1	αMmax = 14.8 °

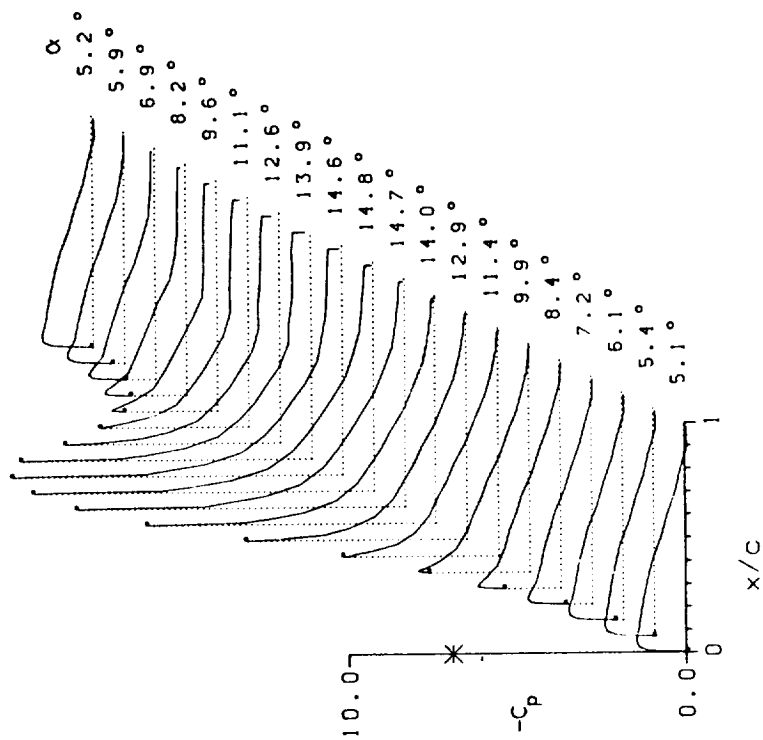
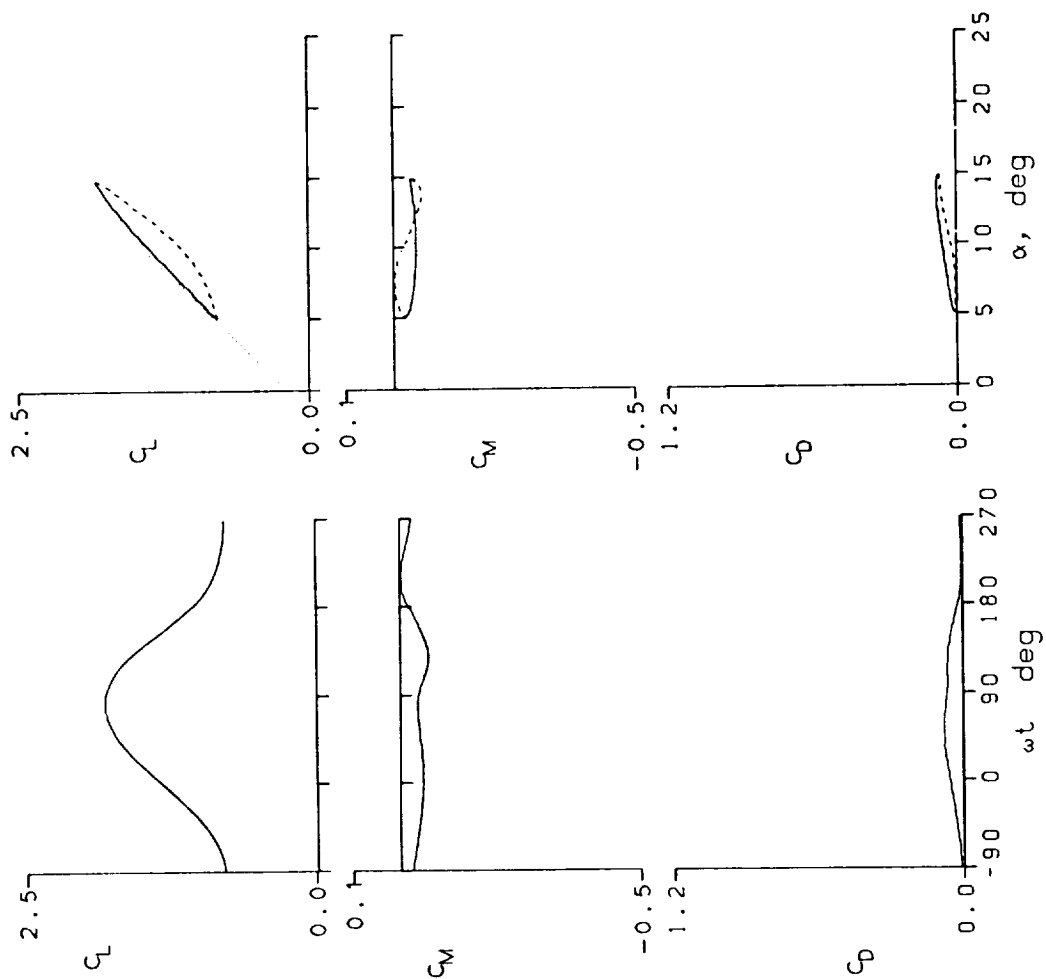


Figure 17.- Continued.

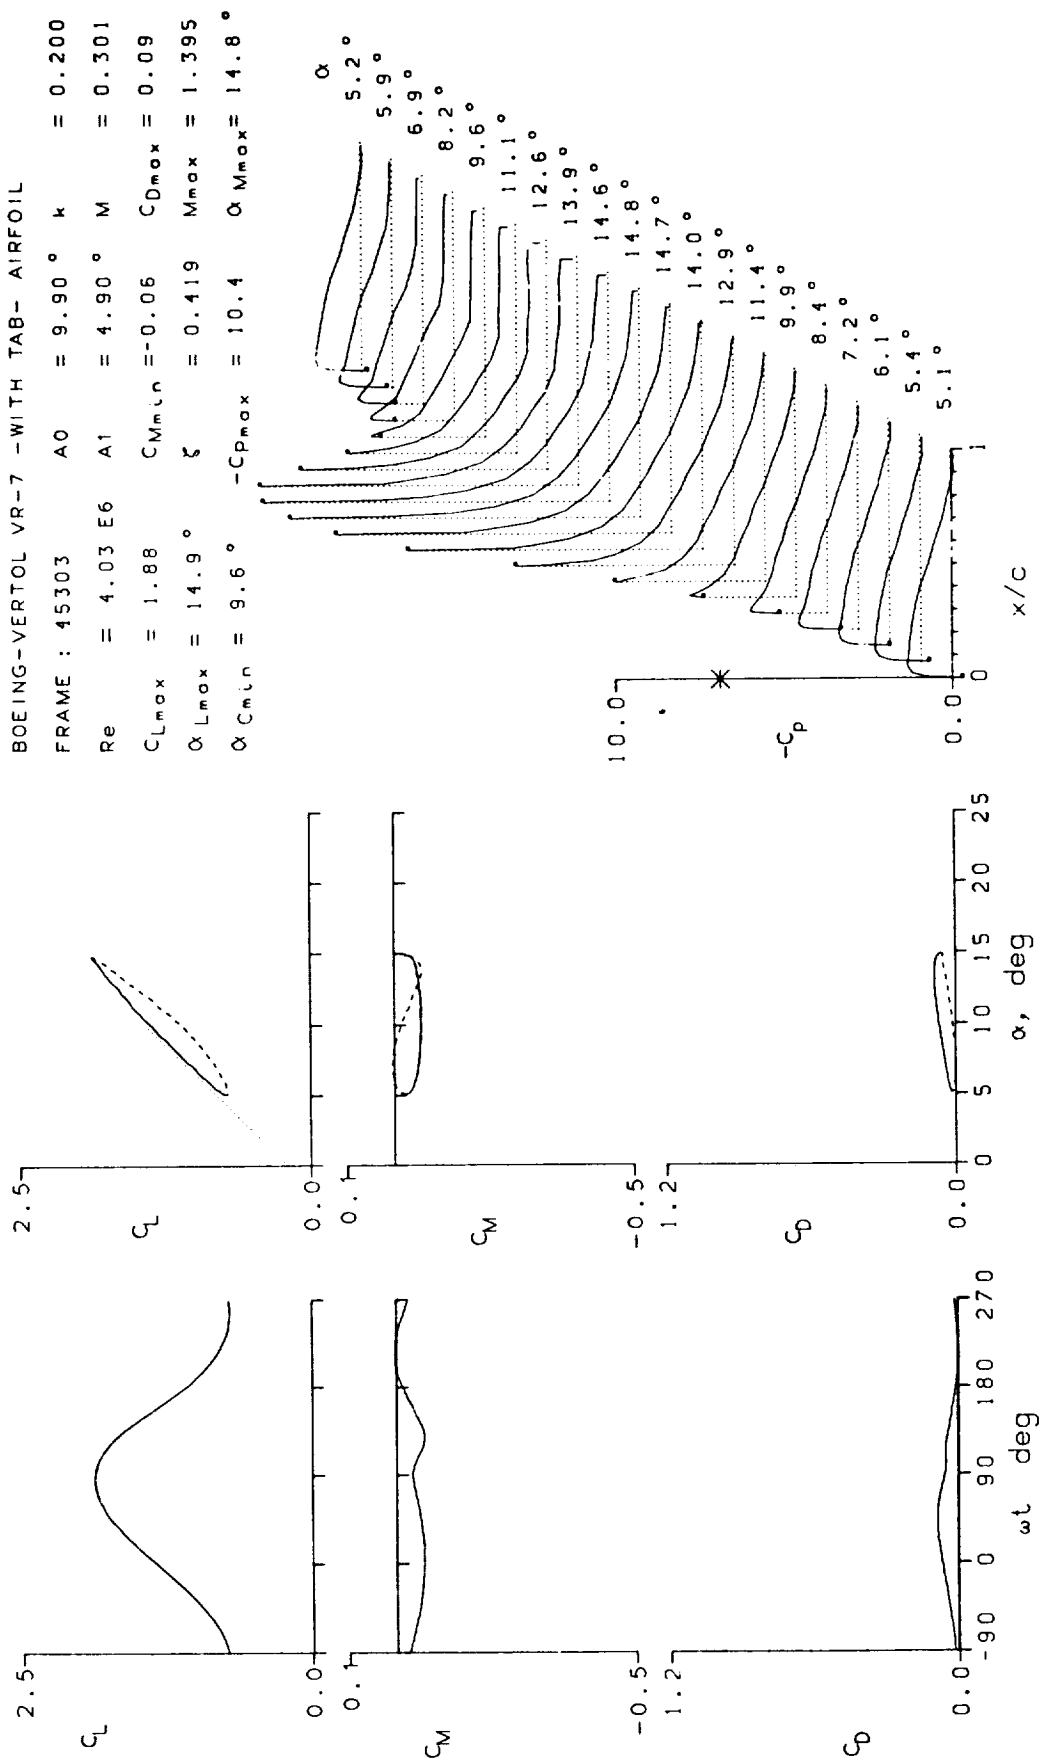


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL TRIP

FRAME : 47020 A0 = 14.81° k = 0.025

Re = 4.06 E6 A1 = 9.88° M = 0.299

C_{Lmax} = 1.66 C_{Mmin} = -0.20 C_{Dmax} = 0.47

α_{Lmax} = 14.9° ξ = 0.211 M_{max} = 1.061

α_{Cmin} = 14.5° $-C_{Dmax}$ = 7.6 α_{Mmax} = 15.2°



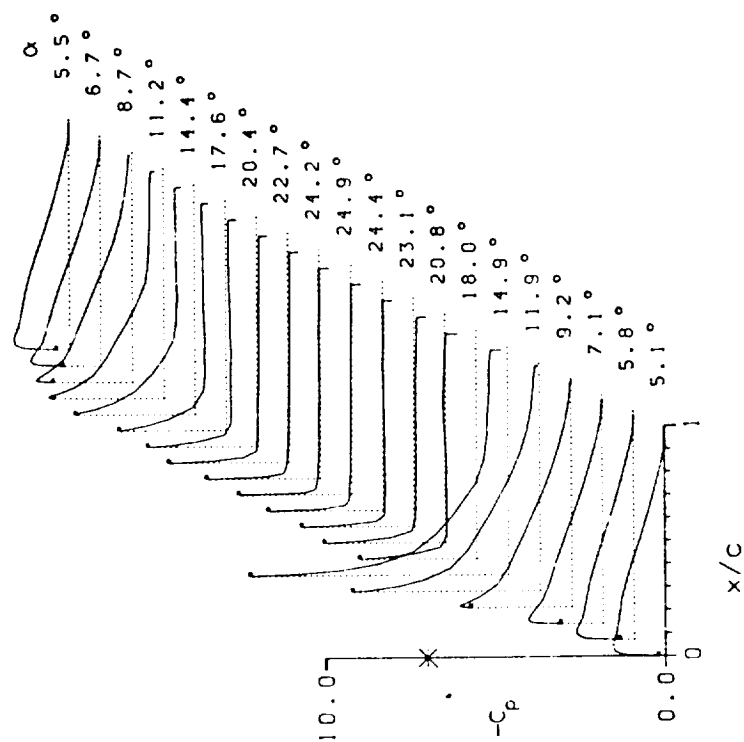


Figure 17.- Continued.

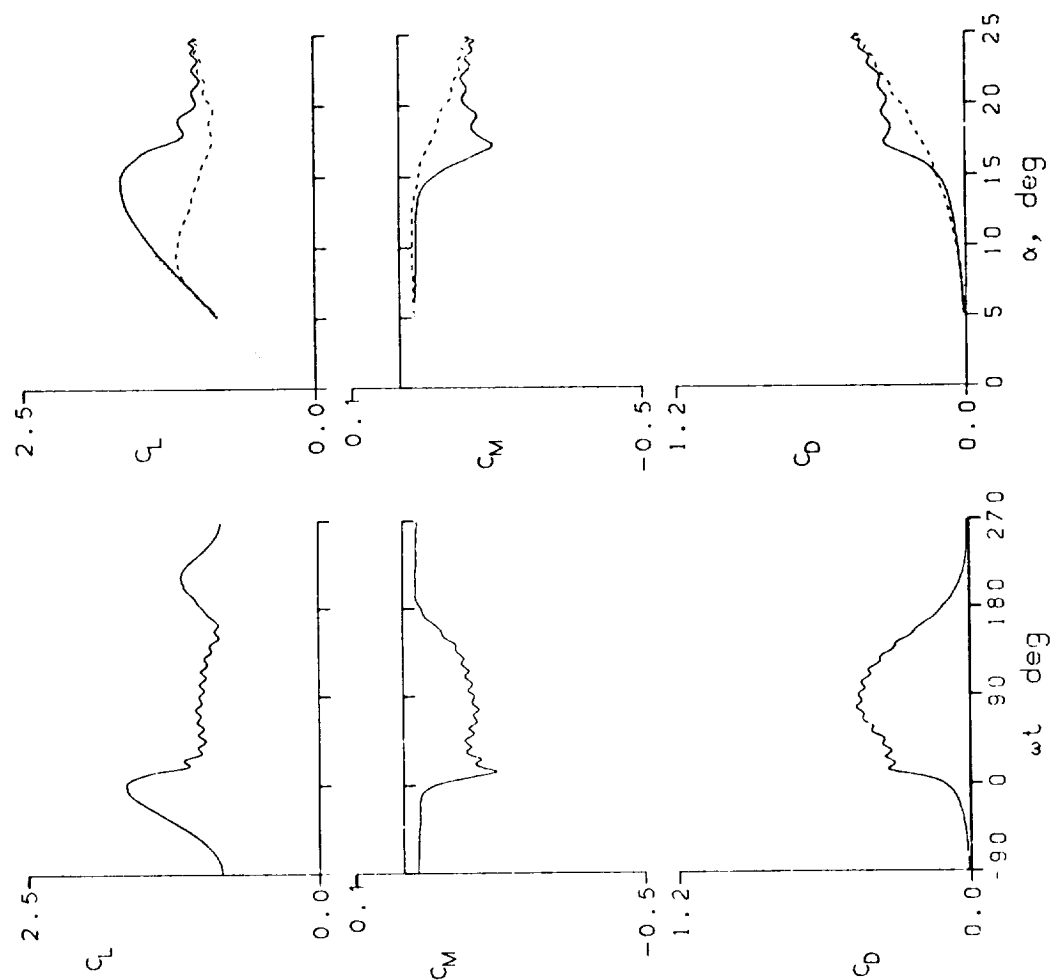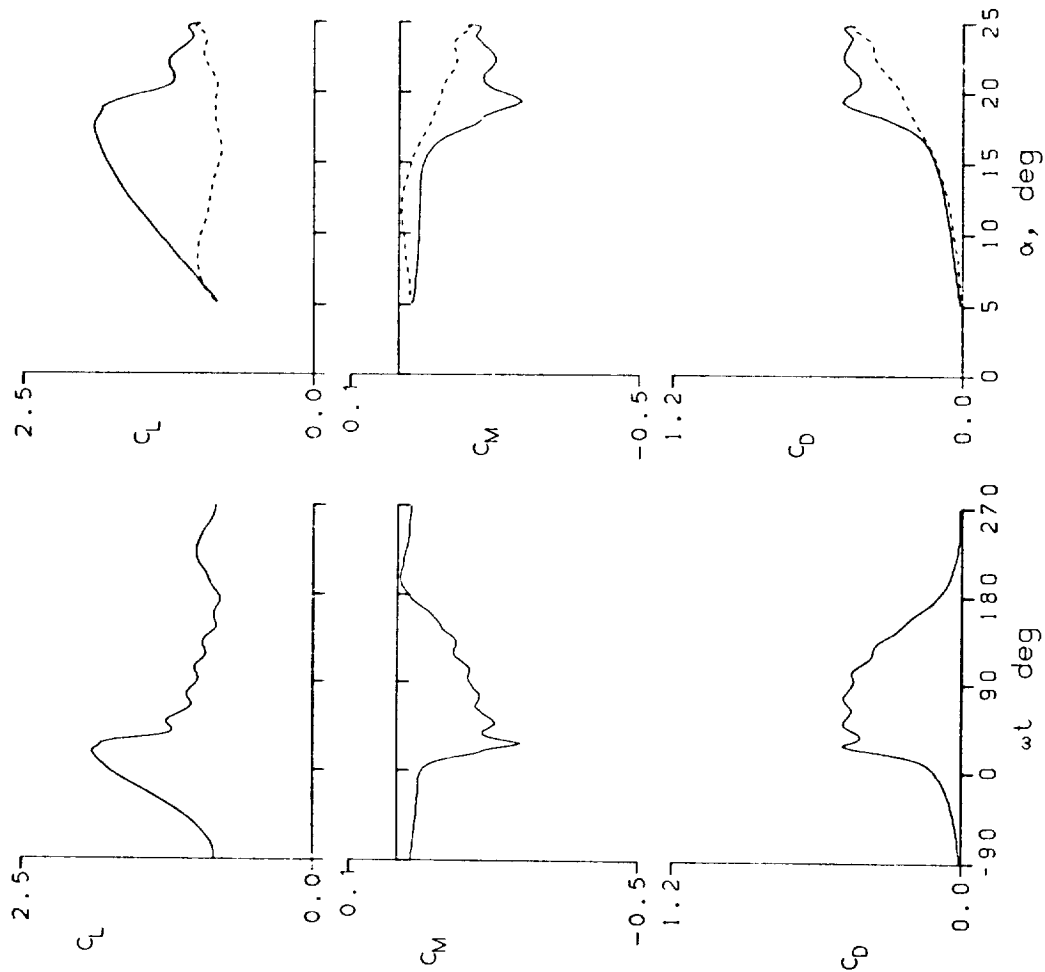

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL TRIP

FRAME : 47022 $A_0 = 14.81^\circ$ $k = 0.050$

$Re = 3.99 \text{ E}6$ $A_1 = 9.89^\circ$ $M = 0.296$

$C_{Lmax} = 1.91$ $C_{Mmin} = -0.26$ $C_{Dmax} = 0.50$

$\alpha_{Lmax} = 17.4^\circ$ $\xi = 0.369$ $M_{max} = 1.291$

$\alpha_{Cmin} = 14.5^\circ$ $-C_{pmax} = 10.0$ $\alpha_{Mmax} = 17.4^\circ$

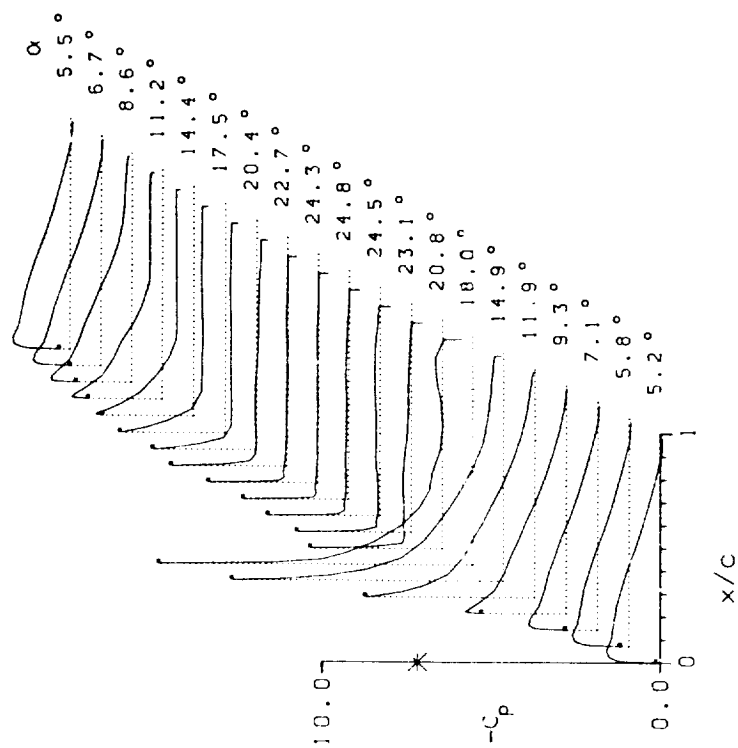


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL TRIP

FRAME : 47:00 A0 = 14.82° k = 0.101

Re = 3.93 E6 A1 = 9.88° M = 0.292

CLmax = 2.34 CMmin = -0.40 CDmax = 0.84

αLmax = 21.0° ξ = 0.558 Mmax = 1.412

αCMmin = 14.4° -CPmax = 11.3 αMmax = 18.6°

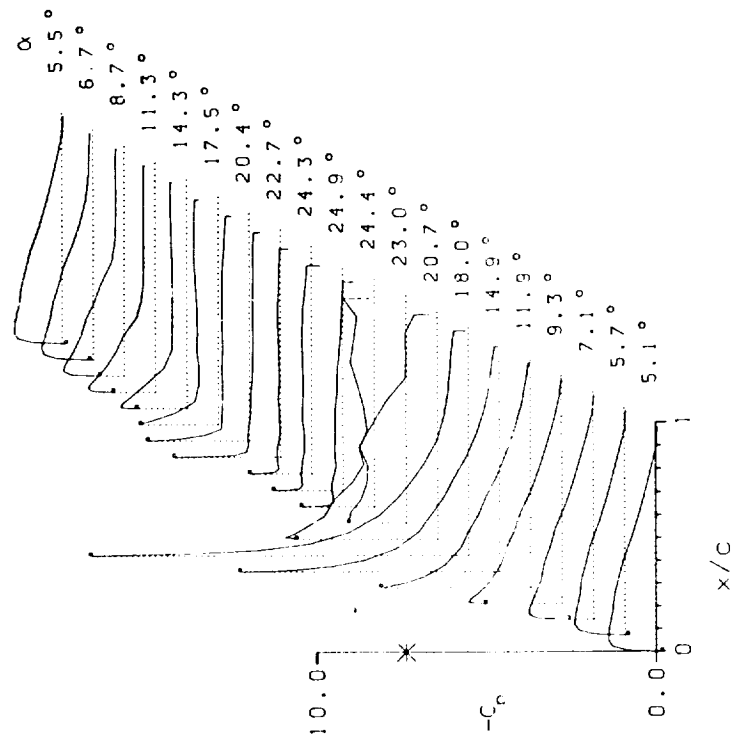
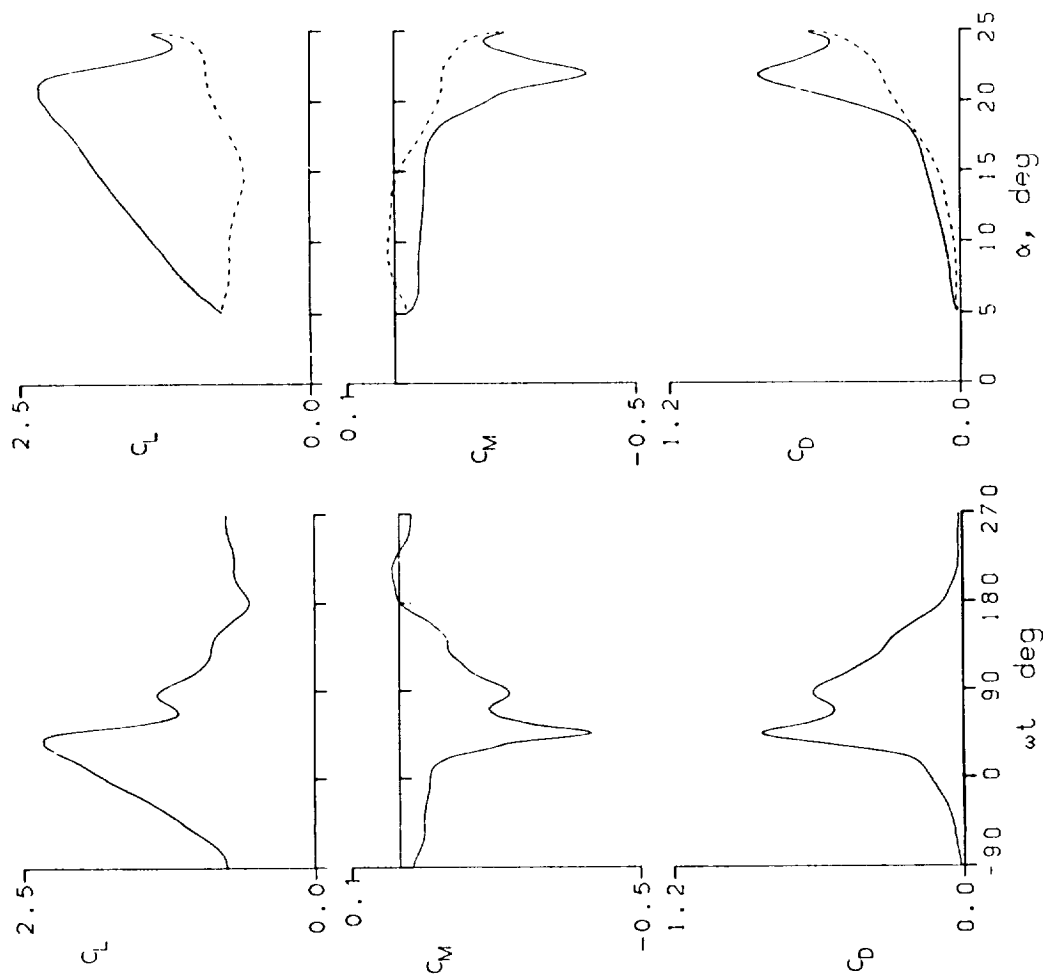


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL TRIP

FRAME : 47110	A0 = 14.81 °	k = 0.051
Re = 2.58 E6	A1 = 9.88 °	M = 0.184
$C_{Lmax} = 1.84$	$C_{Mmin} = -0.27$	$C_{Dmax} = 0.63$
$\alpha_{Lmax} = 17.7 °$	$\zeta = 0.355$	$M_{max} = 0.716$
$\alpha_{Cmin} = 14.5 °$	$-C_{Dmax} = 11.5$	$\alpha_{Mmax} = 18.3 °$

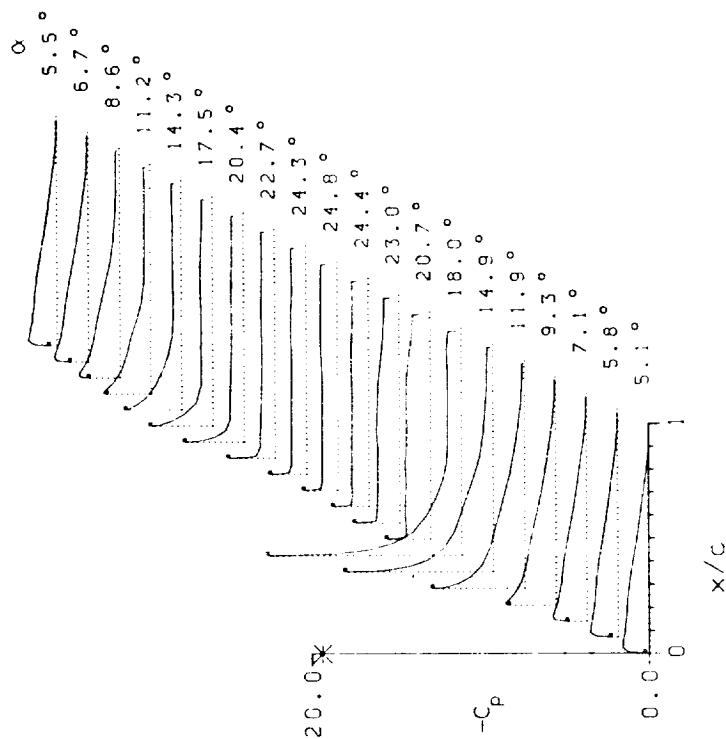
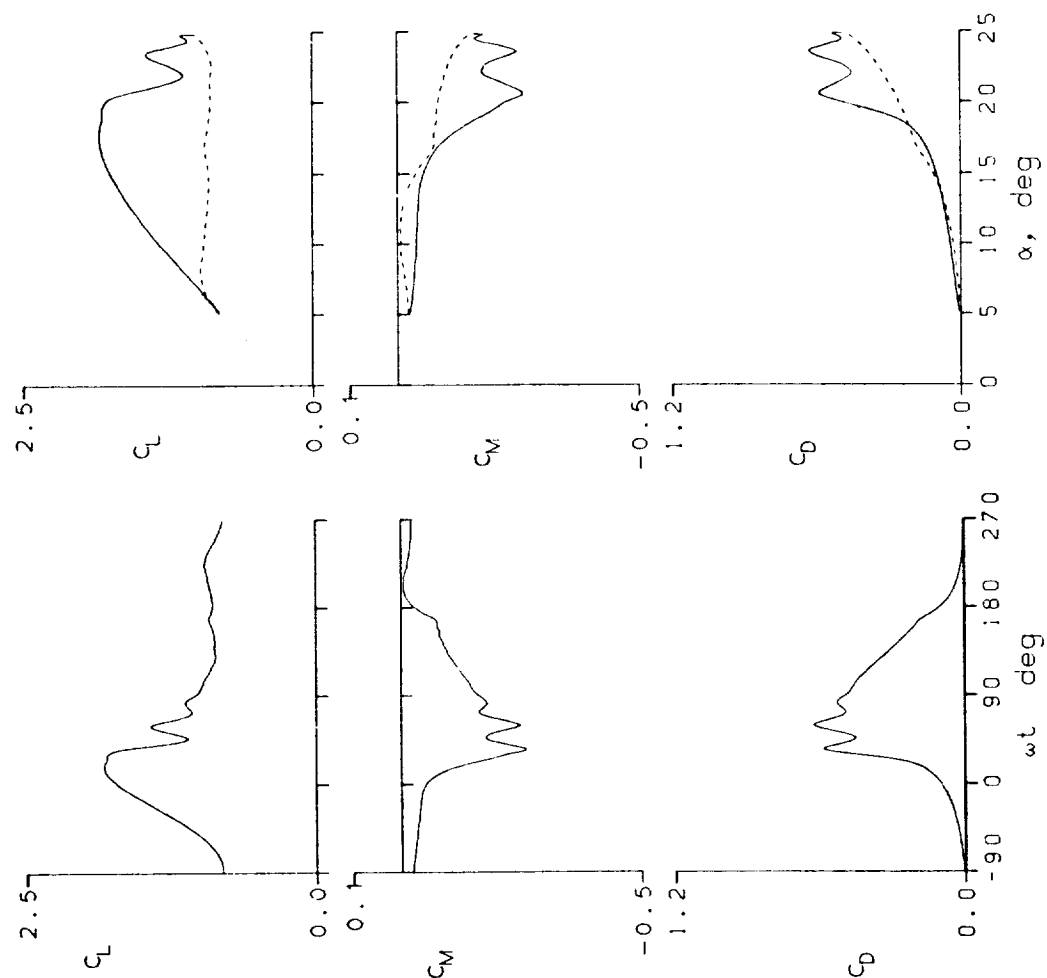


Figure 17.-- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL TRIP

FRAME : 47112 AO = 14.83° k = 0.101

Re = 2.59 E6 A1 = 9.88° M = 0.185

C_{Lmax} = 2.26 C_{Mmin} = -0.37 C_{Dmax} = 0.86

α_{Lmax} = 22.2° ζ = 0.377 M_{max} = 0.888

α_{Cmin} = 14.5° $-C_{Pmax}$ = 16.1 α_{Mmax} = 21.1°


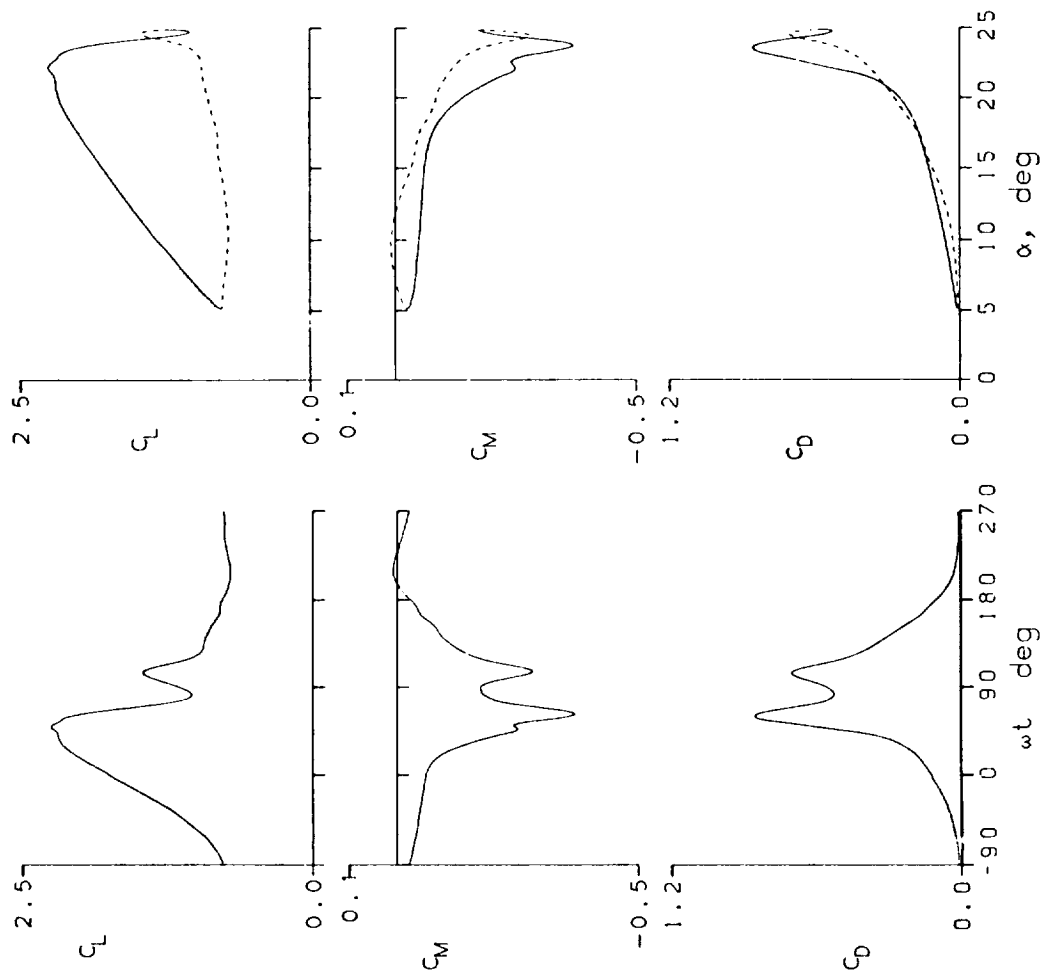


Figure 17.- Continued.

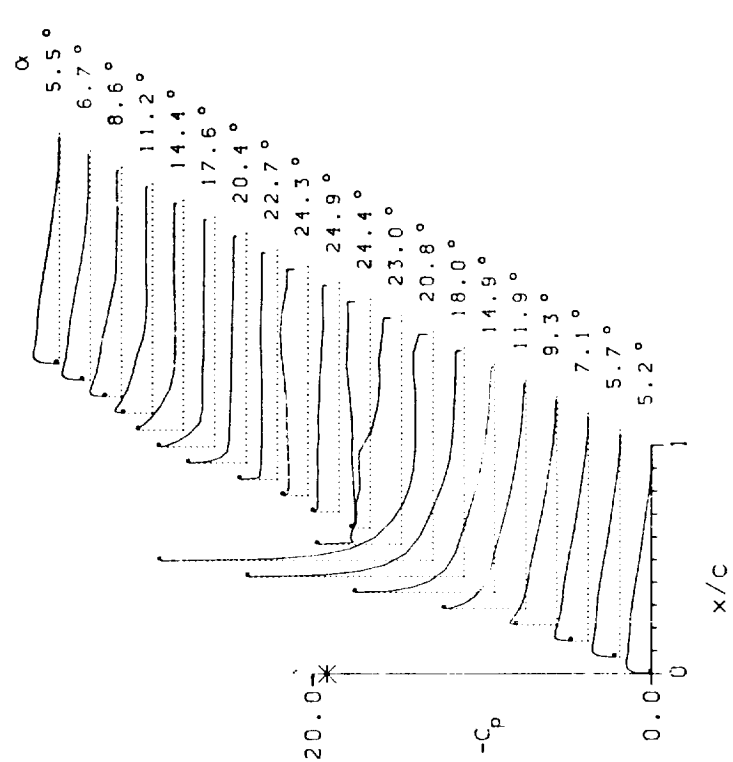

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL TRIP

FRAME : 47114 A0 = 14.82° k = 0.151

Re = 2.58 E6 A1 = 9.88° M = 0.185

C_{Lmax} = 2.61 C_{Mmin} = -0.44 C_{Dmax} = 1.05

α_{Lmax} = 23.2° ζ = 0.273 M_{max} = 1.014

α_{Cmin} = 14.5° $-C_{Pmax}$ = 19.5 α_{Mmax} = 22.6°

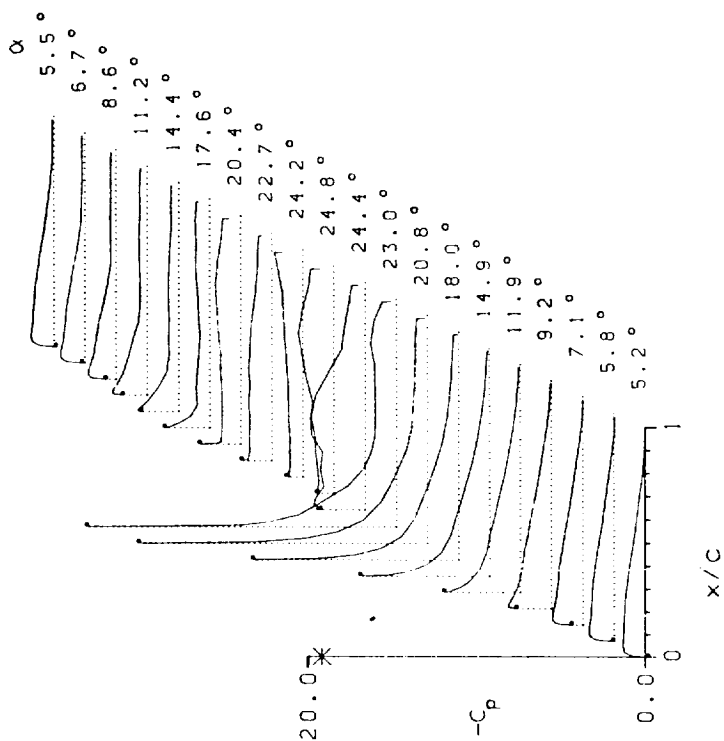
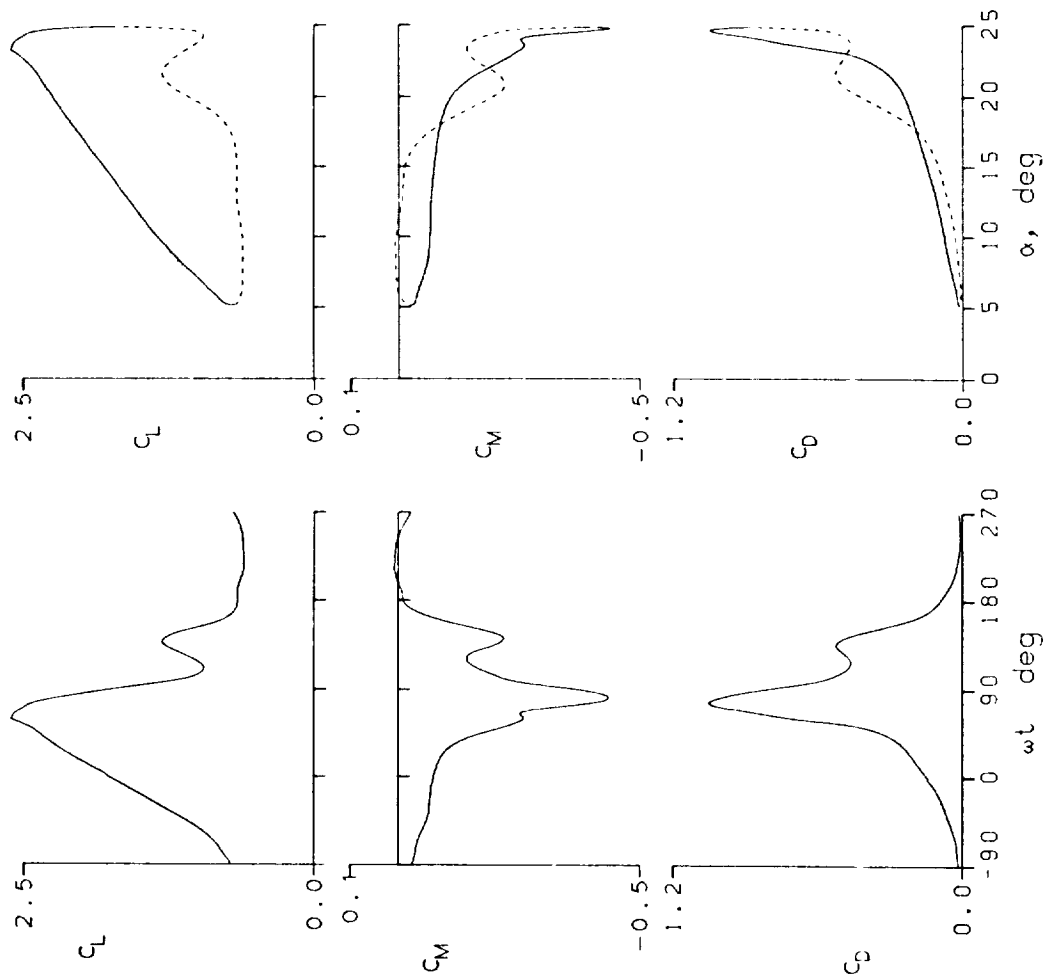


Figure 17.- Continued.

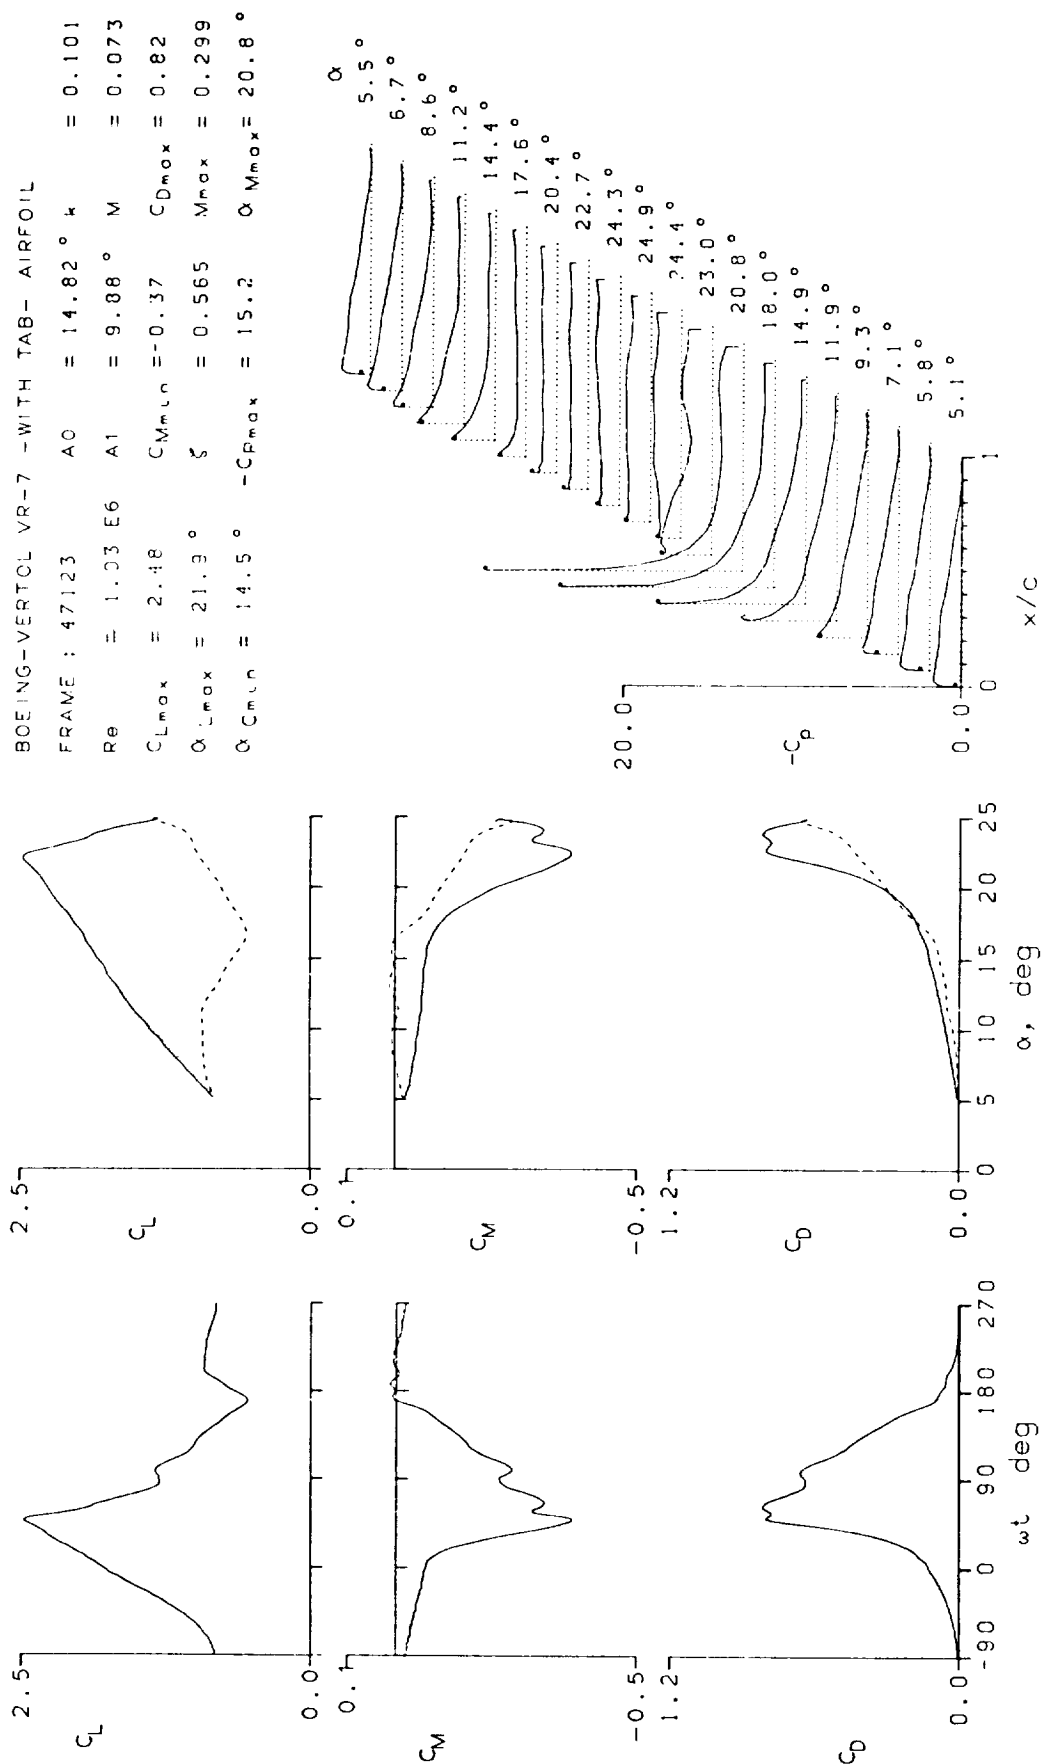


Figure 17.- Continued.

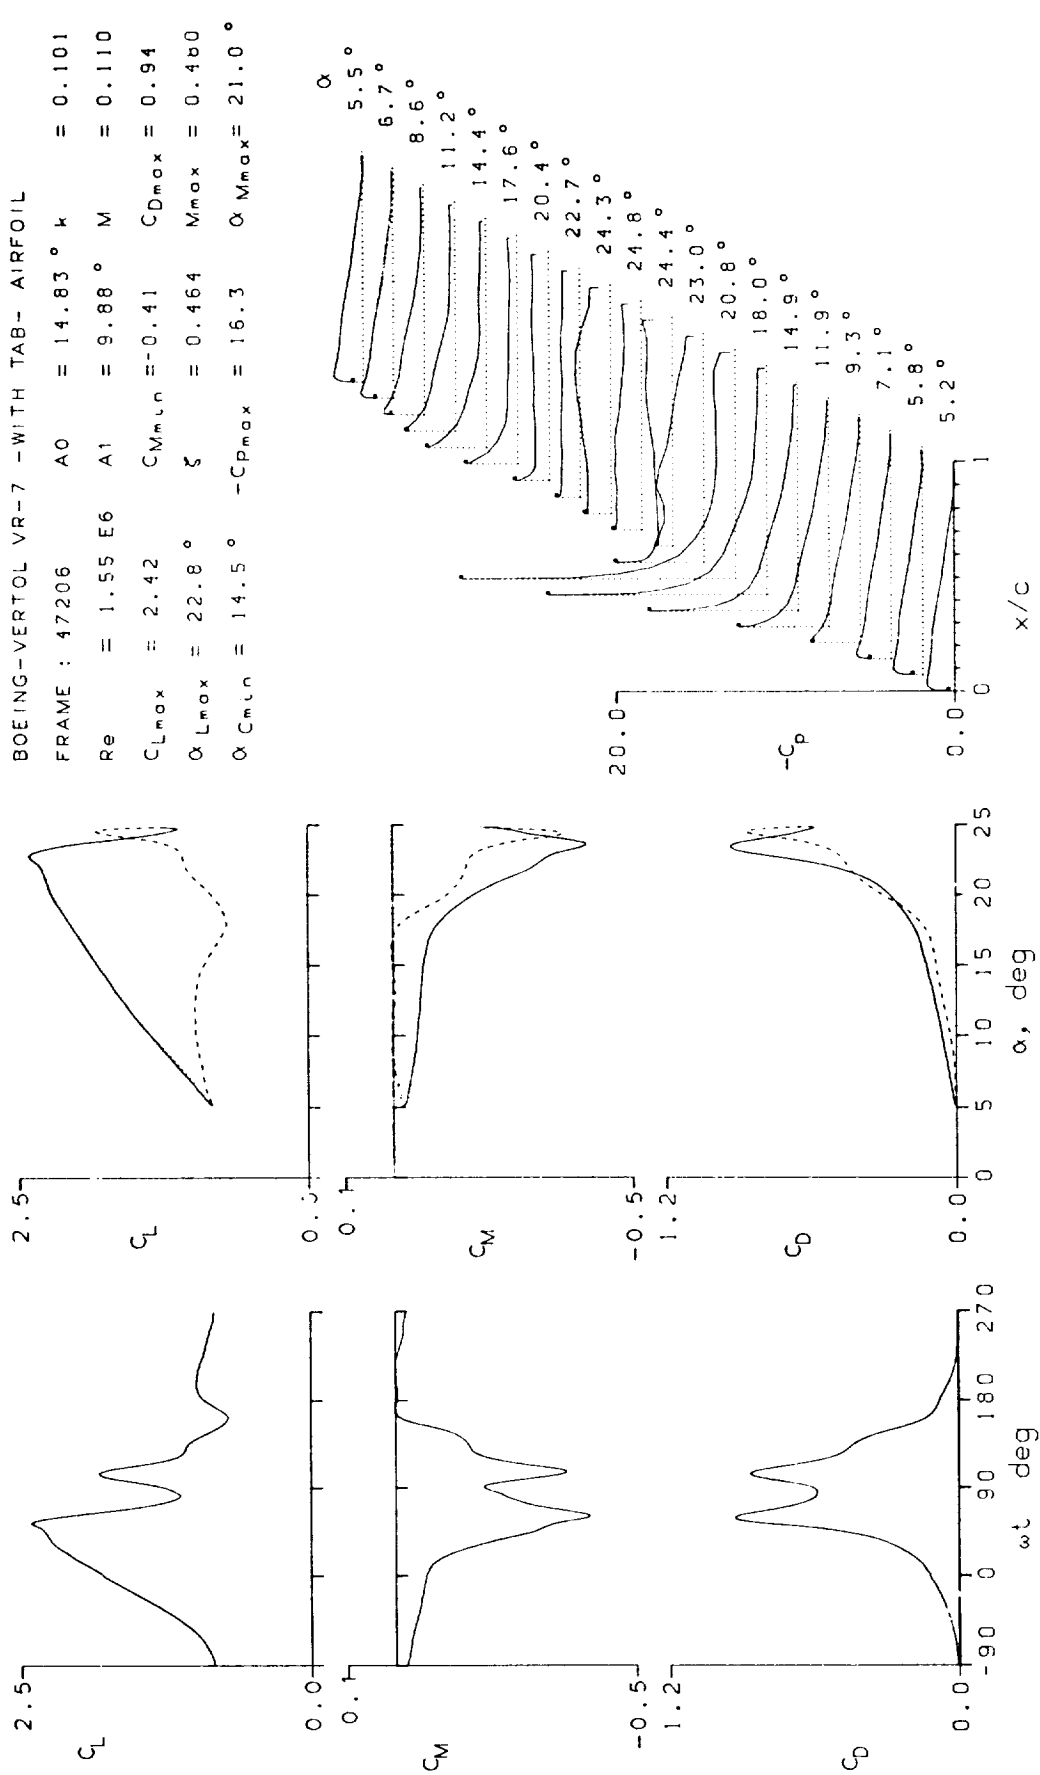


Figure 17.- Continued.

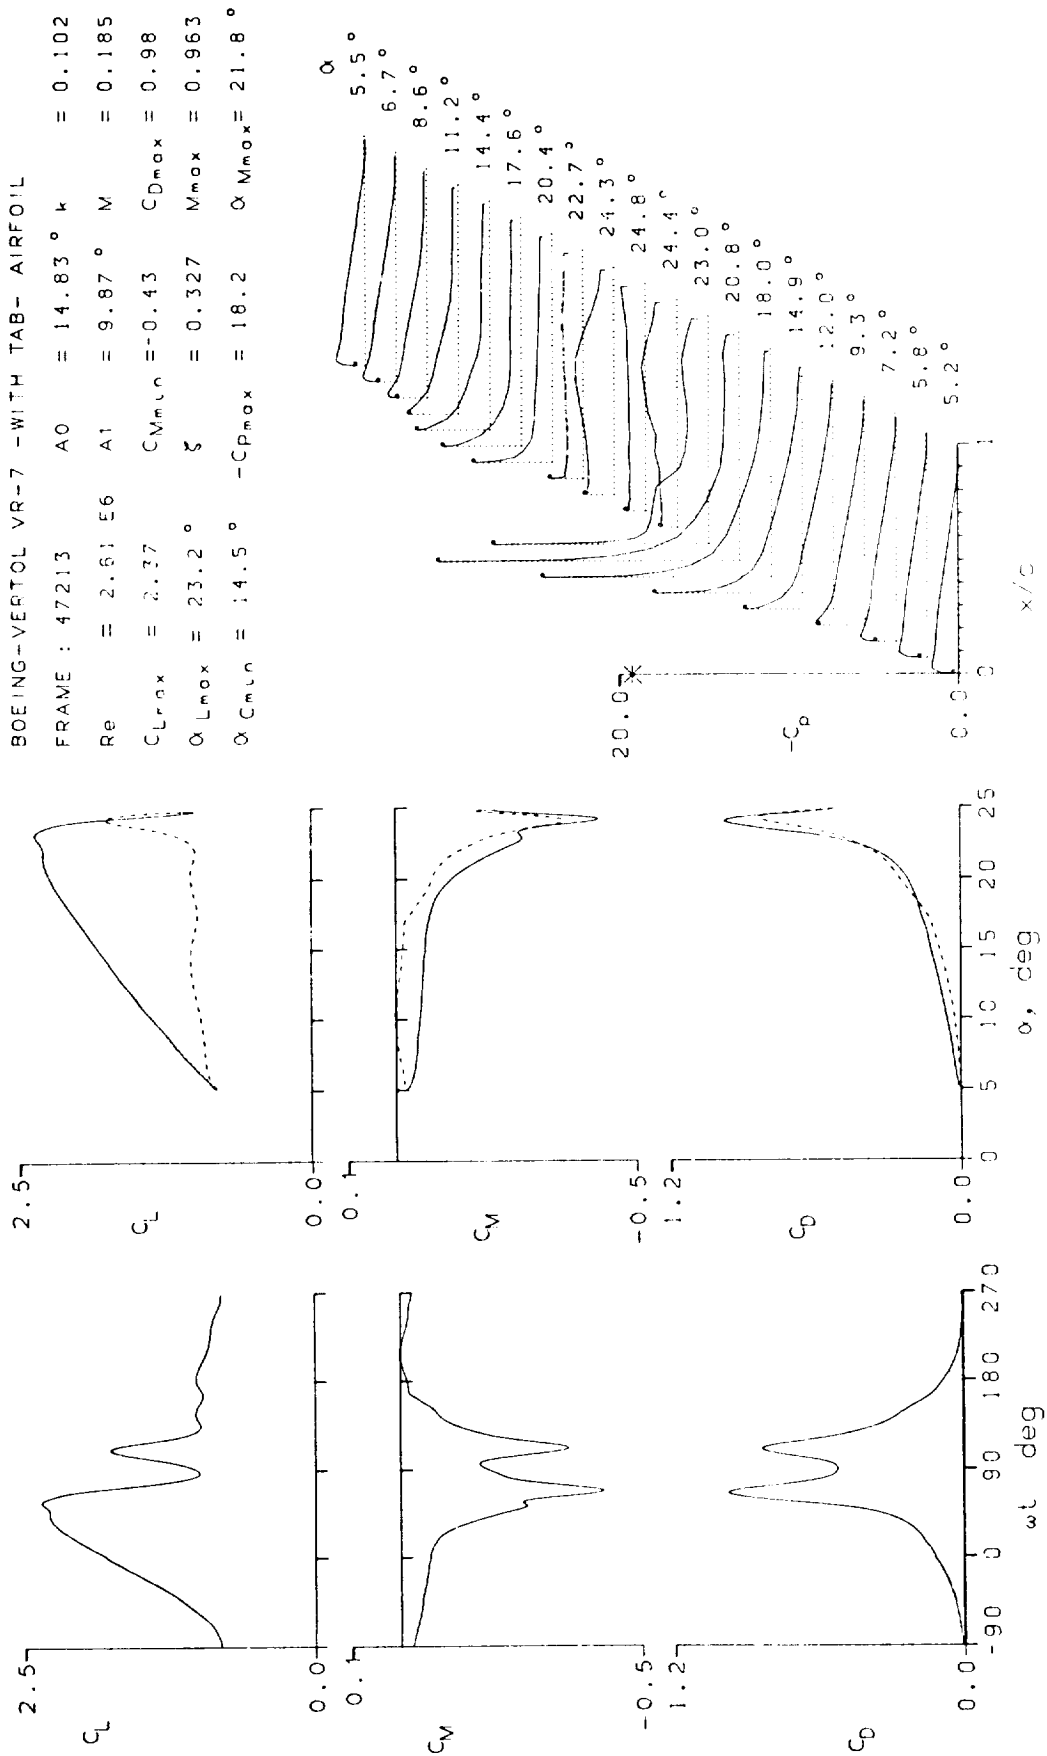


Figure 17.- Continued.

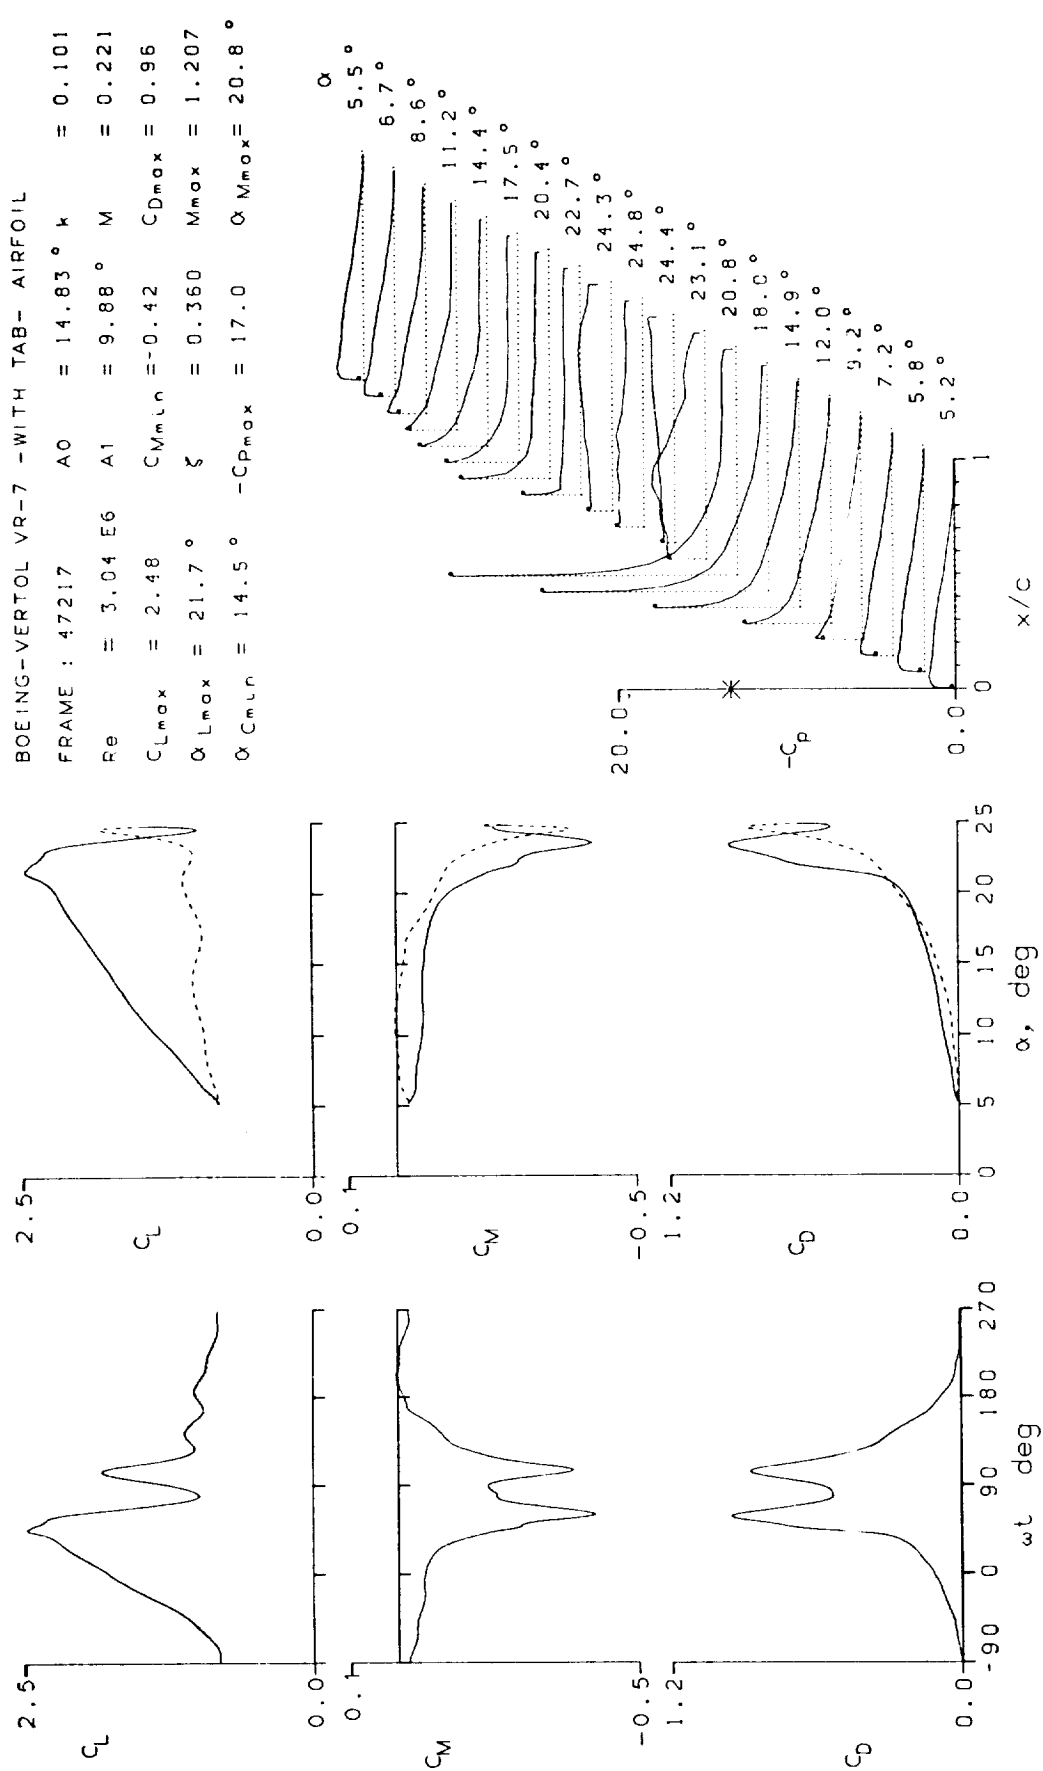


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 47301 $\Lambda_0 = 14.87^\circ$ $\Lambda = 0.101$
 $Re = 3.41 \text{ E}6$ $A1 = 9.87^\circ$ $M = 0.250$
 $C_{Lmax} = 2.39$ $C_{Mmin} = -0.43$ $C_{Dmax} = 0.93$
 $\alpha_{Lmax} = 20.3^\circ$ $\xi = 0.424$ $Mmax = 1.318$
 $\alpha_{Cmin} = 14.5^\circ$ $-C_{Dmax} = 14.5$ $\alpha_{Mmax} = 19.4^\circ$

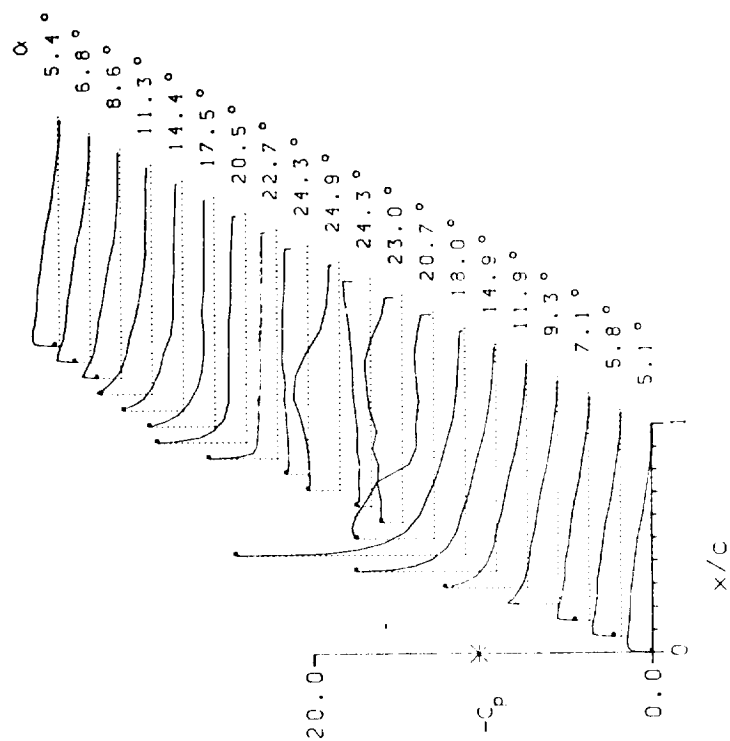
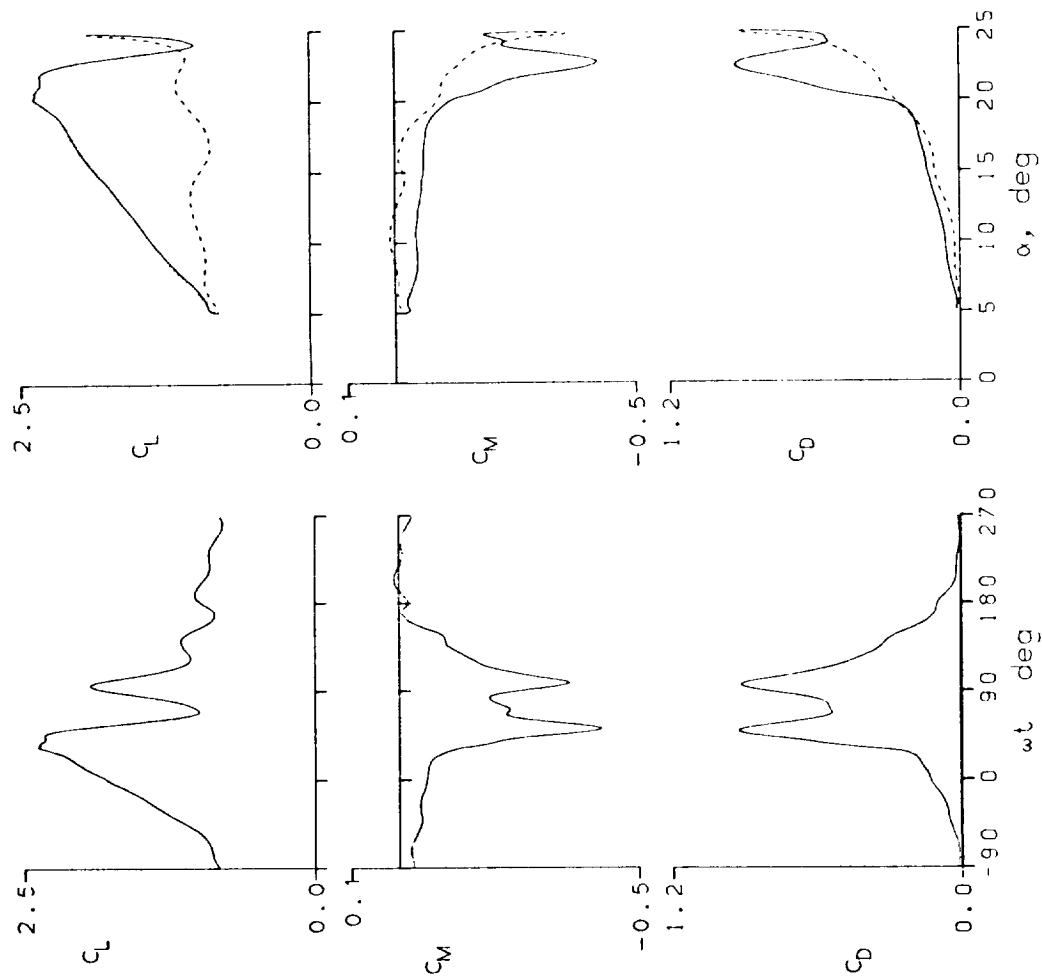


Figure 17.- Continued.

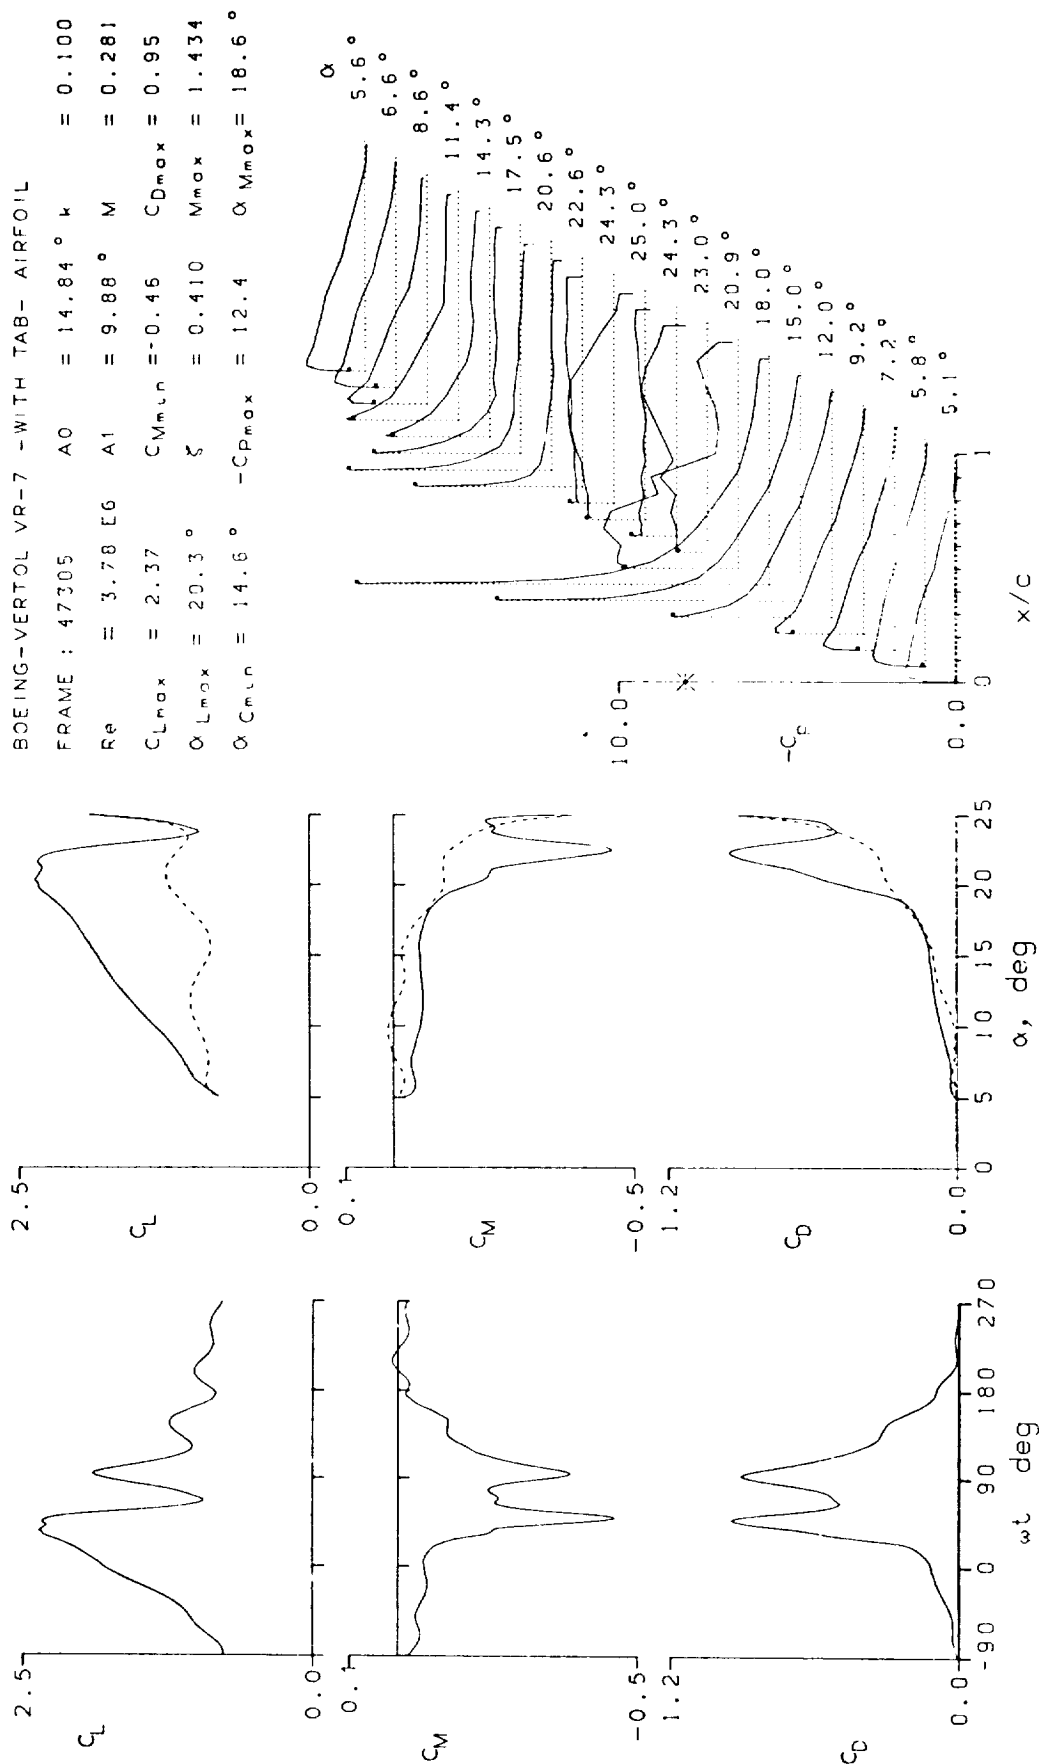


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 48019 AO = 3.95° k = 0.010
 Re = 4.22 E6 α^1 = 10.10° M = 0.299
 C_{Lmax} = 1.63 C_{Mmin} = -0.07 C_{Dmax} = 0.11
 α_{Lmax} = 13.4° ξ = 0.021 M_{max} = 1.068
 α_{Cmin} = 3.5° $-C_{Dmax}$ = 7.7 α_{Mmax} = 13.7°

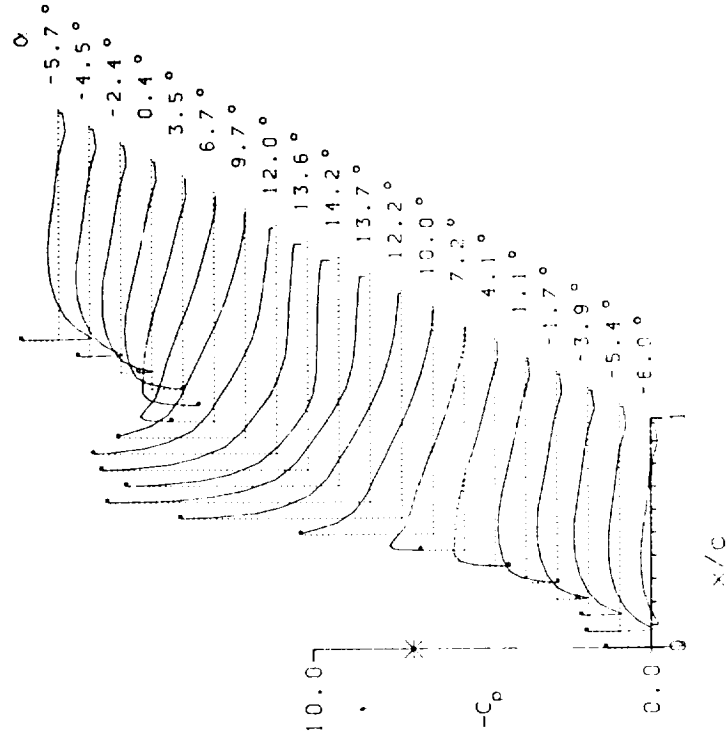
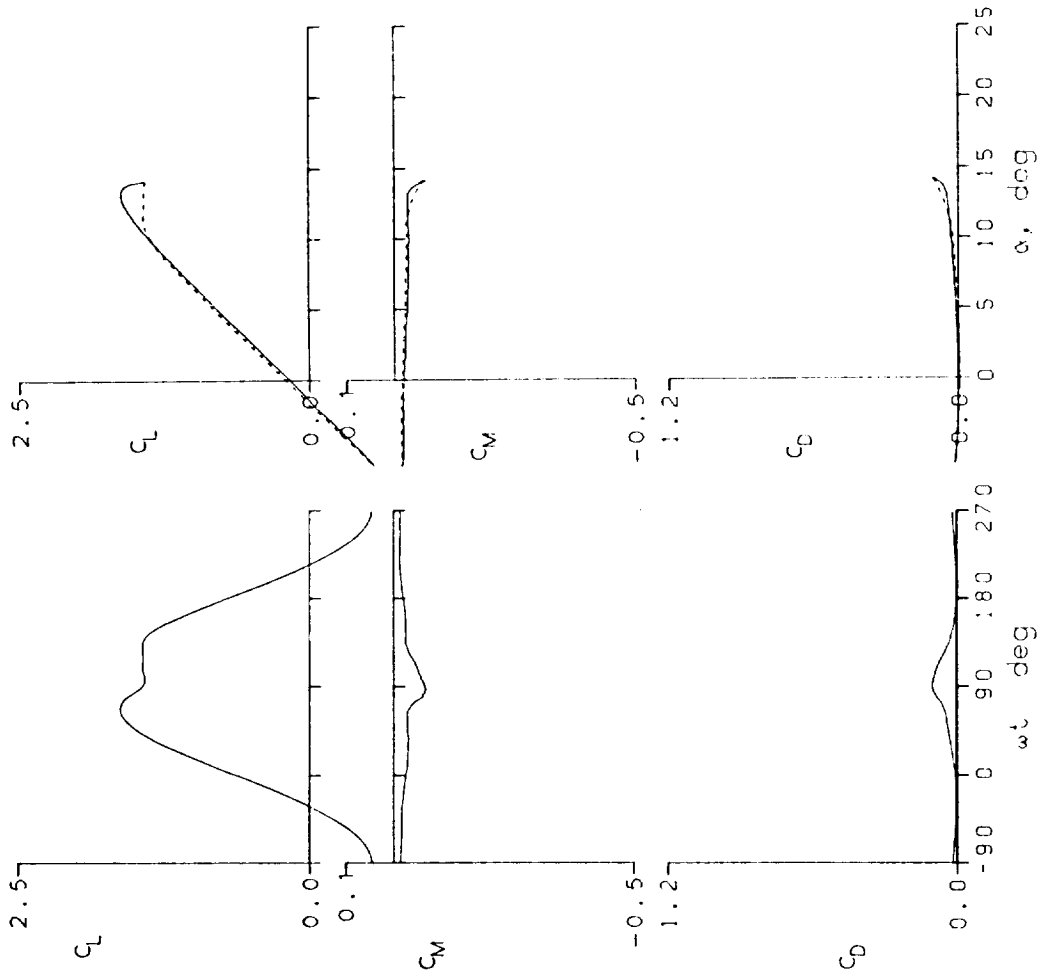


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 48023	$A_0 = 3.95^\circ$	$k = 0.025$
$Re = 4.19 \times 10^6$	$A_1 = 10.10^\circ$	$M = 0.300$
$C_{Lmax} = 1.68$	$C_{Mmin} = -0.07$	$C_{Dmax} = 0.10$
$\alpha_{Lmax} = 13.7^\circ$	$\xi = 0.058$	$M_{max} = 1.146$
$\alpha_{Cmin} = 3.5^\circ$	$-C_{pmax} = 8.4$	$\alpha_{Mmax} = 14.0^\circ$

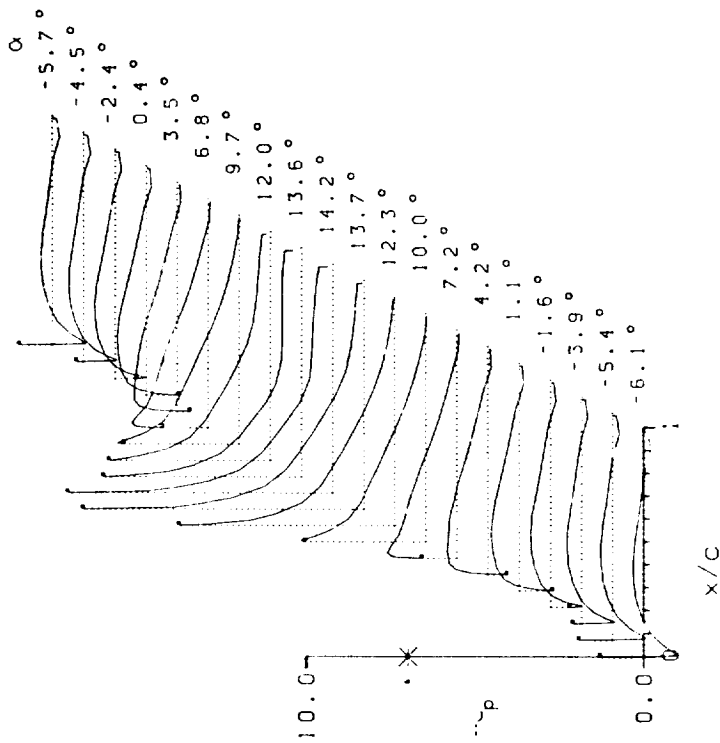
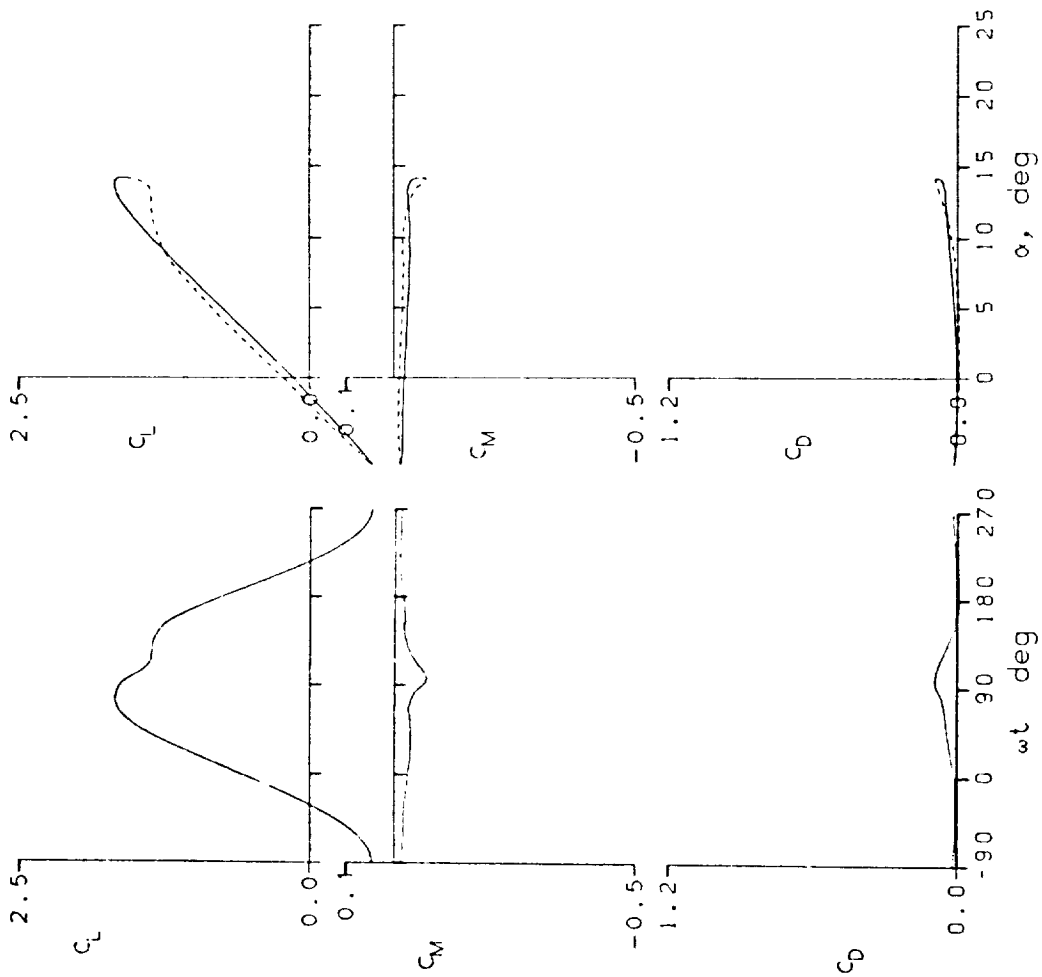


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 48101	A0 = 3.95 °	k = 0.051
Re = 4.15 E6	A1 = 10.10 °	M = 0.299
$C_{Lmax} = 1.73$	$C_{Mmin} = -0.05$	$C_{Dmax} = 0.07$
$\alpha_{Lmax} = 14.0 °$	$\xi = 0.130$	$M_{max} = 1.216$
$\alpha_{Cmin} = 3.5 °$	$-C_{pmax} = 9.1$	$\alpha_{Mmax} = 14.2 °$

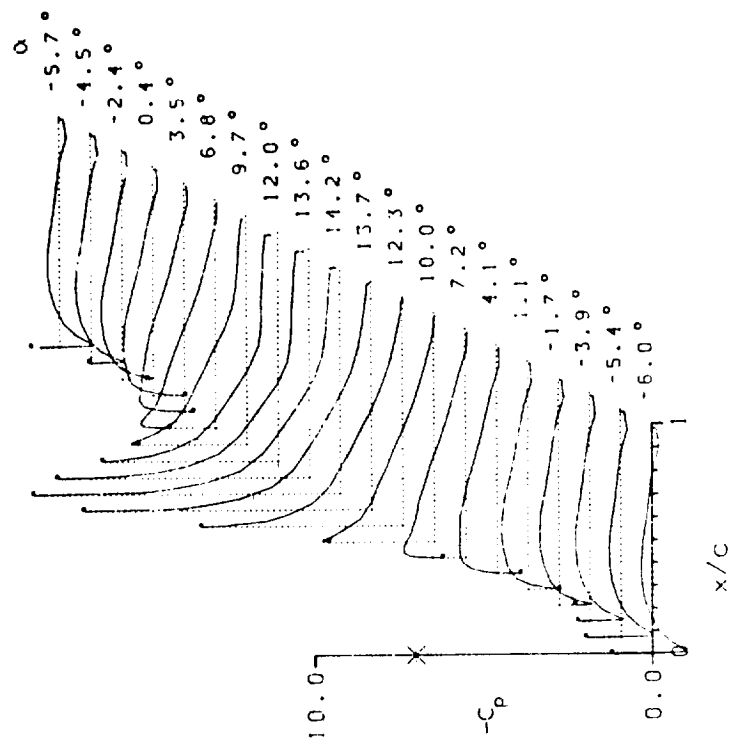
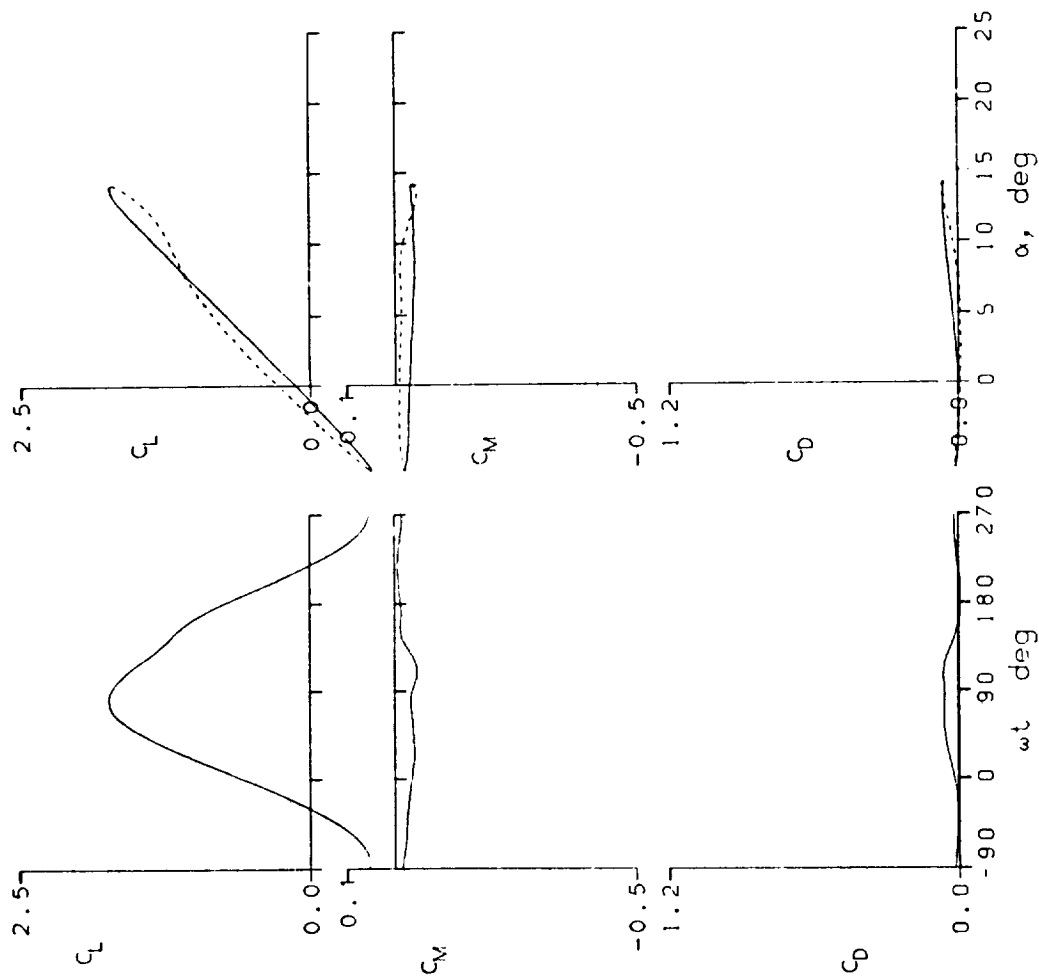


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 48103	A0 = 3.95 °	k = 0.102
Re = 4.15 E6	A1 = 10.10 °	M = 0.300
CLmax = 1.78	CMmin = -0.06	CDmax = 0.09
αLmax = 14.2 °	ξ = 0.307	Mmax = 1.271
αCmin = 3.5 °	-CDmax = 9.5	αMmax = 14.1 °

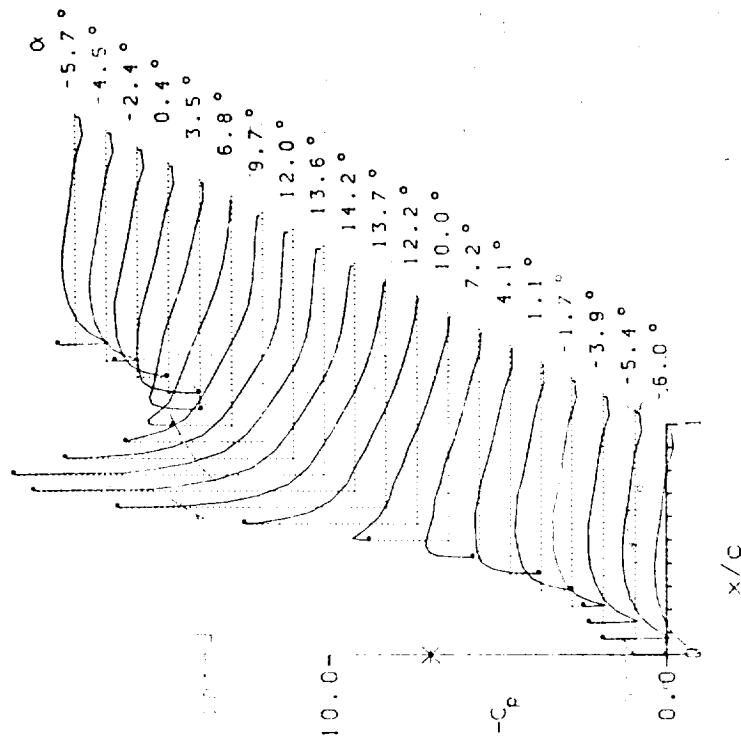
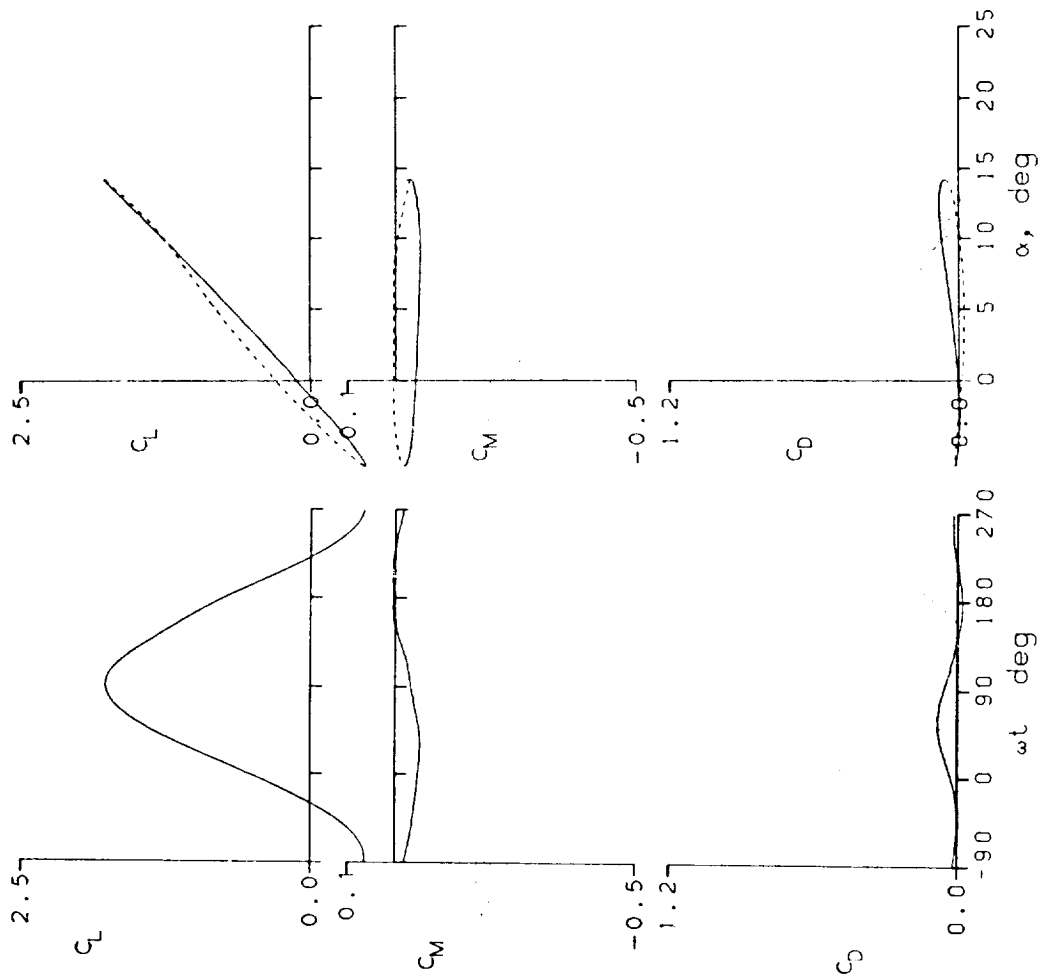


Figure 17.- Continued.

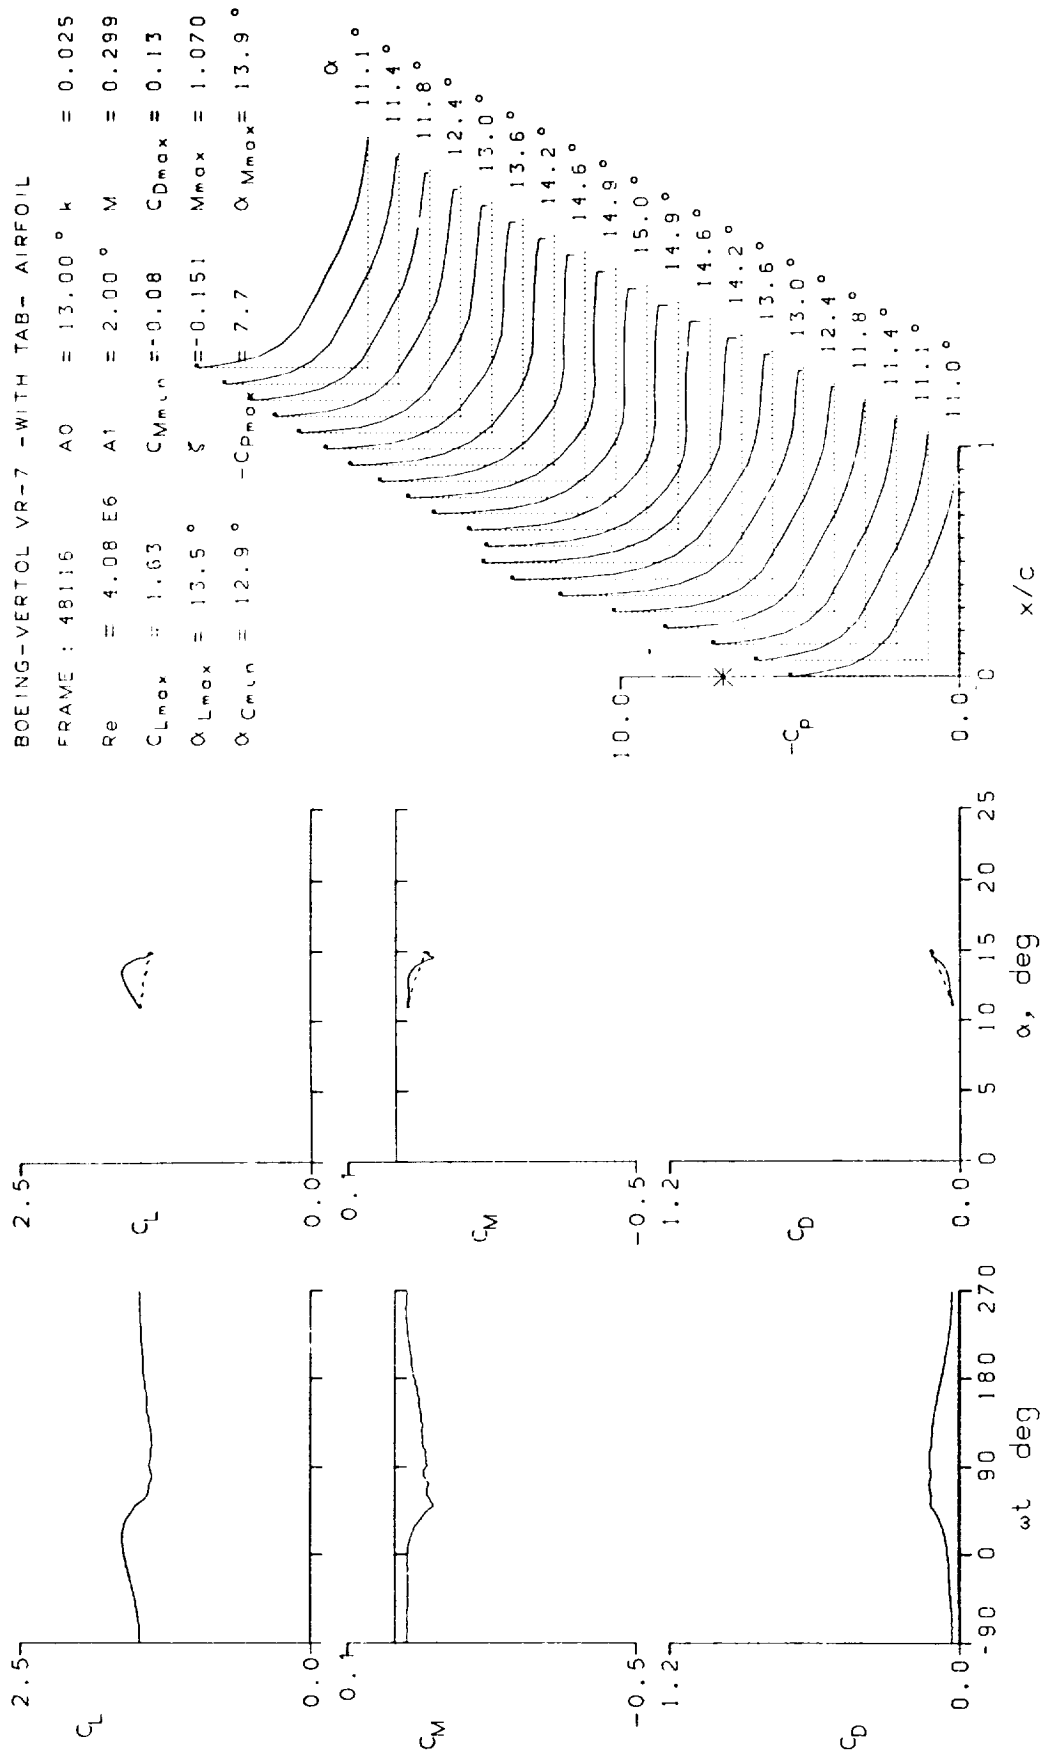


Figure 17.- Continued.

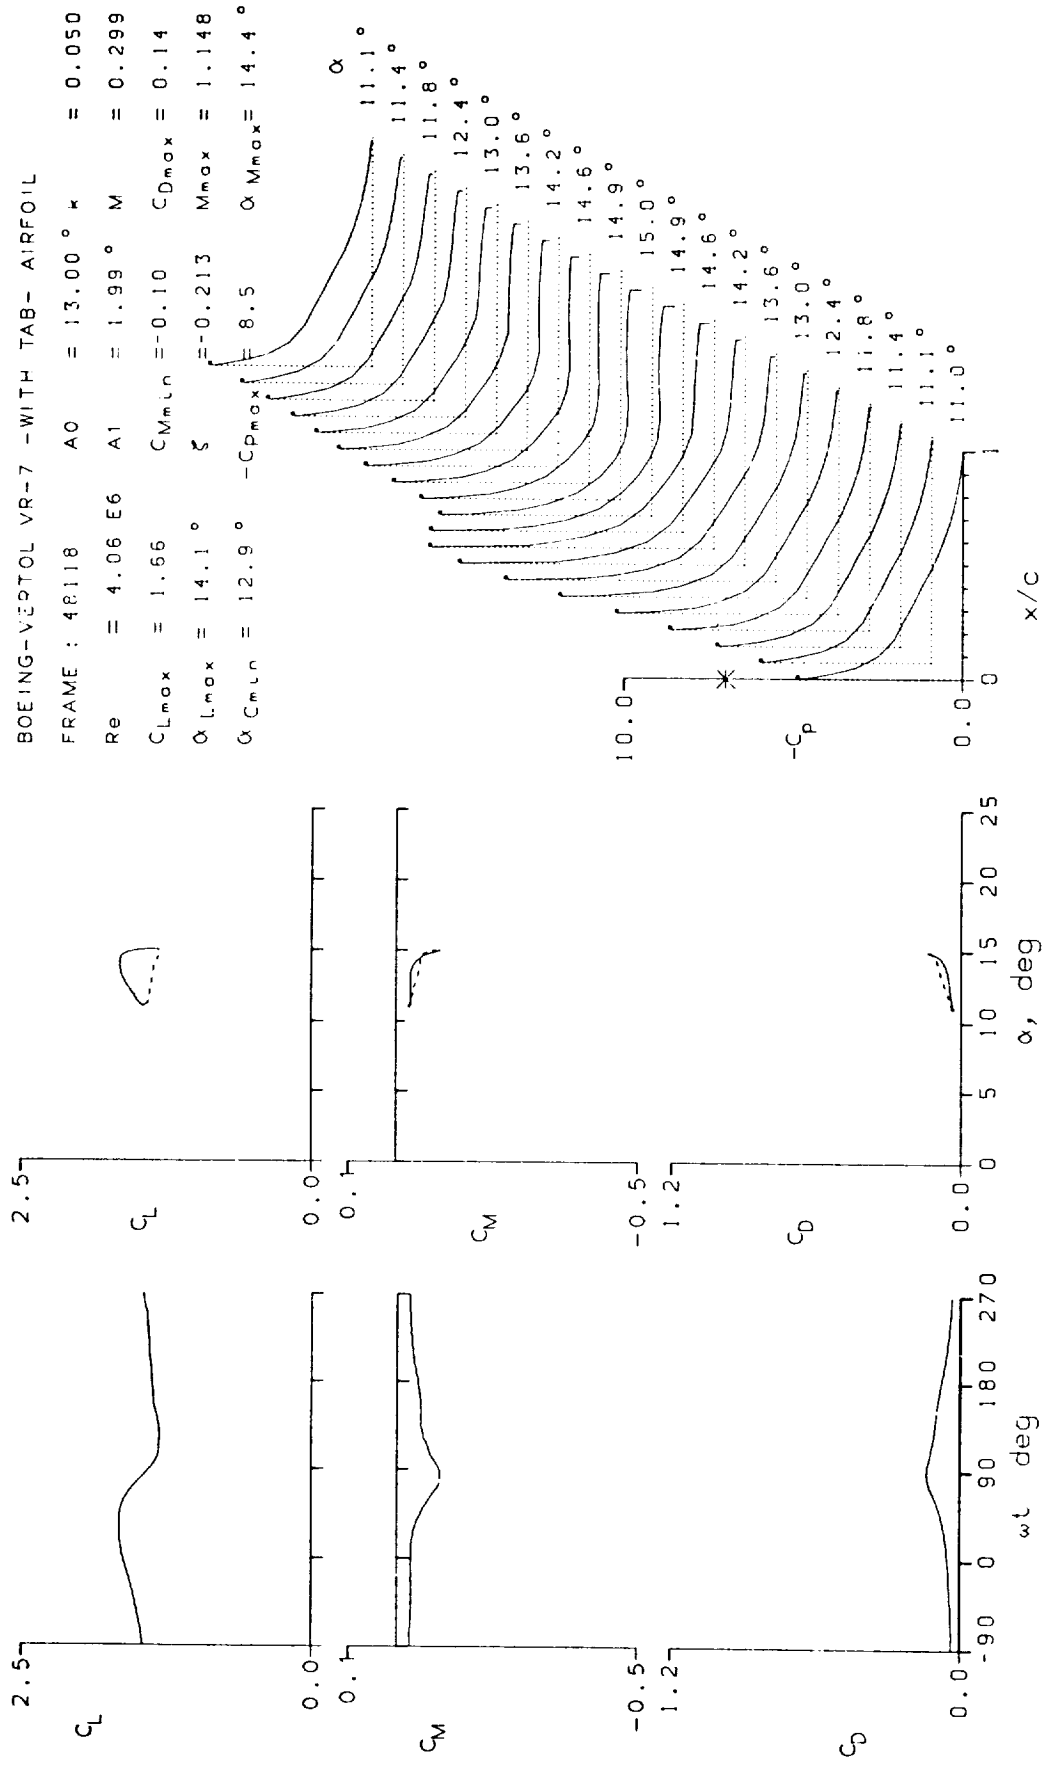


Figure 17.- Continued.

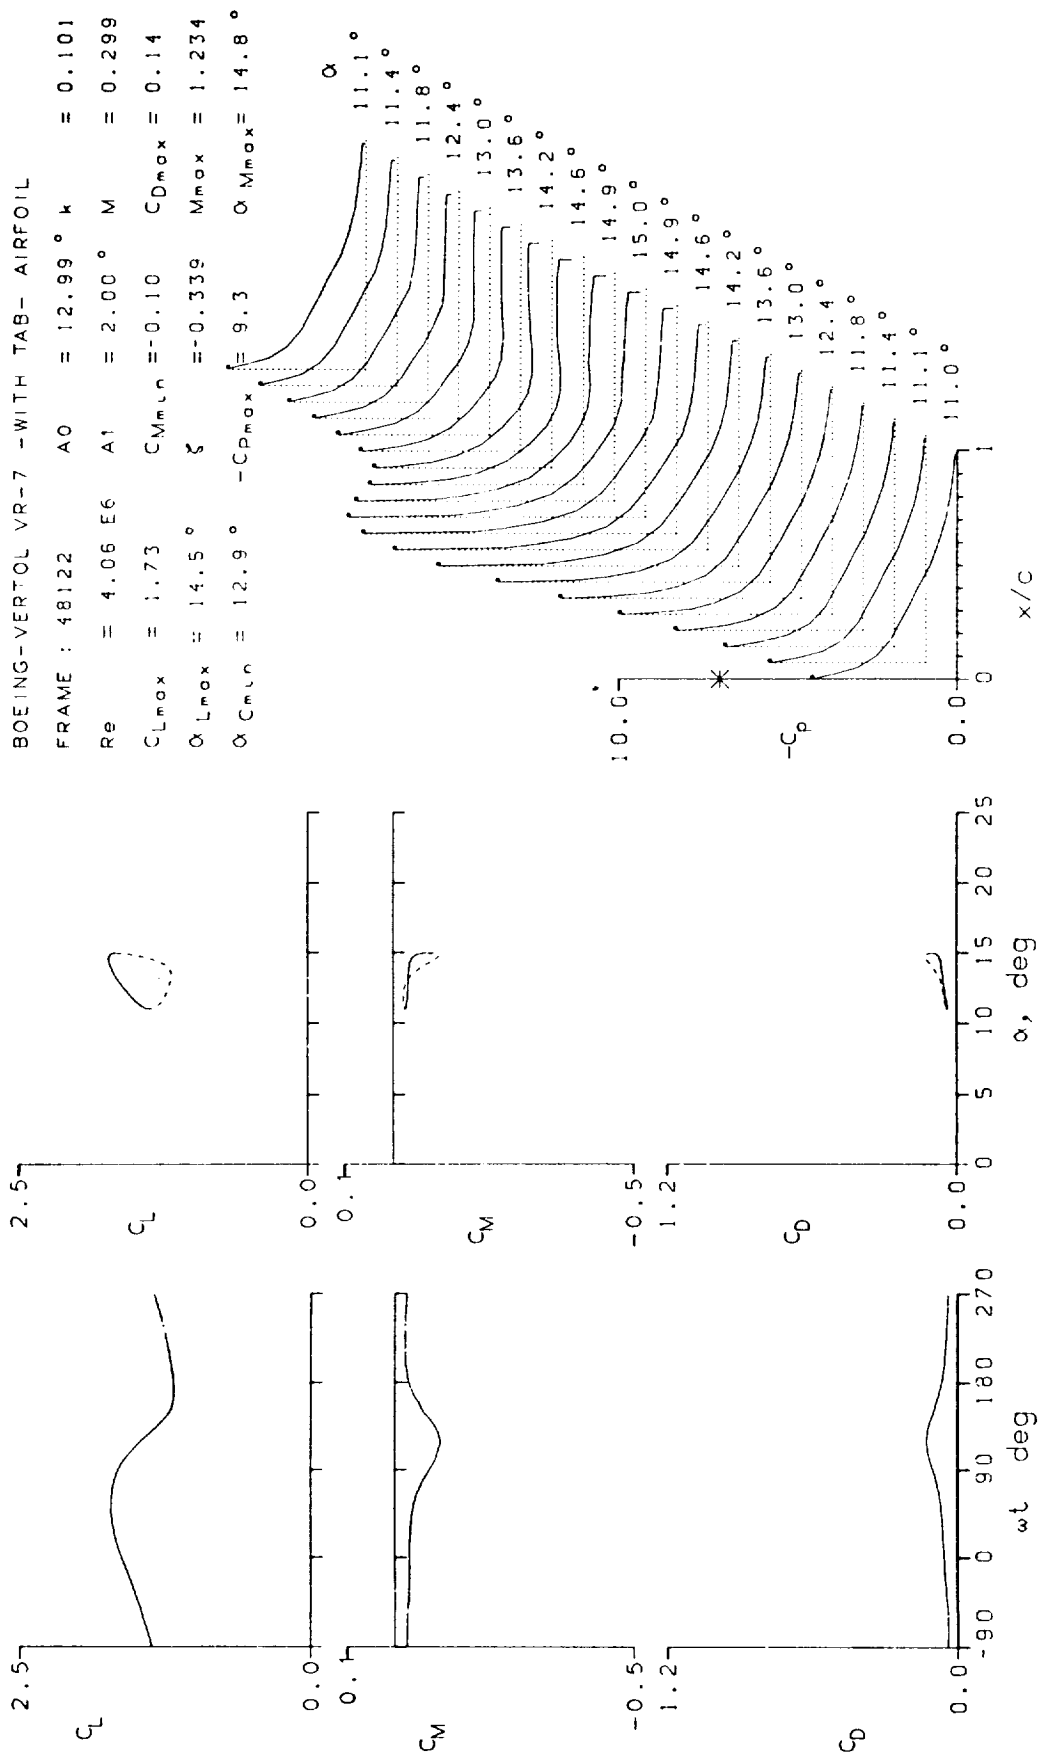


Figure 17.- Continued.

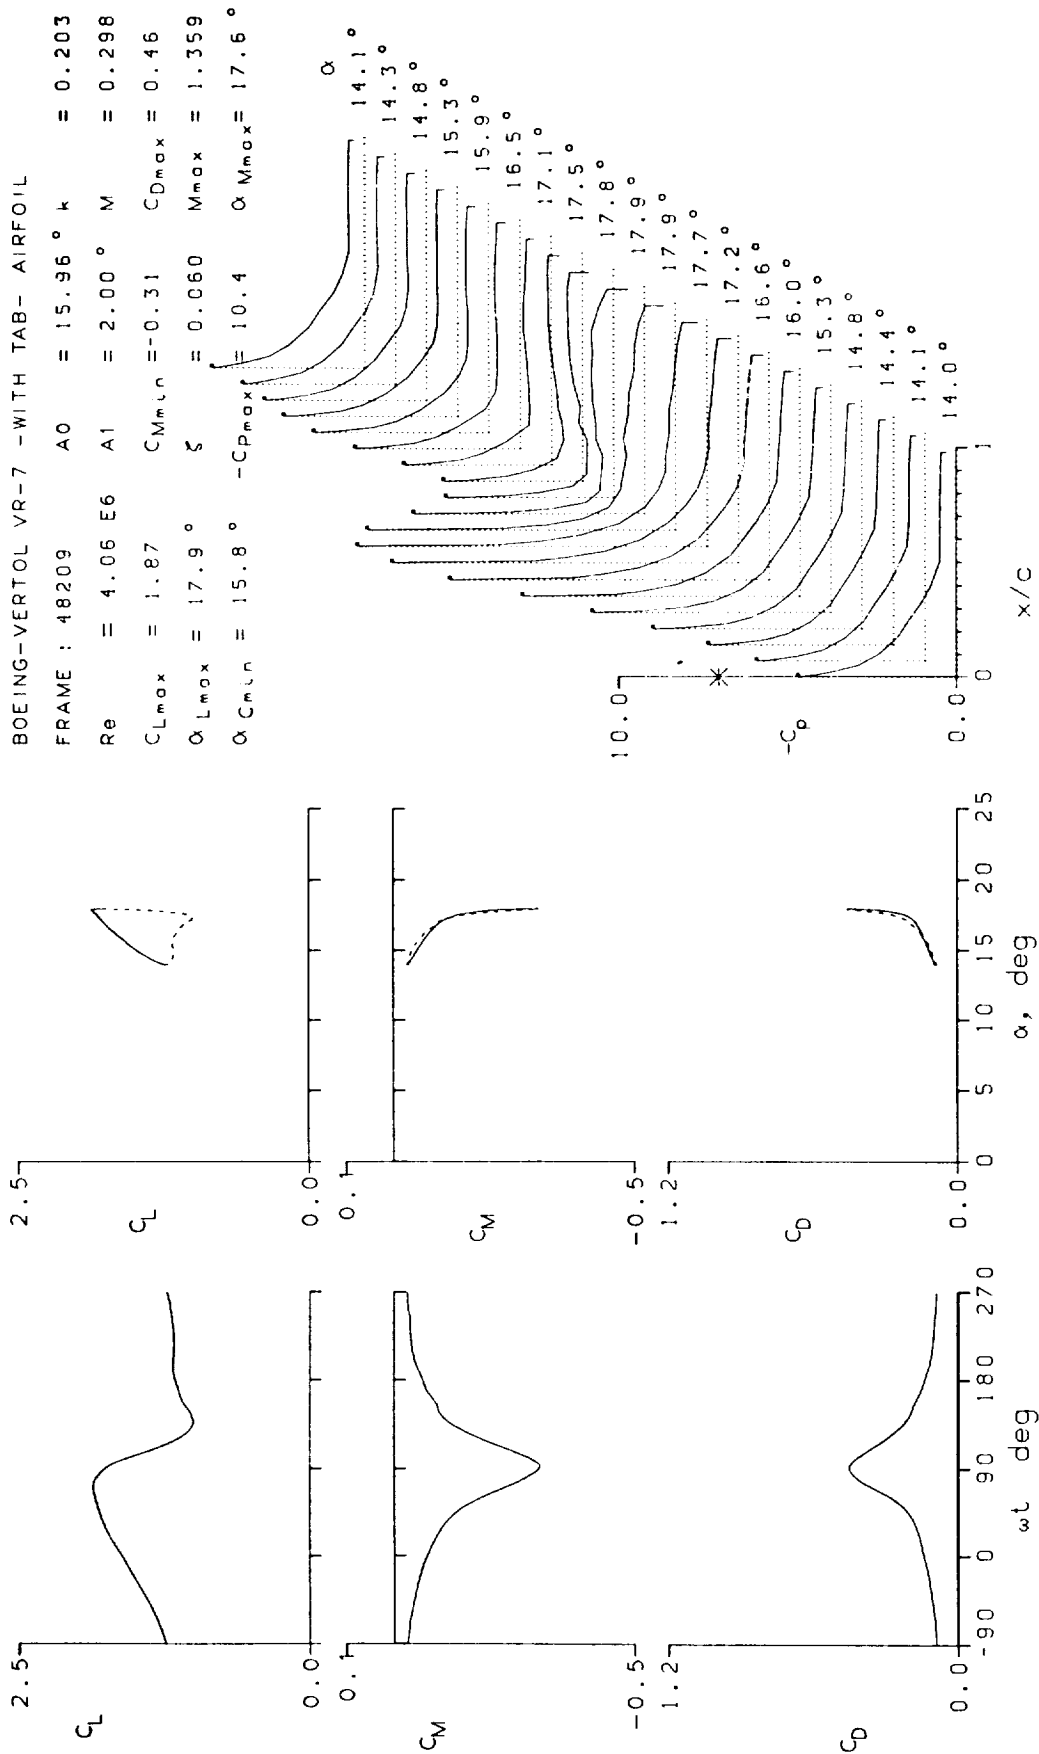


Figure 17.- Continued.


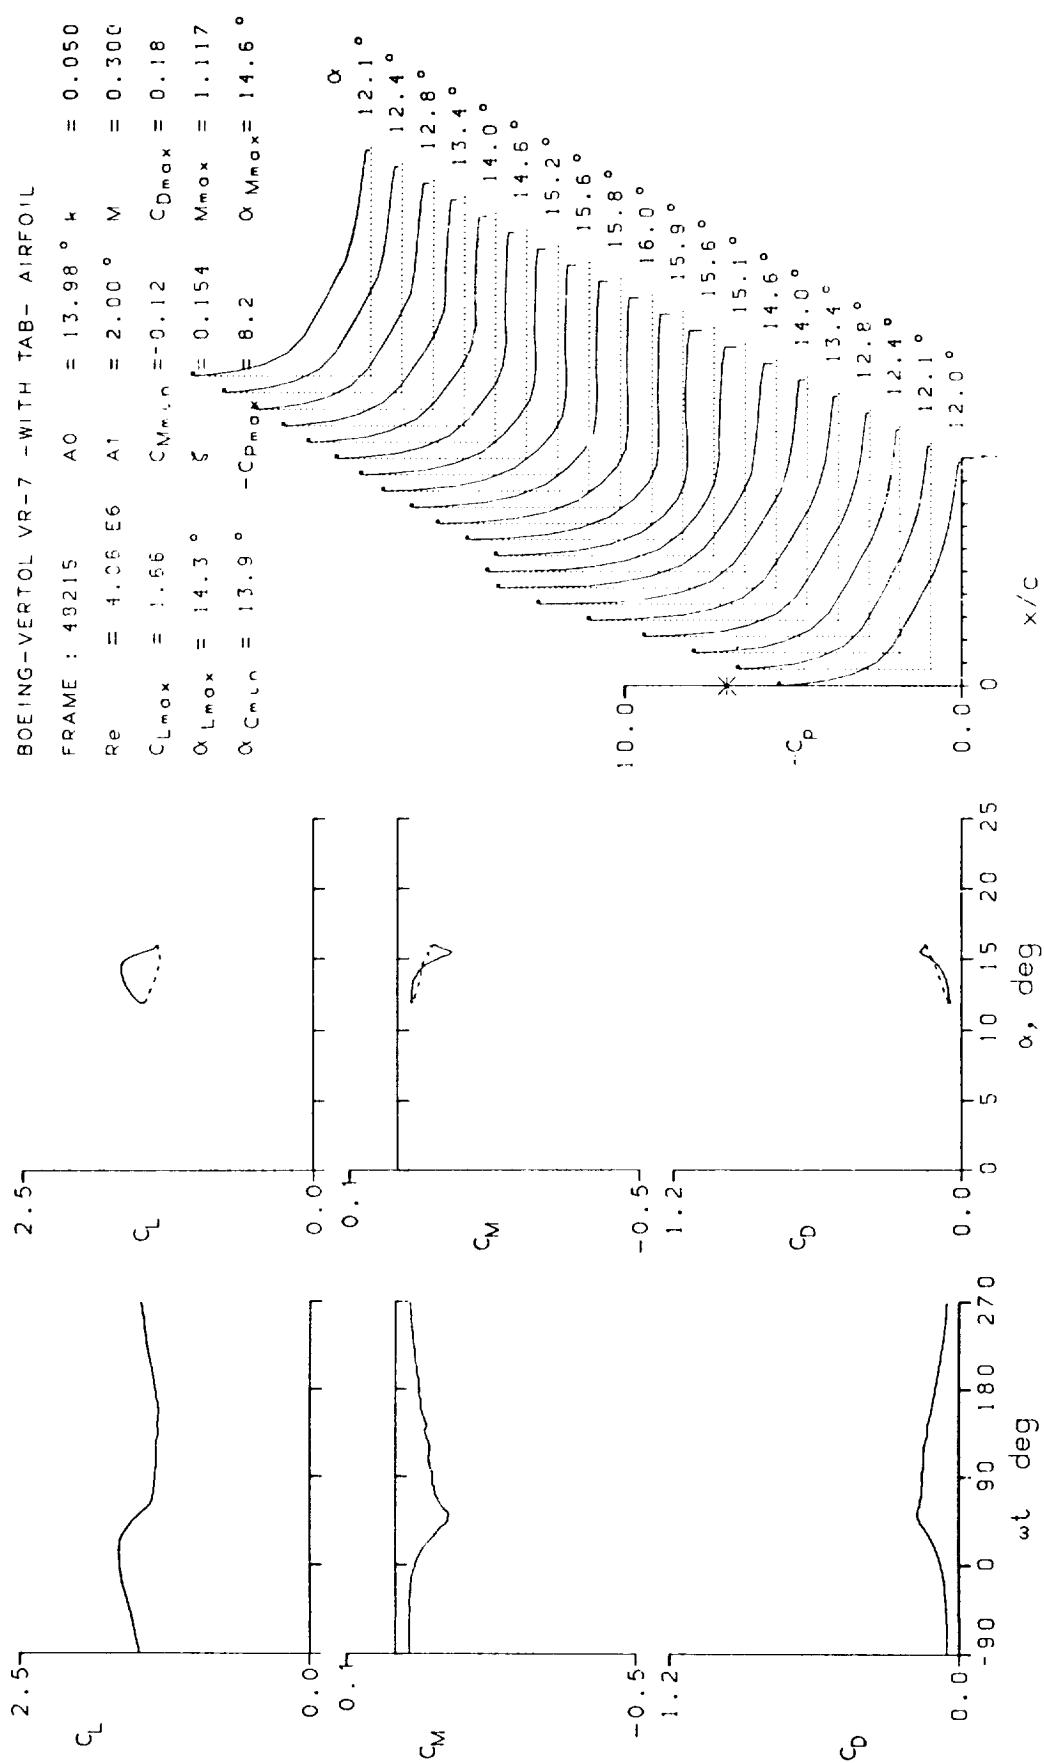


Figure 17.- Continued.

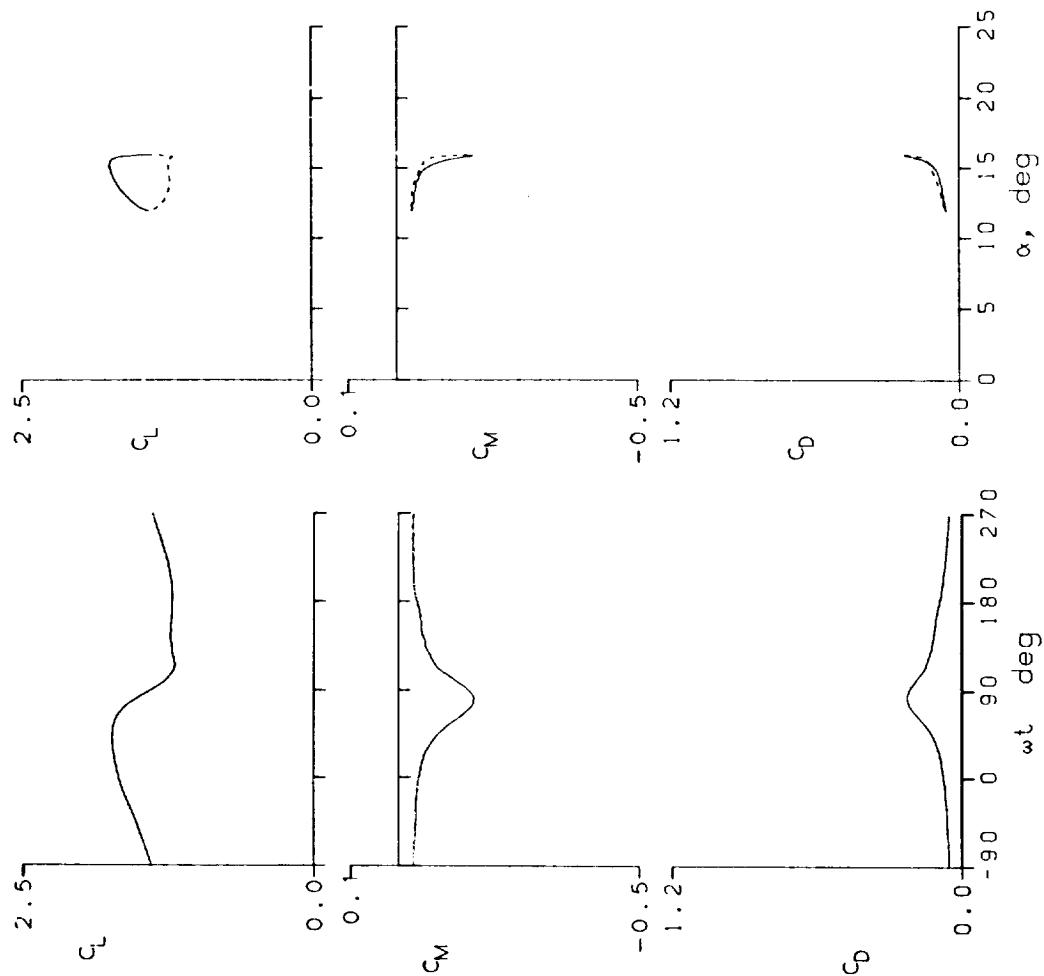

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 48216 $A_0 = 13.99^\circ$ $k = 0.101$
 $Re = 4.05 \text{ E}6$ $A_1 = 1.99^\circ$ $M = 0.300$
 $C_{L_{max}} = 1.74$ $C_{M_{min}} = -0.16$ $C_{D_{max}} = 0.23$
 $\alpha_{L_{max}} = 15.2^\circ$ $\xi = 0.456$ $M_{max} = 1.238$
 $\alpha_{C_{min}} = 14.0^\circ$ $-C_{P_{max}} = 9.3$ $\alpha_{V_{max}} = 15.3^\circ$

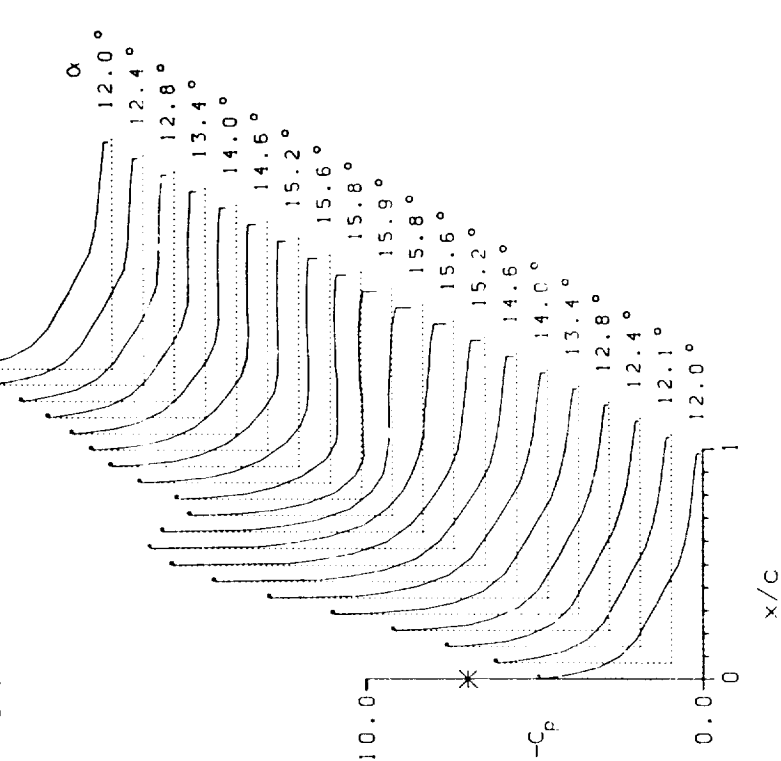


Figure 17.- Continued.

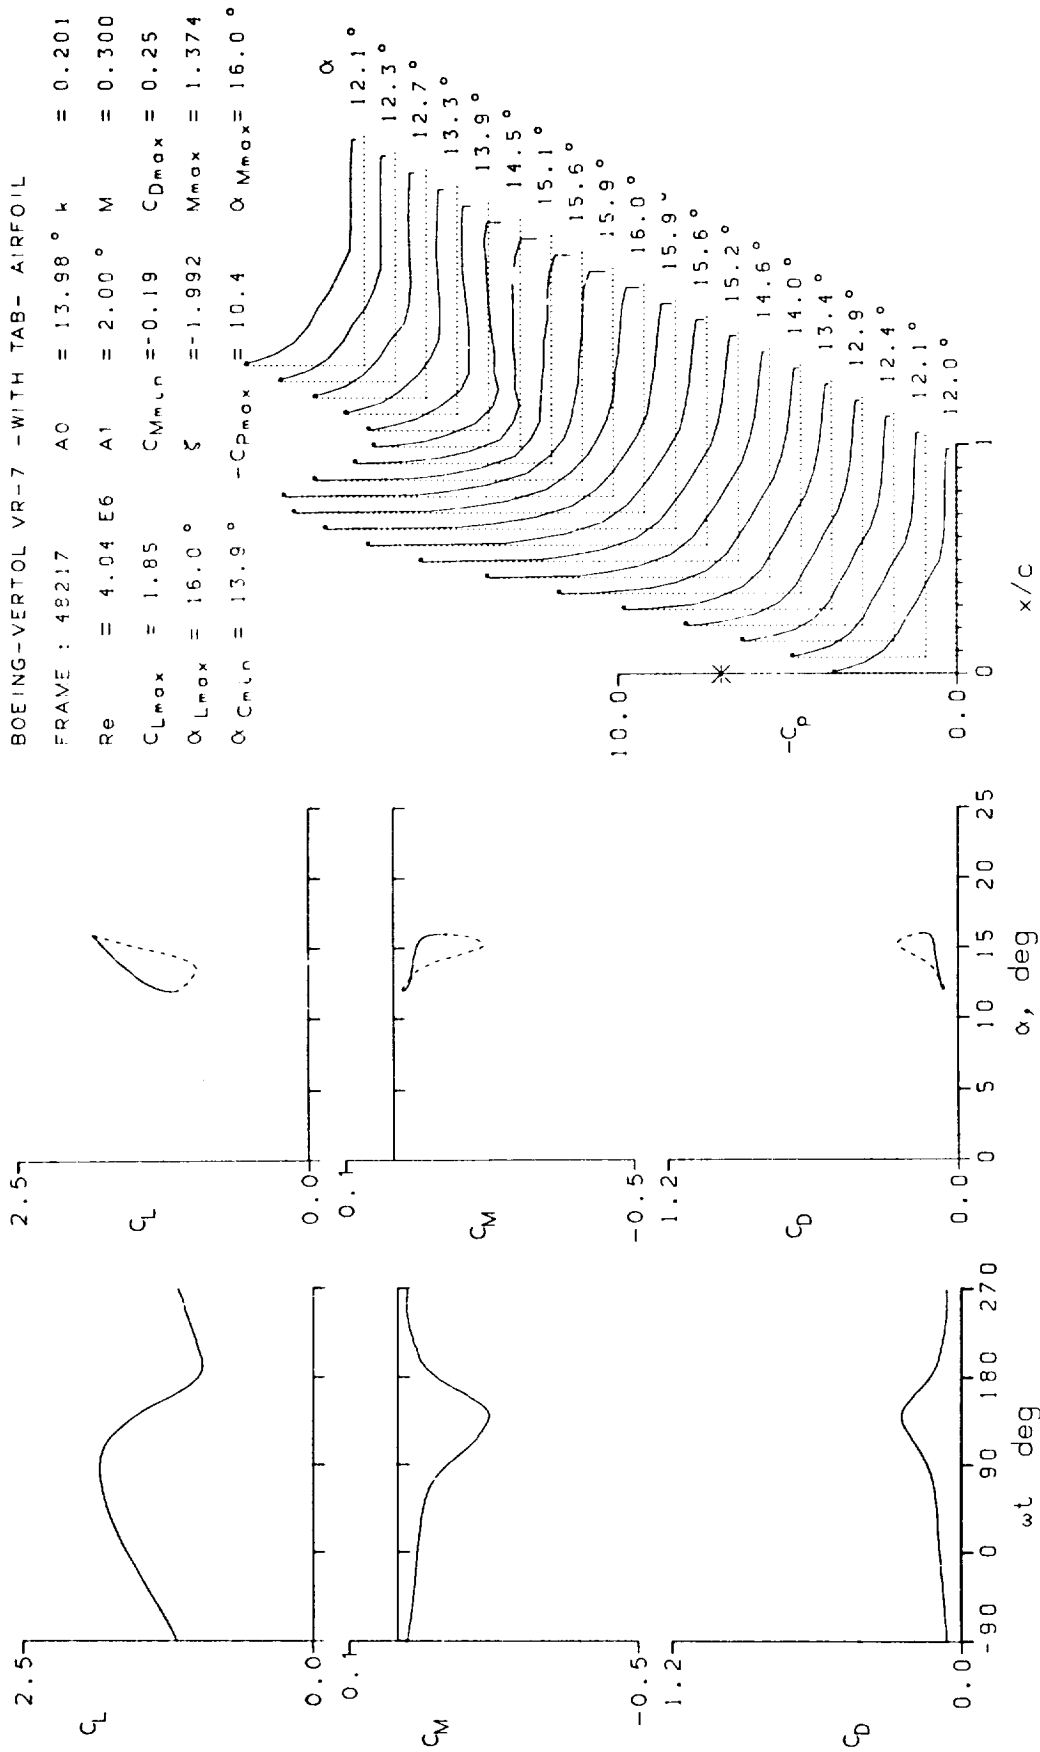


Figure 17.- Continued.

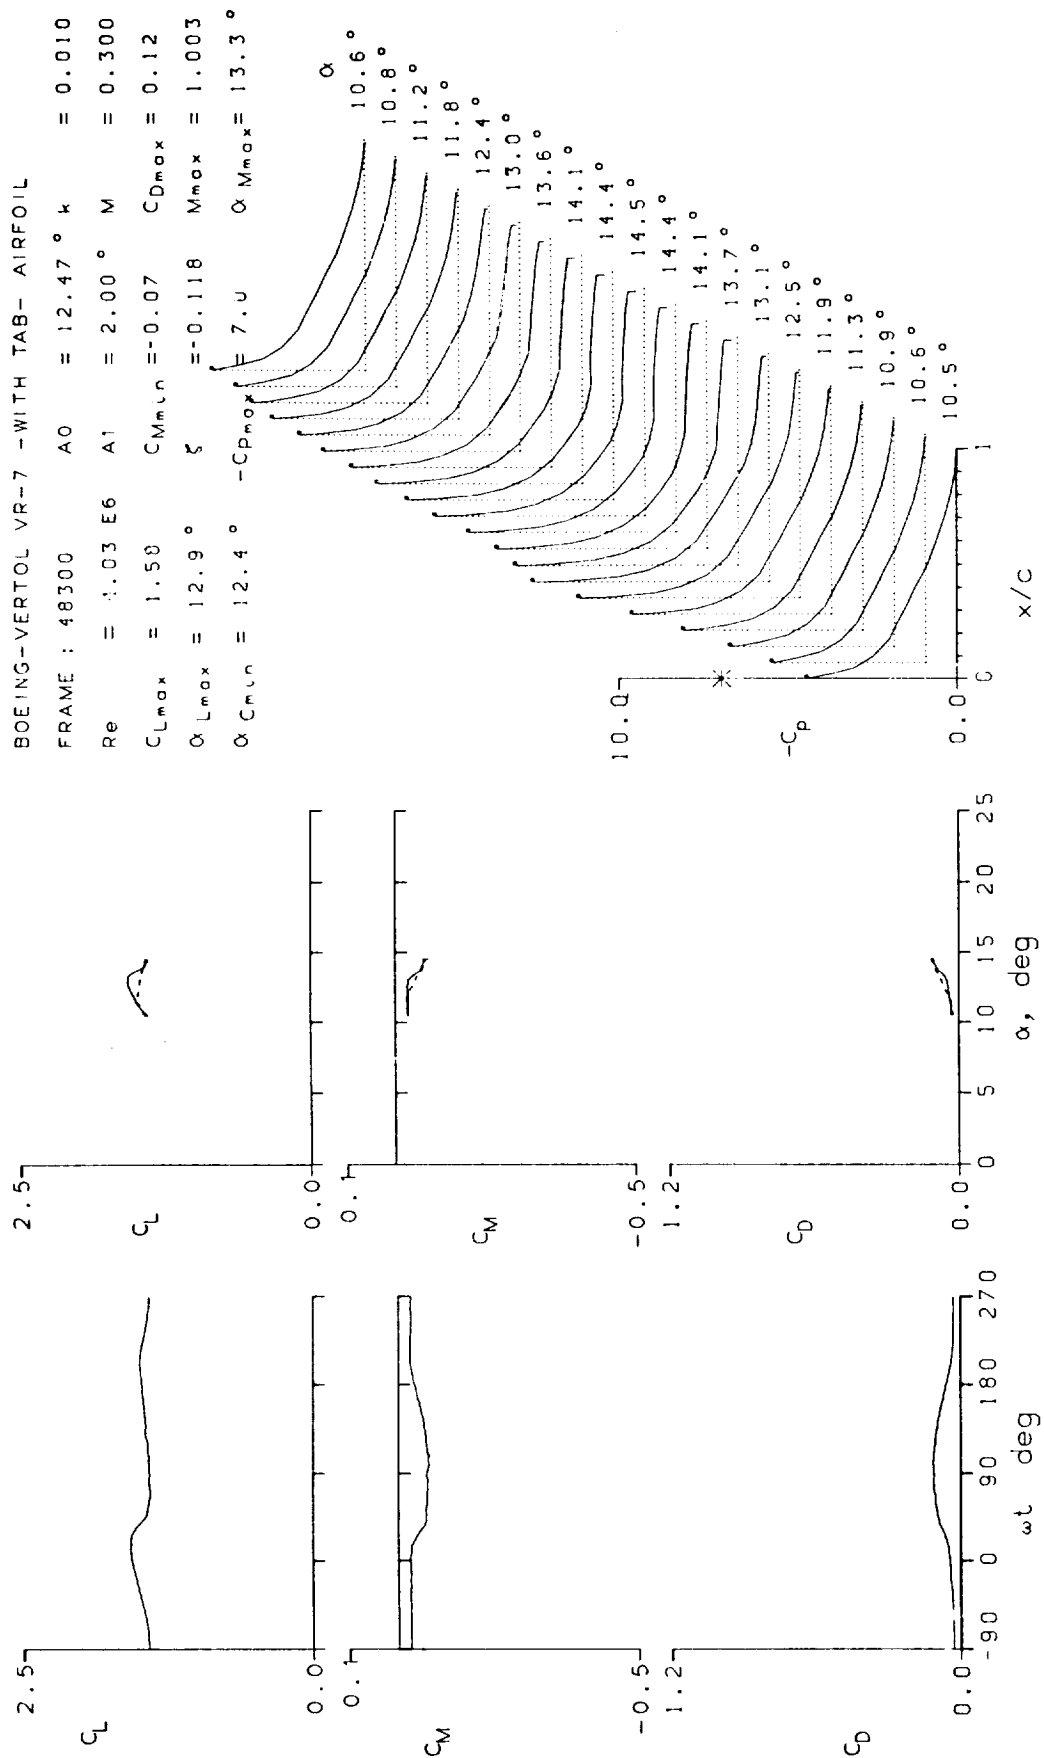


Figure 17.- Continued.


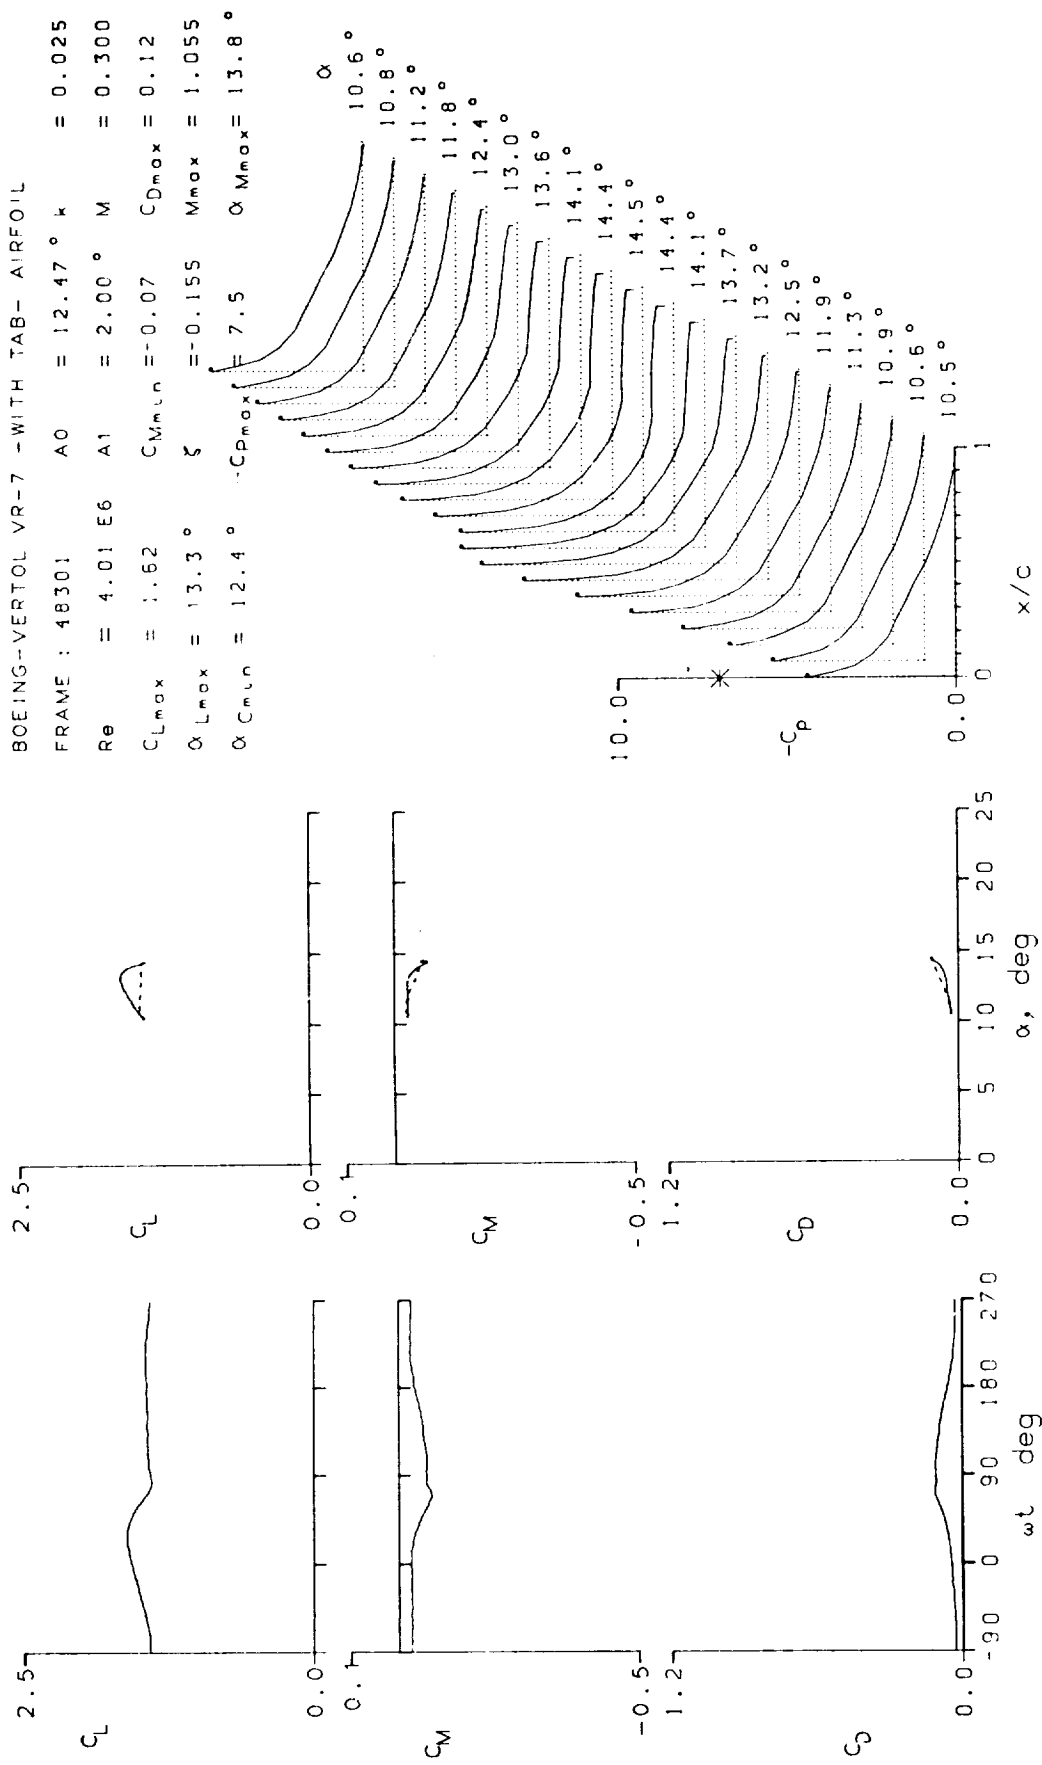


Figure 17.- Continued.

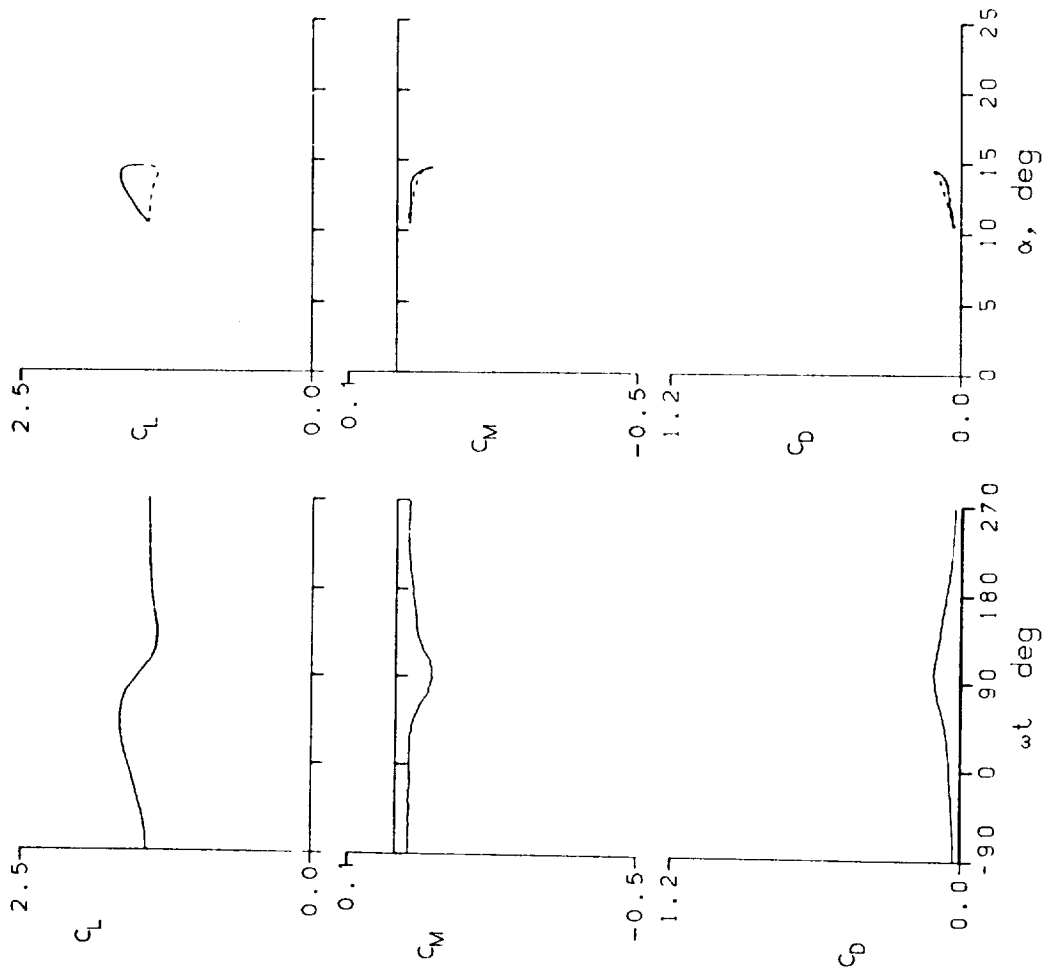

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 48302 $A_0 = 12.48^\circ$ $k = 0.050$
 $Re = 4.01 \text{ E}6$ $A_1 = 2.00^\circ$ $M = 0.301$
 $C_{L_{max}} = 1.66$ $C_{M_{min}} = -0.08$ $C_{D_{max}} = 0.12$
 $\alpha_{L_{max}} = 13.8^\circ$ $\xi = -0.153$ $M_{max} = 1.119$
 $\alpha_{C_{min}} = 12.4^\circ$ $-C_{p_{max}} = 8.1$ $\alpha_{M_{max}} = 14.2^\circ$

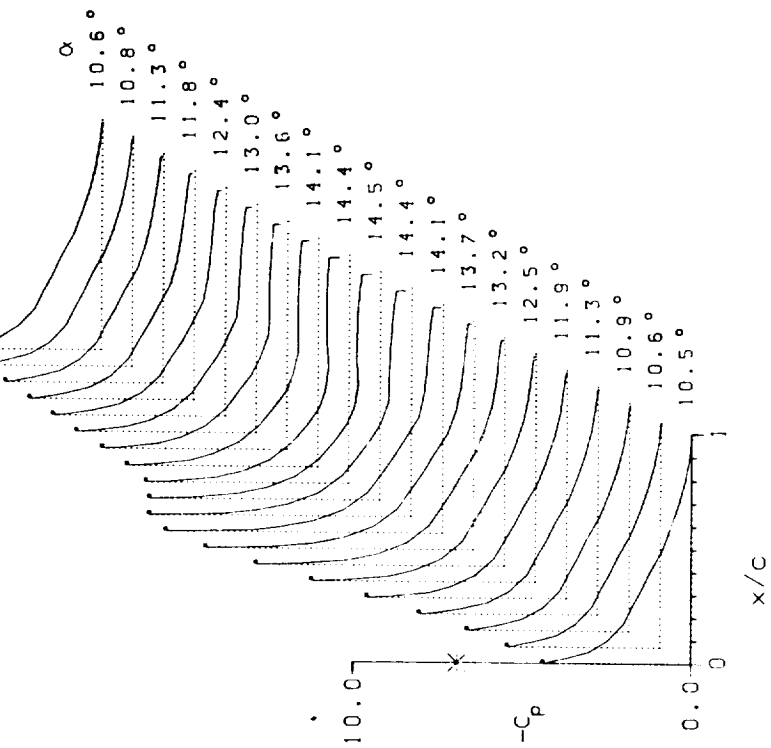


Figure 17.- Continued.

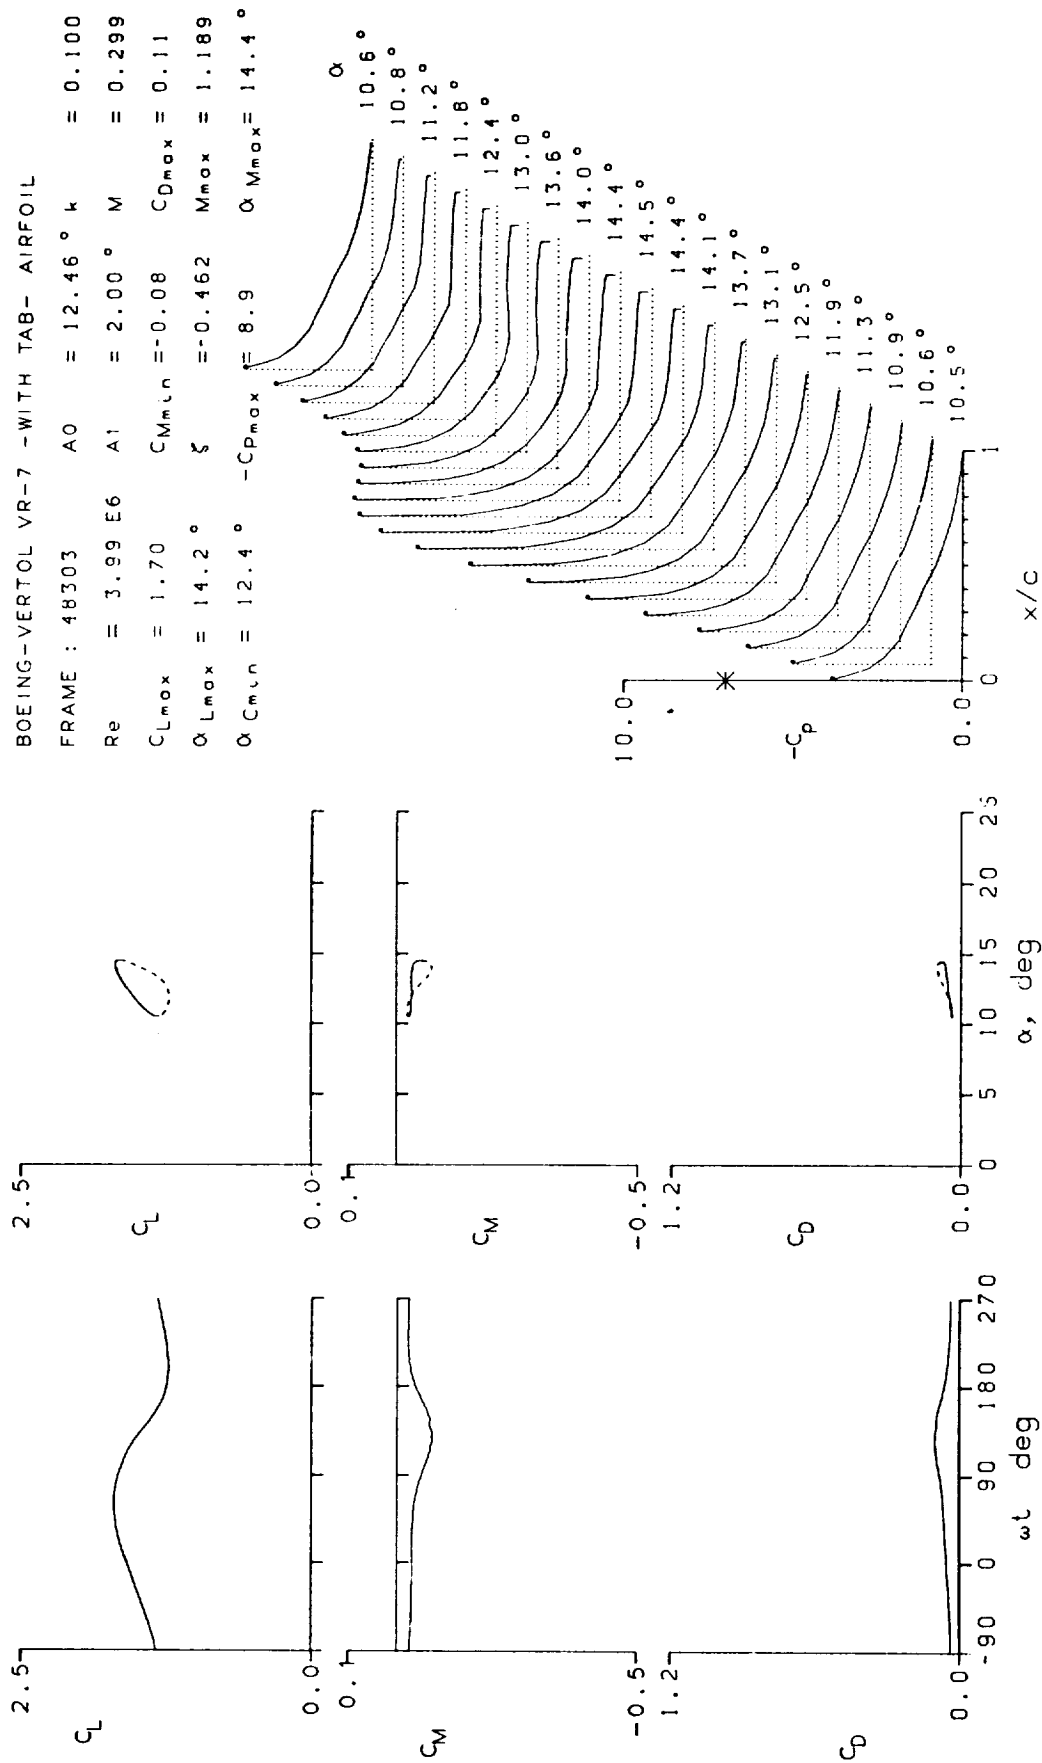


Figure 17.- Continued.

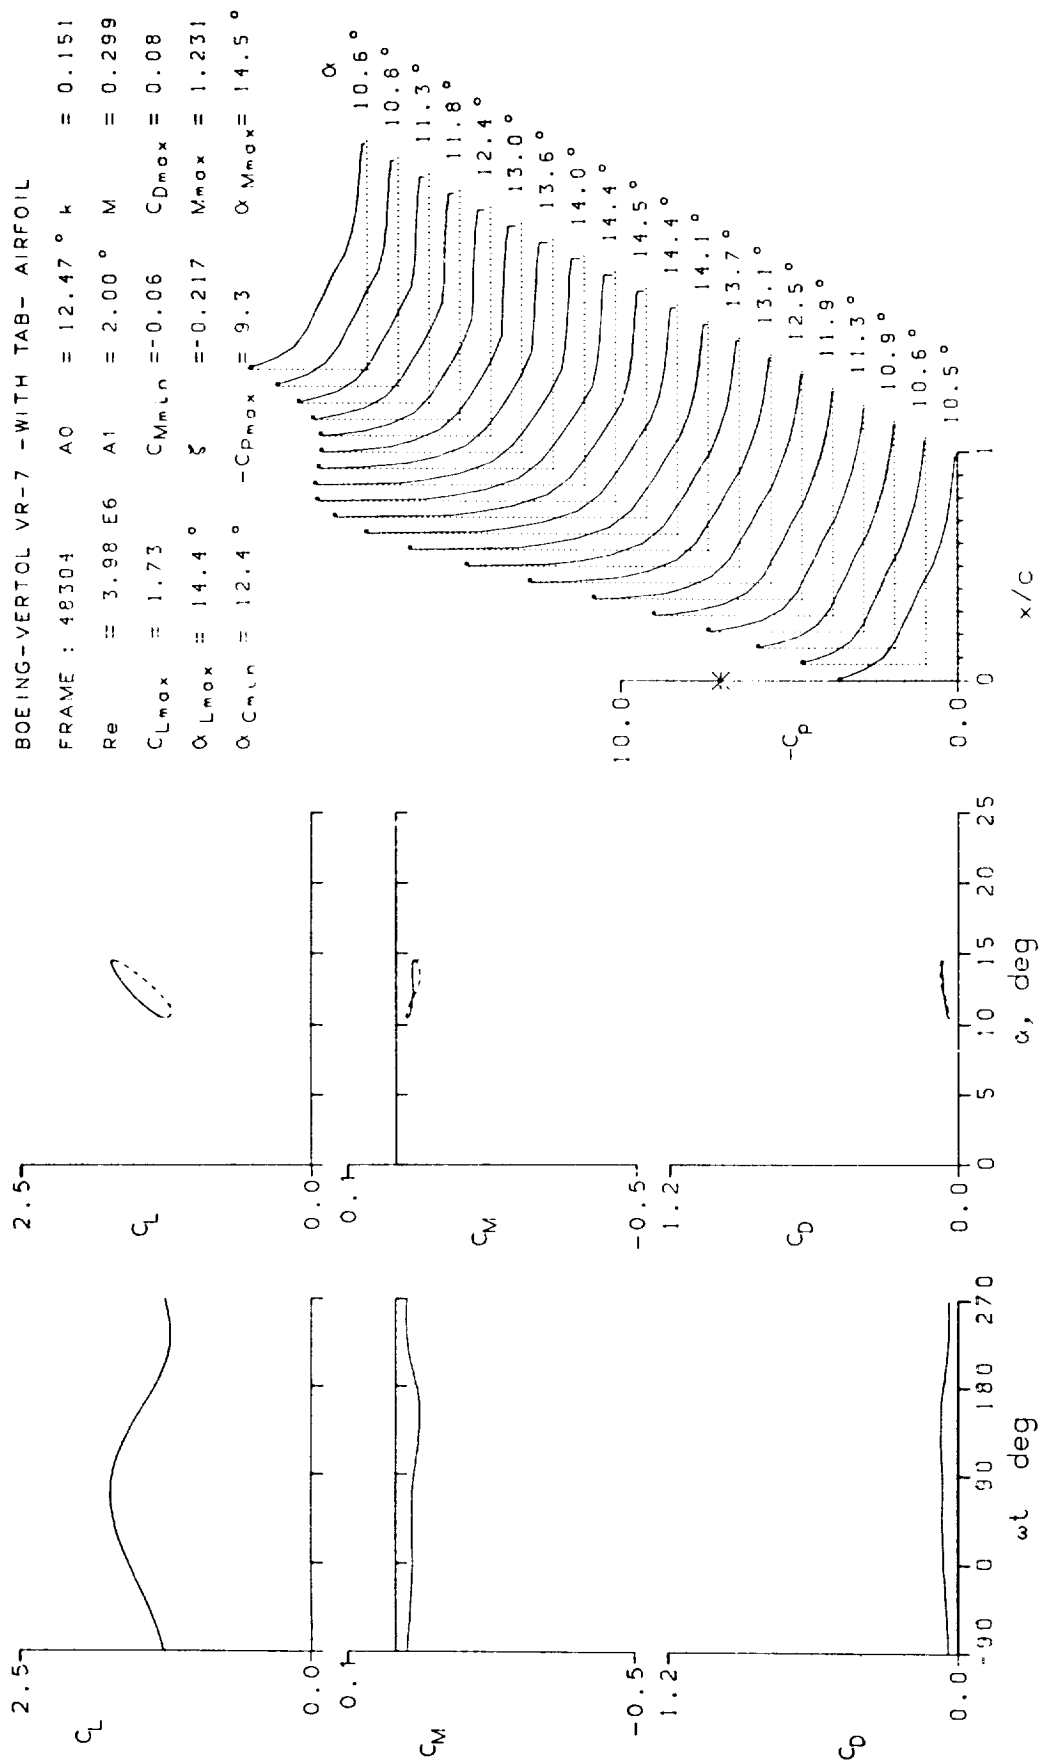


Figure 17.- Continued.

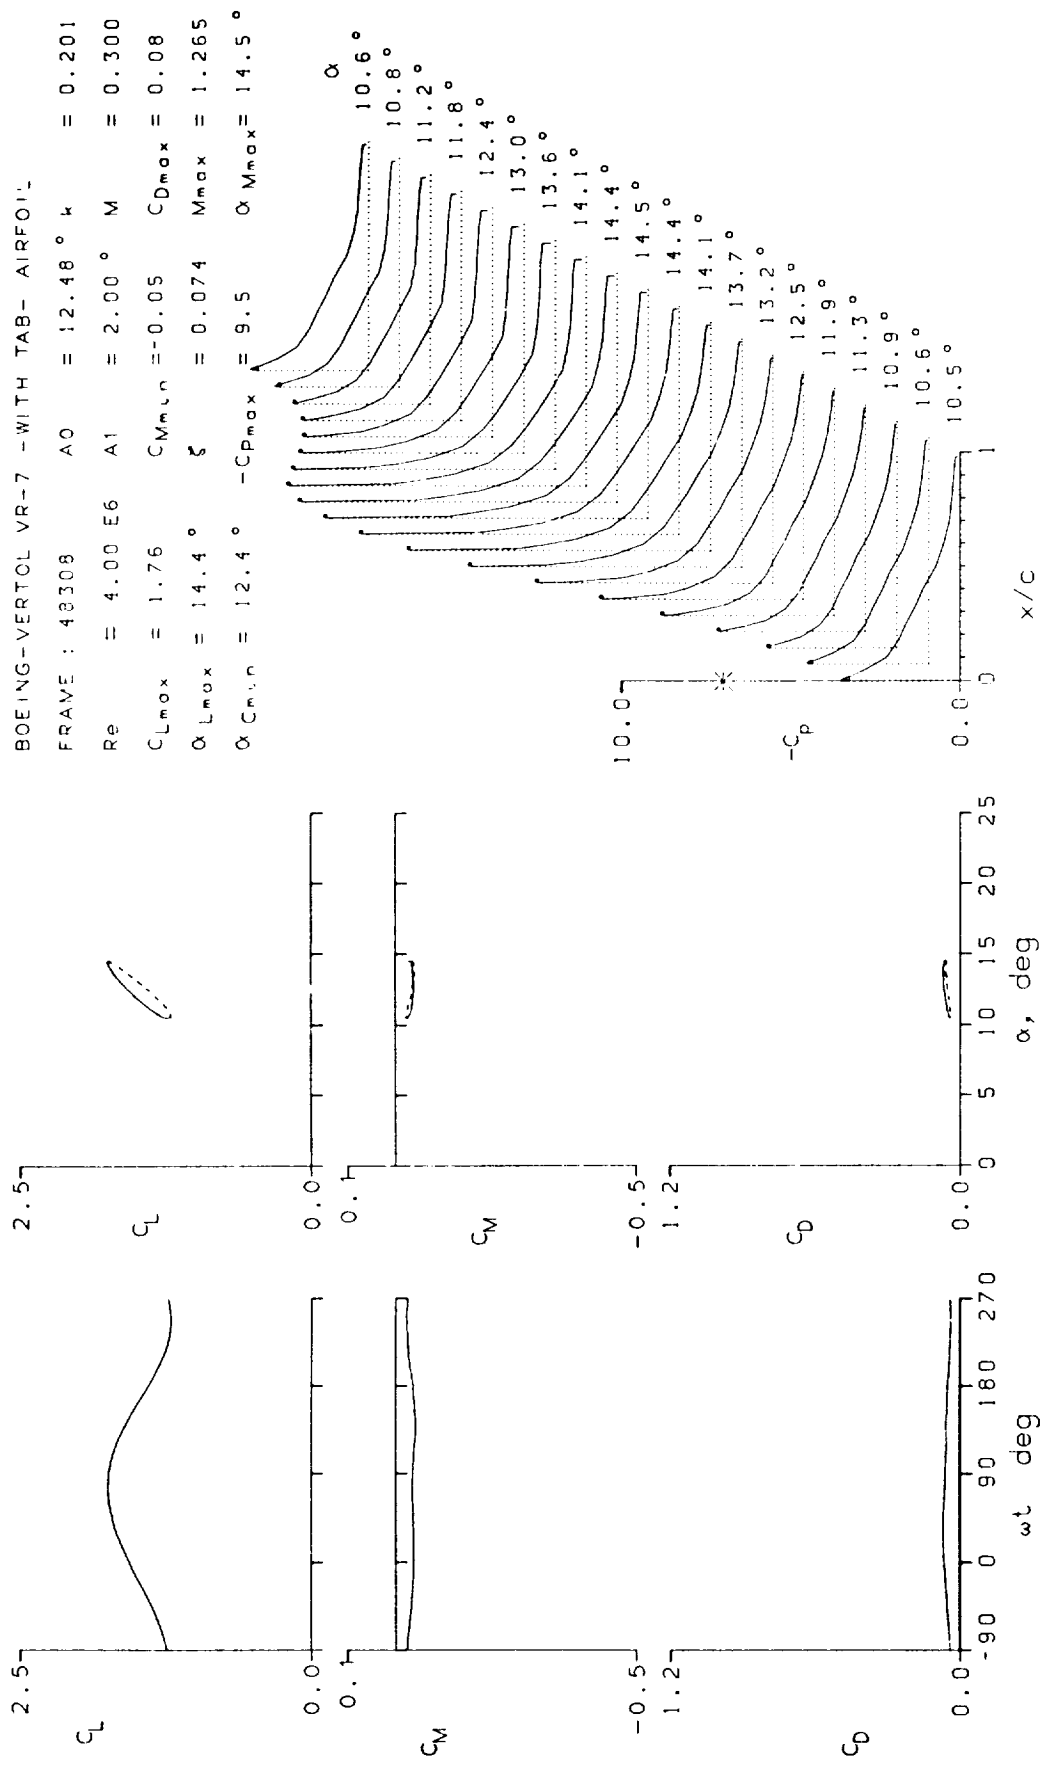


Figure 17.- Continued.

BOEING-VERFOL VR-7 -WITH TAB- AIRFOIL

FRAME : 49023	A0 = 14.77 °	k = 0.010
Re = 2.54 E6	A1 = 9.90 °	M = 0.184
CLmax = 1.58	CMmin = -0.12	CDmax = 0.36
αLmax = 13.9 °	ξ = 0.084	Mmax = 0.609
αCmin = 14.2 °	-CPmax = 8.6	αMmax = 14.9 °

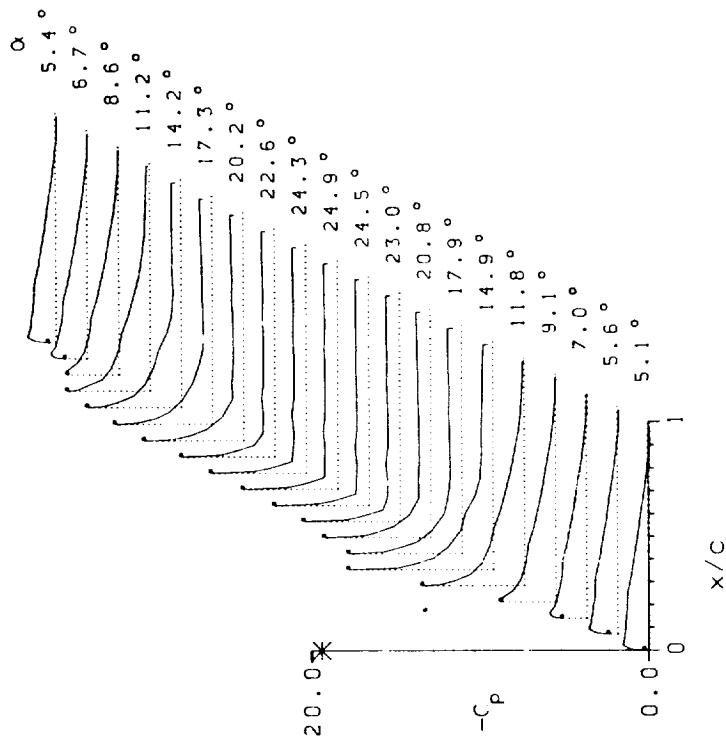
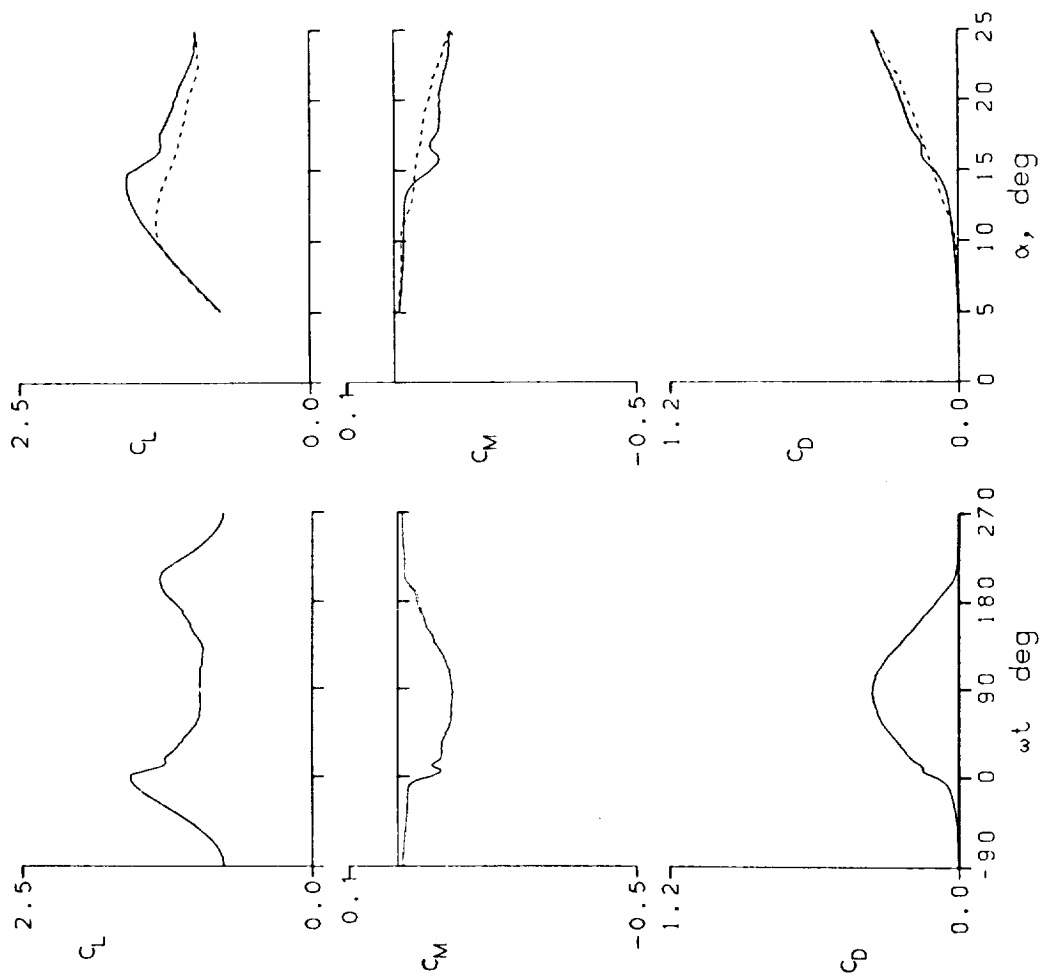


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFO'L

FRAME : 49110	A0 = 14.77 °	k = 0.026
Re = 2.63 E6	A1 = 9.90 °	M = 0.184
C _{Lmax} = 1.76	C _{Mmin} = -0.22	C _{Dmax} = 0.38
α _{Lmax} = 16.1 °	ζ = 0.270	M _{max} = 0.681

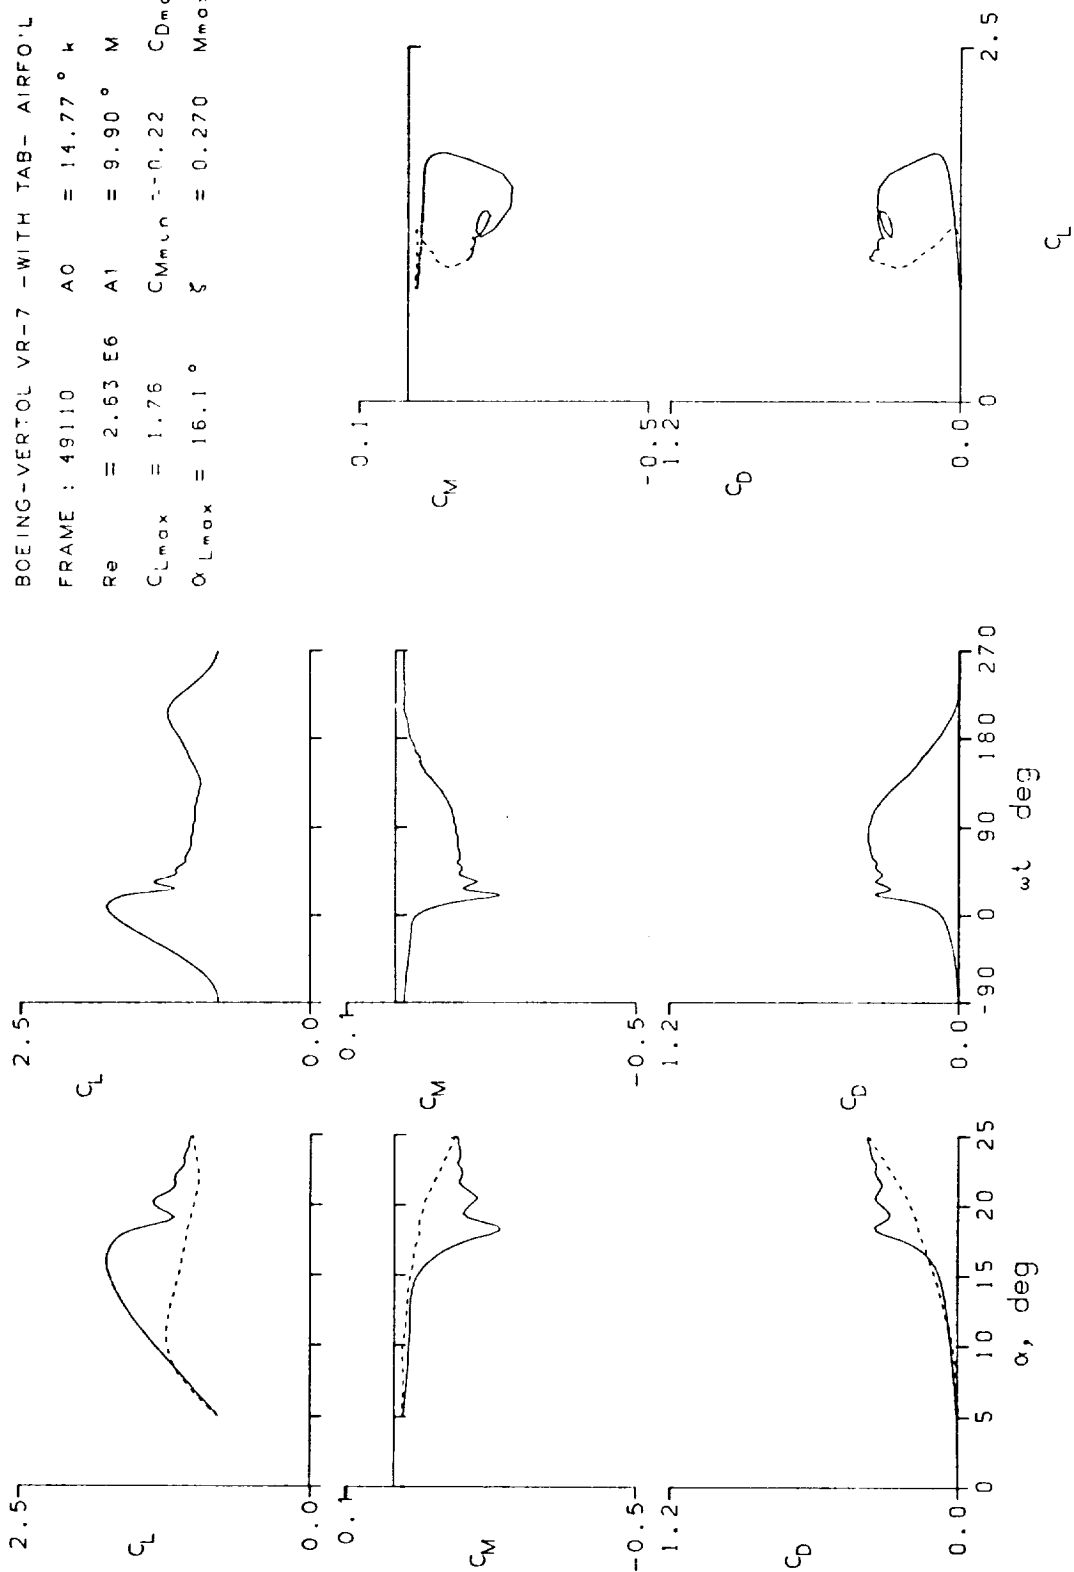


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 49117	A0 = 14.78 °	k = 0.051
Re = 2.62 E6	A1 = 9.90 °	M = 0.185
$C_{Lmax} = 1.95$	$C_{Mmin} = -0.33$	$C_{Dmax} = 0.68$
$\alpha_{Lmax} = 17.9 °$	$\xi = 0.387$	$M_{max} = 0.792$

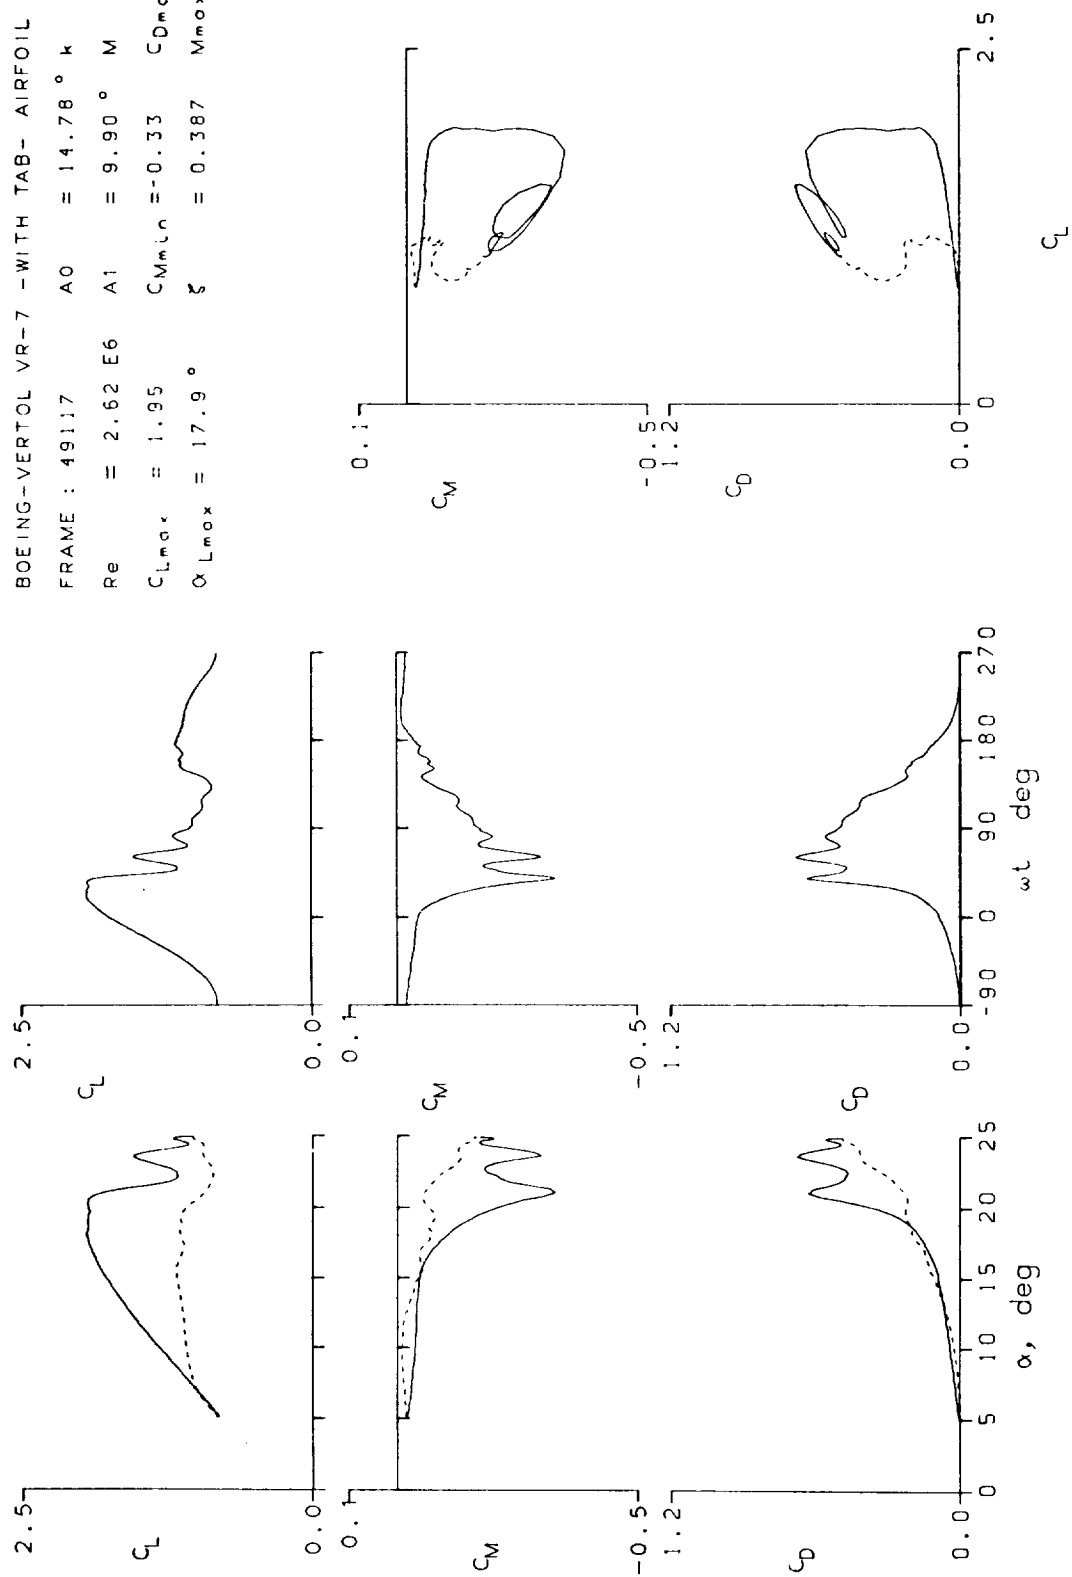


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 49120	A0 = 14.78 °	k = 0.101
Re = 2.60 E6	A1 = 9.90 °	M = 0.185
C _{Lmax} = 2.34	C _{Mmin} = -0.42	C _{Dmax} = 0.97
α _{Lmax} = 23.0 °	ξ = 0.338	M _{max} = 0.959
α _{Cmin} = 14.3 °	-C _{Pmax} = 18.1	α _{Mmax} = 21.6 °

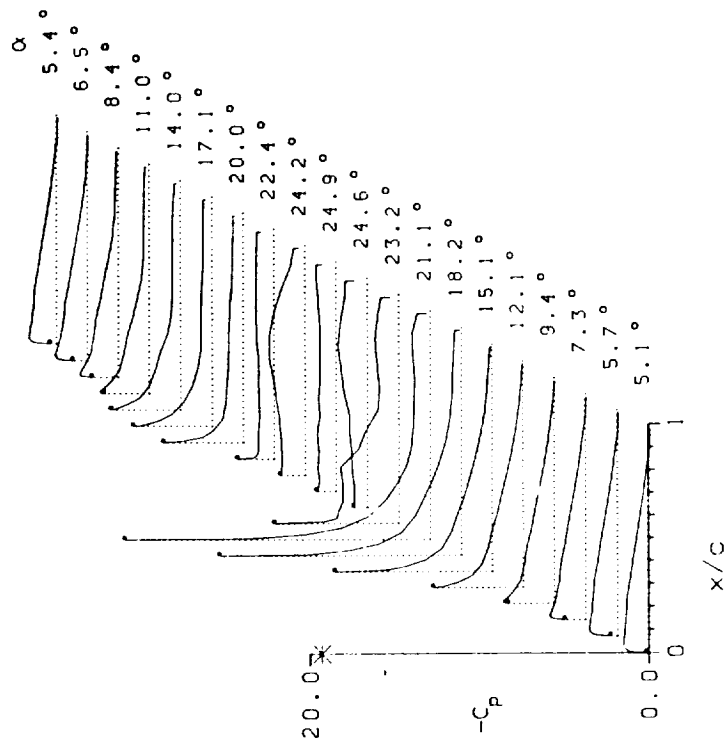
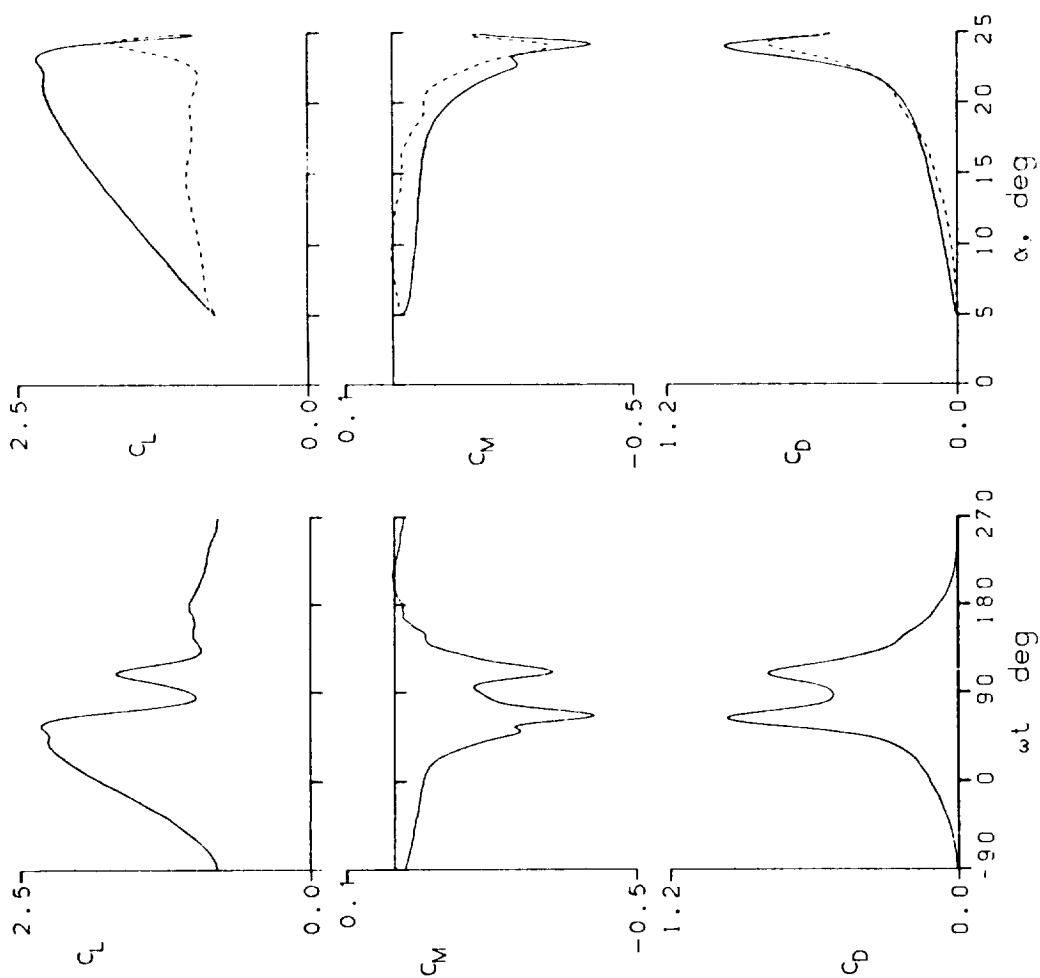


Figure 17.- Continued.


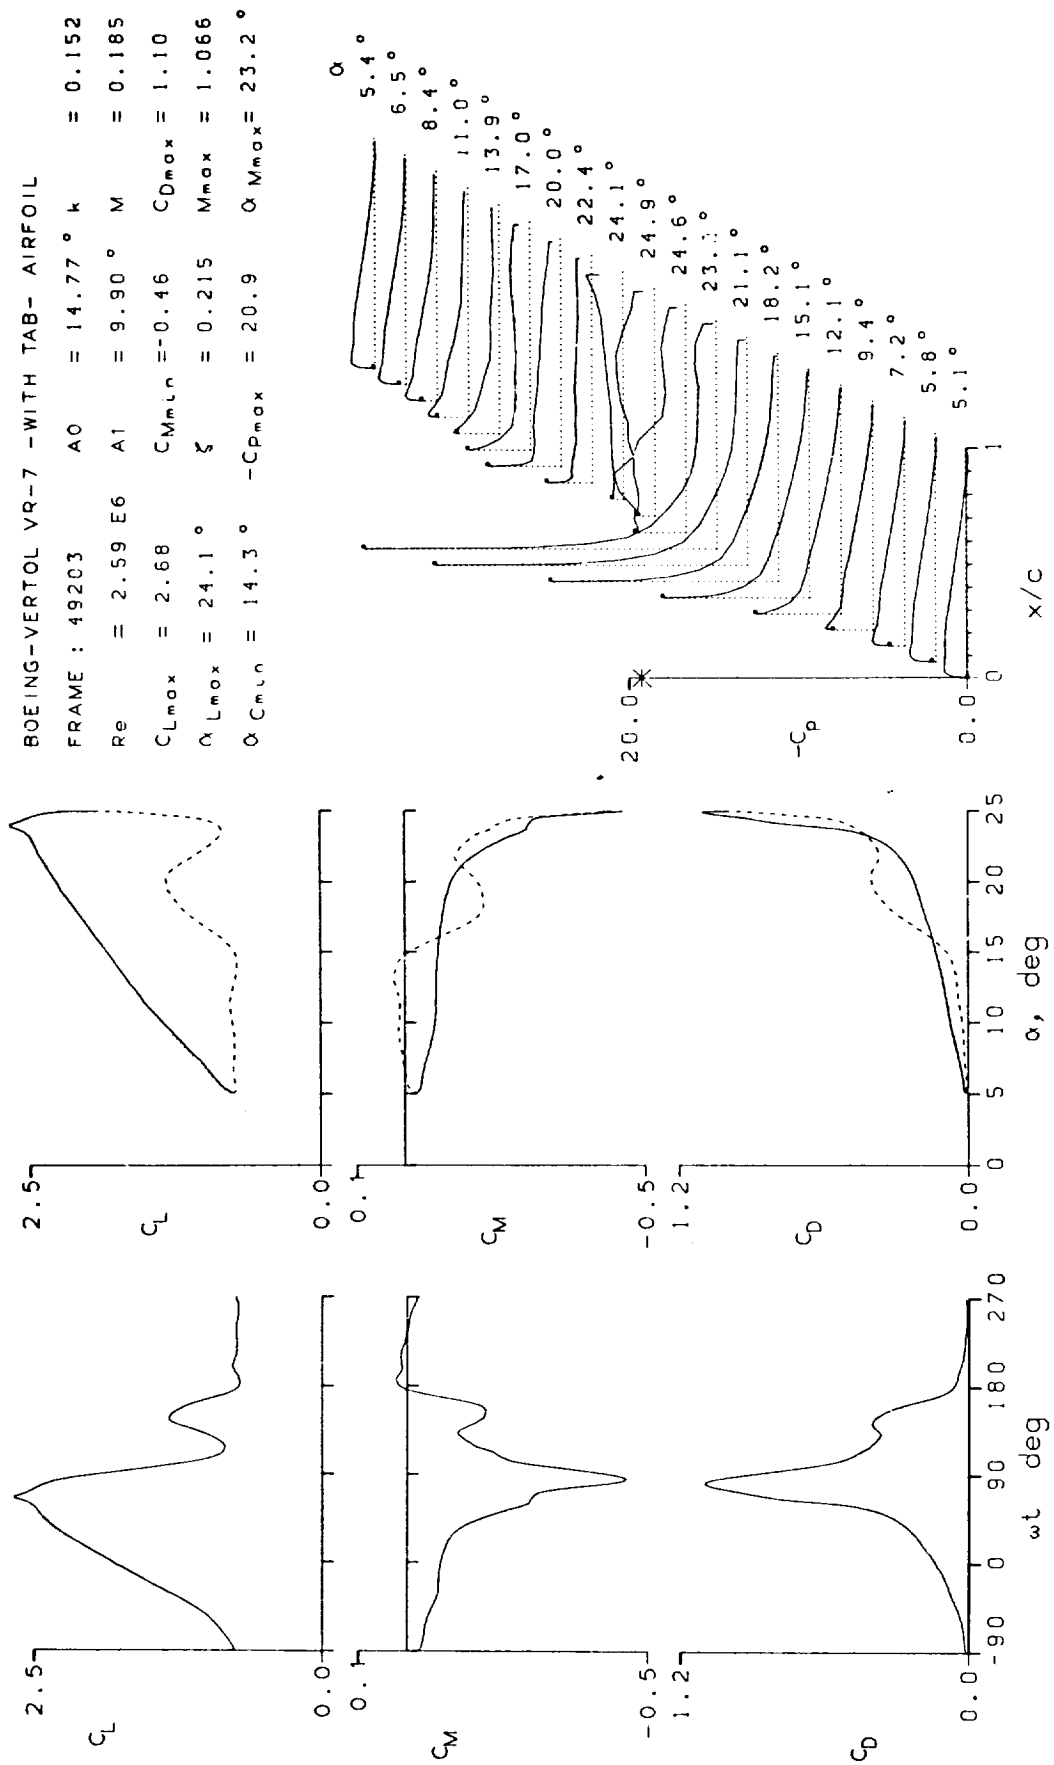


Figure 17.- Continued.

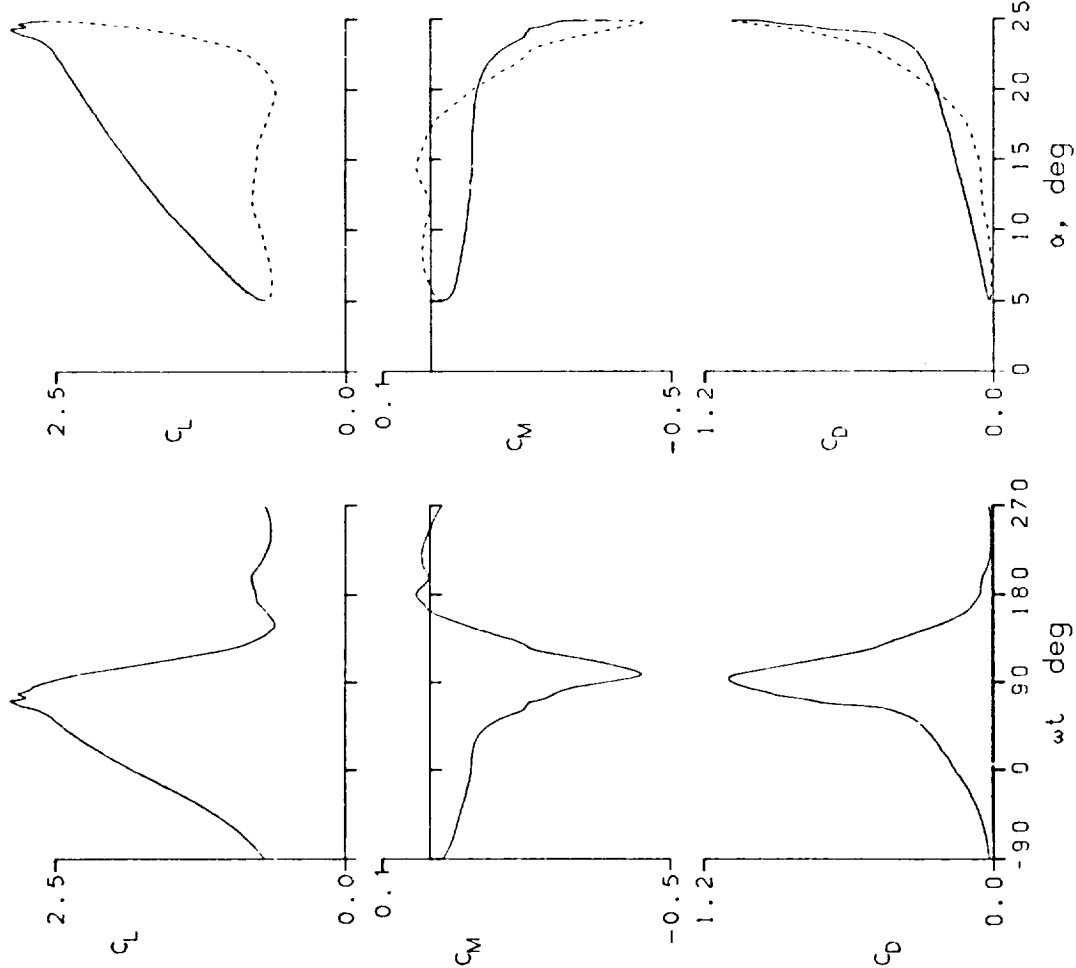

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 4920E A0 = 14.77 ° k = 0.202
 Re = 2.58 E6 A1 = 9.90 ° M = 0.185
 $C_{Lmax} = 2.90$ $C_{Mmin} = -0.44$ $C_{Dmax} = 1.10$
 $\alpha_{Lmax} = 24.3^\circ$ $\xi = 0.294$ $M_{max} = 1.130$
 $\alpha_{Cmin} = 14.4^\circ$ $-C_{Dmax} = 22.5$ $\alpha_{M_{max}} = 23.8^\circ$

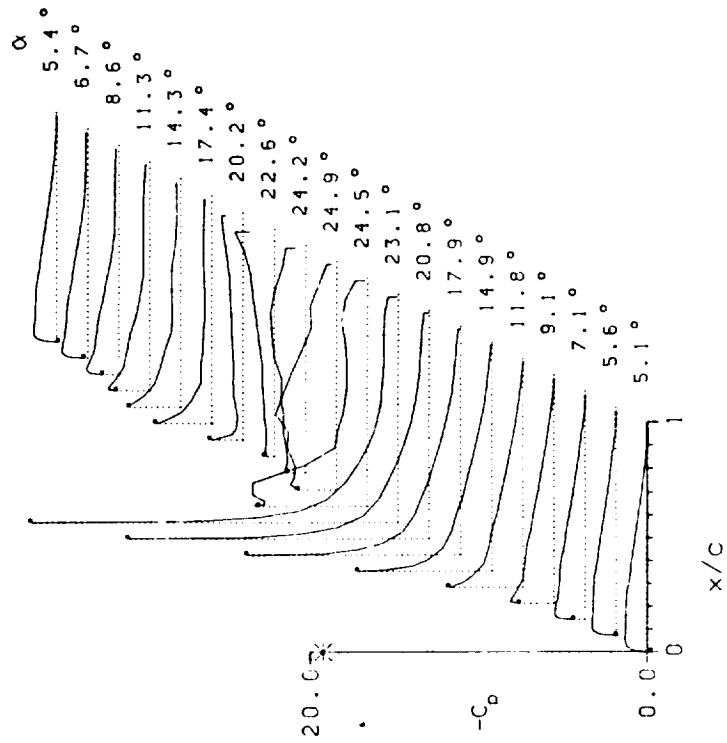


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 49216	A0 = 4.55°	k = 0.025
Re = 2.56 E6	A1 = 10.05°	M = 0.184
CLmax = 1.62	CMmin = -0.09	CDmax = 0.11
αLmax = 13.9°	ξ = 0.058	Mmax = 0.600
αCmin = 4.1°	-CDmax = 8.3	αMmax = 14.3°

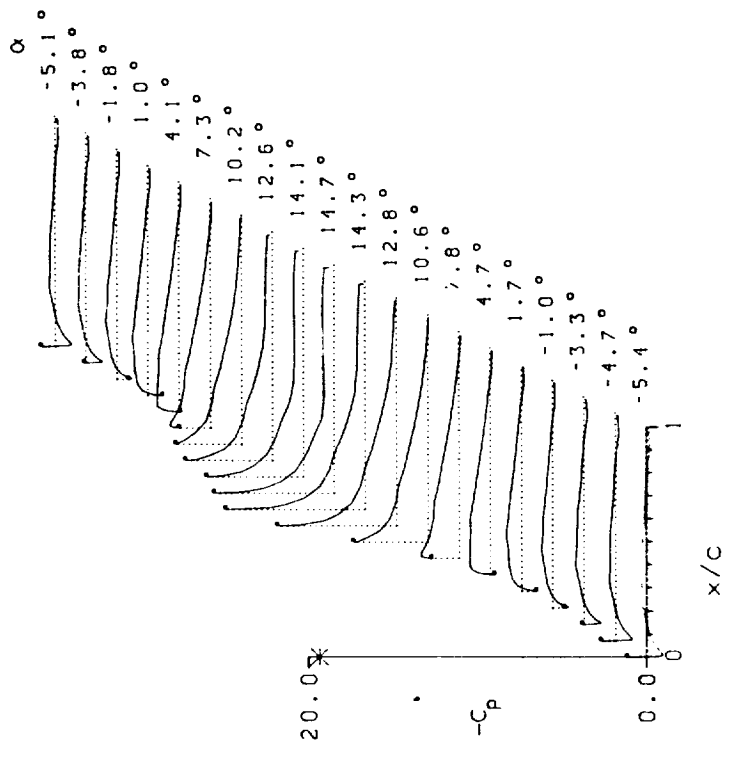
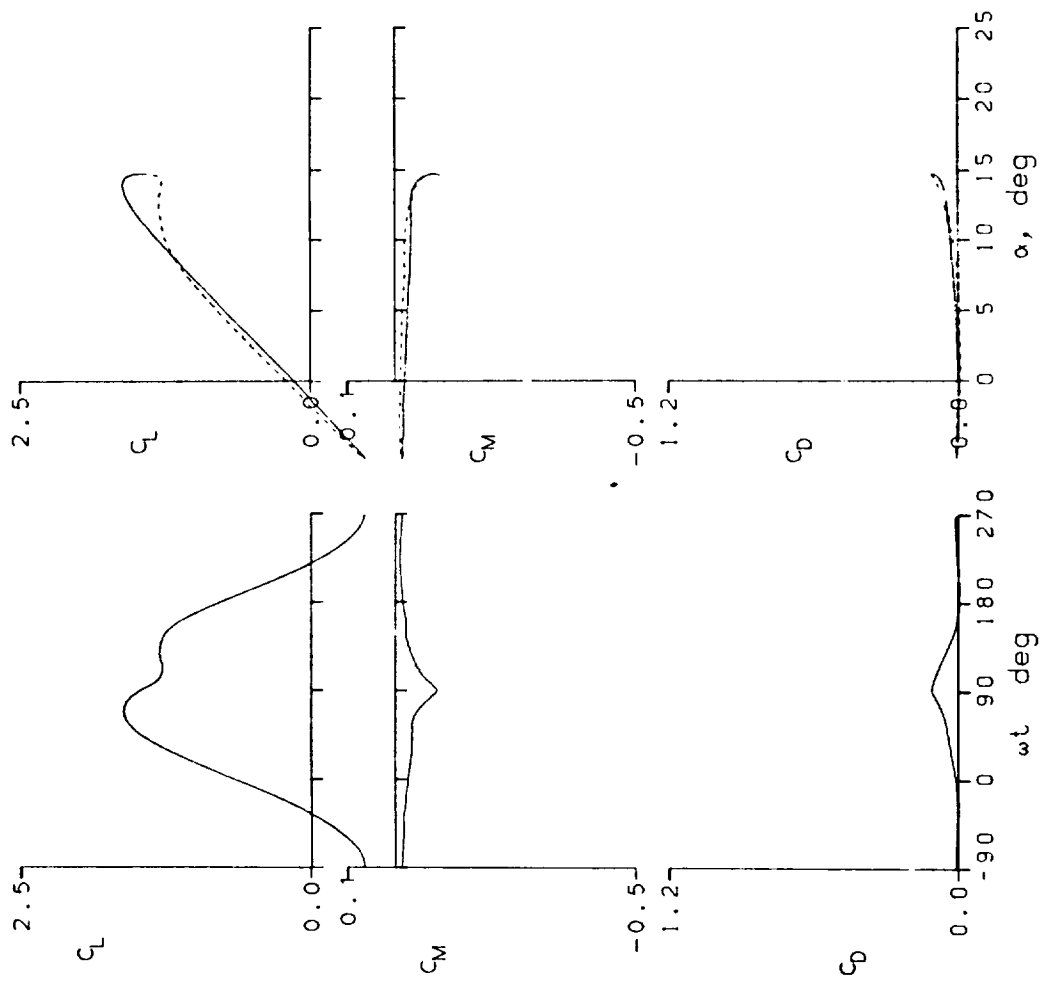


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 49300	A0 = 4.54 °	k = 0.101
Re = 2.54 E6	A1 = 10.05 °	M = 0.184
CLmax = 1.72	CMmin = -0.05	CDmax = 0.09
αLmax = 14.7 °	ξ = 0.260	Mmax = 0.638
αCmin = 4.1 °	-CPmax = 9.3	αMmax = 14.7 °

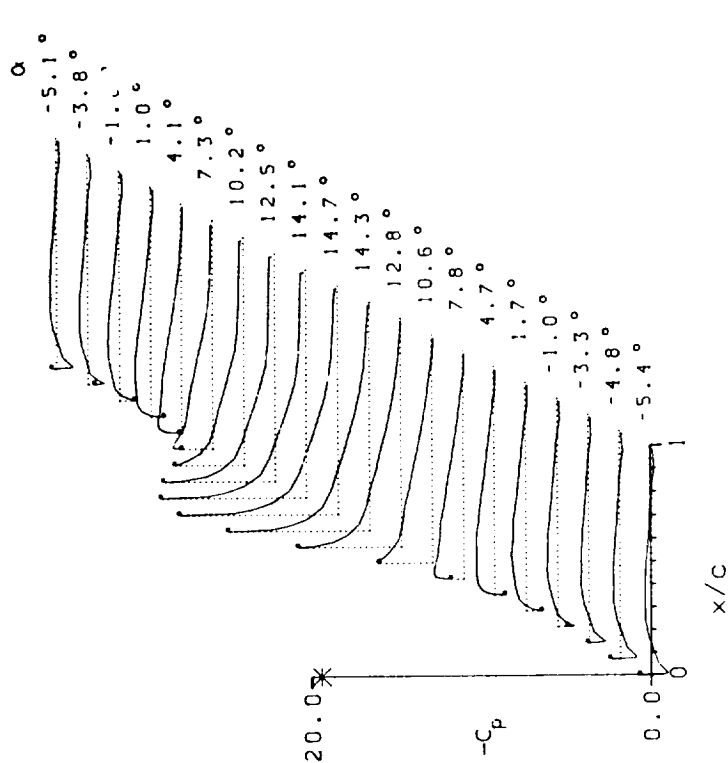
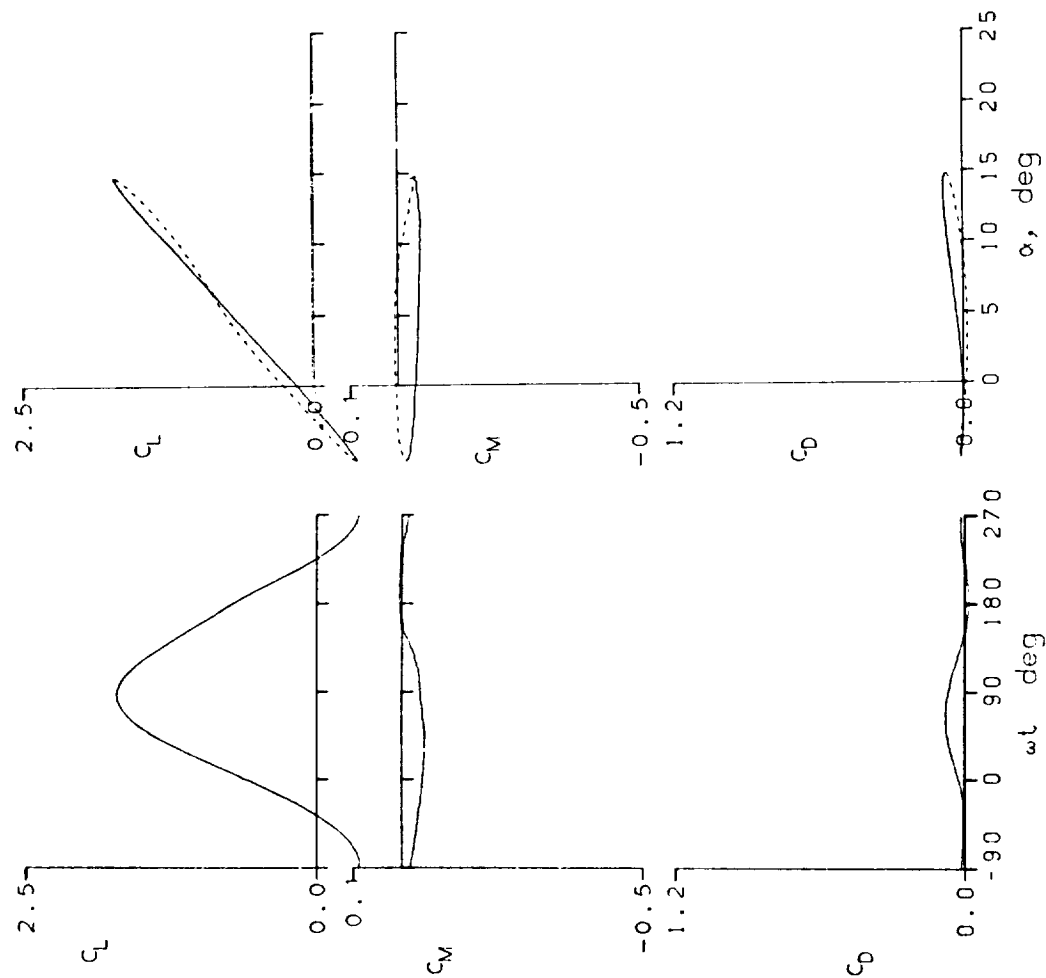


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 49307	A0 = 4.53 °	k = 0.201
Re = 2.55 E6	A1 = 10.05 °	M = 0.185
CLmax = 1.71	CMmin = -0.07	CDmax = 0.11
αLmax = 14.7 °	ξ = 0.578	Mmax = 0.640
αCmin = 4.1 °	-CPmax = 9.3	αMmax = 14.6 °



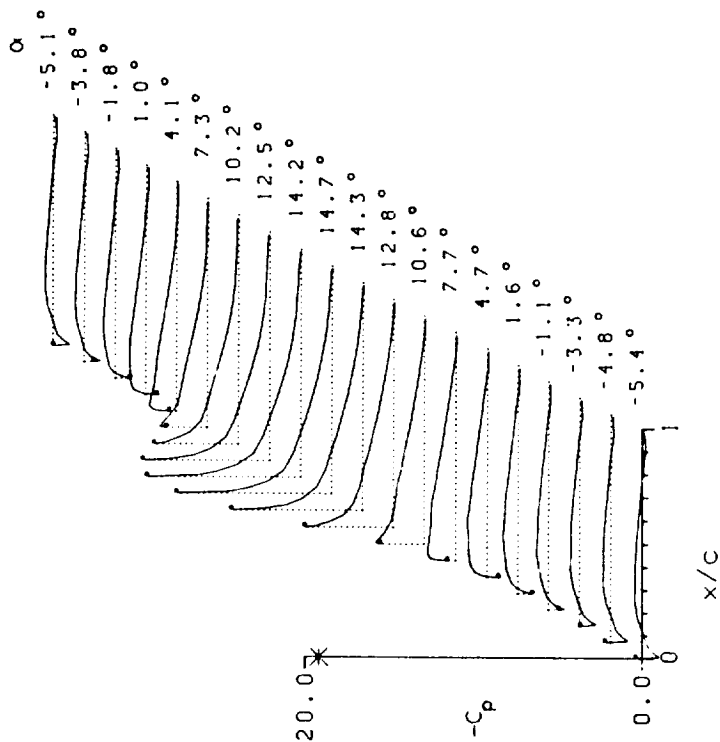


Figure 17.- Continued.

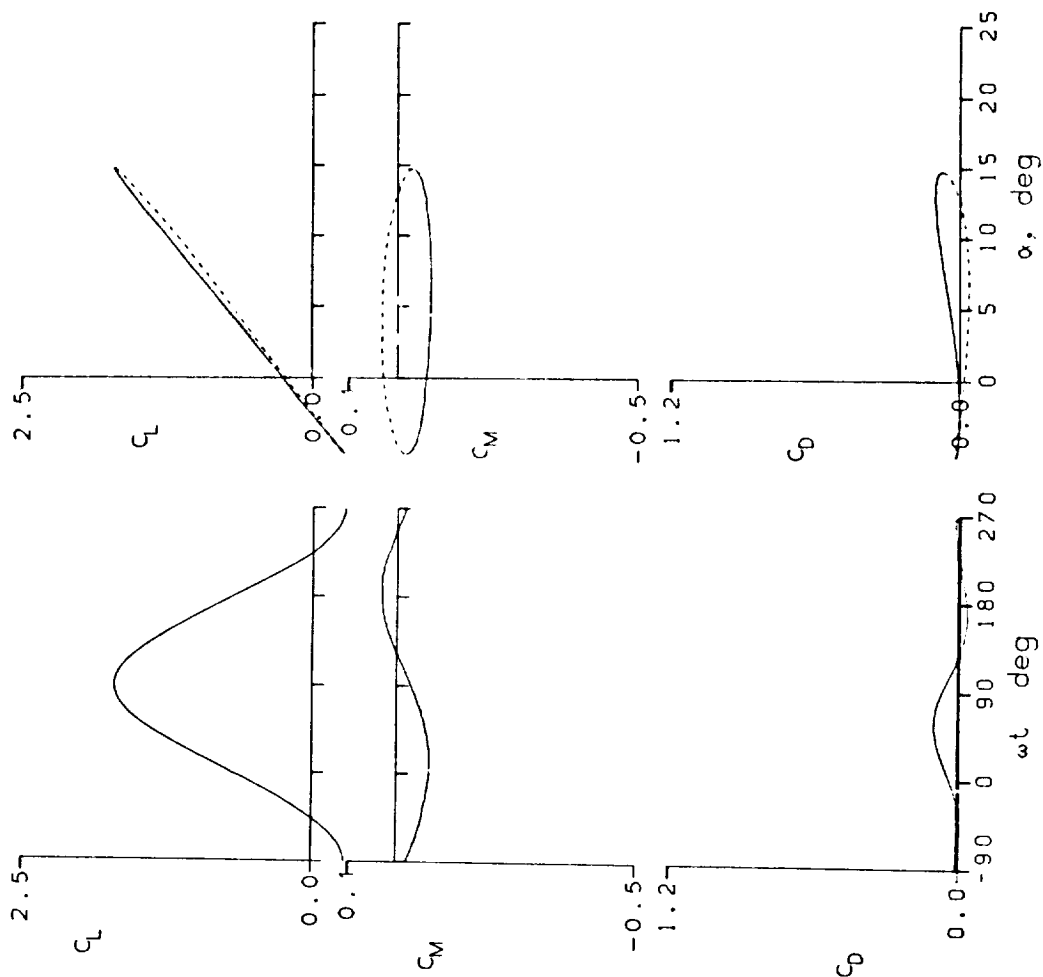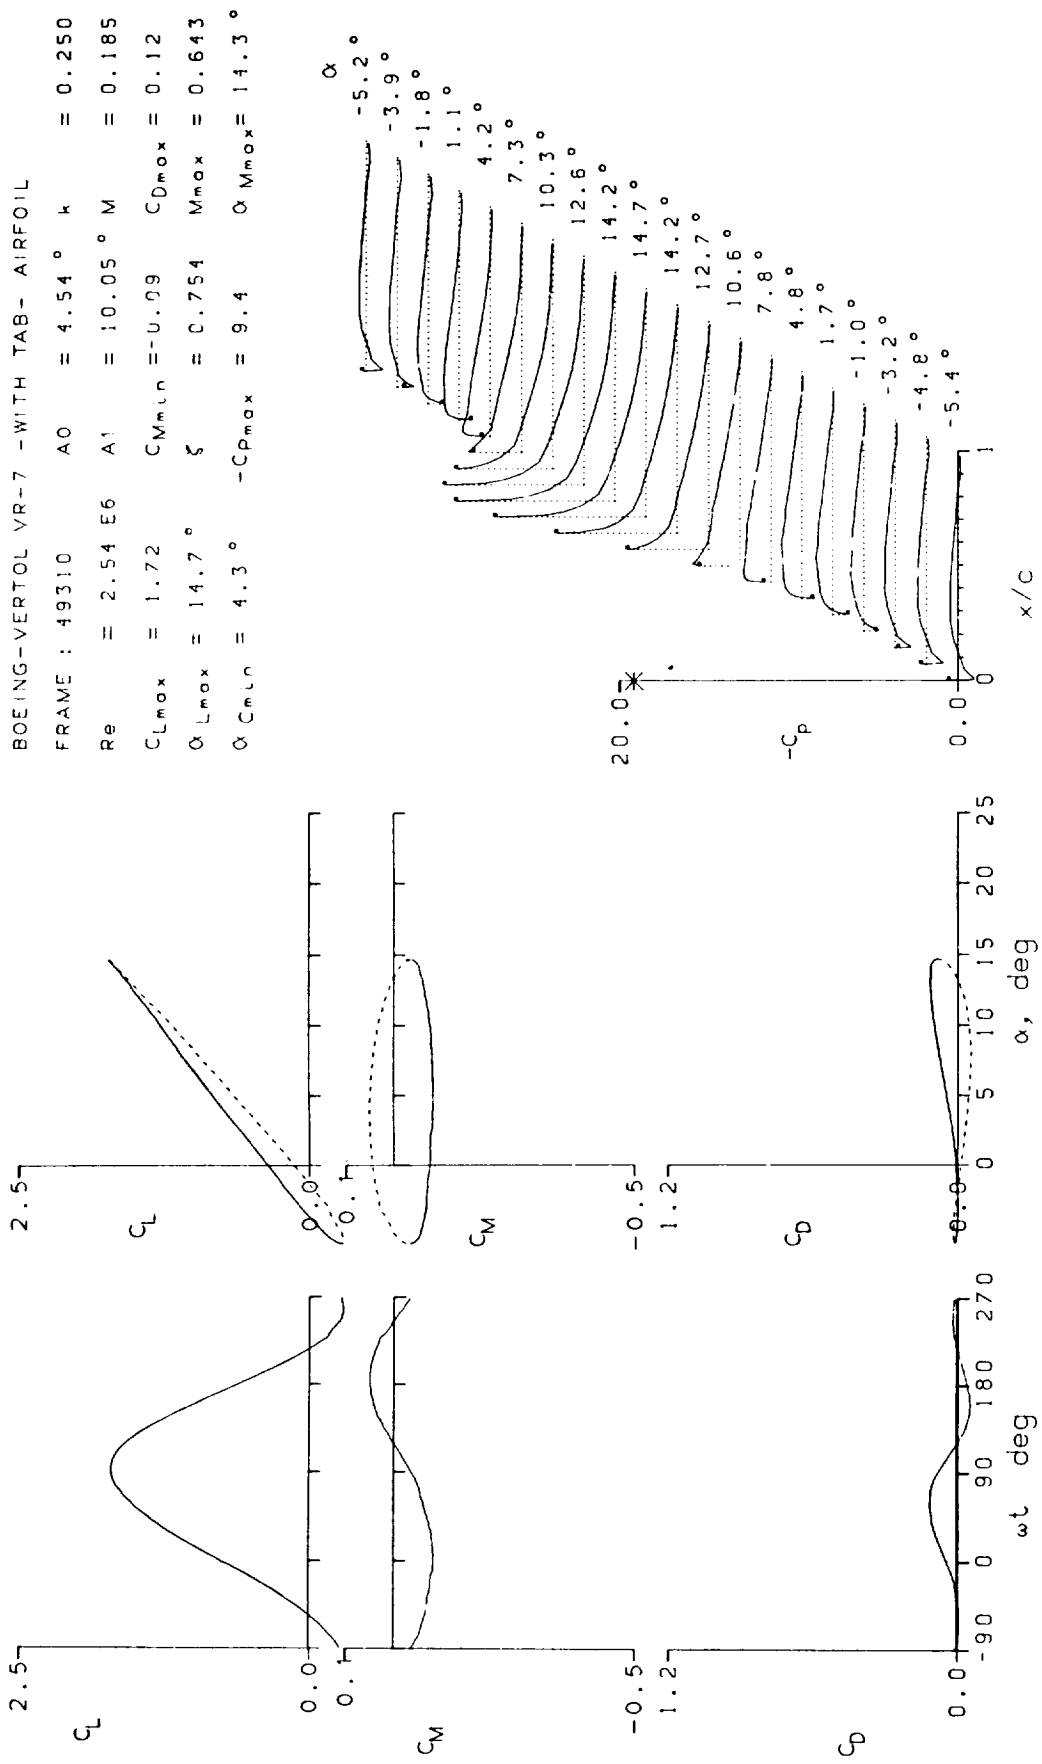

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 50116	A0 = 4.55°	k = 0.010
Re = 2.53 E6	A1 = 10.05°	M = 0.183
$C_{Lmax} = 1.56$	$C_{Mmin} = -0.07$	$C_{Dmax} = 0.11$
$\alpha_{Lmax} = 13.4°$	$\xi = 0.023$	$M_{max} = 0.560$
$\alpha_{Cmin} = 4.1°$	$-C_{pmax} = 7.4$	$\alpha_{Mmax} = 13.7°$

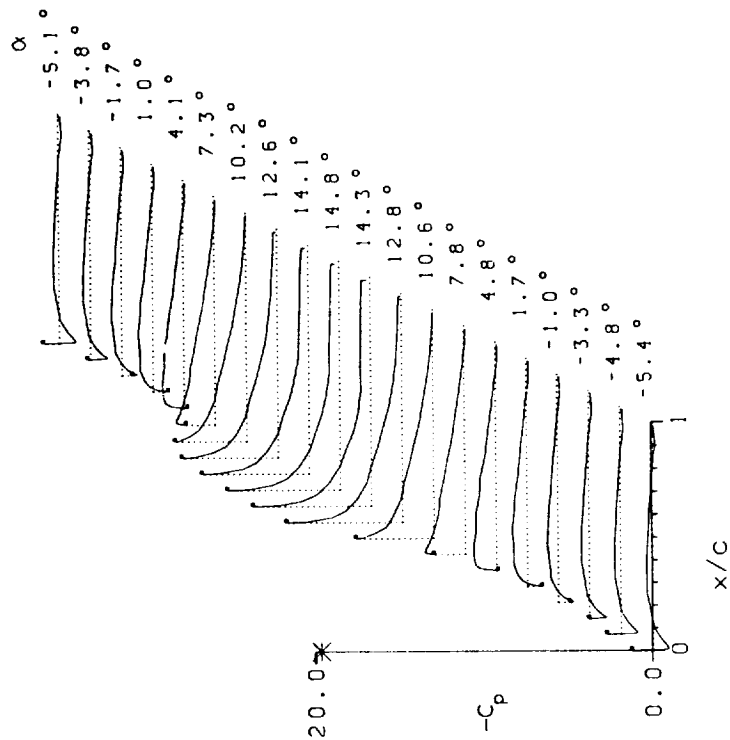
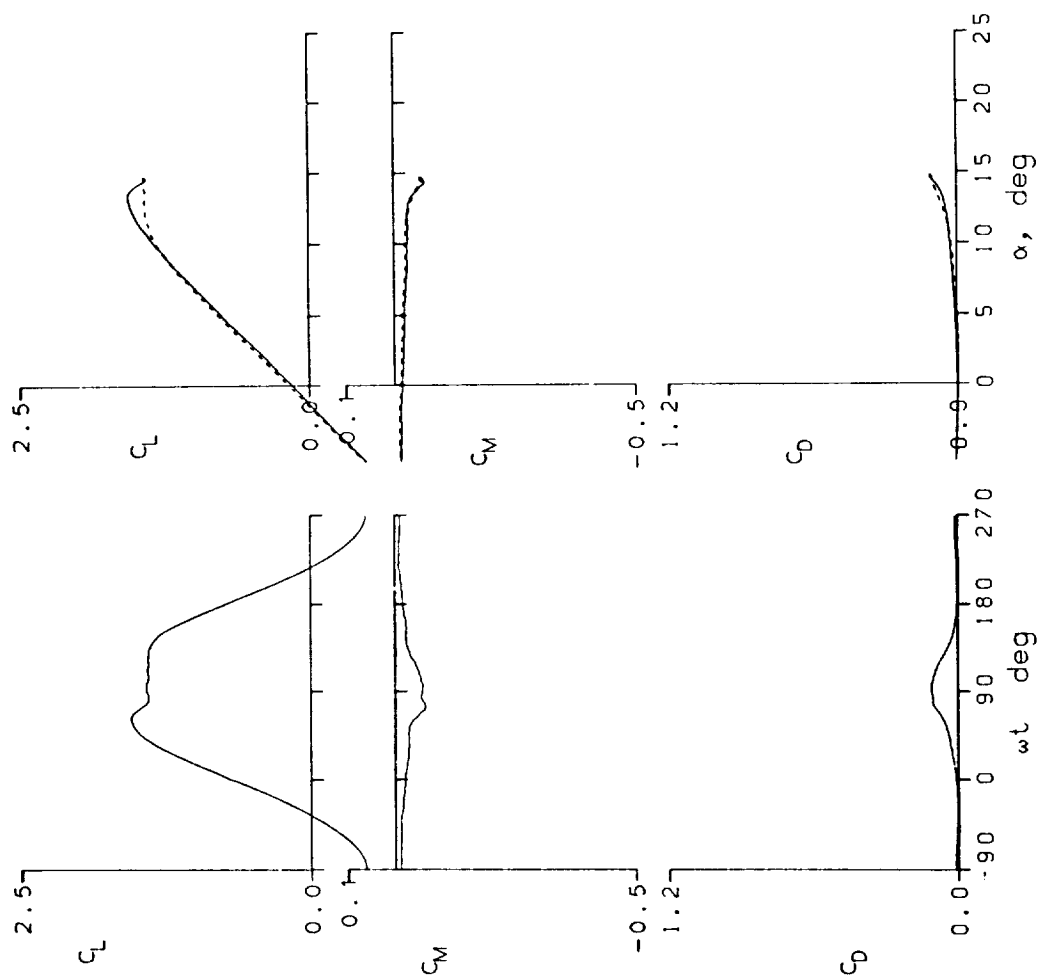


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 54019	A0 = 9.82 °	k = 0.026
Re = 2.63 E6	A1 = 9.90 °	M = 0.183
CLmax = 1.74	CMmin = -0.18	CDmax = 0.28
αLmax = 15.3 °	ξ = 0.146	Mmax = 0.669
αCMmin = 9.3 °	-CPmax = 10.3	αMmax = 16.1 °

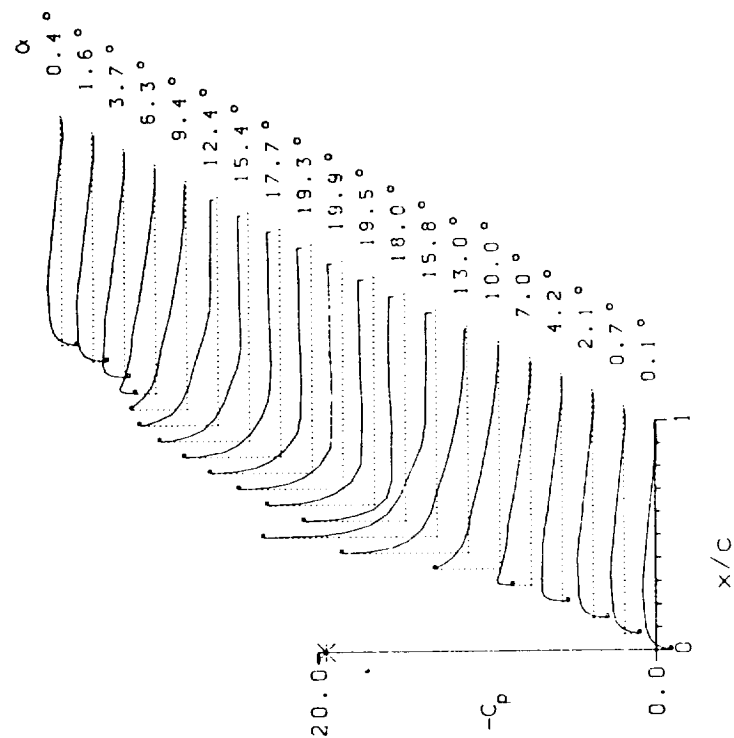
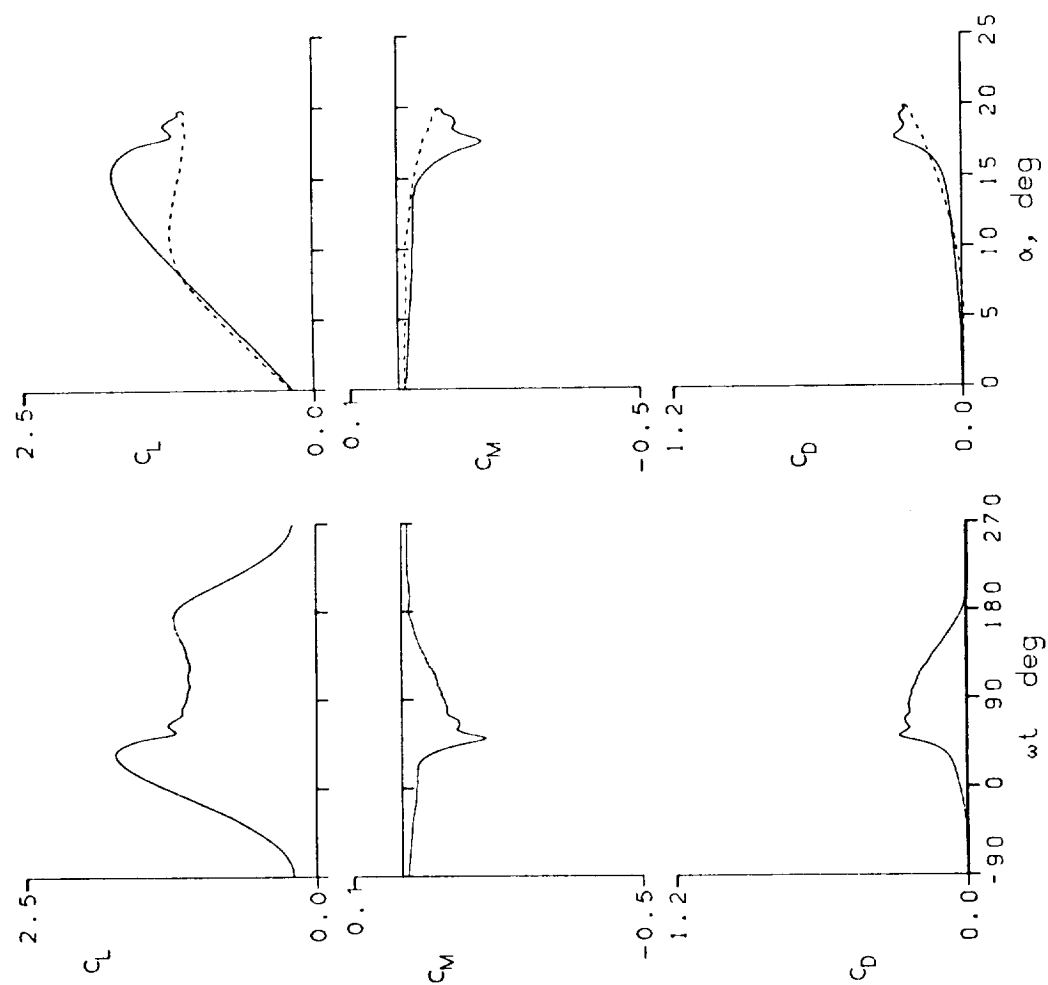


Figure 17.- Continued.

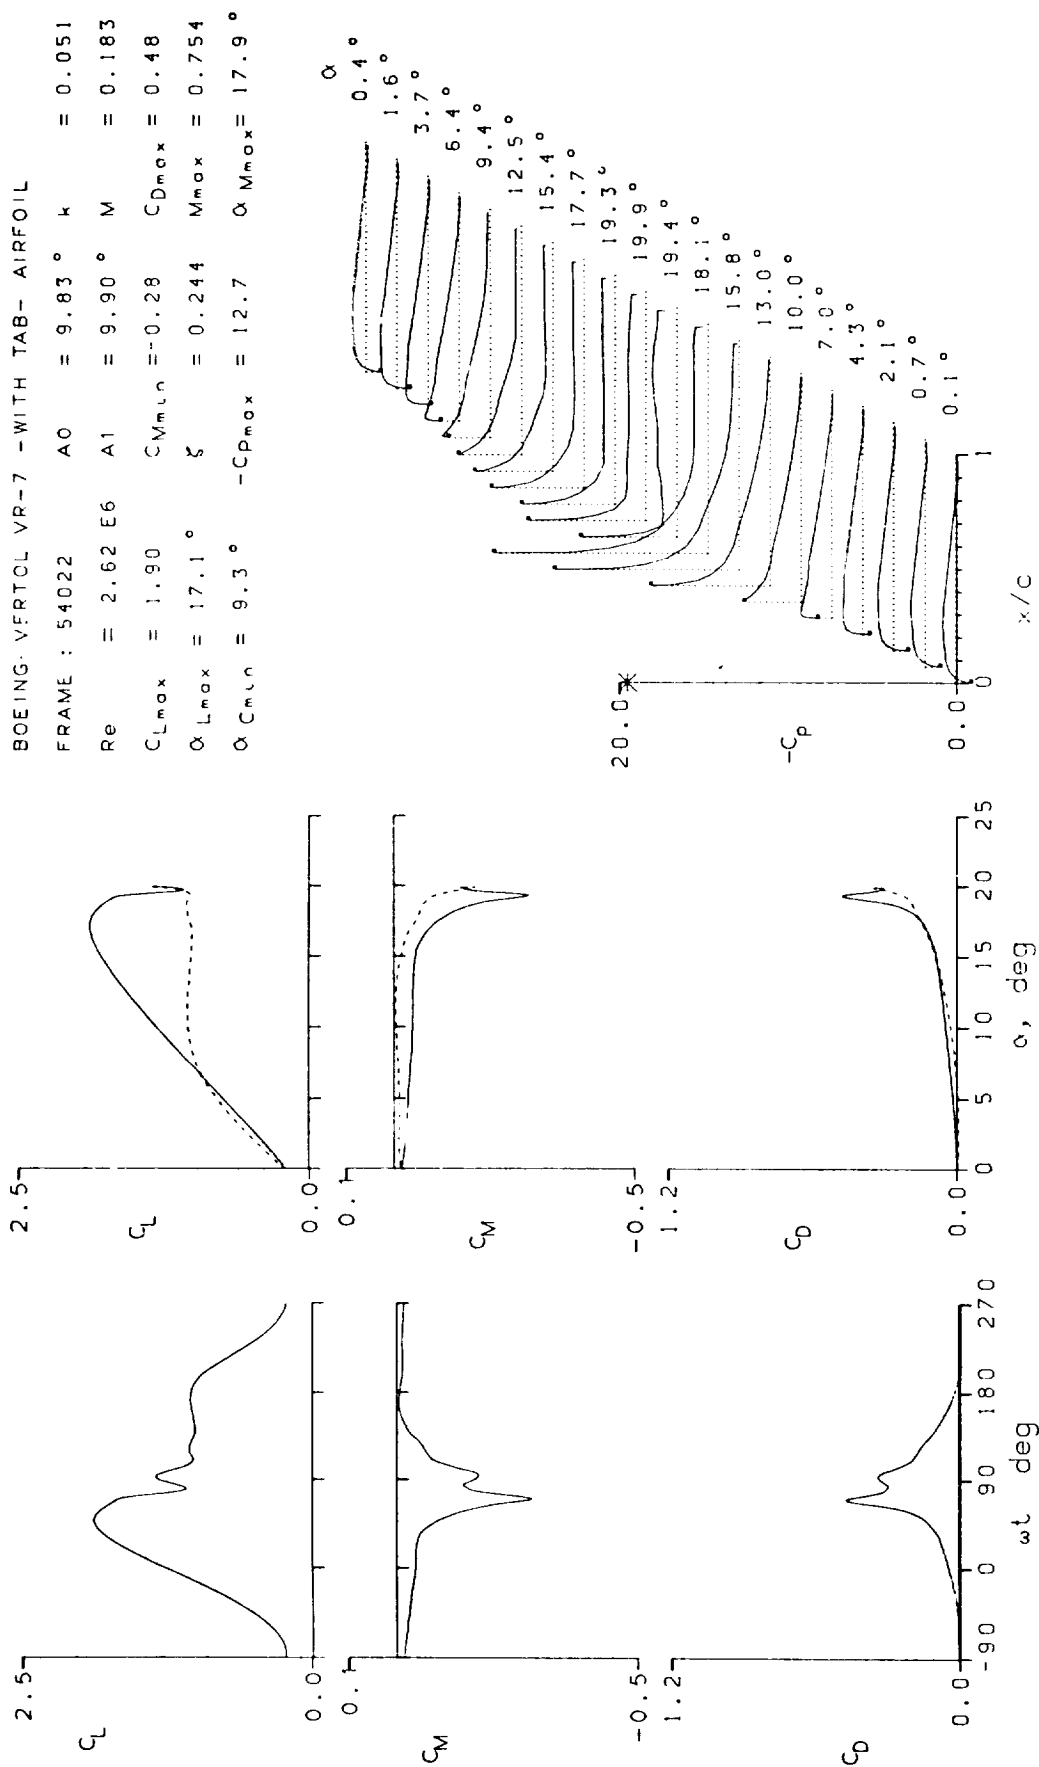


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 54101	A0 = 9.83 °	k = 0.102
Re = 2.61 E6	A1 = 9.90 °	M = 0.183
C _{Lmax} = 2.11	C _{Mmin} = -0.29	C _{Dmax} = 0.54
α _{Lmax} = 19.0 °	ξ = 0.154	M _{max} = 0.867
α _{Cmin} = 9.4 °	-C _{pmax} = 15.9	α _{Mmax} = 19.4 °

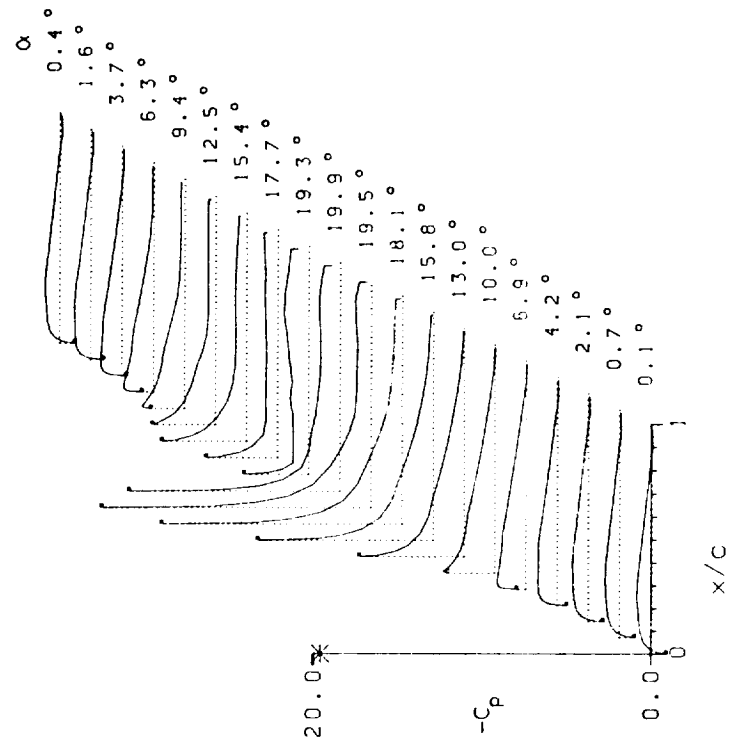
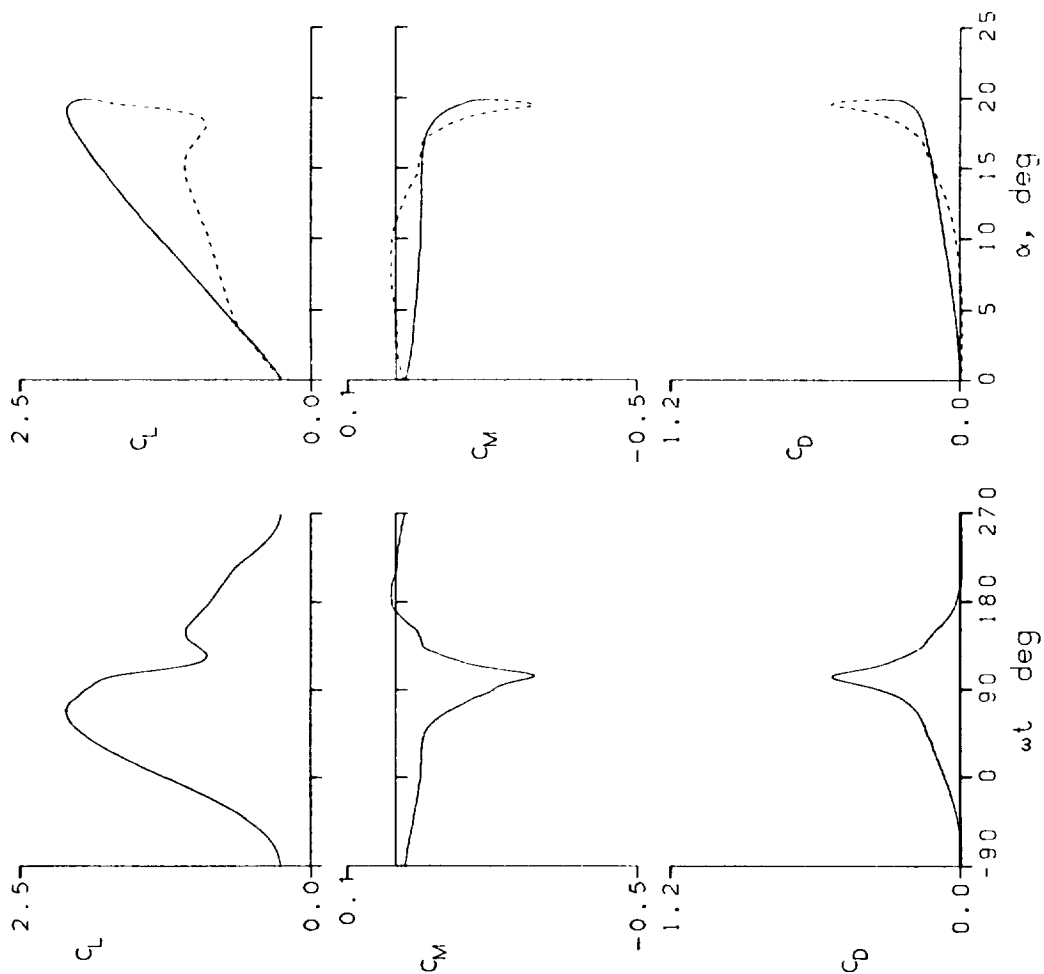


Figure 17.- Continued.

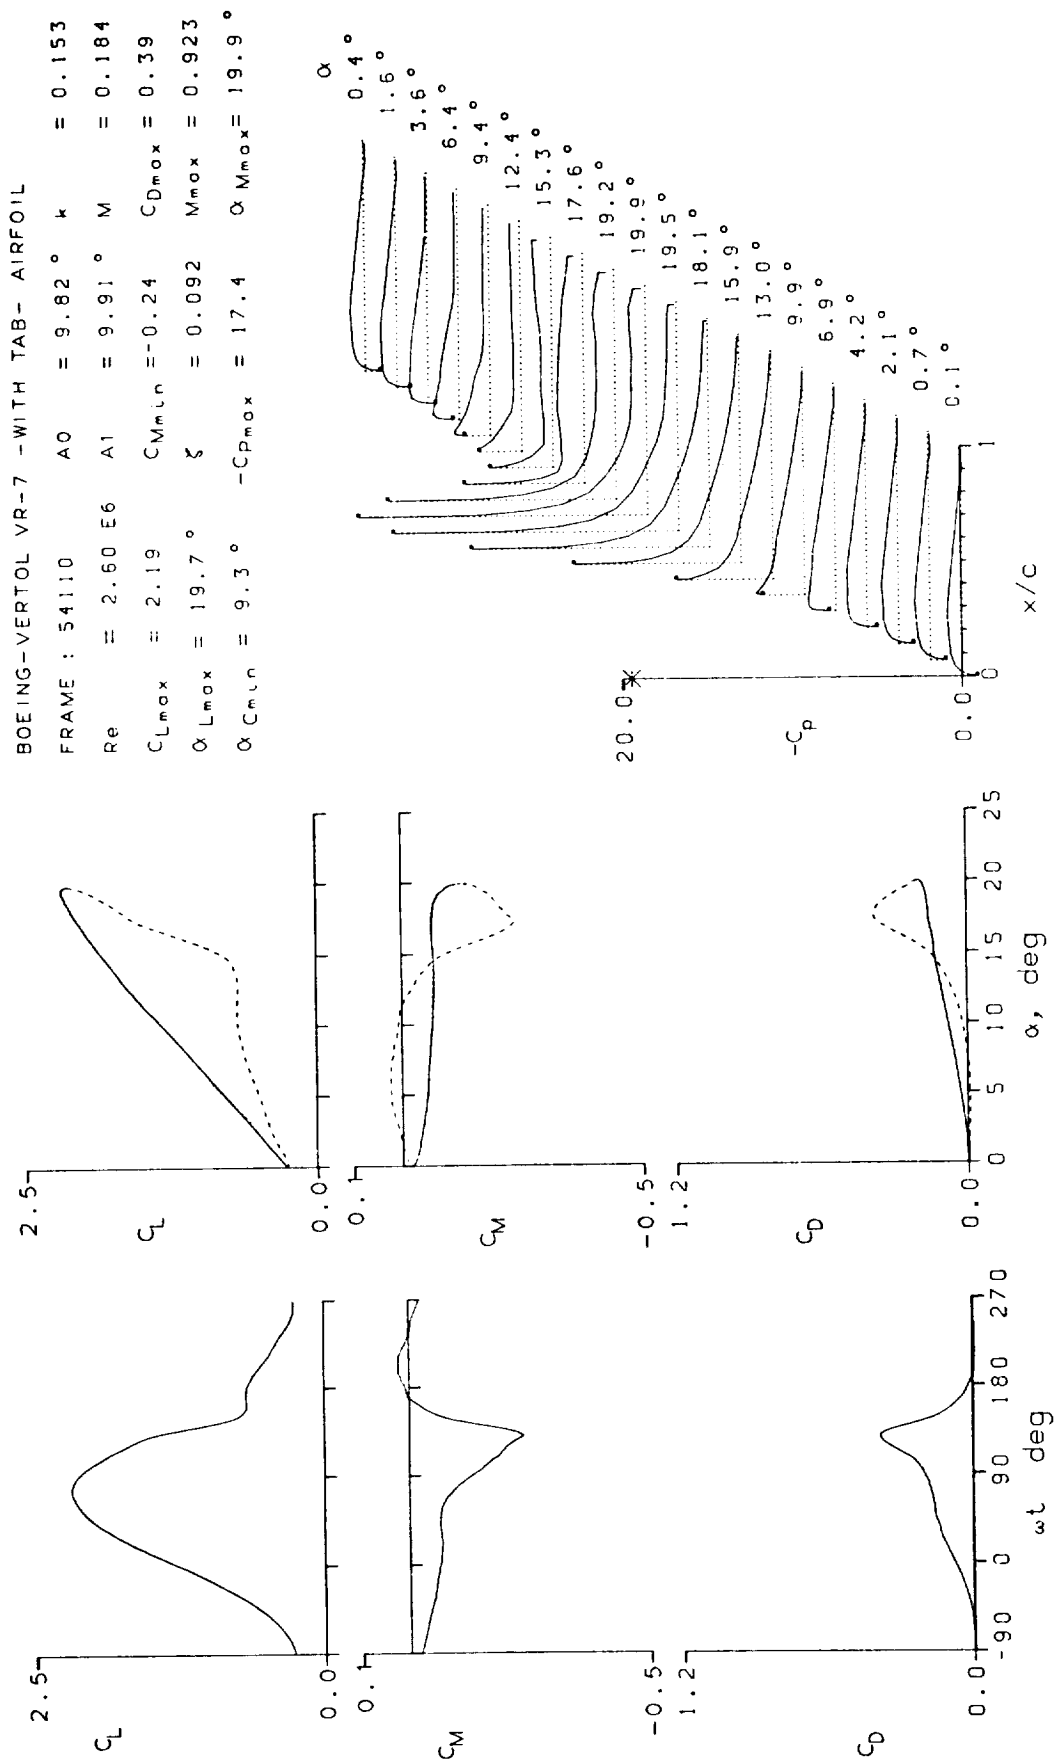


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 54113	A0 = 9.81 °	k = 0.203
Re = 2.59 E6	A1 = 9.91 °	M = 0.184
CLmax = 2.24	CMmin = -0.16	CDmax = 0.20
α Lmax = 19.8 °	ξ = 0.177	Mmax = 0.950
α Cmin = 9.3 °	-CPmax = 18.1	α Mmax = 19.9 °

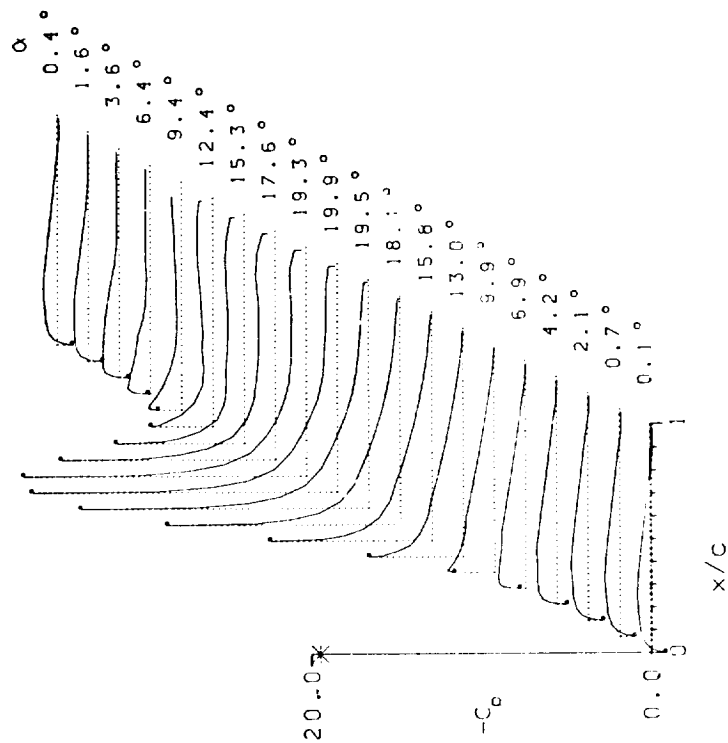
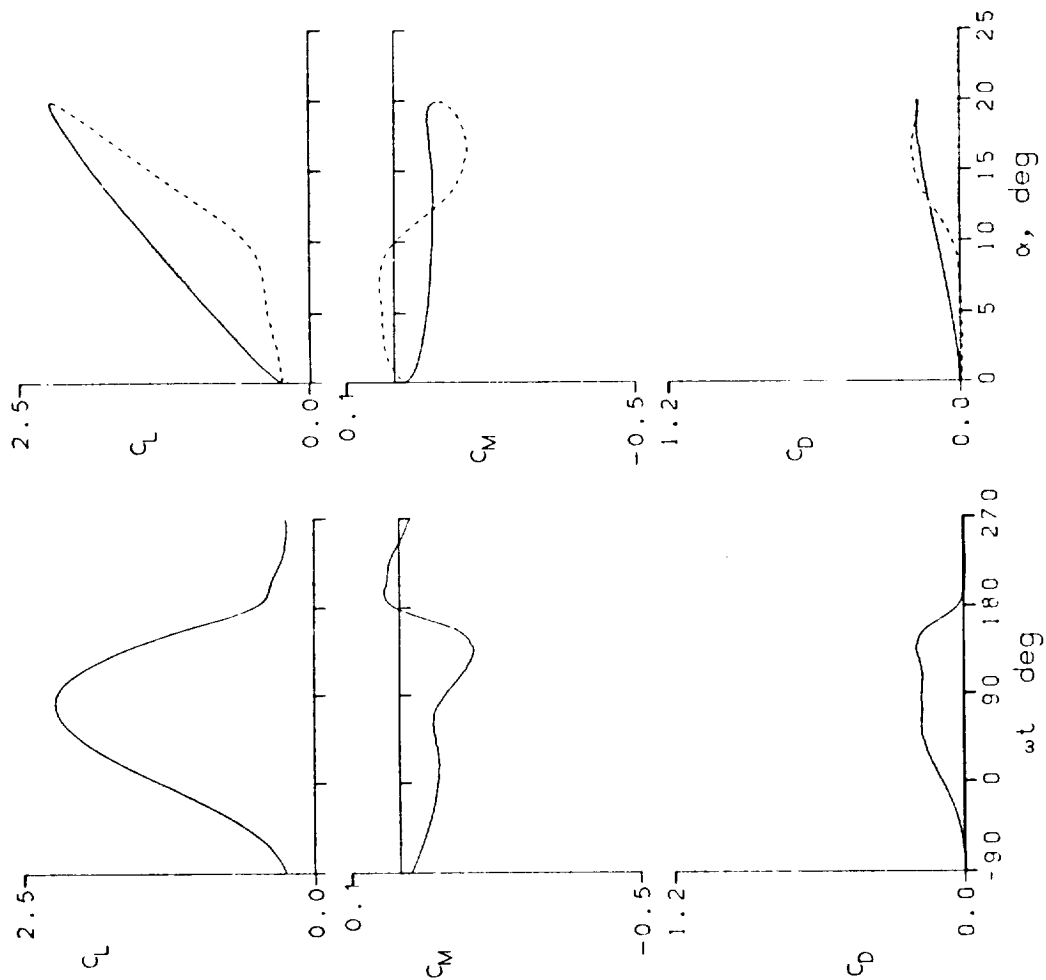


Figure 17.- Continued.

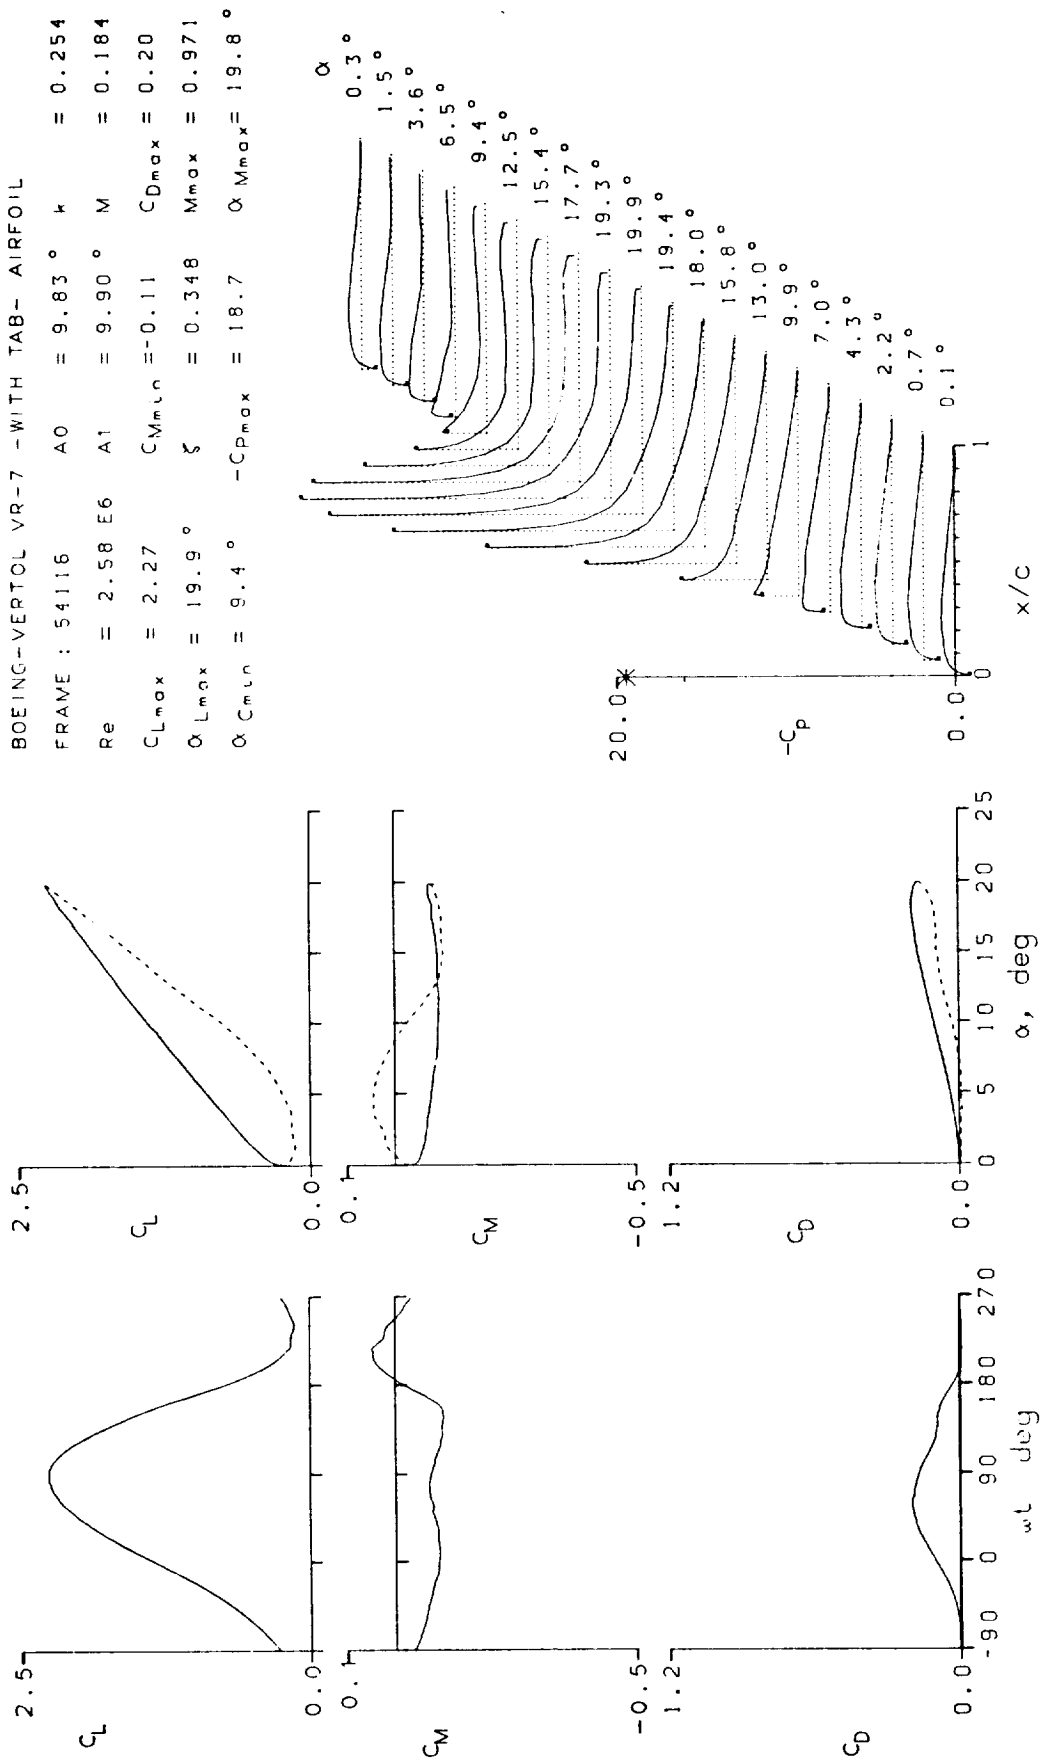


Figure 17.- Continued.

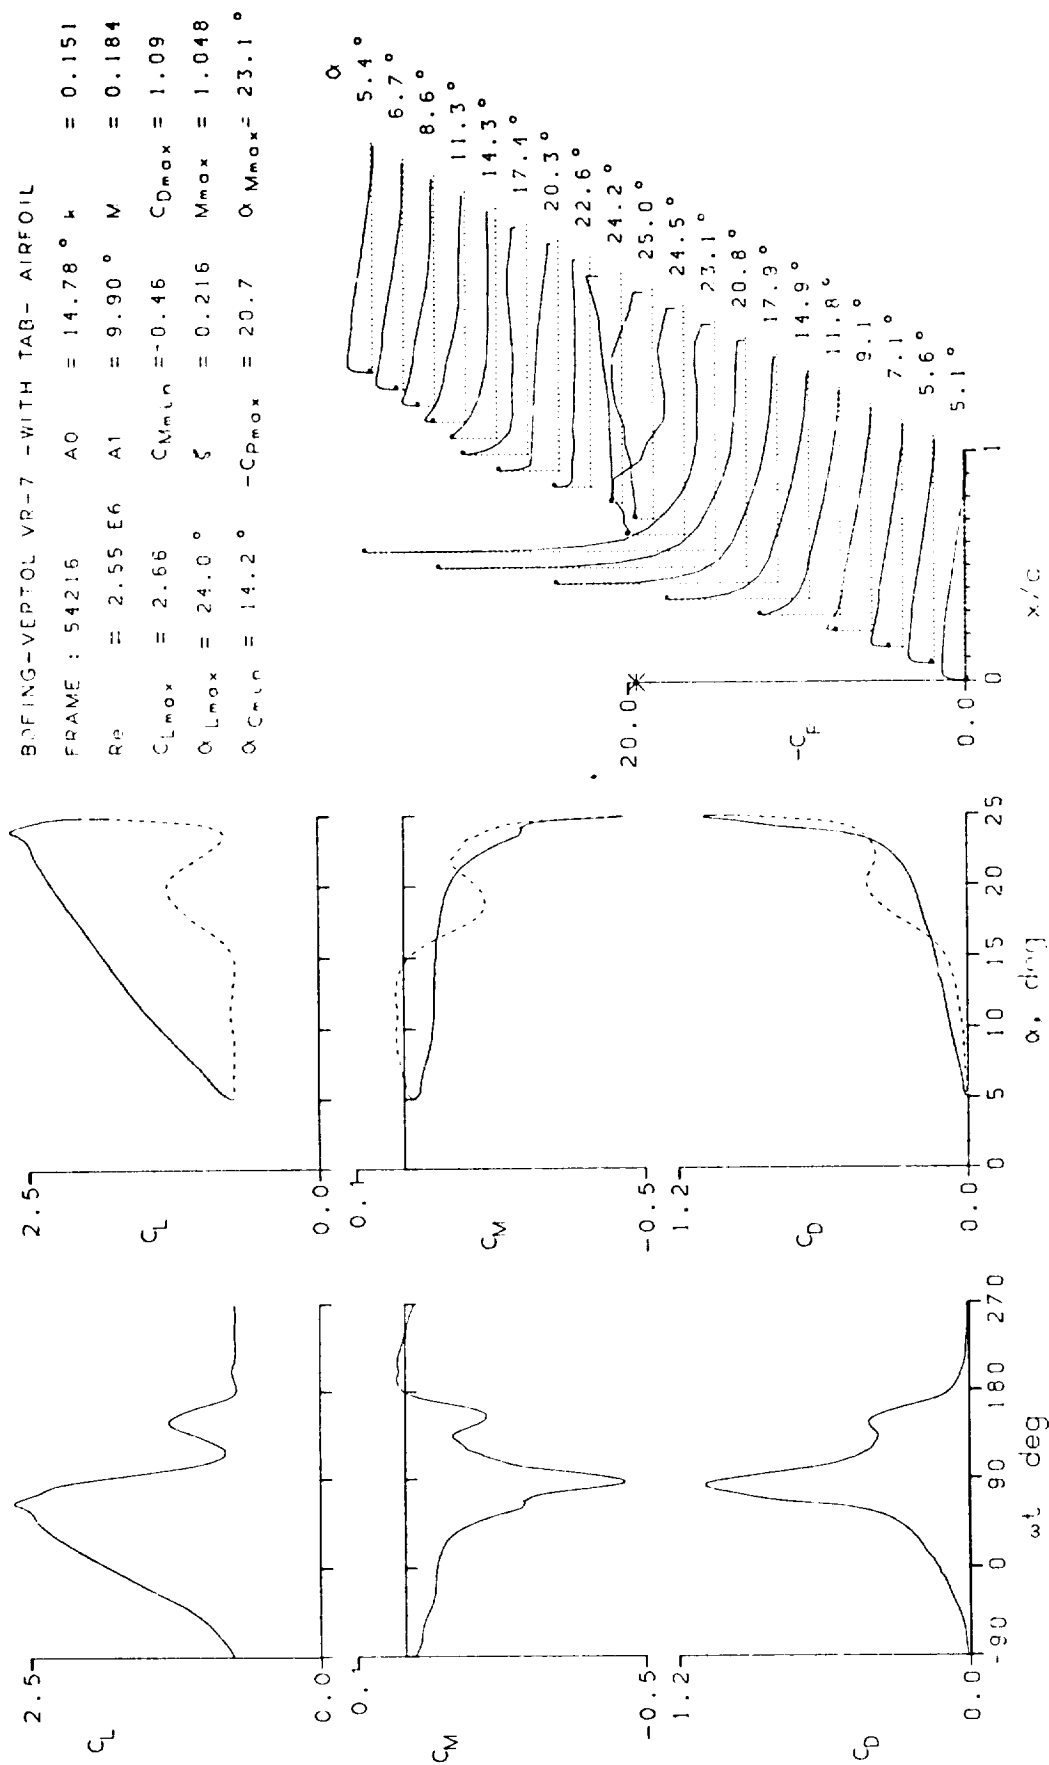


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL
 FRAME : 57018 A0 = 14.77° k = 0.152
 Re = 2.56 E6 A1 = 9.90° M = 0.184
 C_{Lmax} = 2.67 C_{Mmin} = -0.46 C_{Dmax} = 1.06
 α_{Lmax} = 24.0° ξ = 0.226 M_{max} = 1.056
 α_{Cmin} = 14.2° -C_{pmax} = 20.9 α_{Mmax} = 23.2°

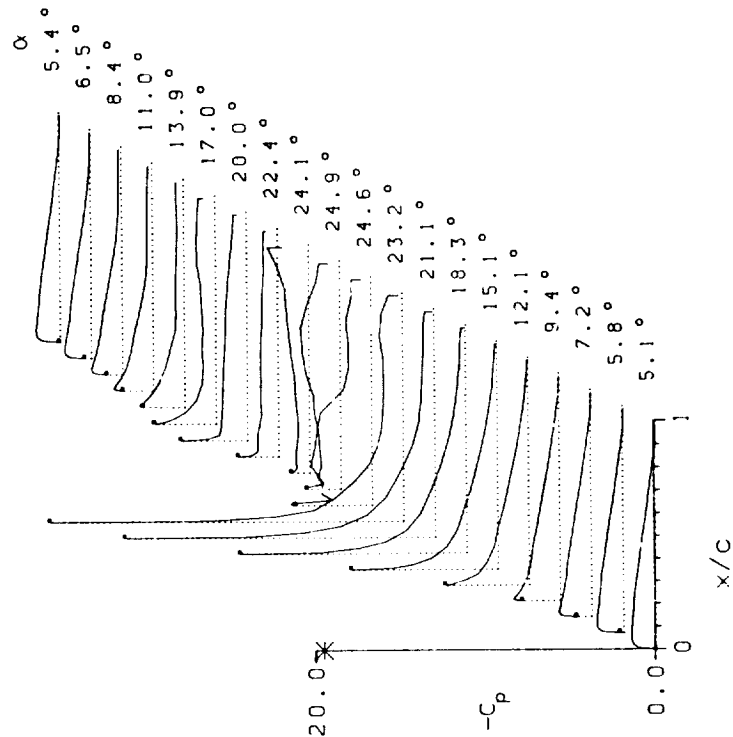
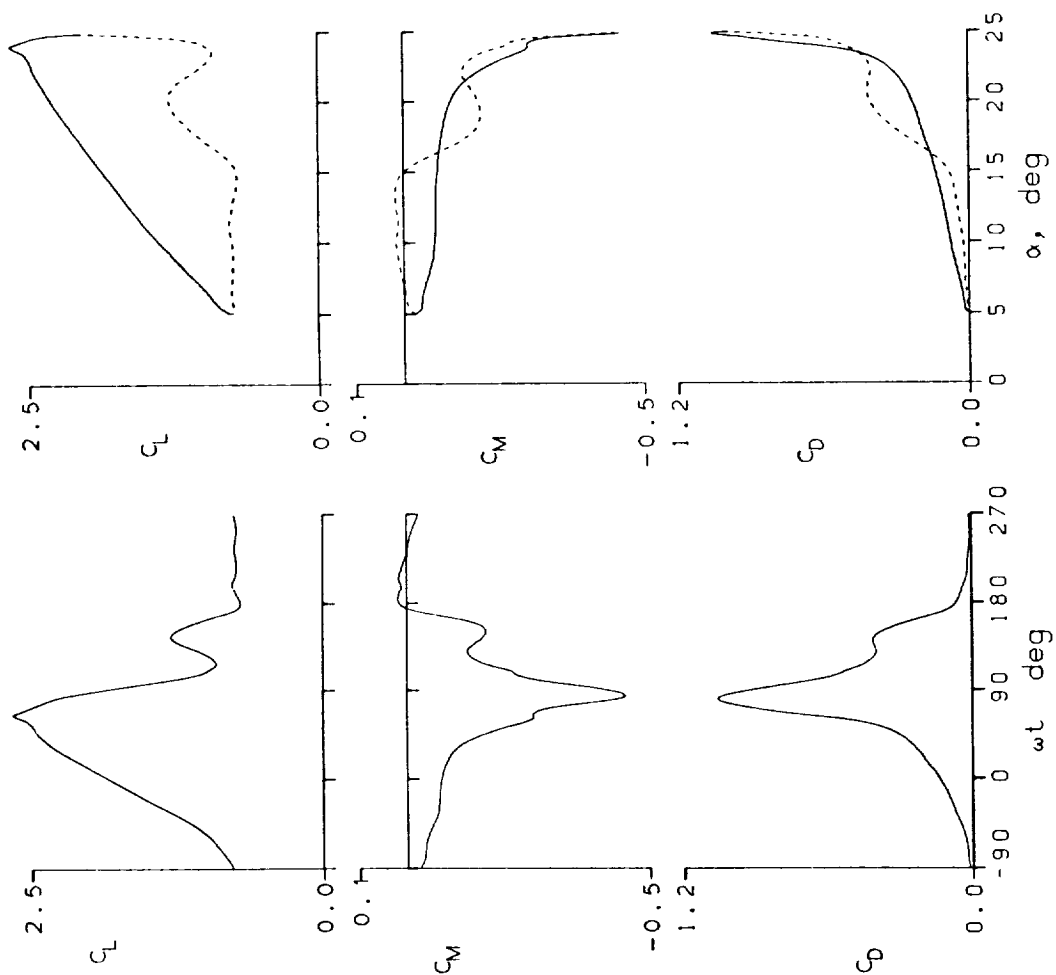


Figure 17.- Continued.

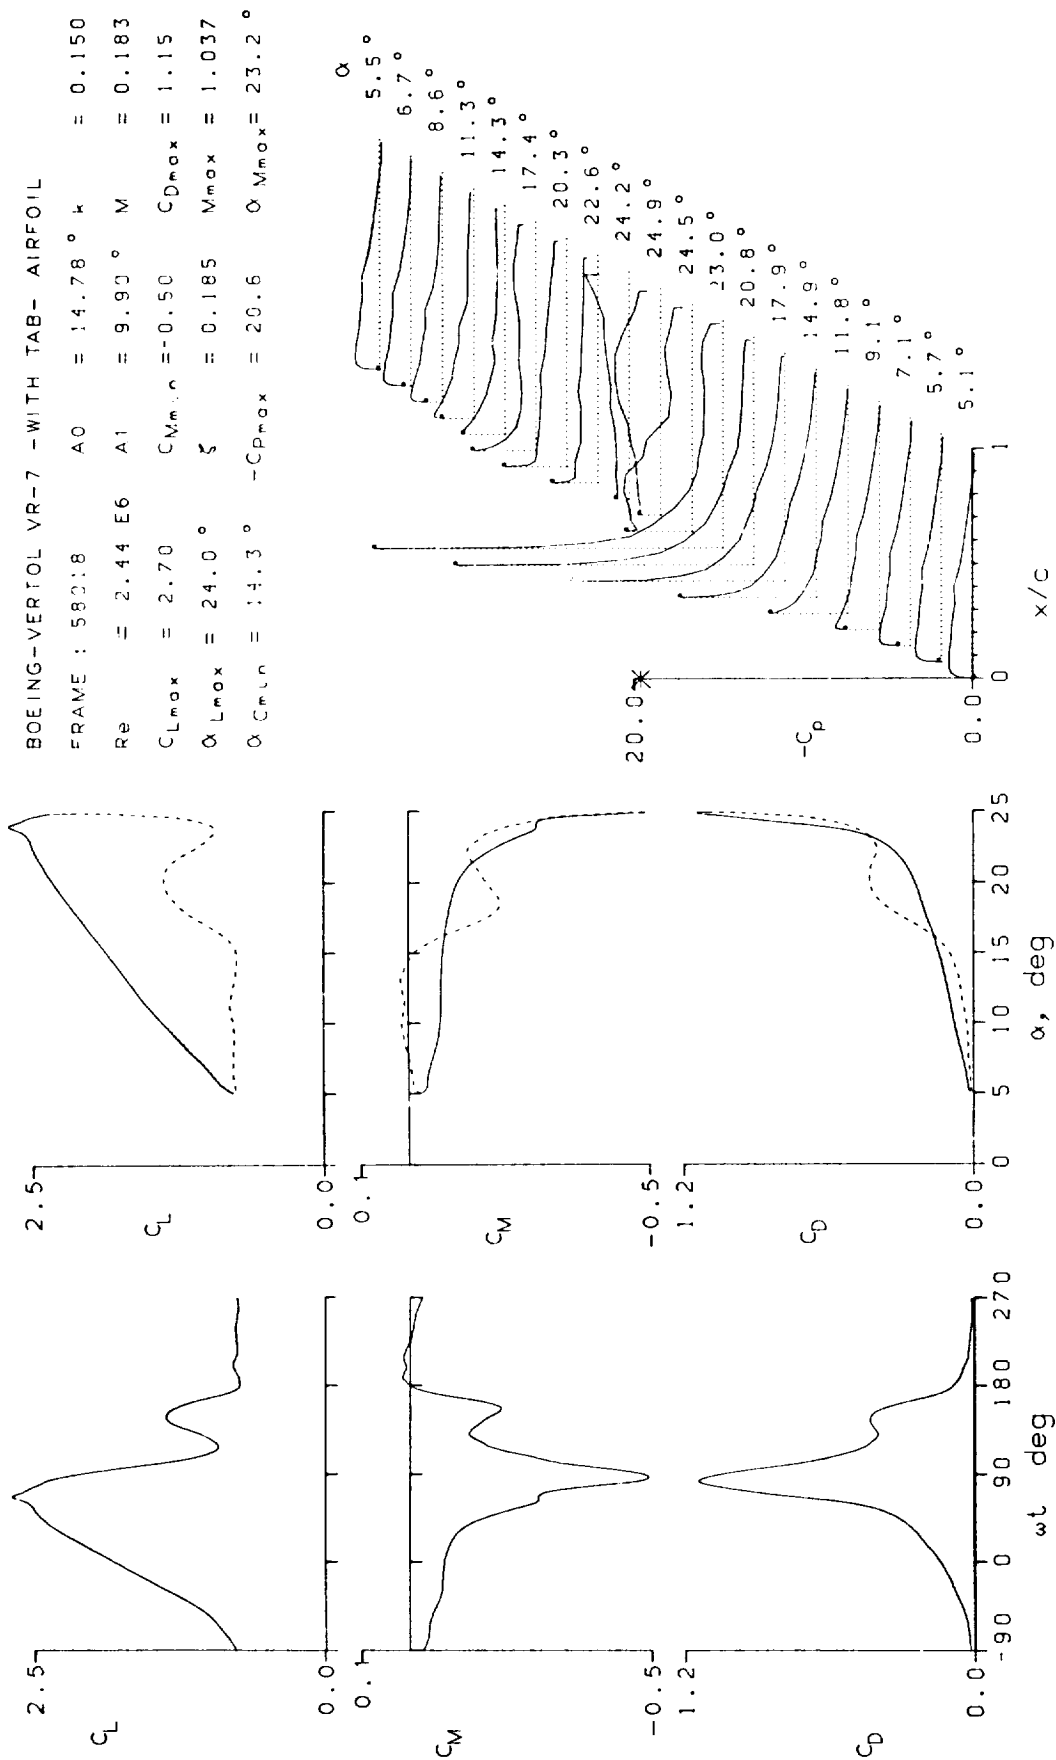


Figure 17.- Continued.

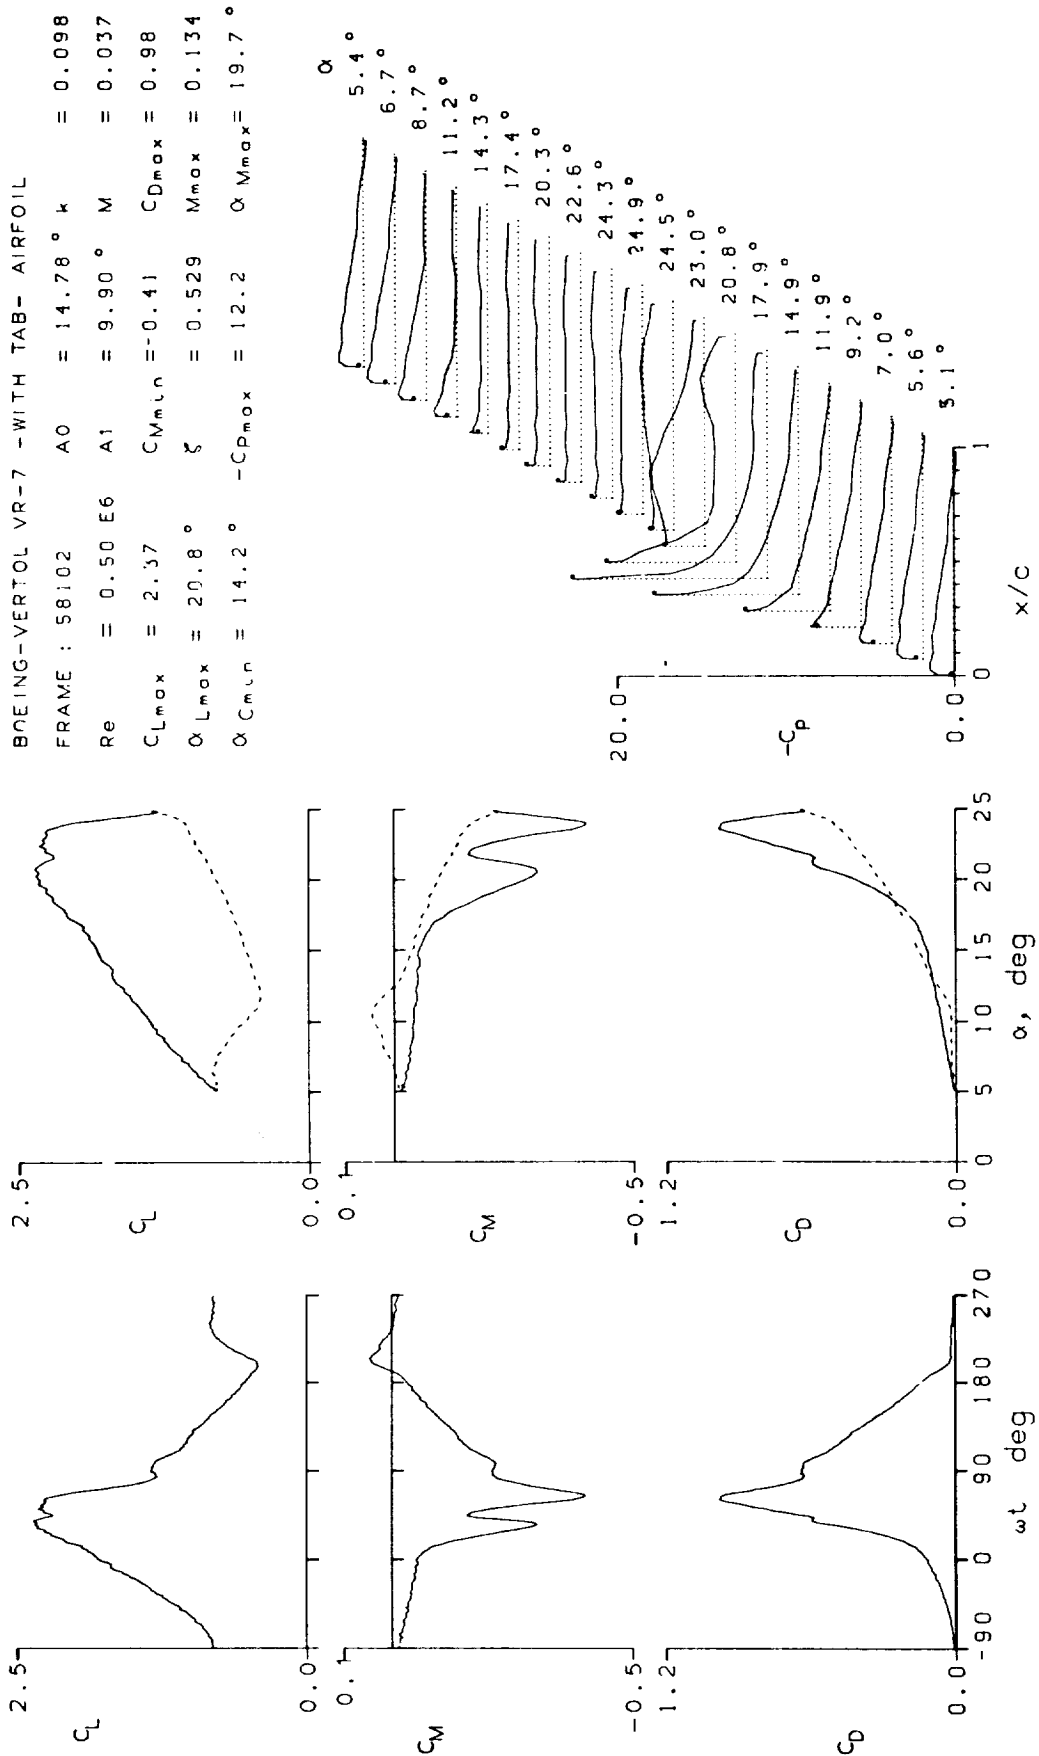


Figure 17.- Continued.

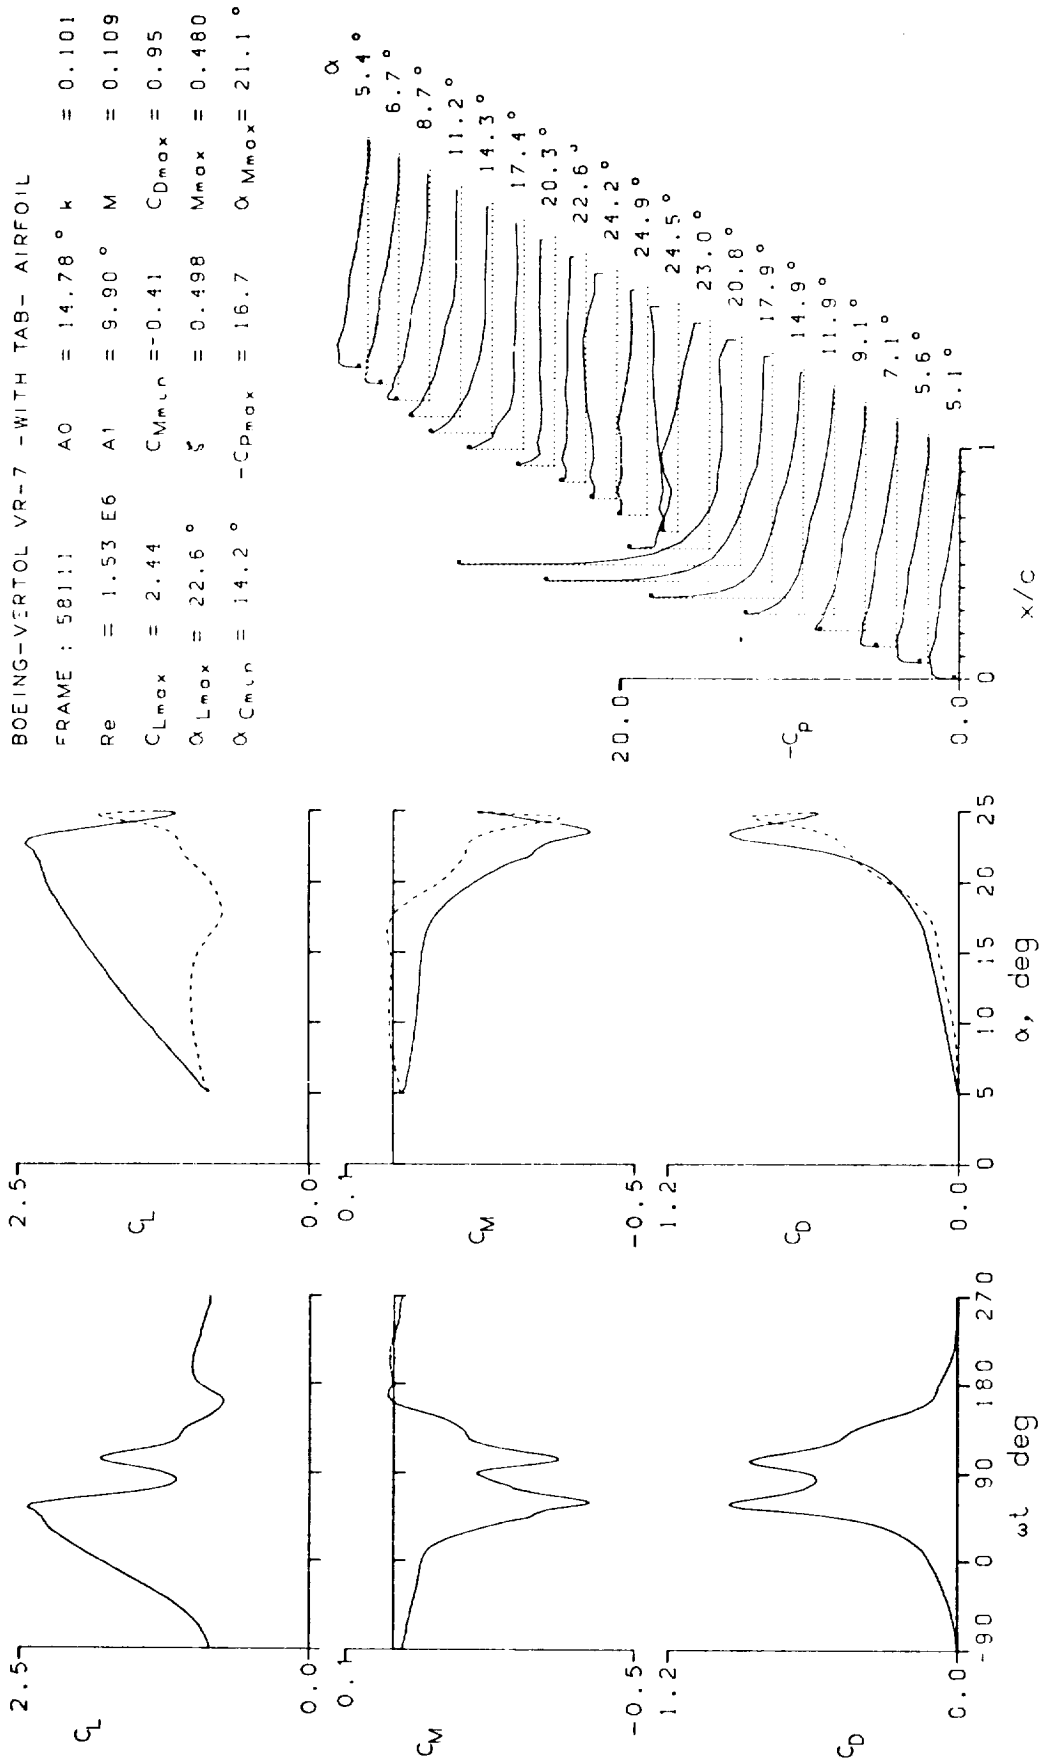


Figure 17.- Continued.

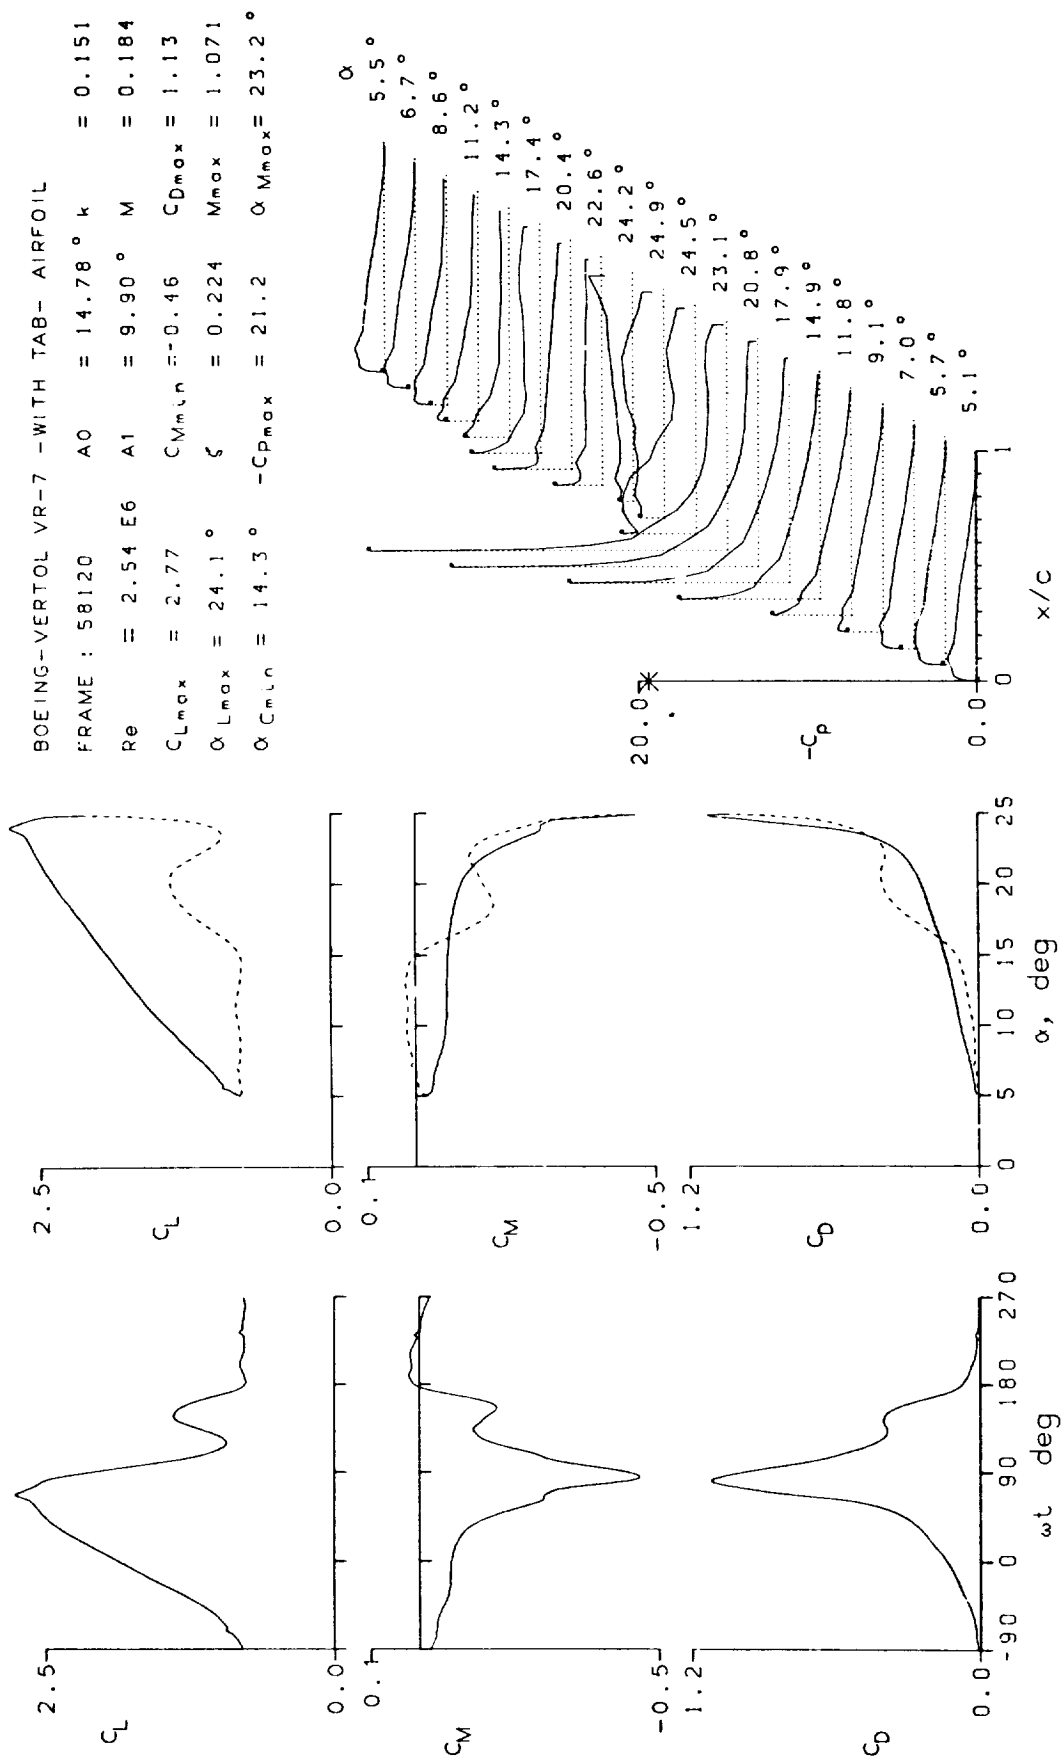


Figure 17.- Continued.

BOEING-VERTOL VR-7 -WITH TAB- AIRFOIL

FRAME : 58121	AO = 14.79 °	k = 0.101
Re = 2.53 E6	A1 = 9.90 °	M = 0.184
$C_{Lmax} = 2.43$	$C_{Mmin} = -0.42$	$C_{Dmax} = 0.98$
$\alpha_{Lmax} = 23.1 °$	$\xi = 0.391$	$M_{max} = 0.962$
$\alpha_{Cmin} = 14.3 °$	$-C_{pmax} = 18.4$	$\alpha_{Mmax} = 21.8 °$

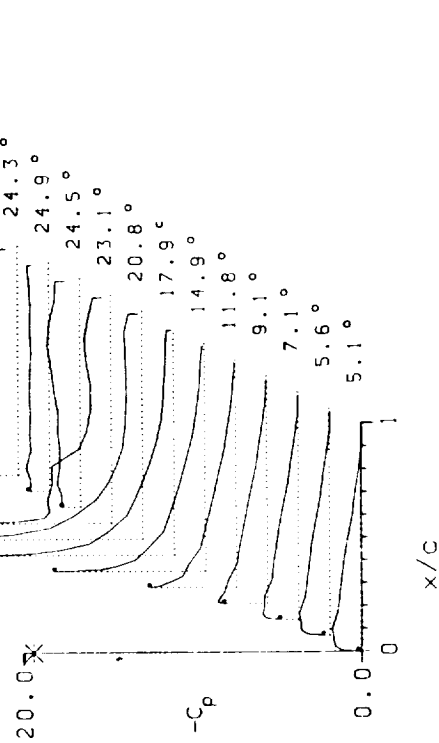
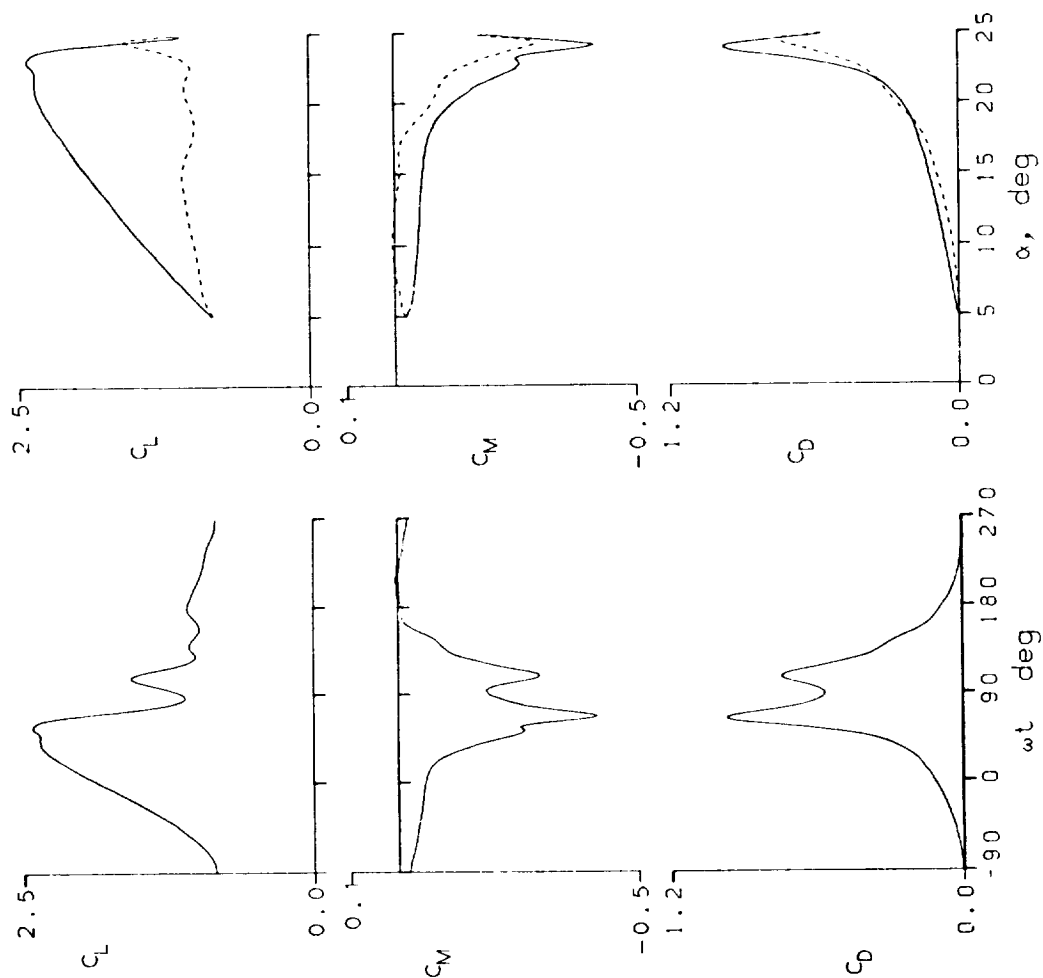


Figure 17.- Continued.

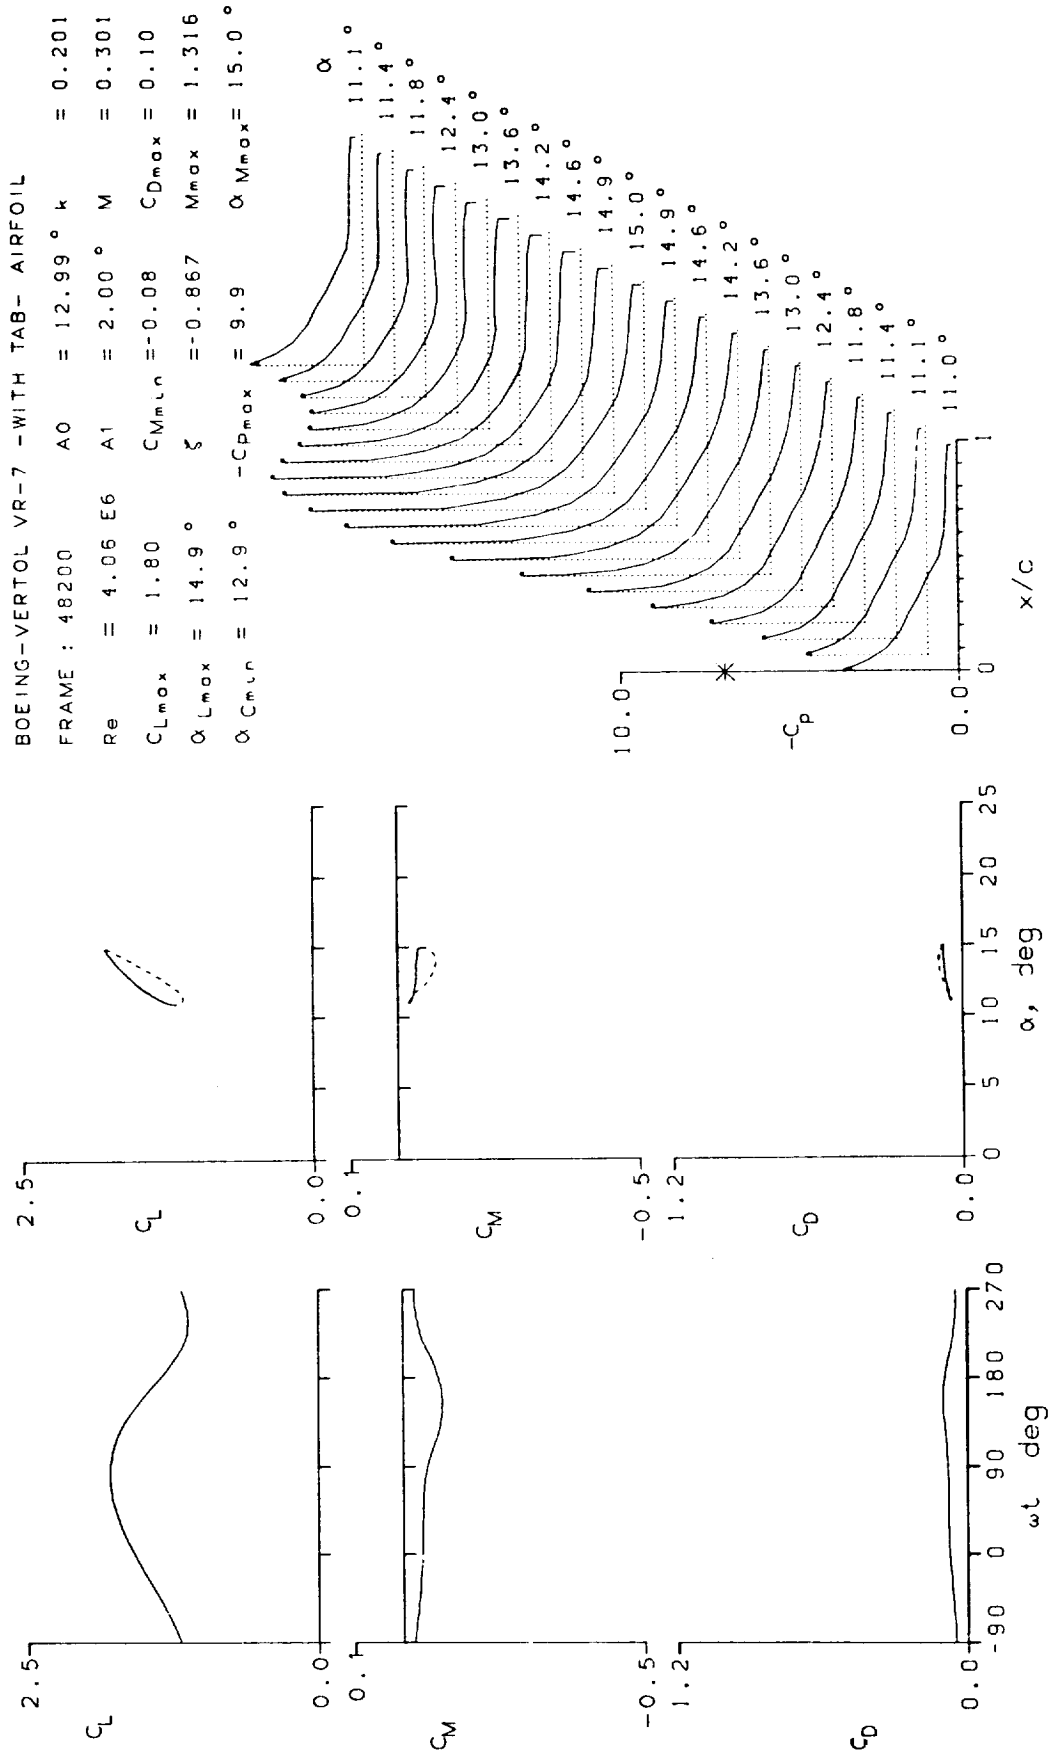


Figure 17.- Concluded.

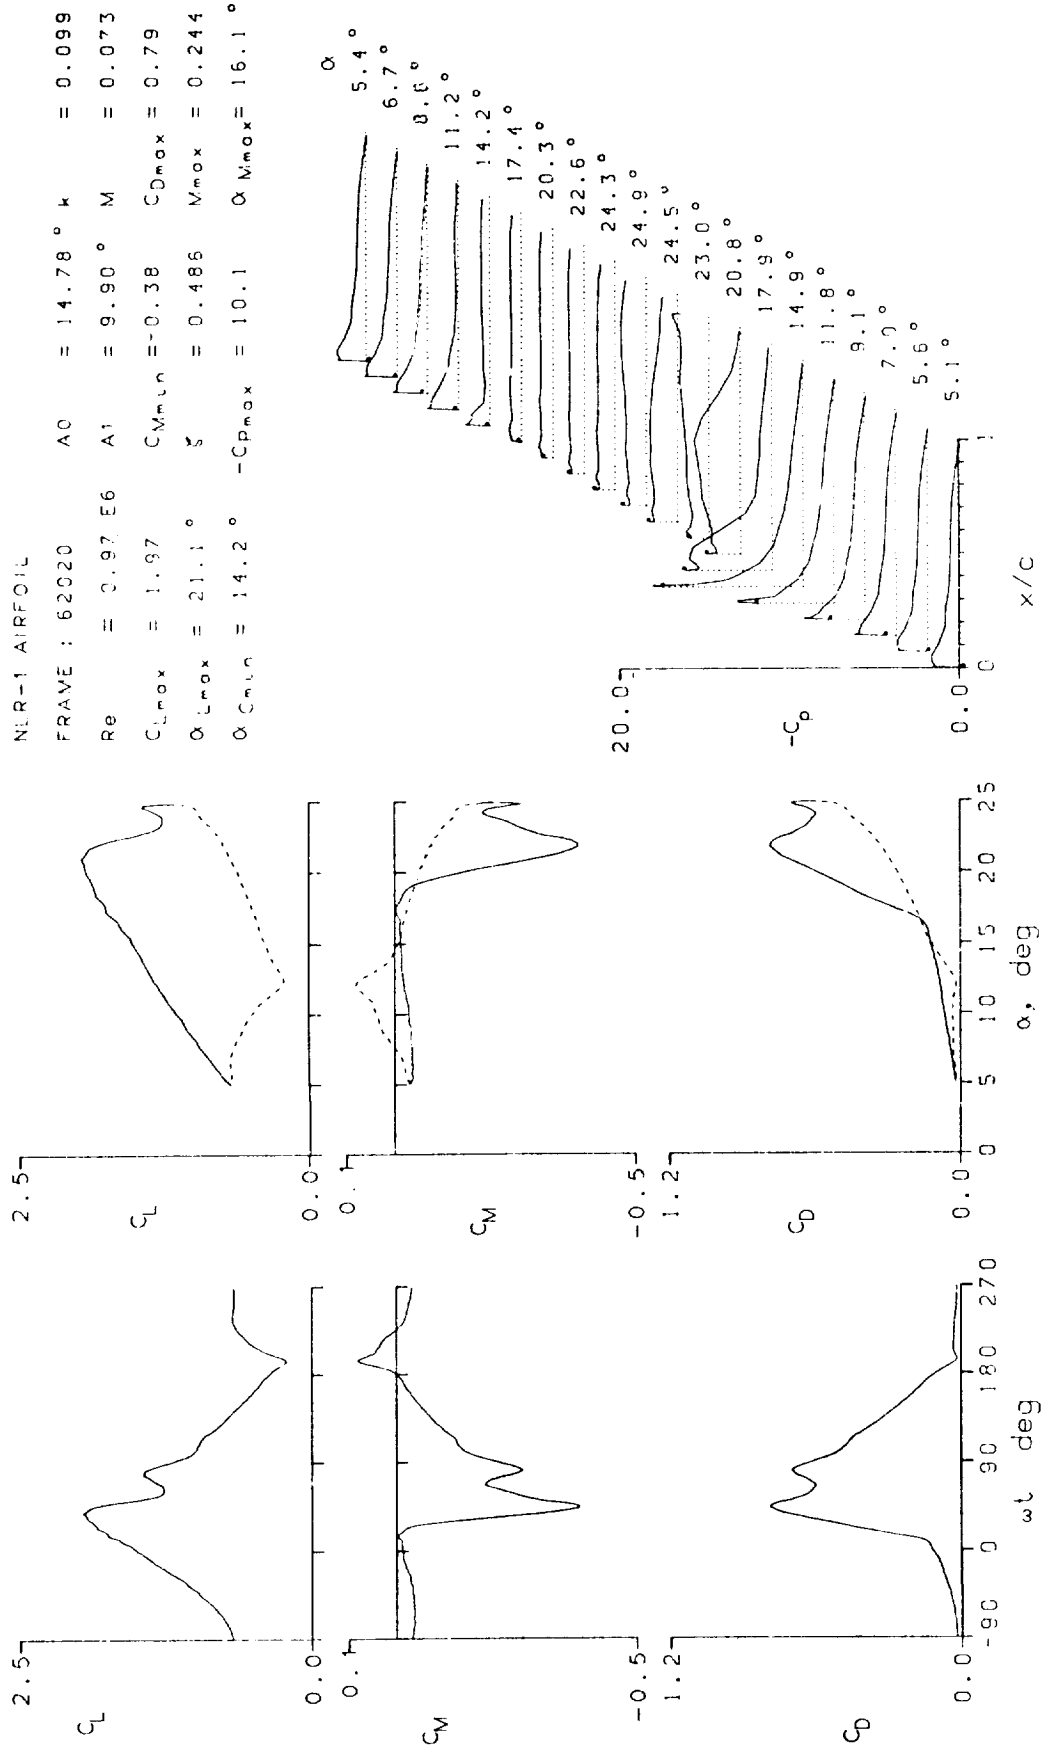


Figure 18.- Dynamic data for NLR-1 airfoil.

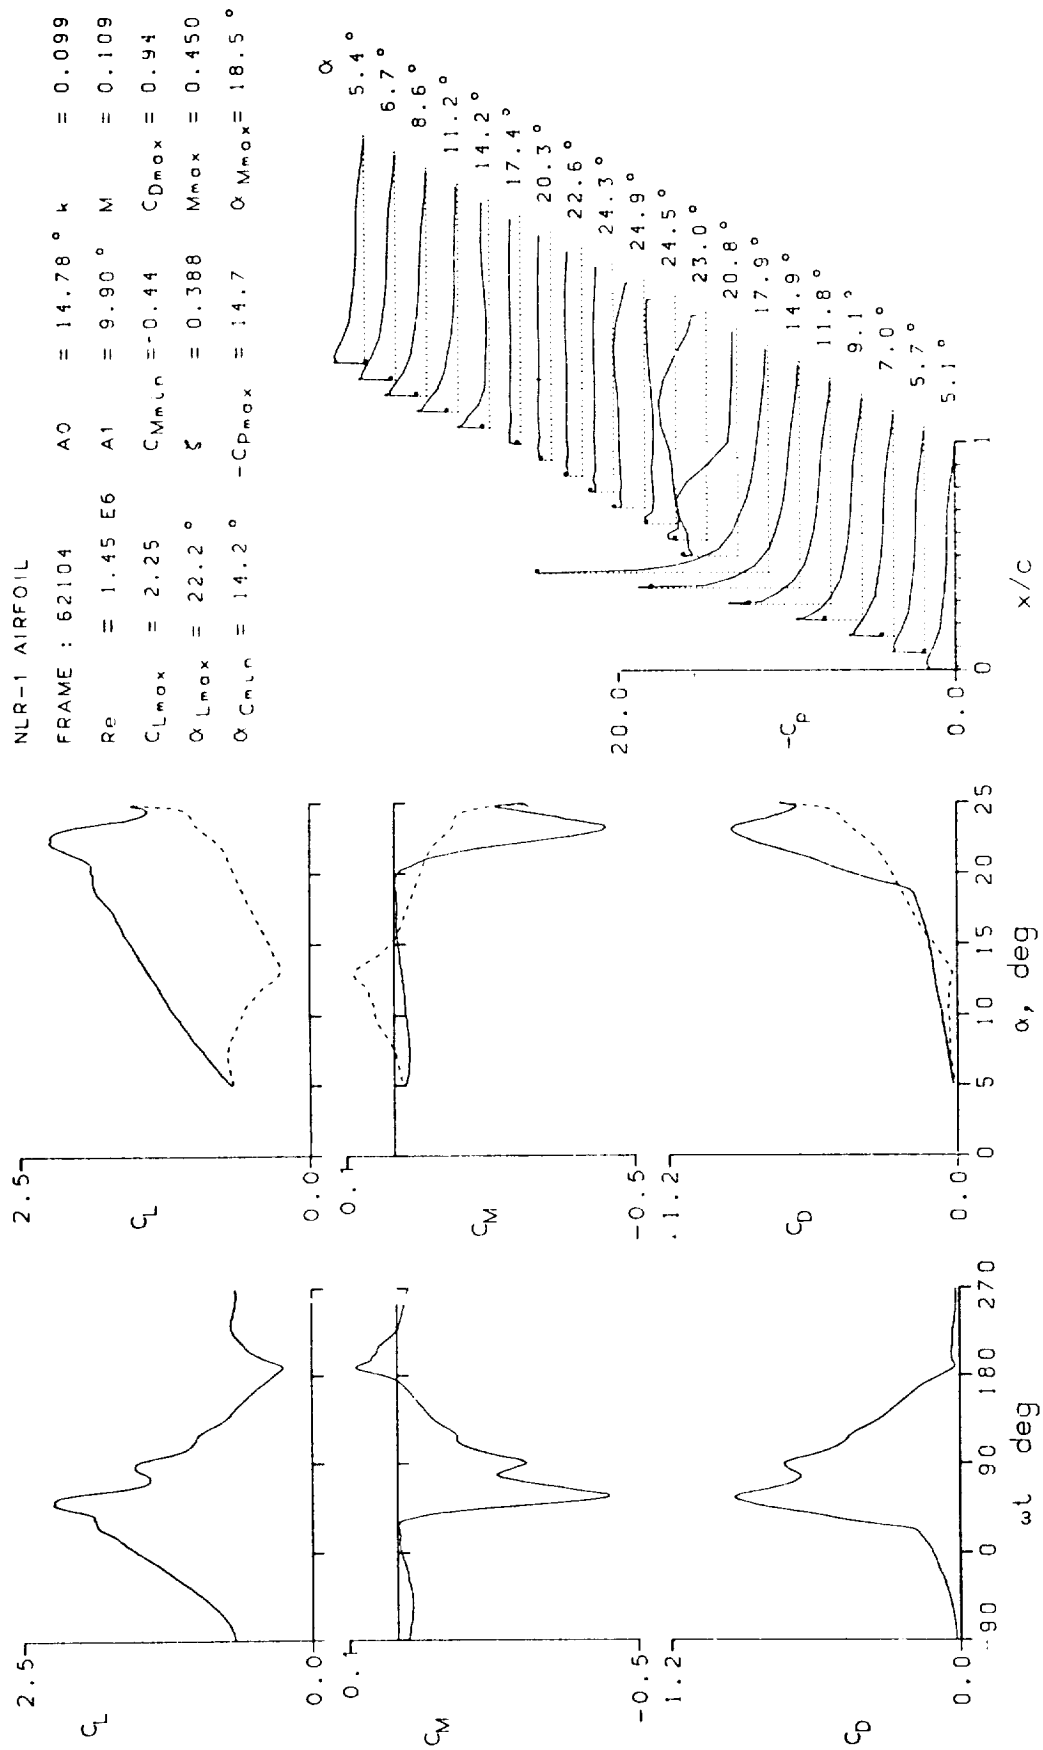
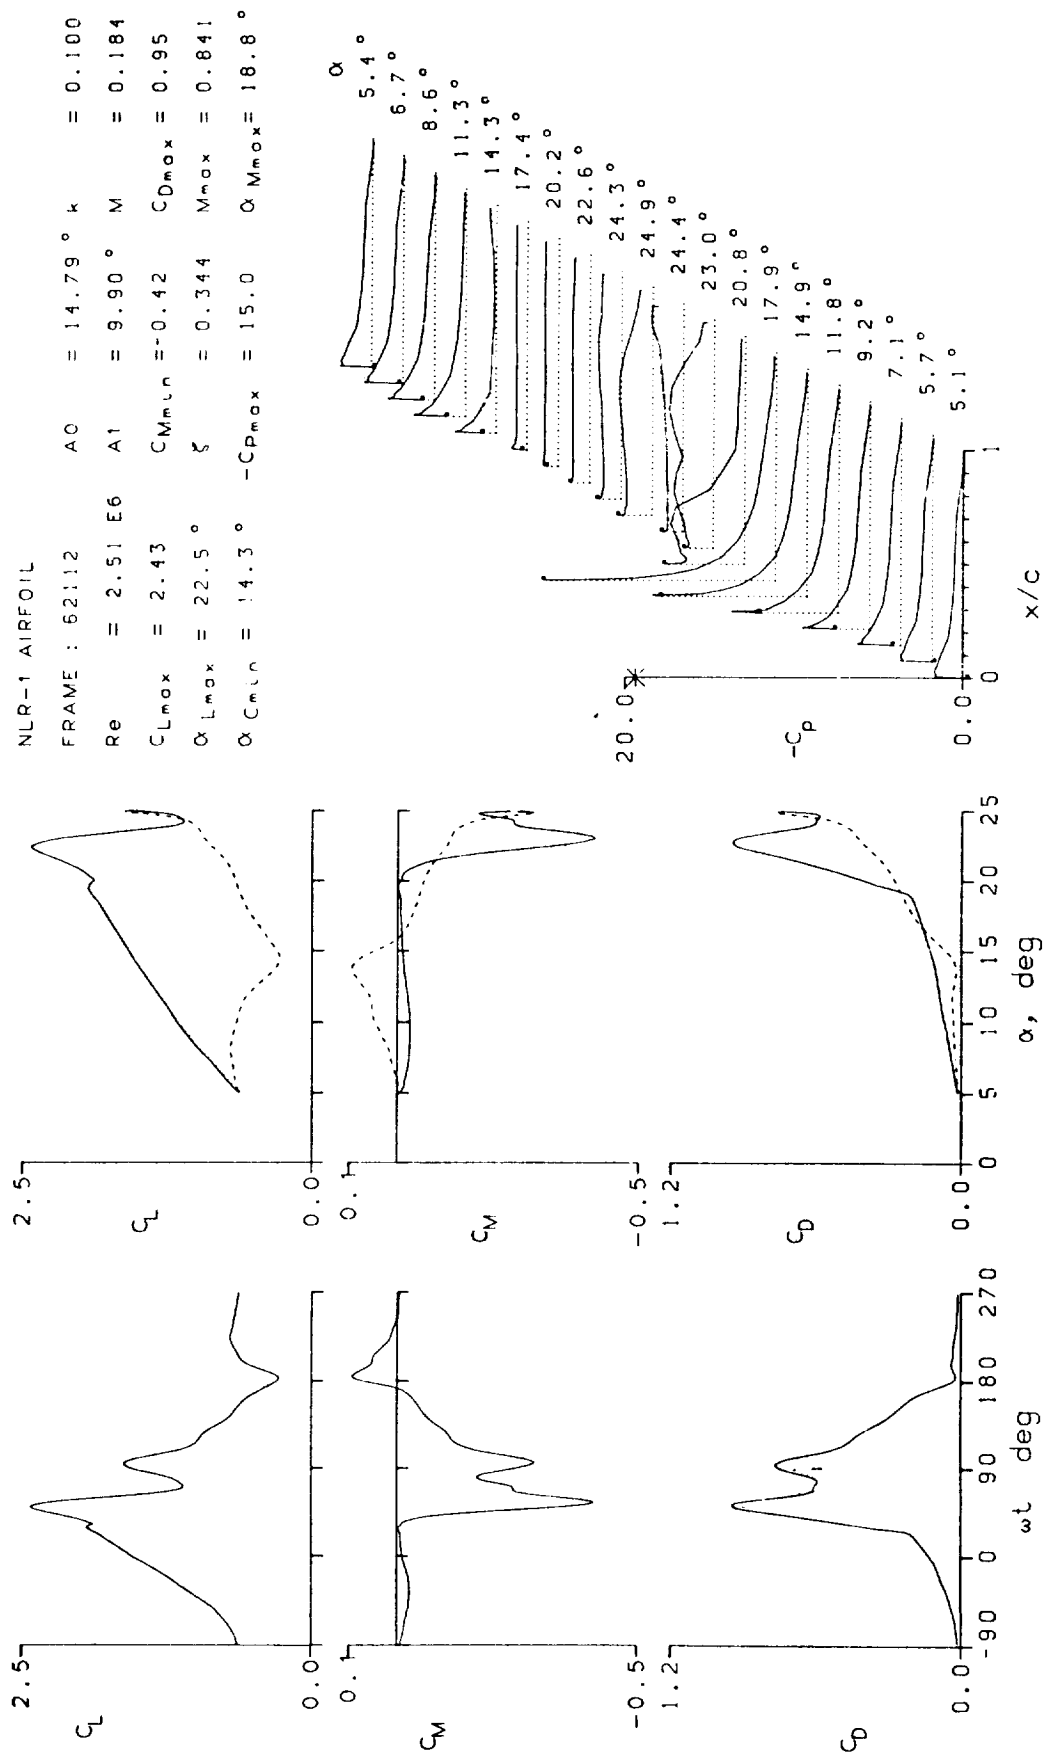


Figure 18.- Continued.



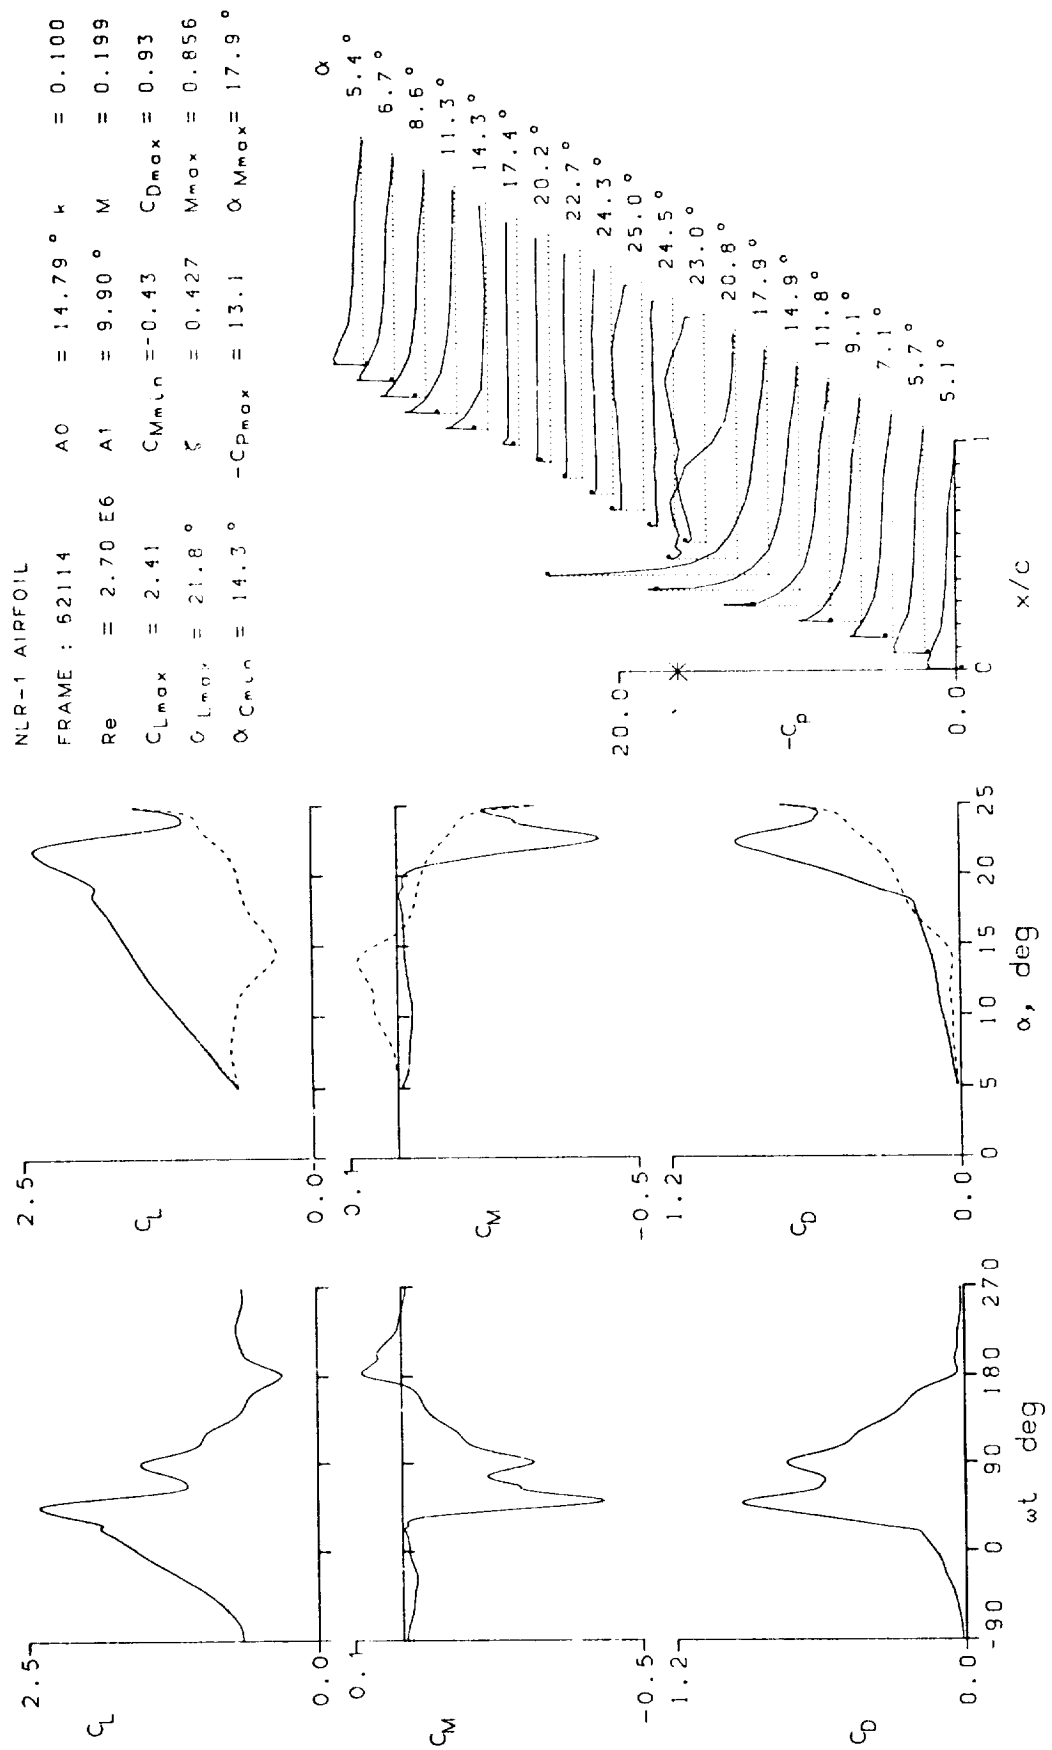


Figure 18.- Continued.

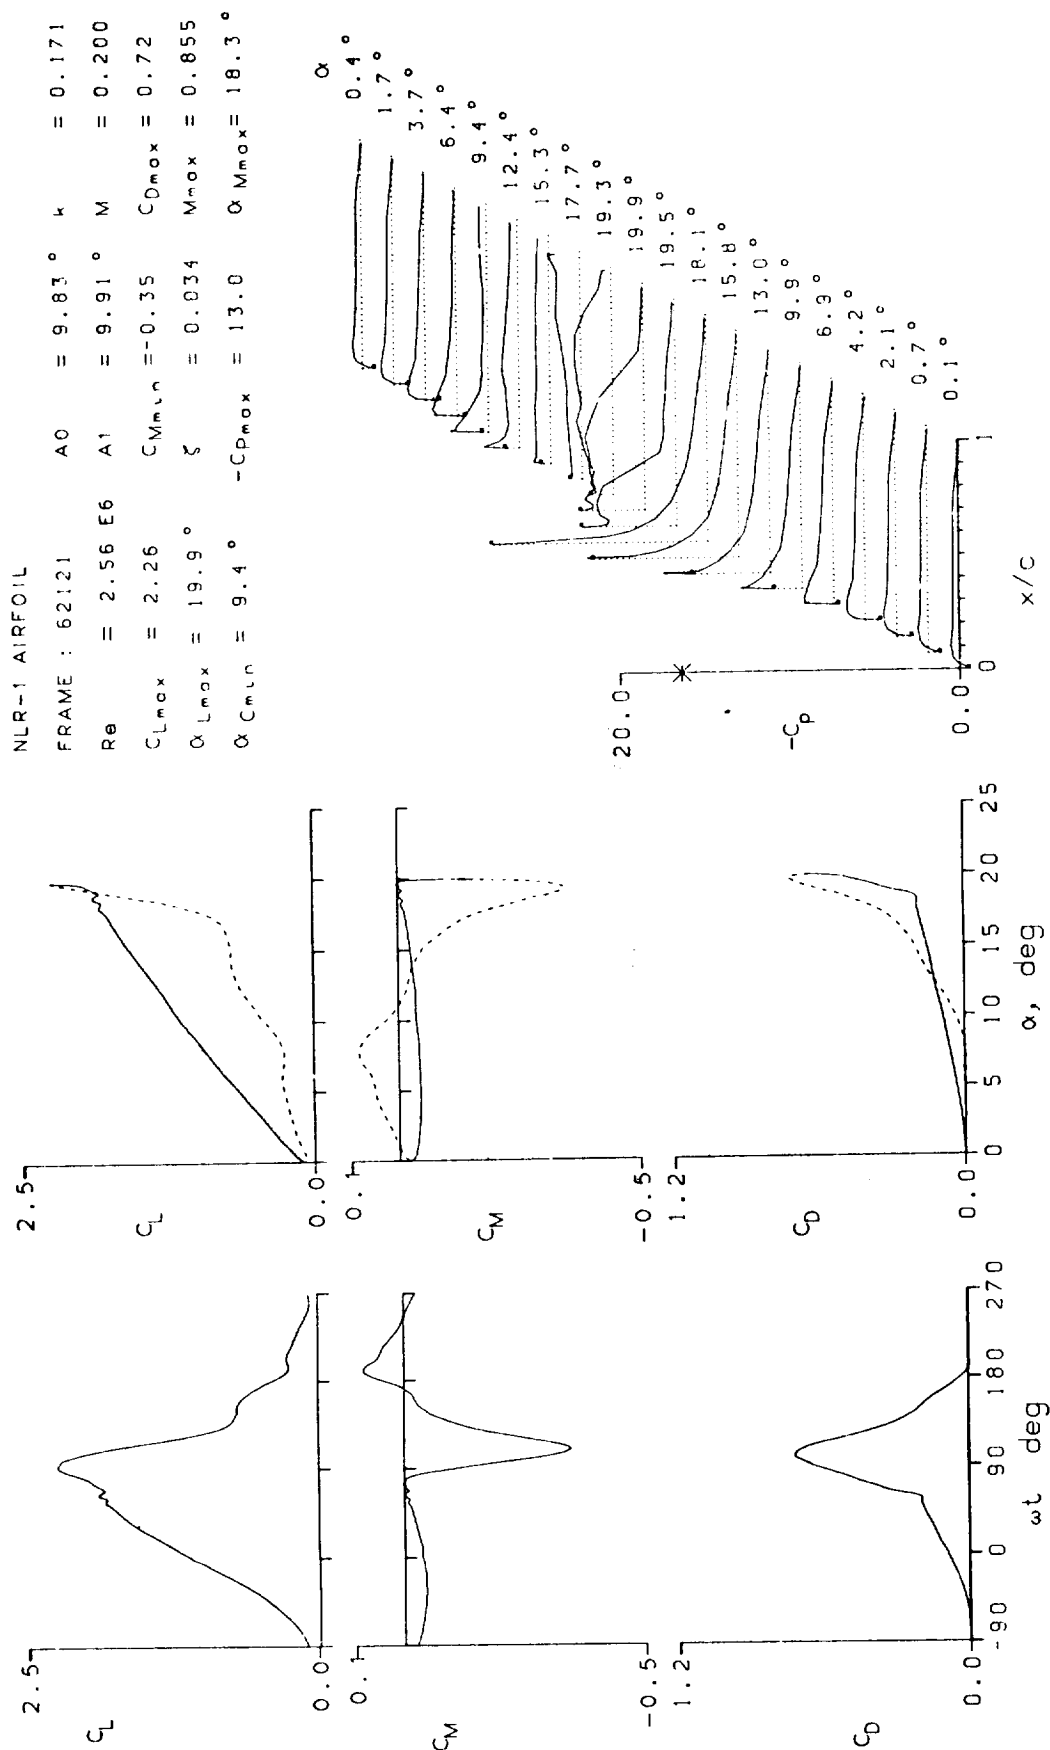


Figure 18.- Continued.

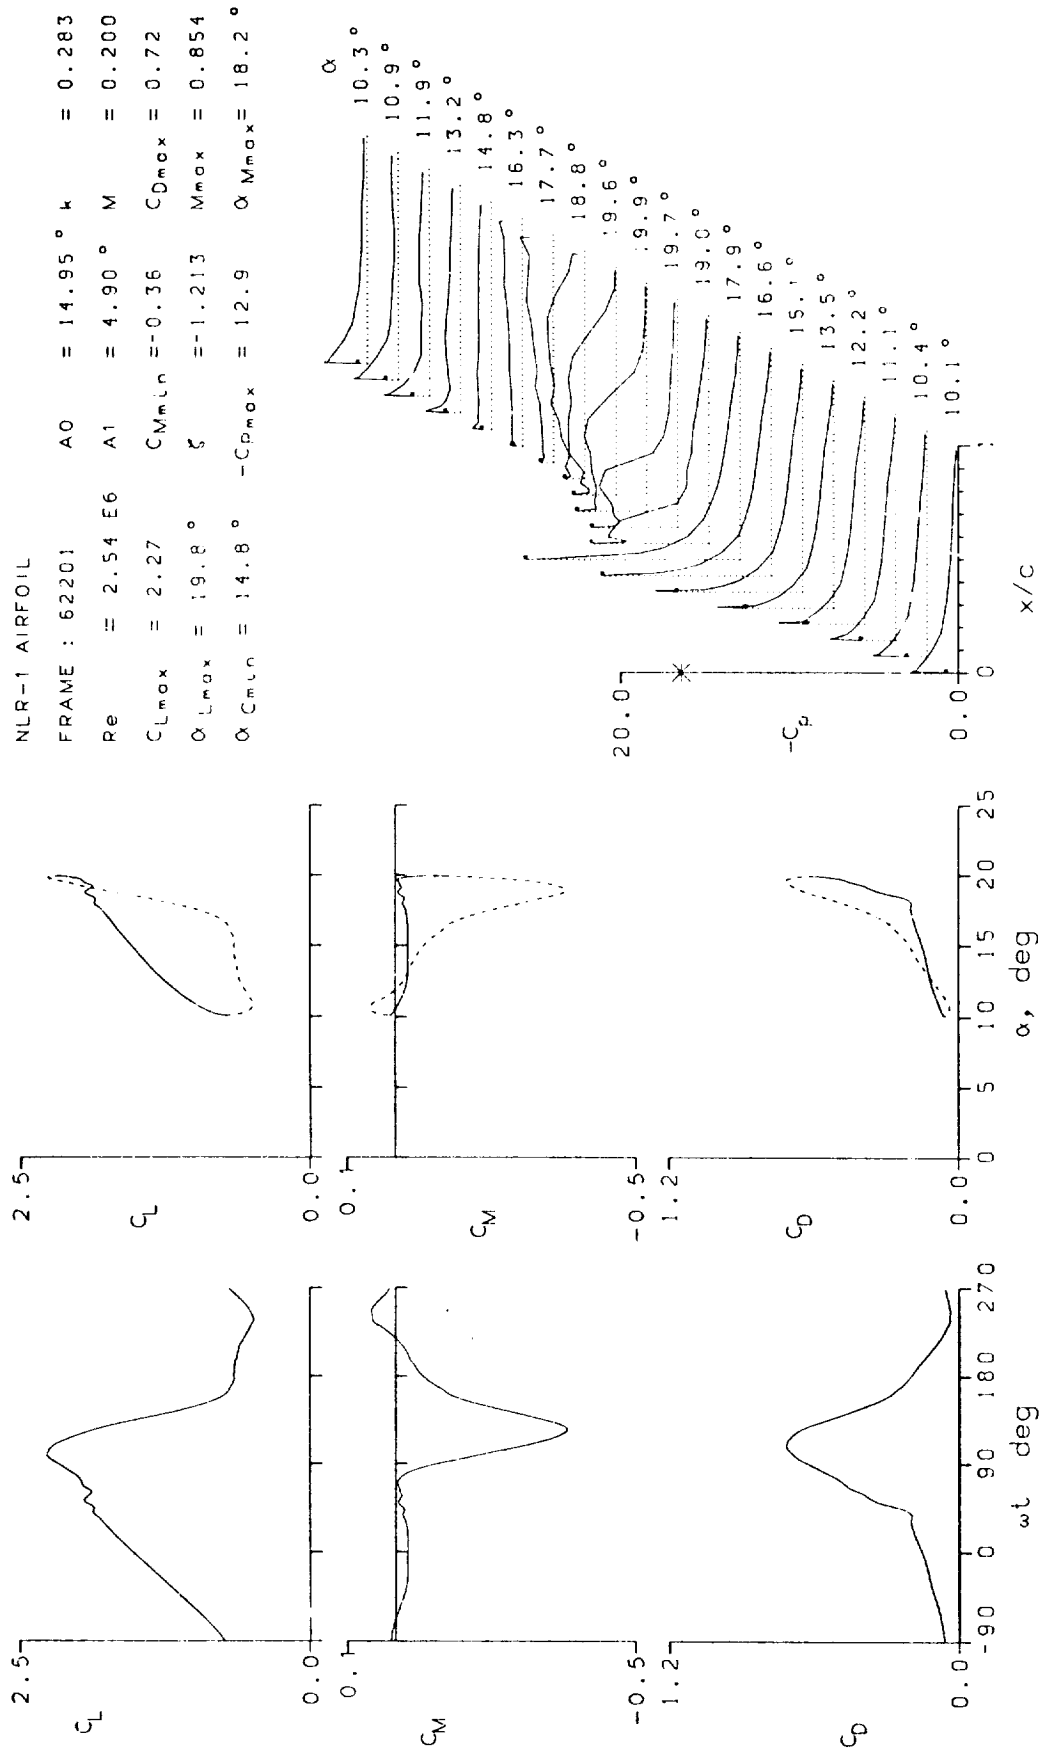


Figure 18.- Continued.

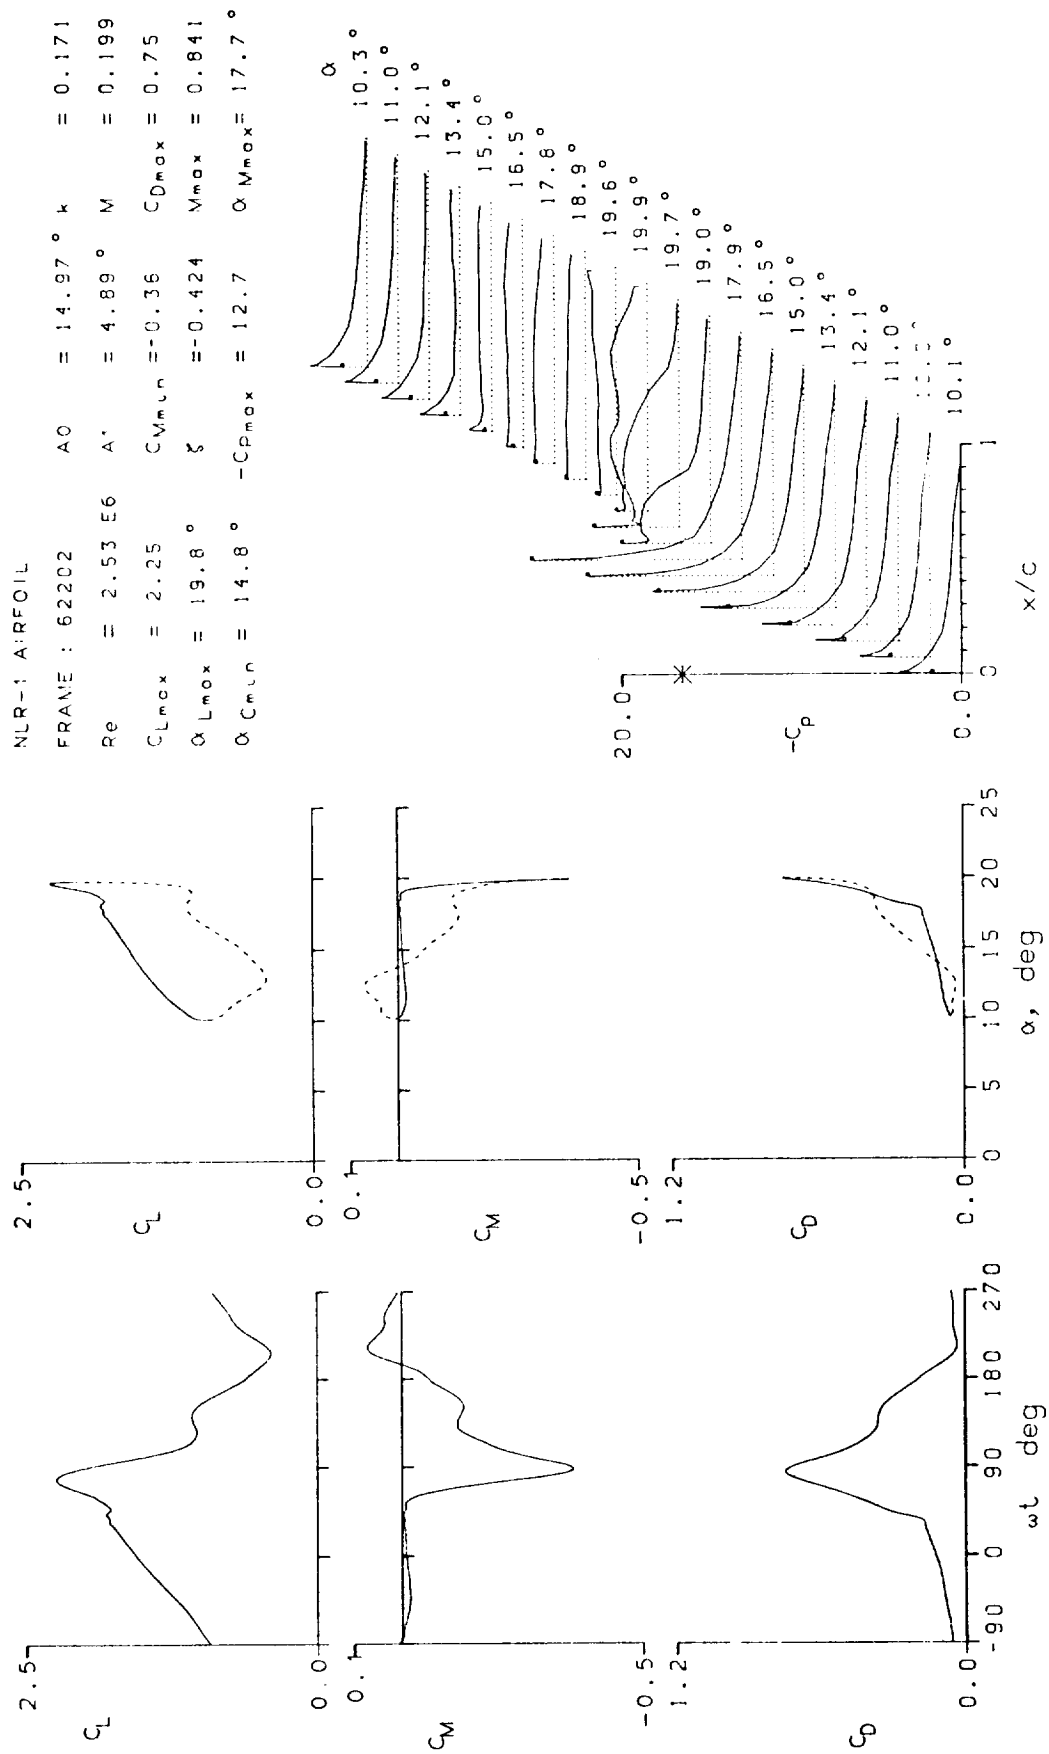
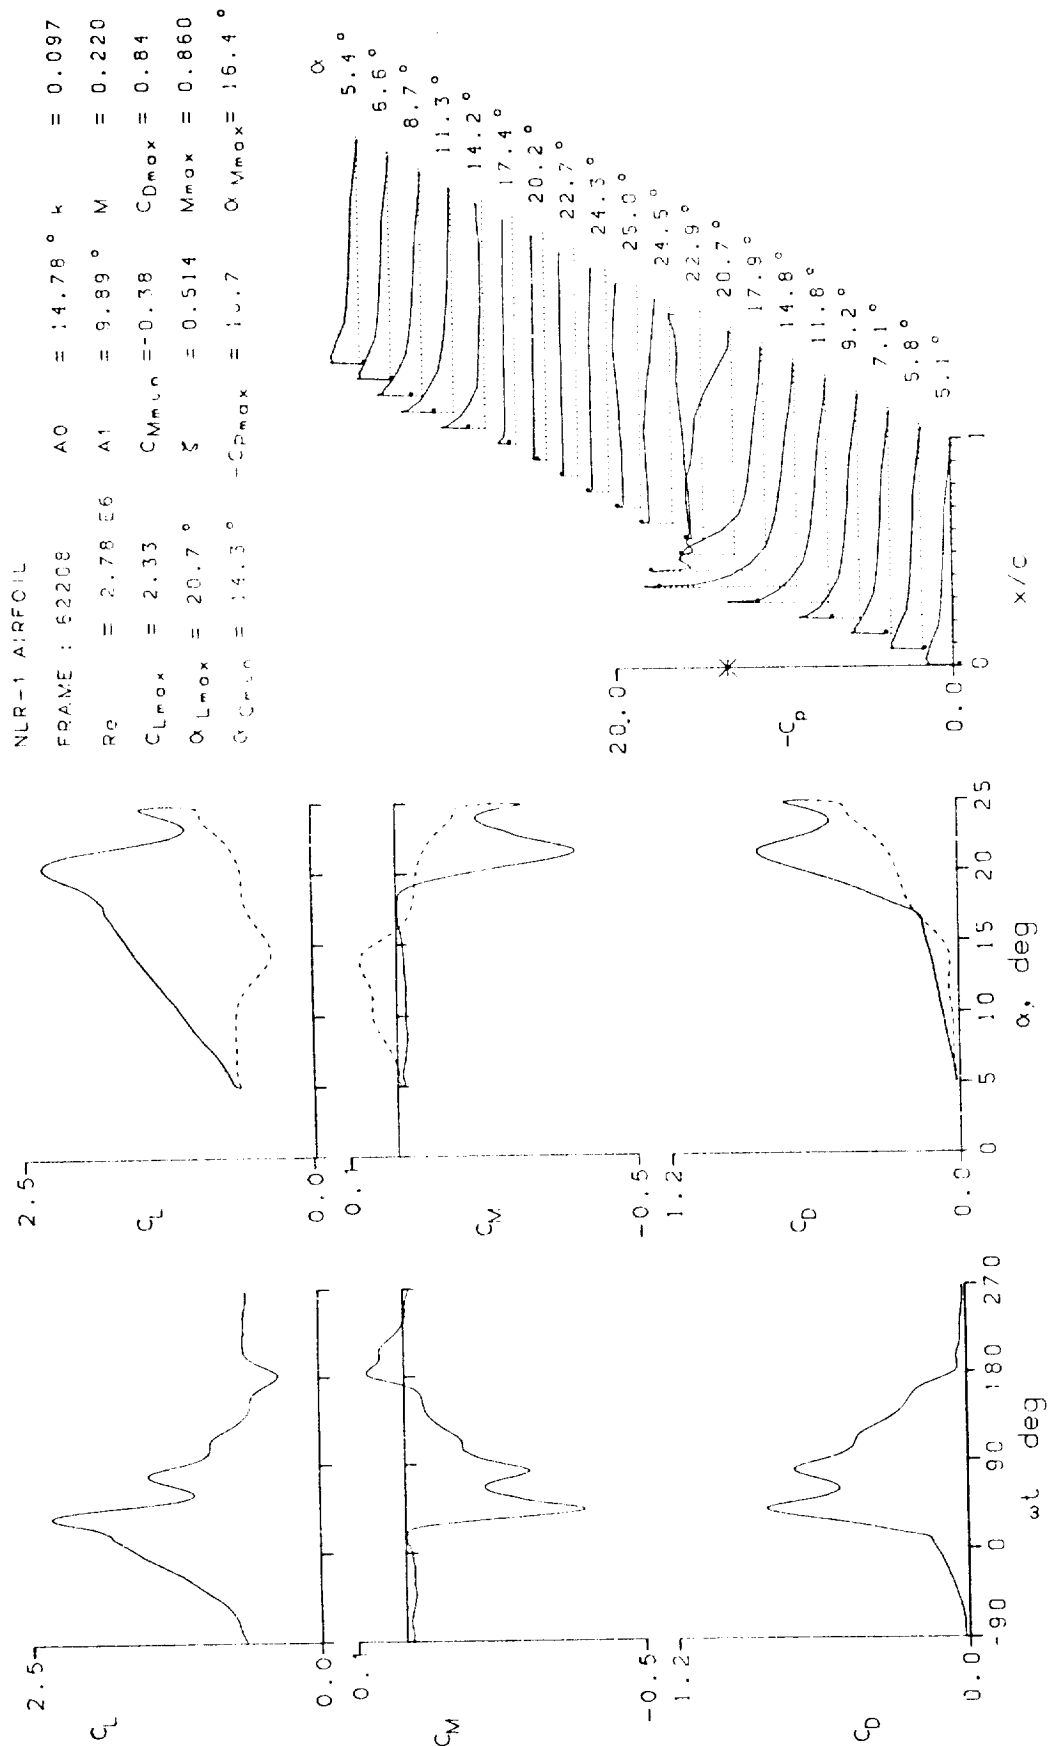


Figure 18.- Continued.



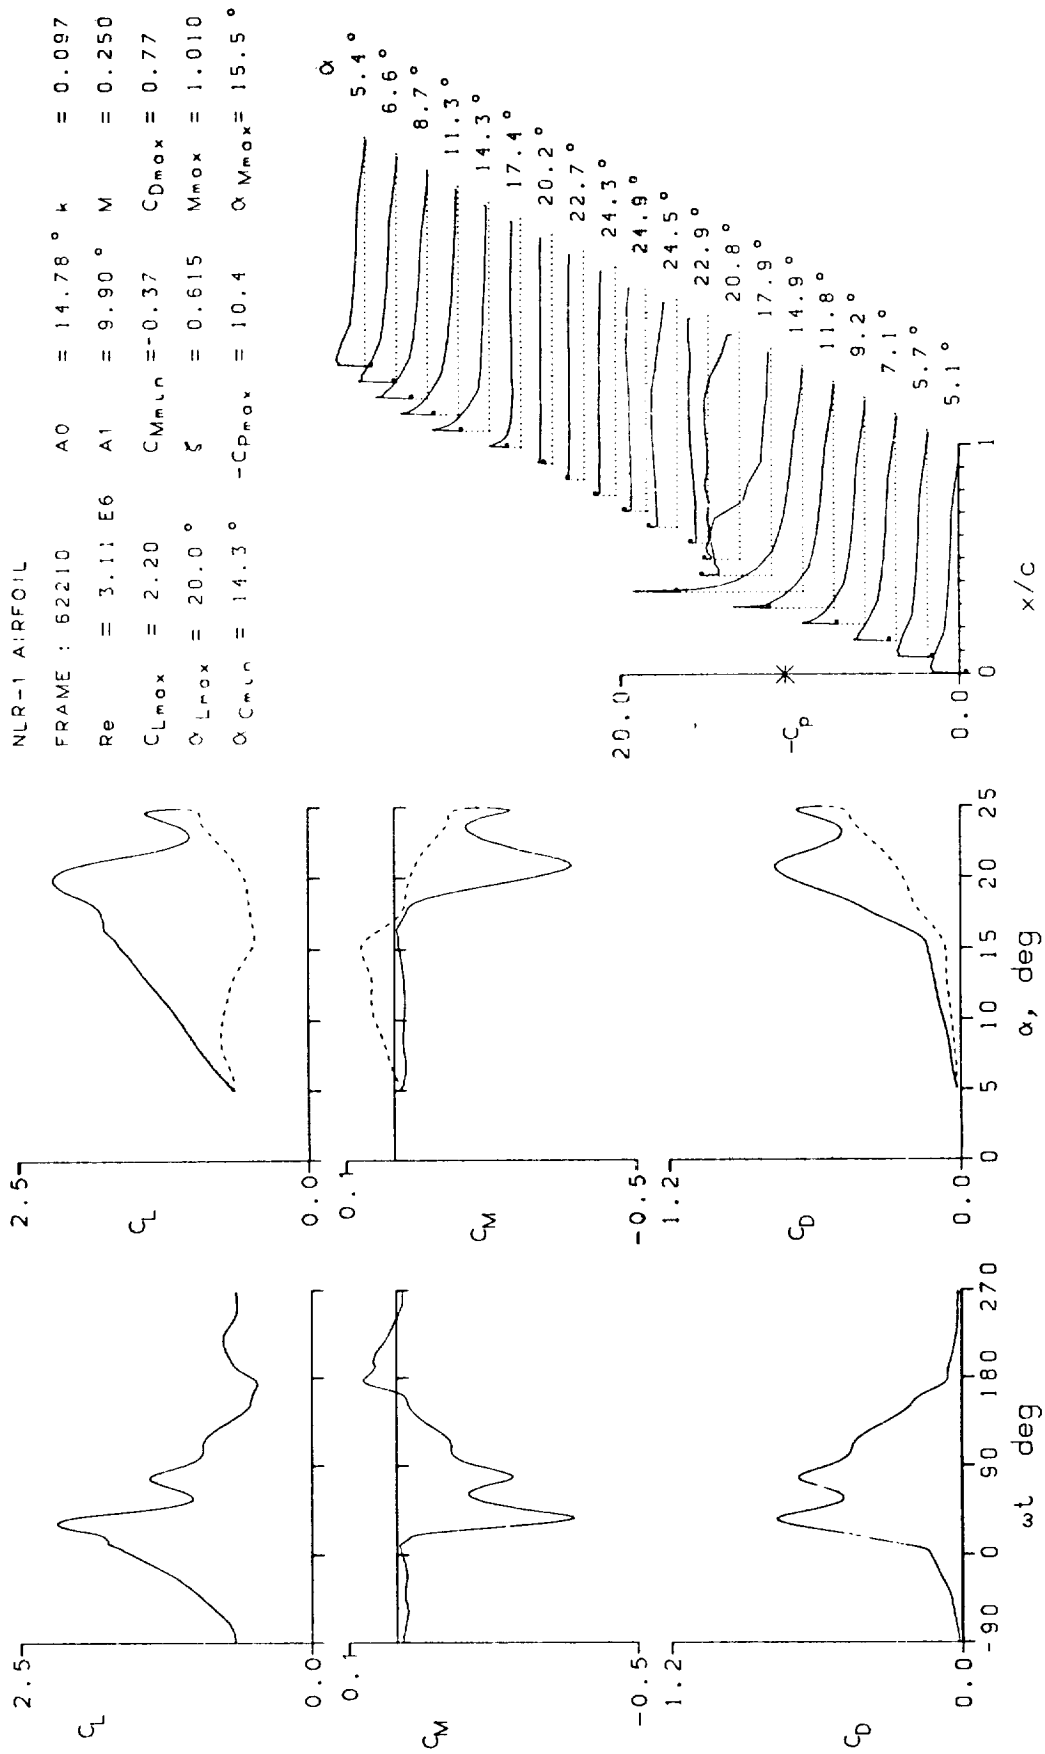
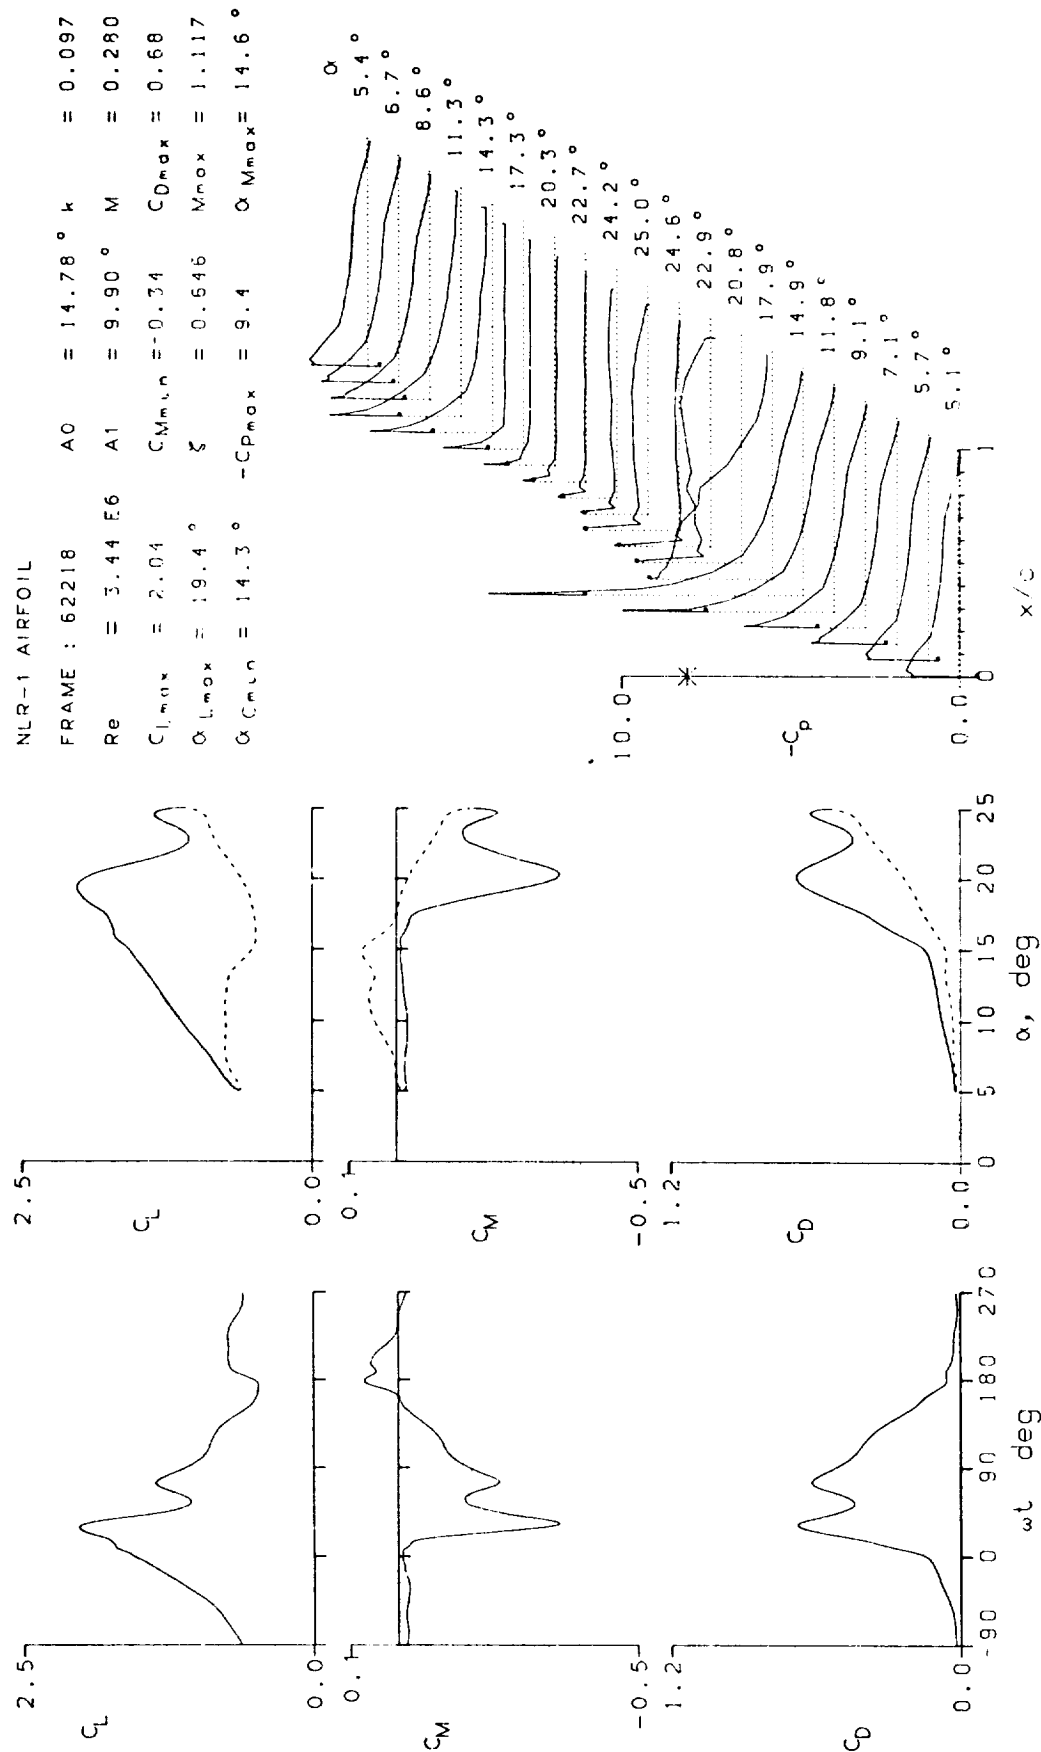


Figure 18.- Continued.



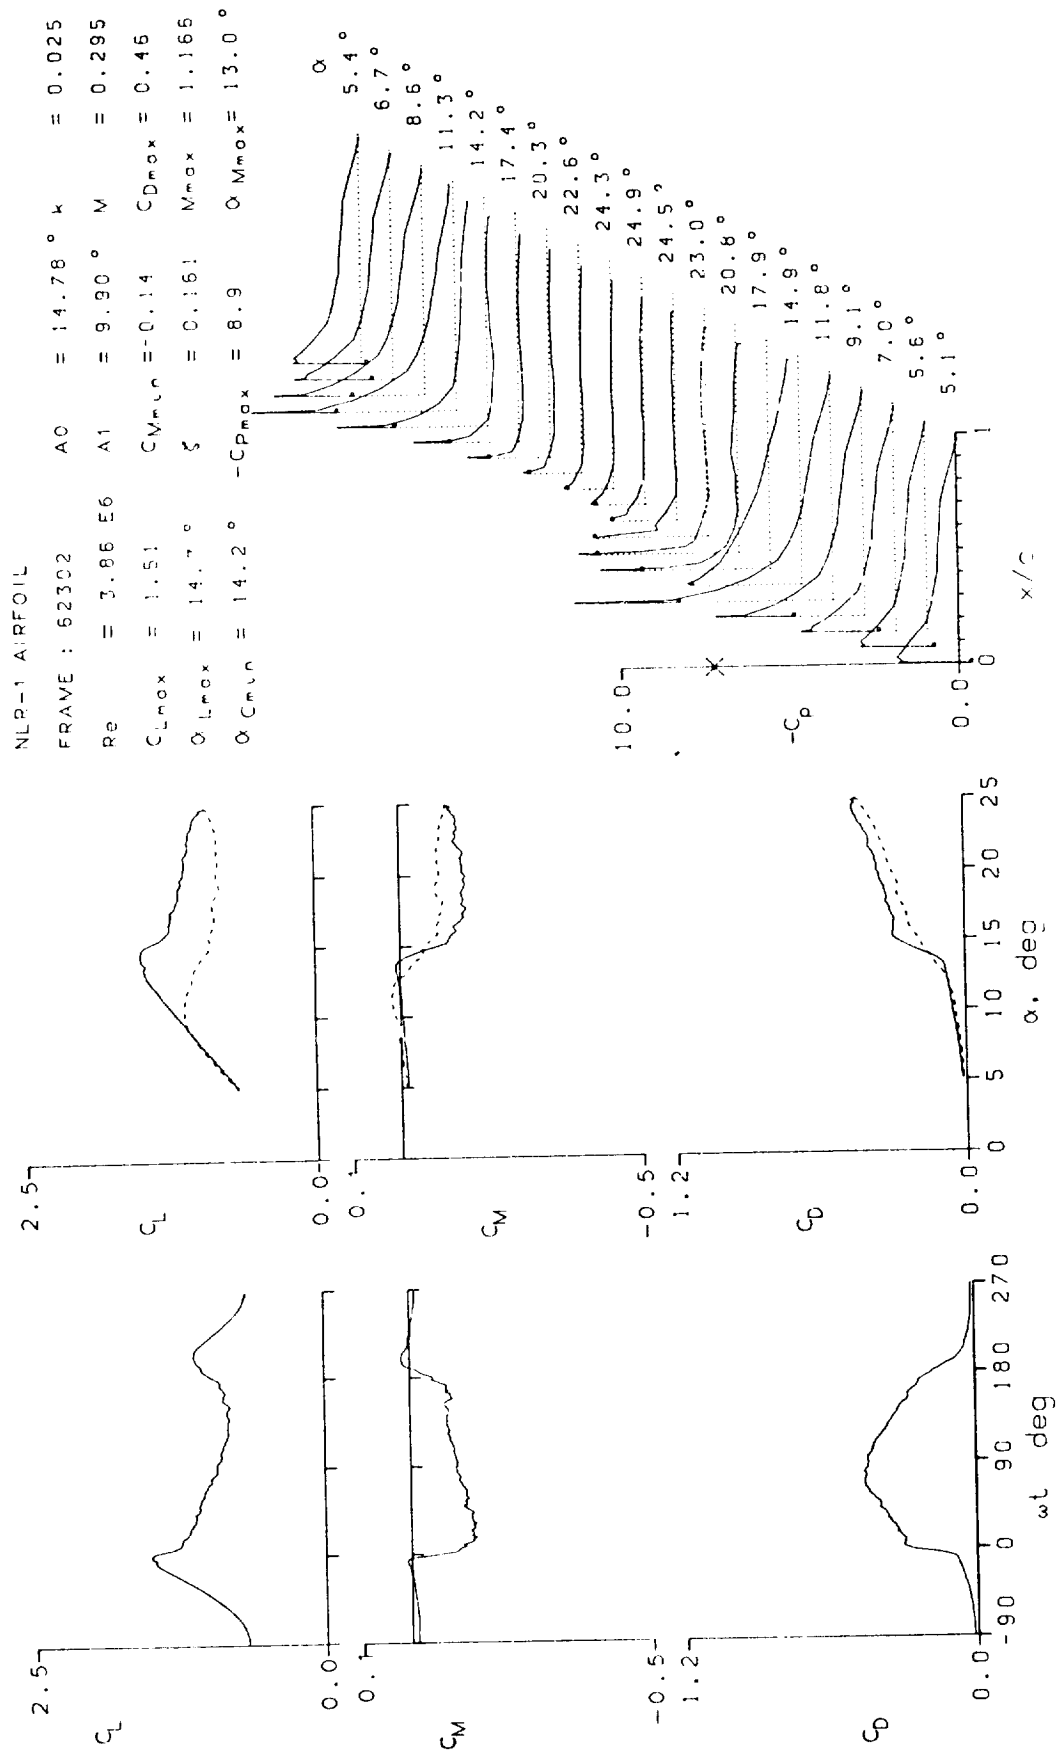


Figure 18.- Continued.

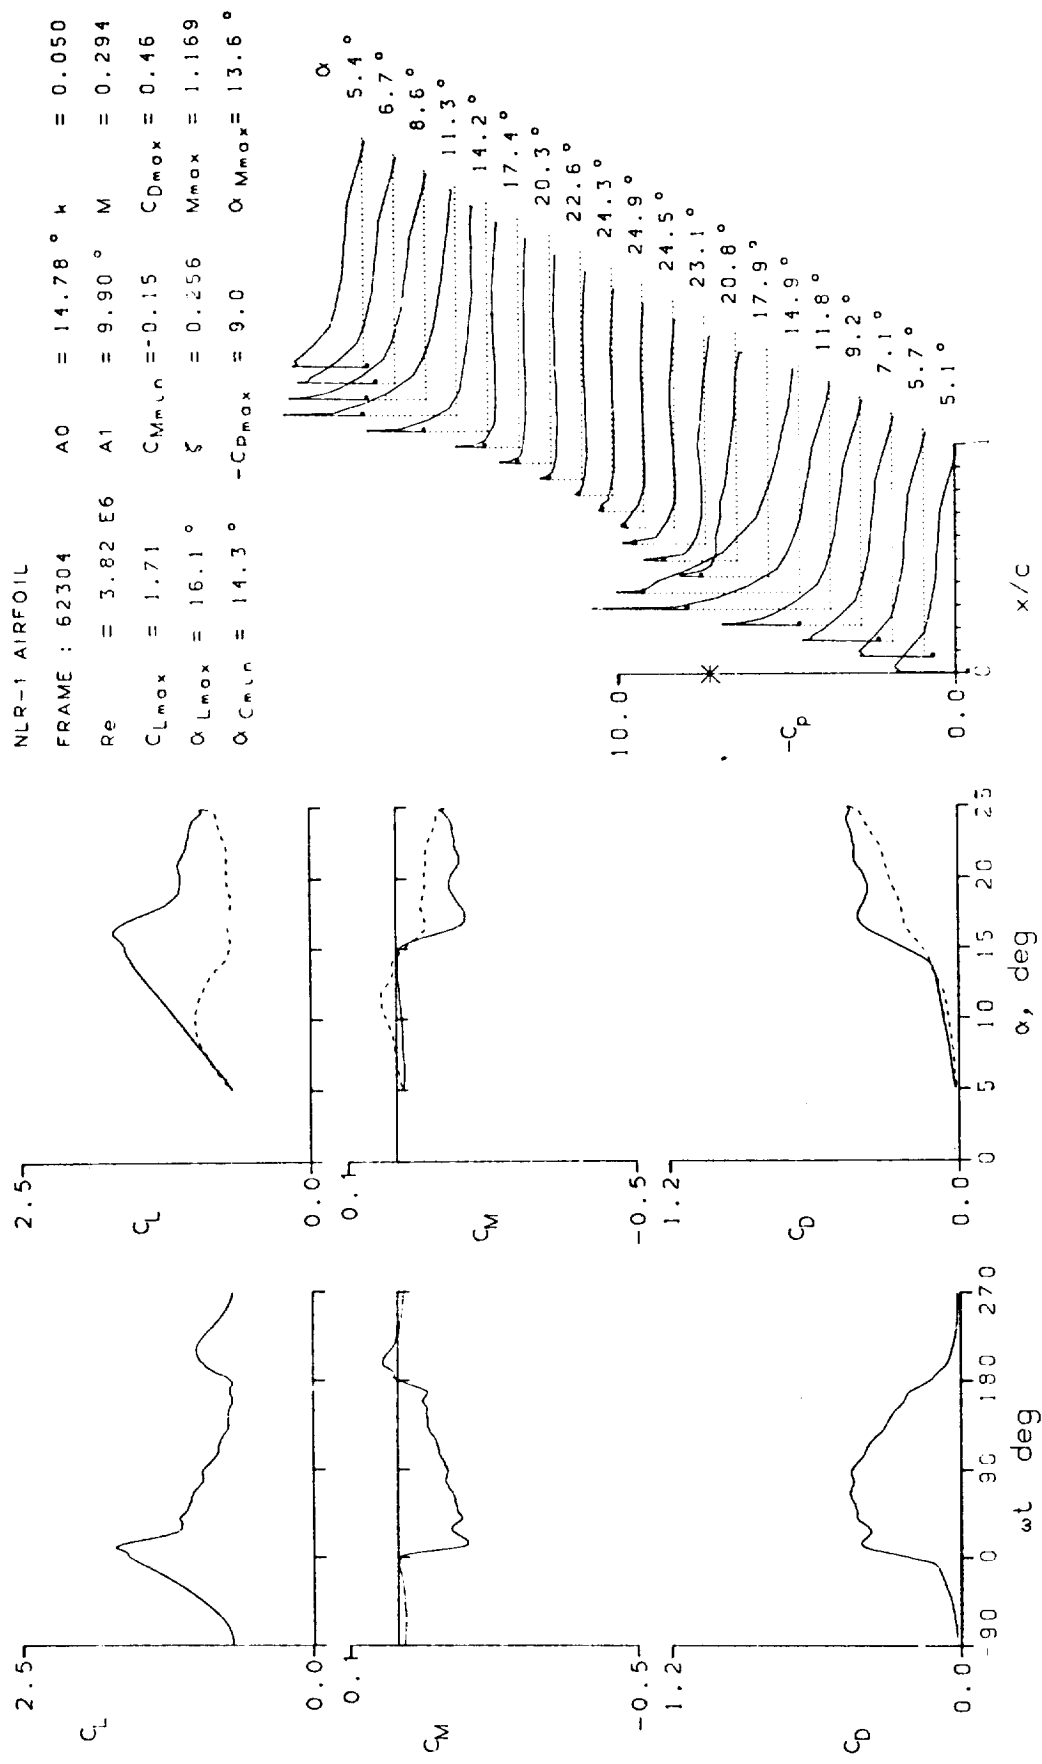


Figure 18.- Continued.

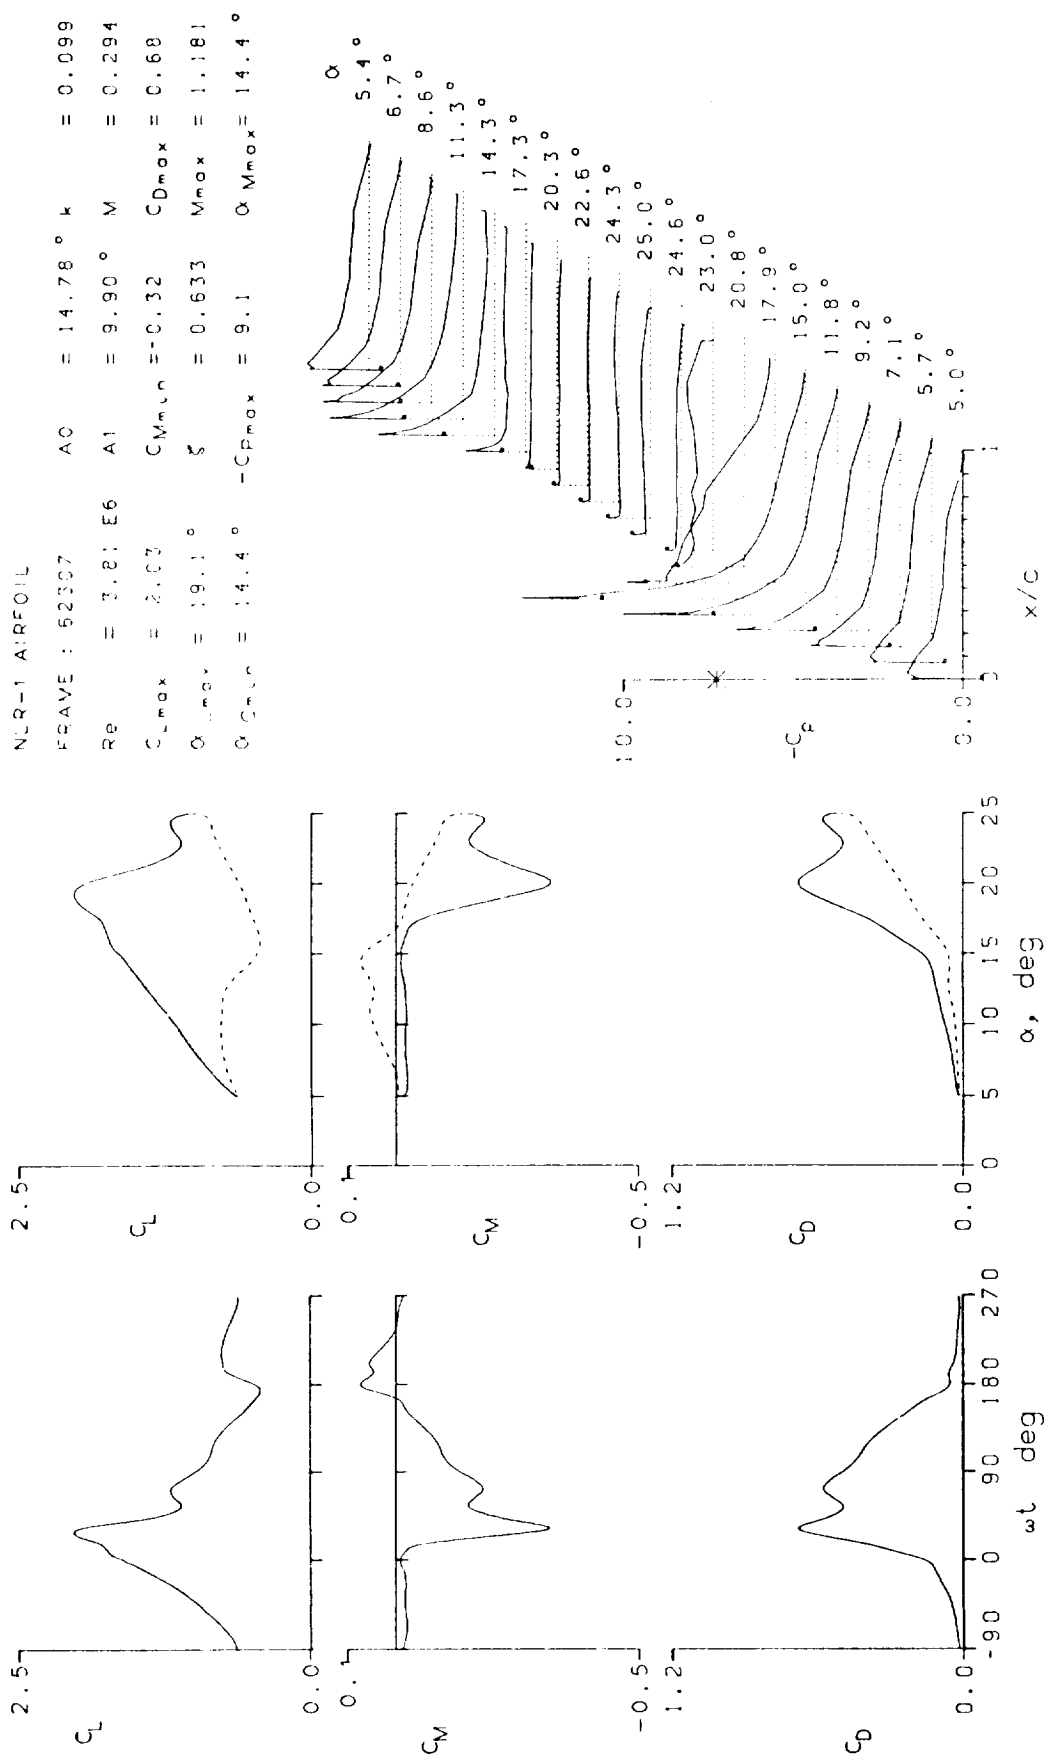


Figure 18.- Continued.

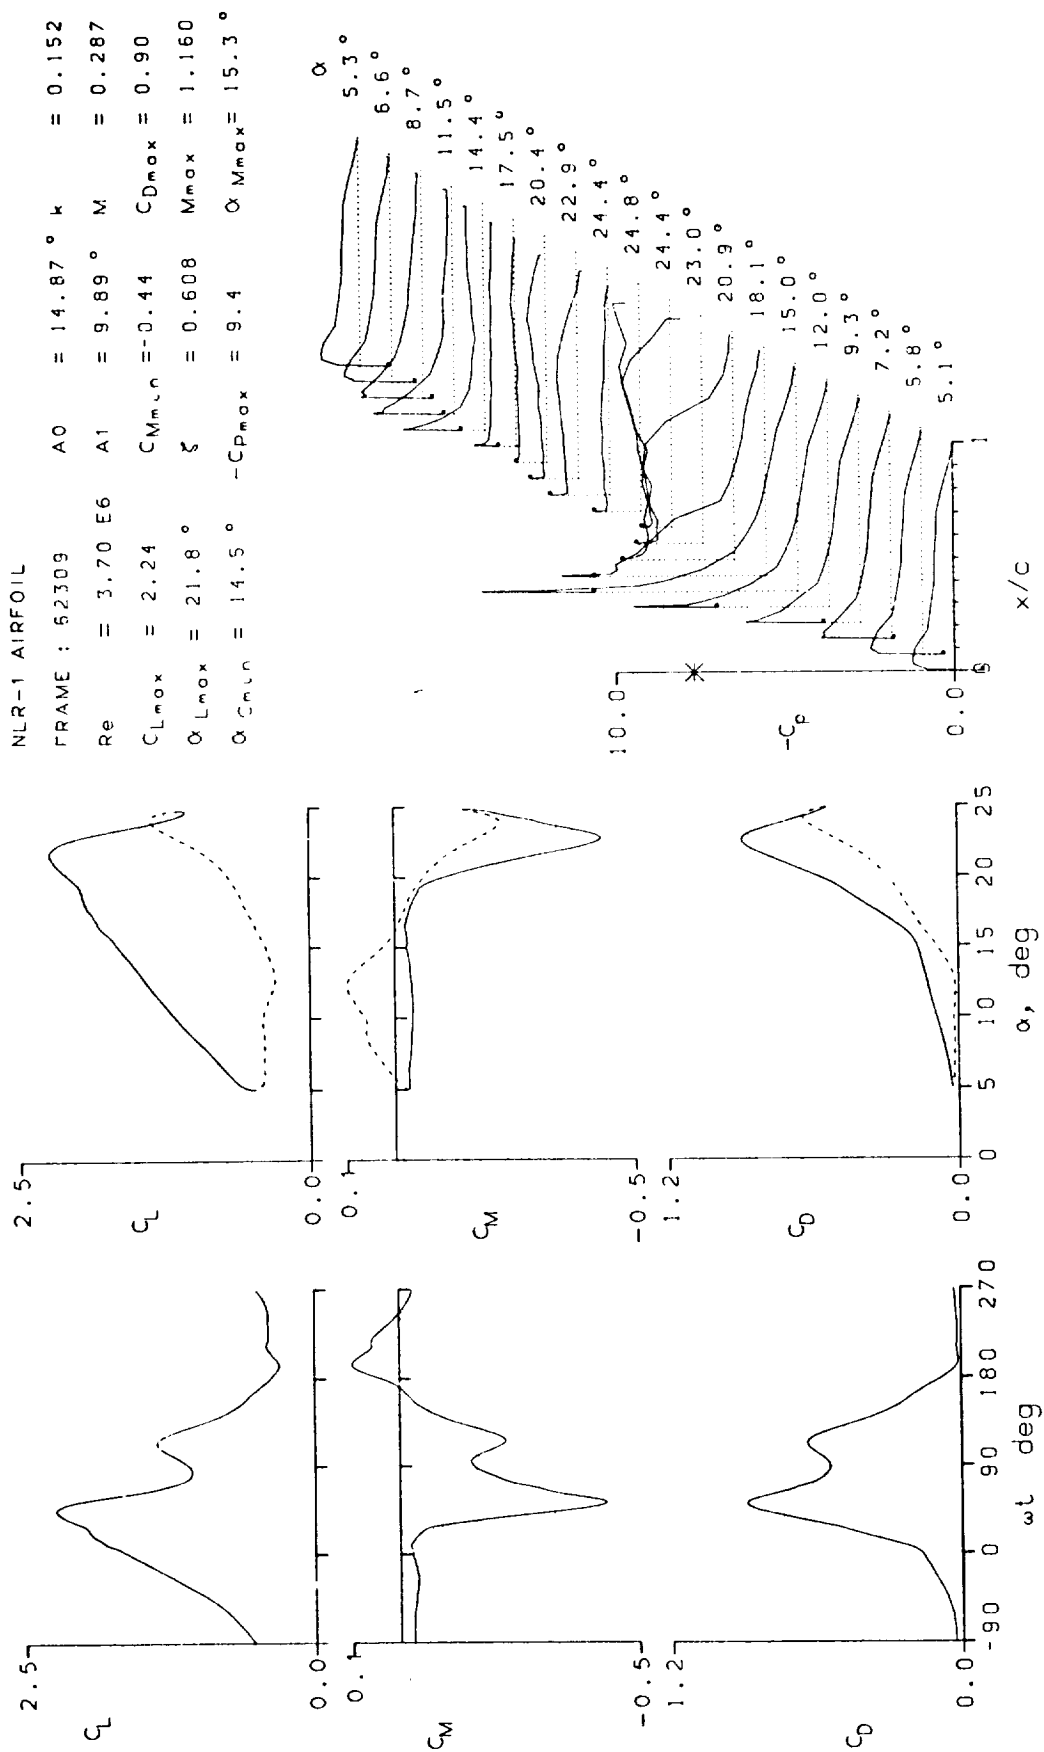


Figure 18.- Continued.

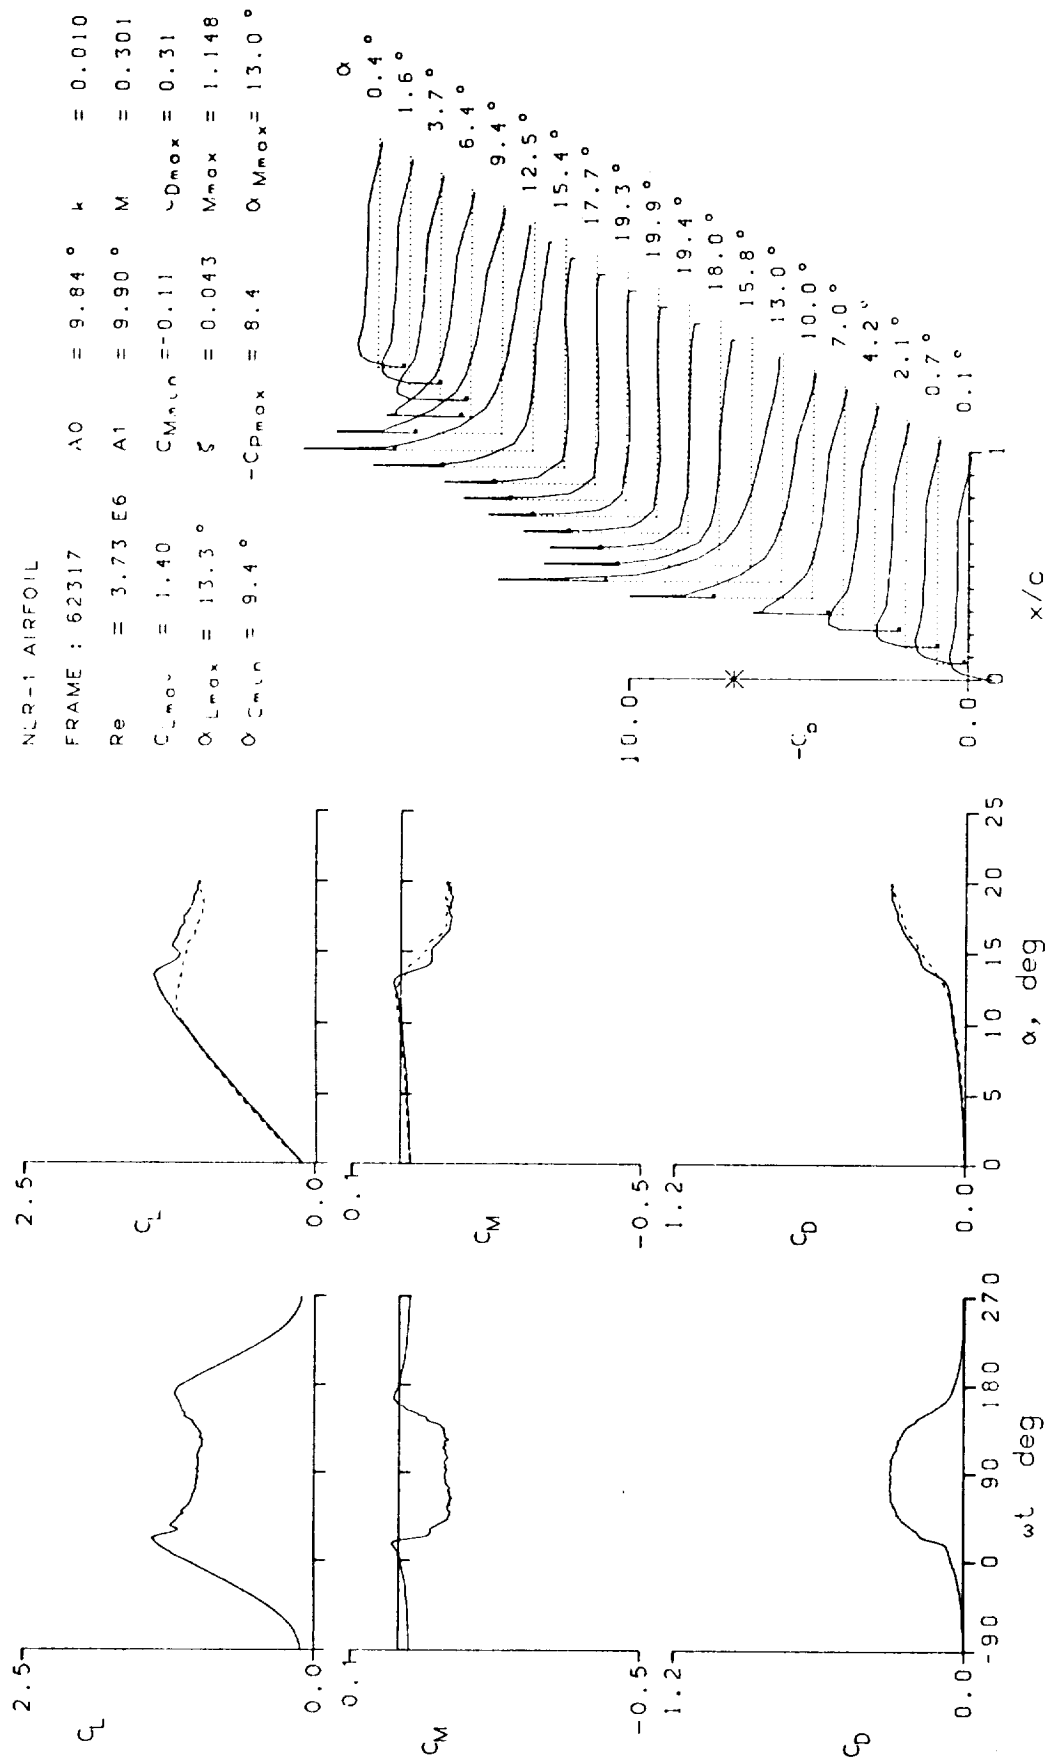


Figure 18.- Continued.

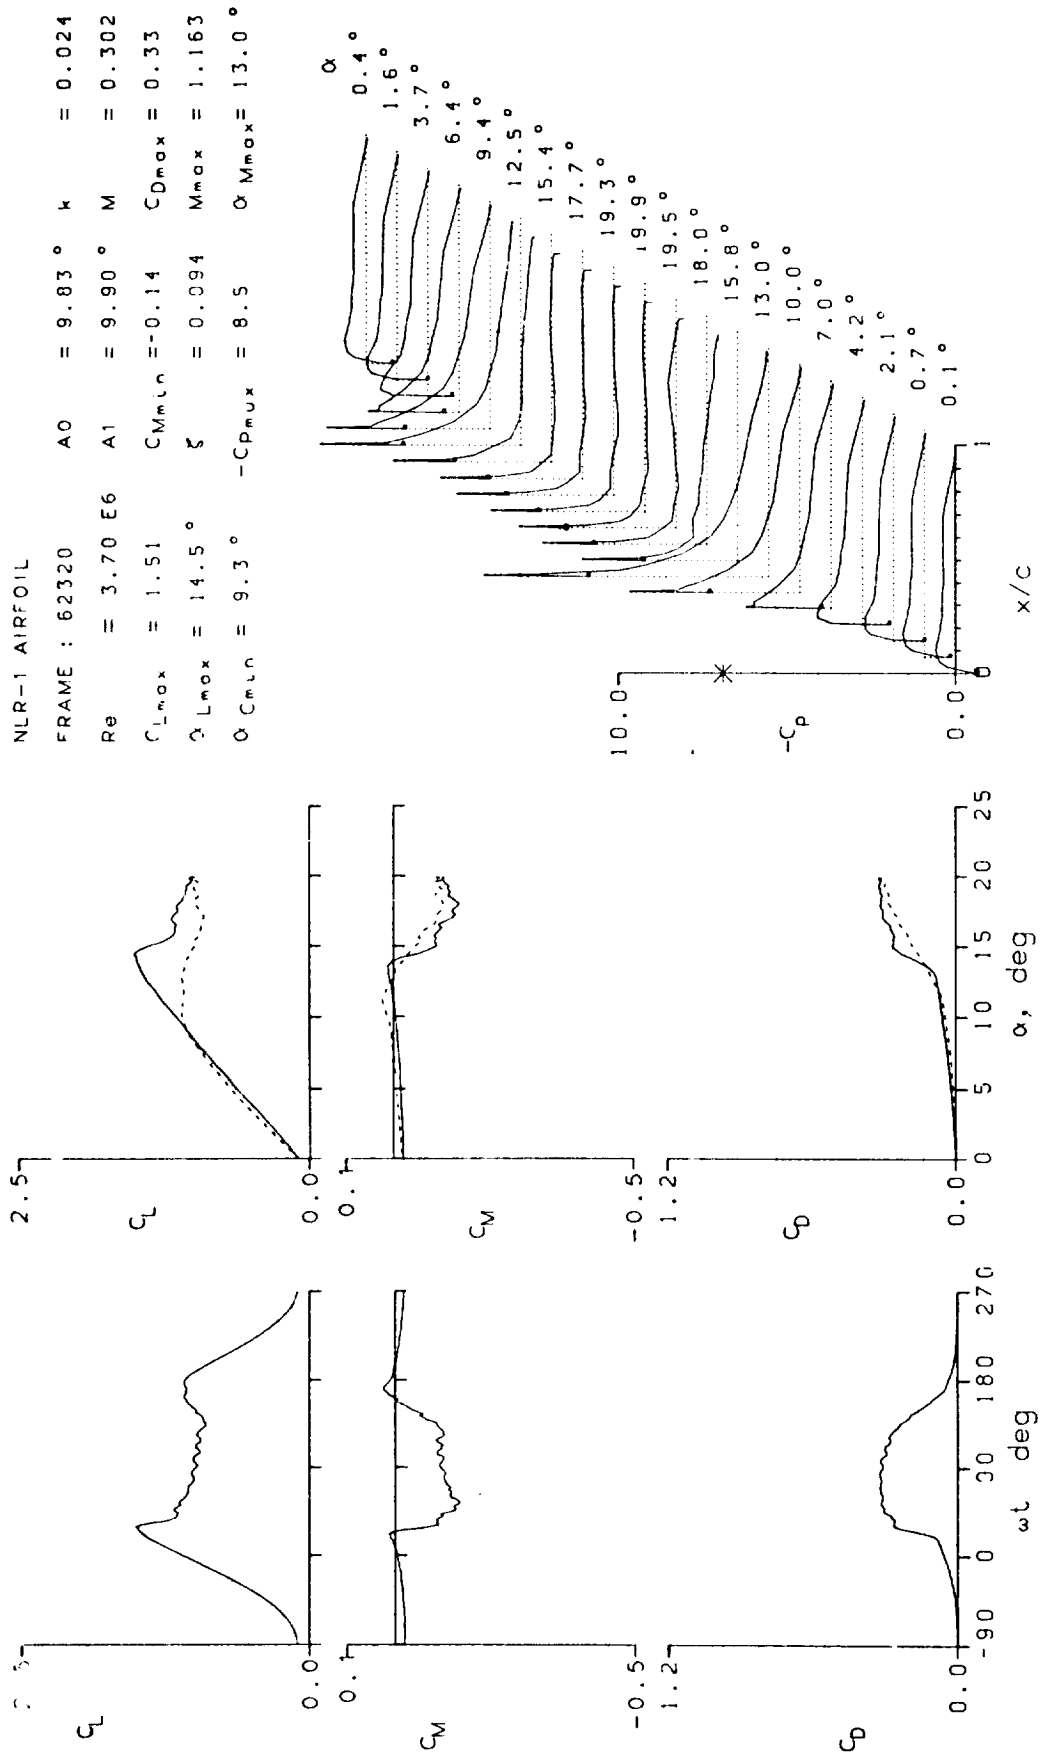


Figure 18.- Continued.

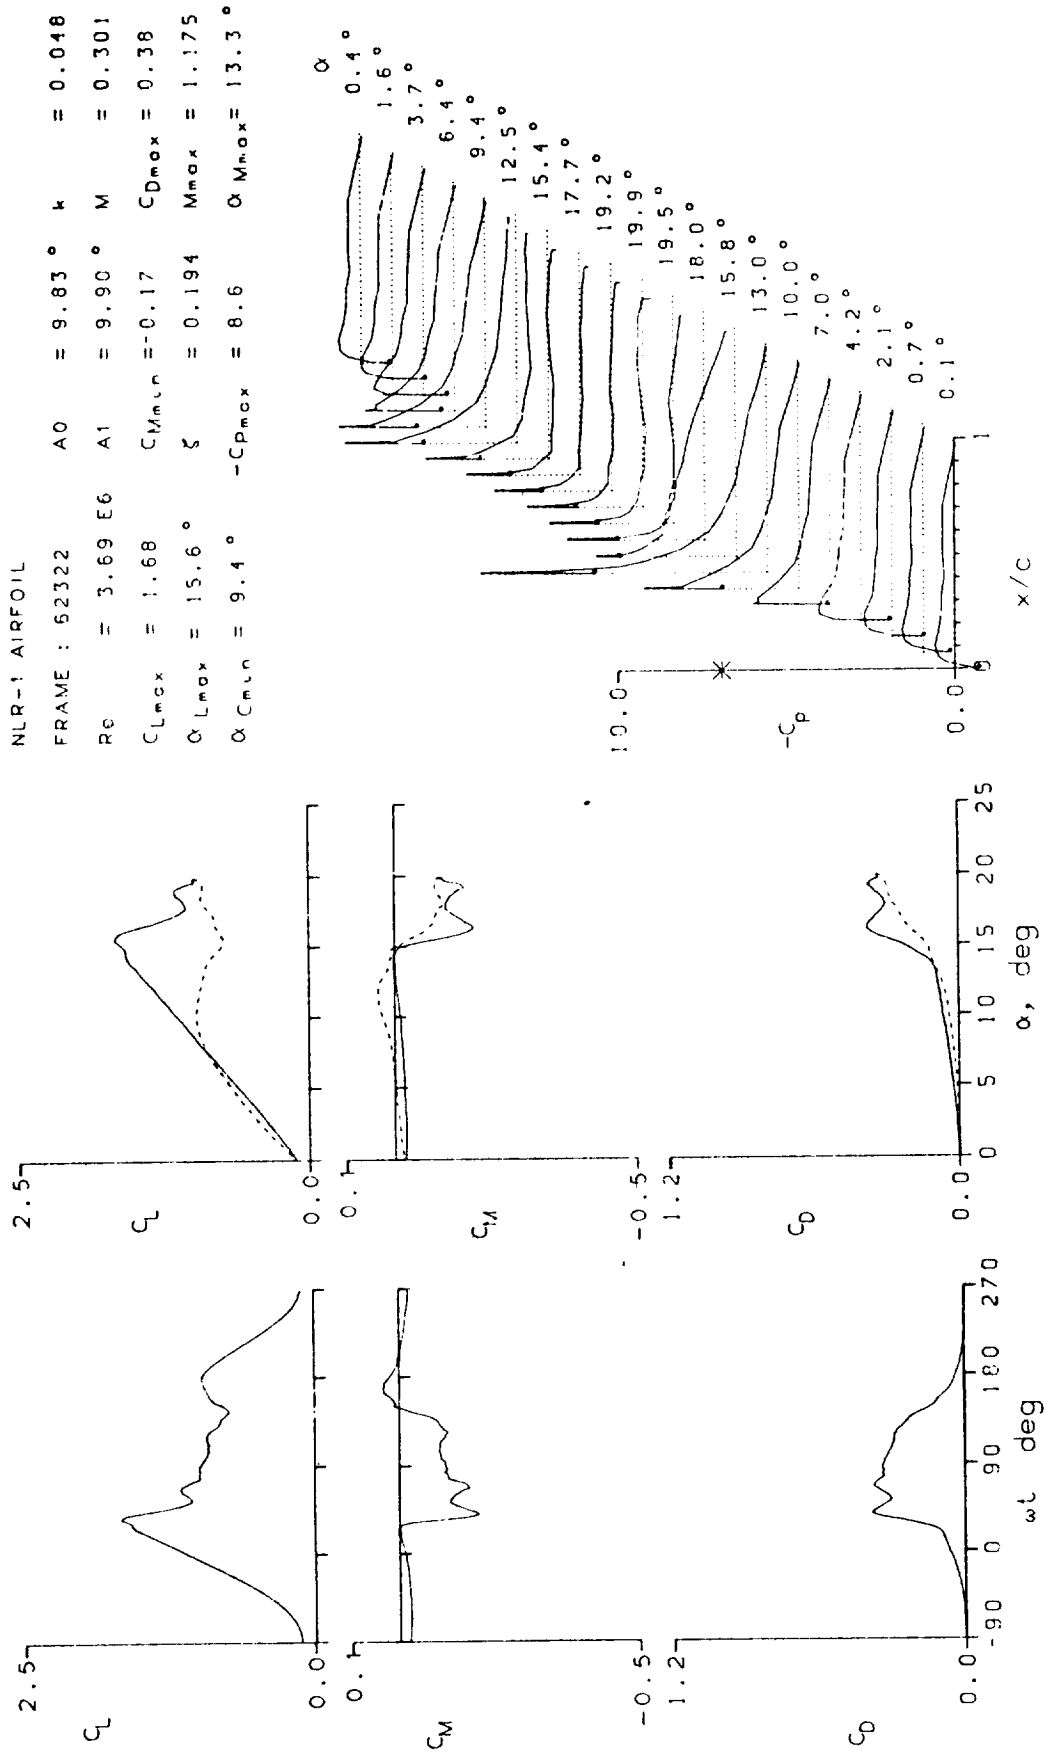


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 62400	A0 = 9.82 °	k = 0.097
Re = 3.69 E6	A1 = 9.89 °	M = 0.302
CLmax = 1.95	CMmin = -0.26	CDmax = 0.55
αLmax = 17.7 °	ξ = 0.342	Mmax = 1.178
αCMmin = 9.3 °	-CPmax = 8.6	αMmax = 13.9 °

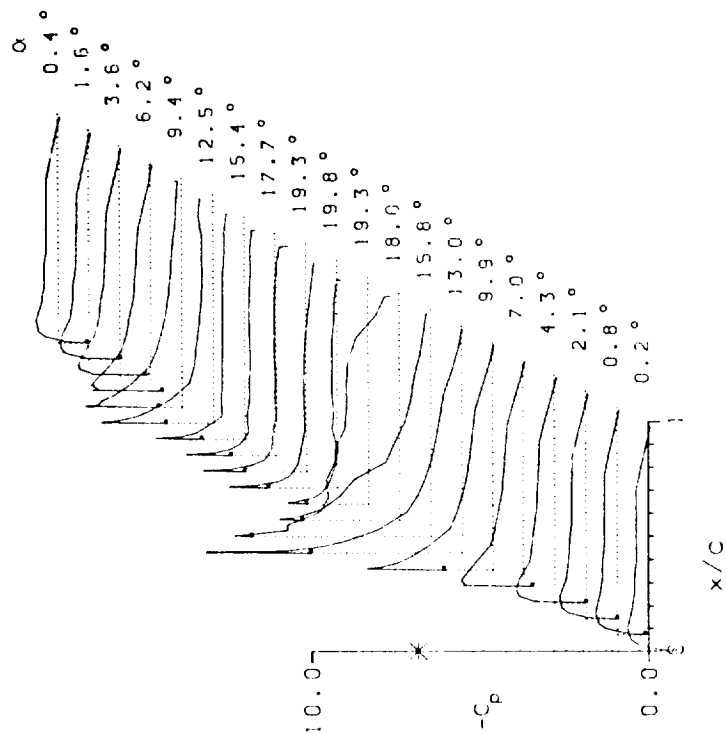
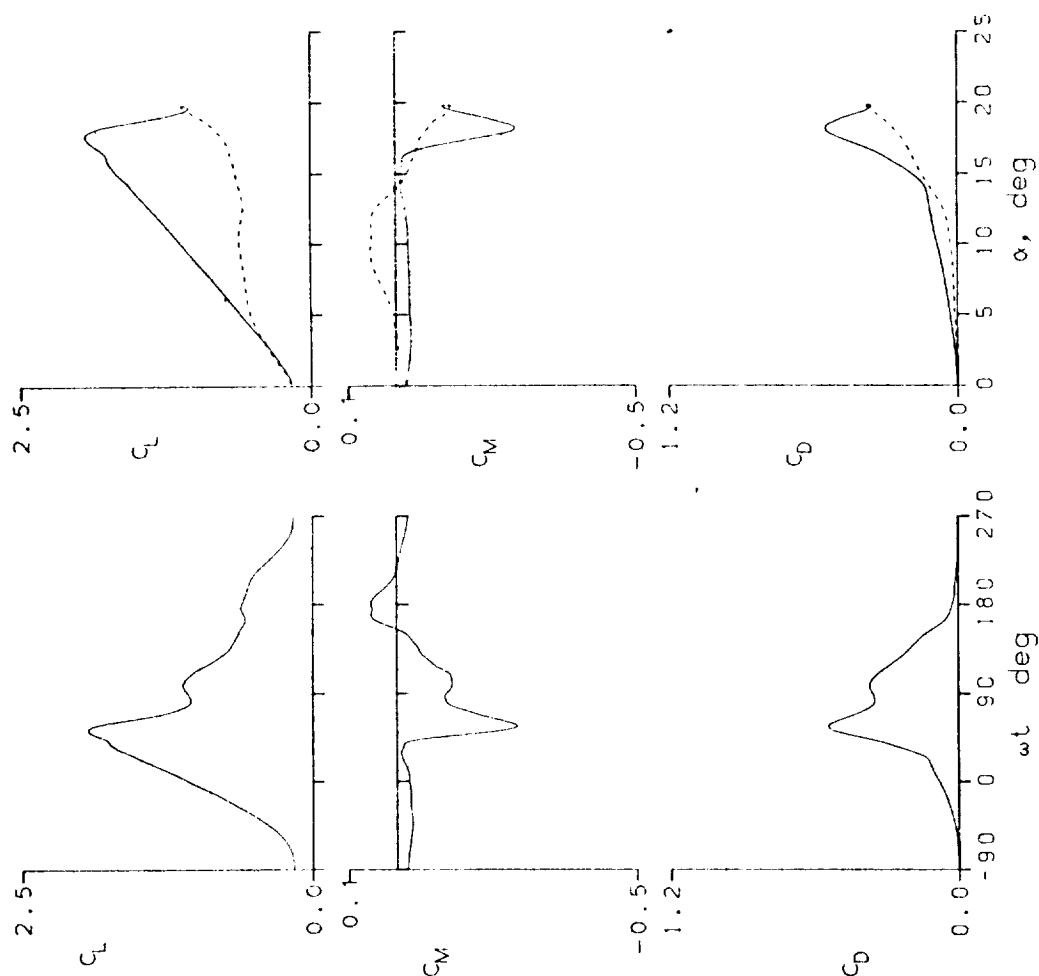


Figure 18.- Continued.

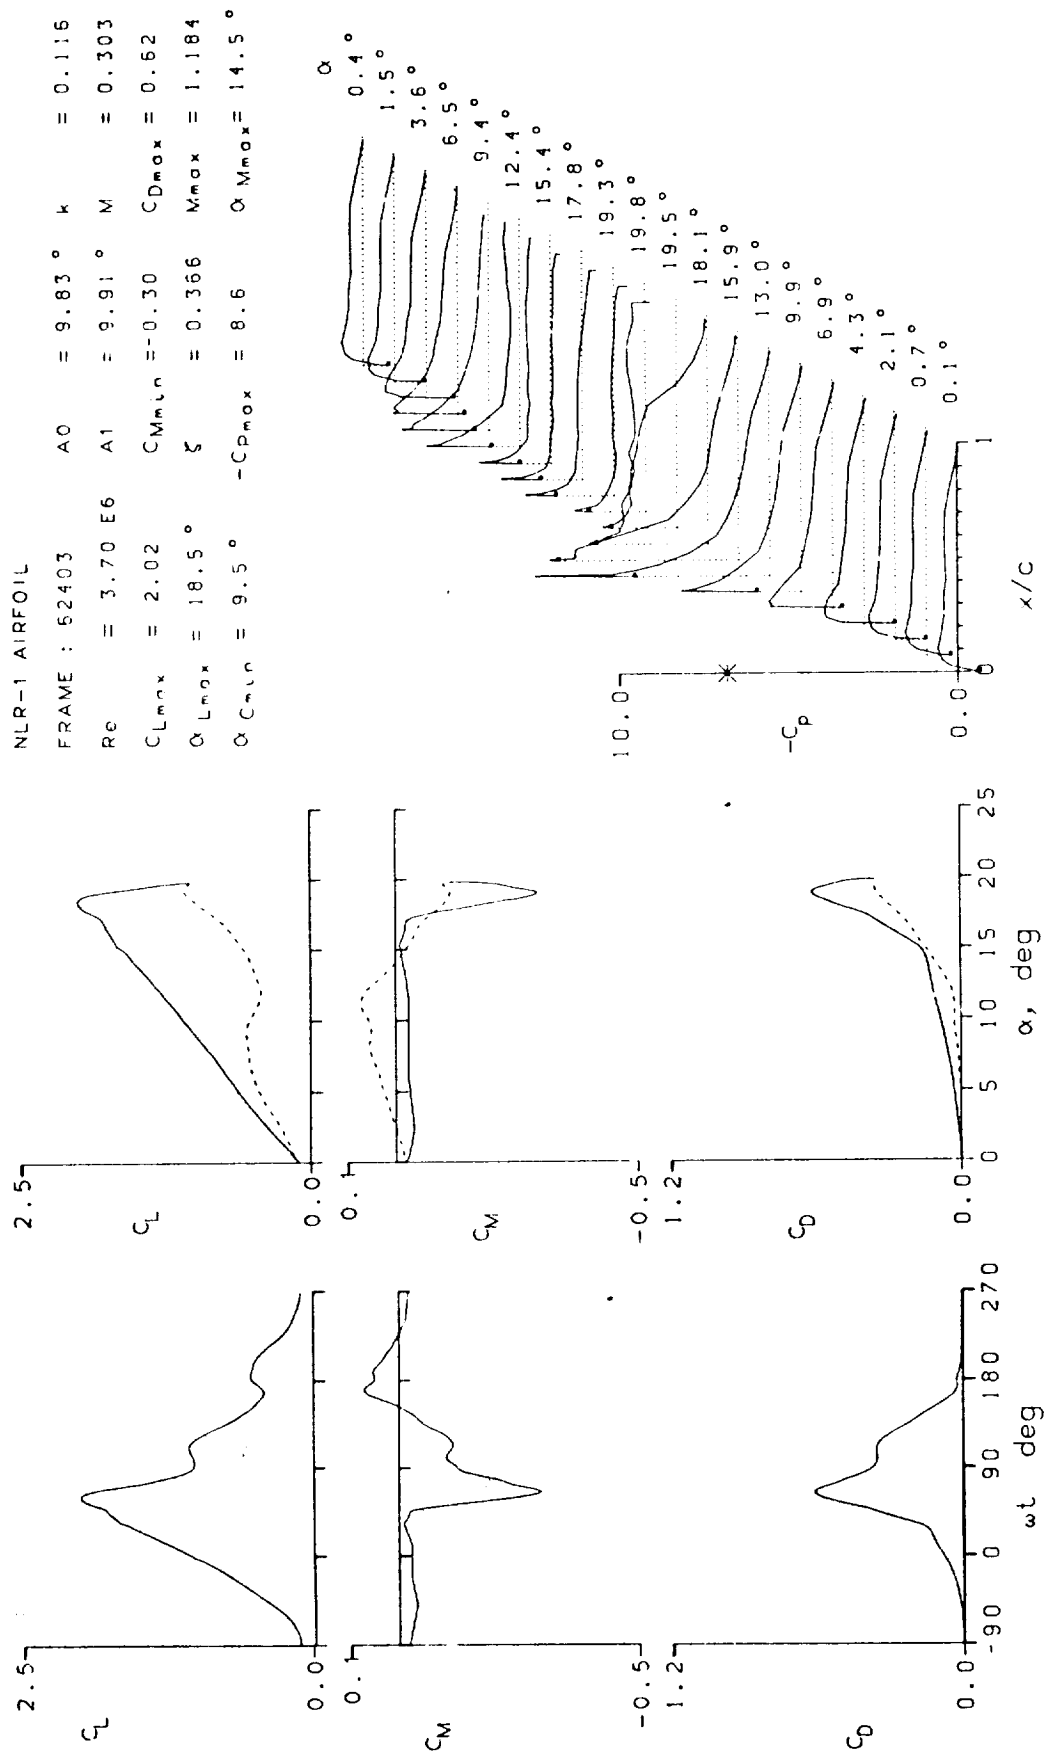


Figure 18.- Continued.

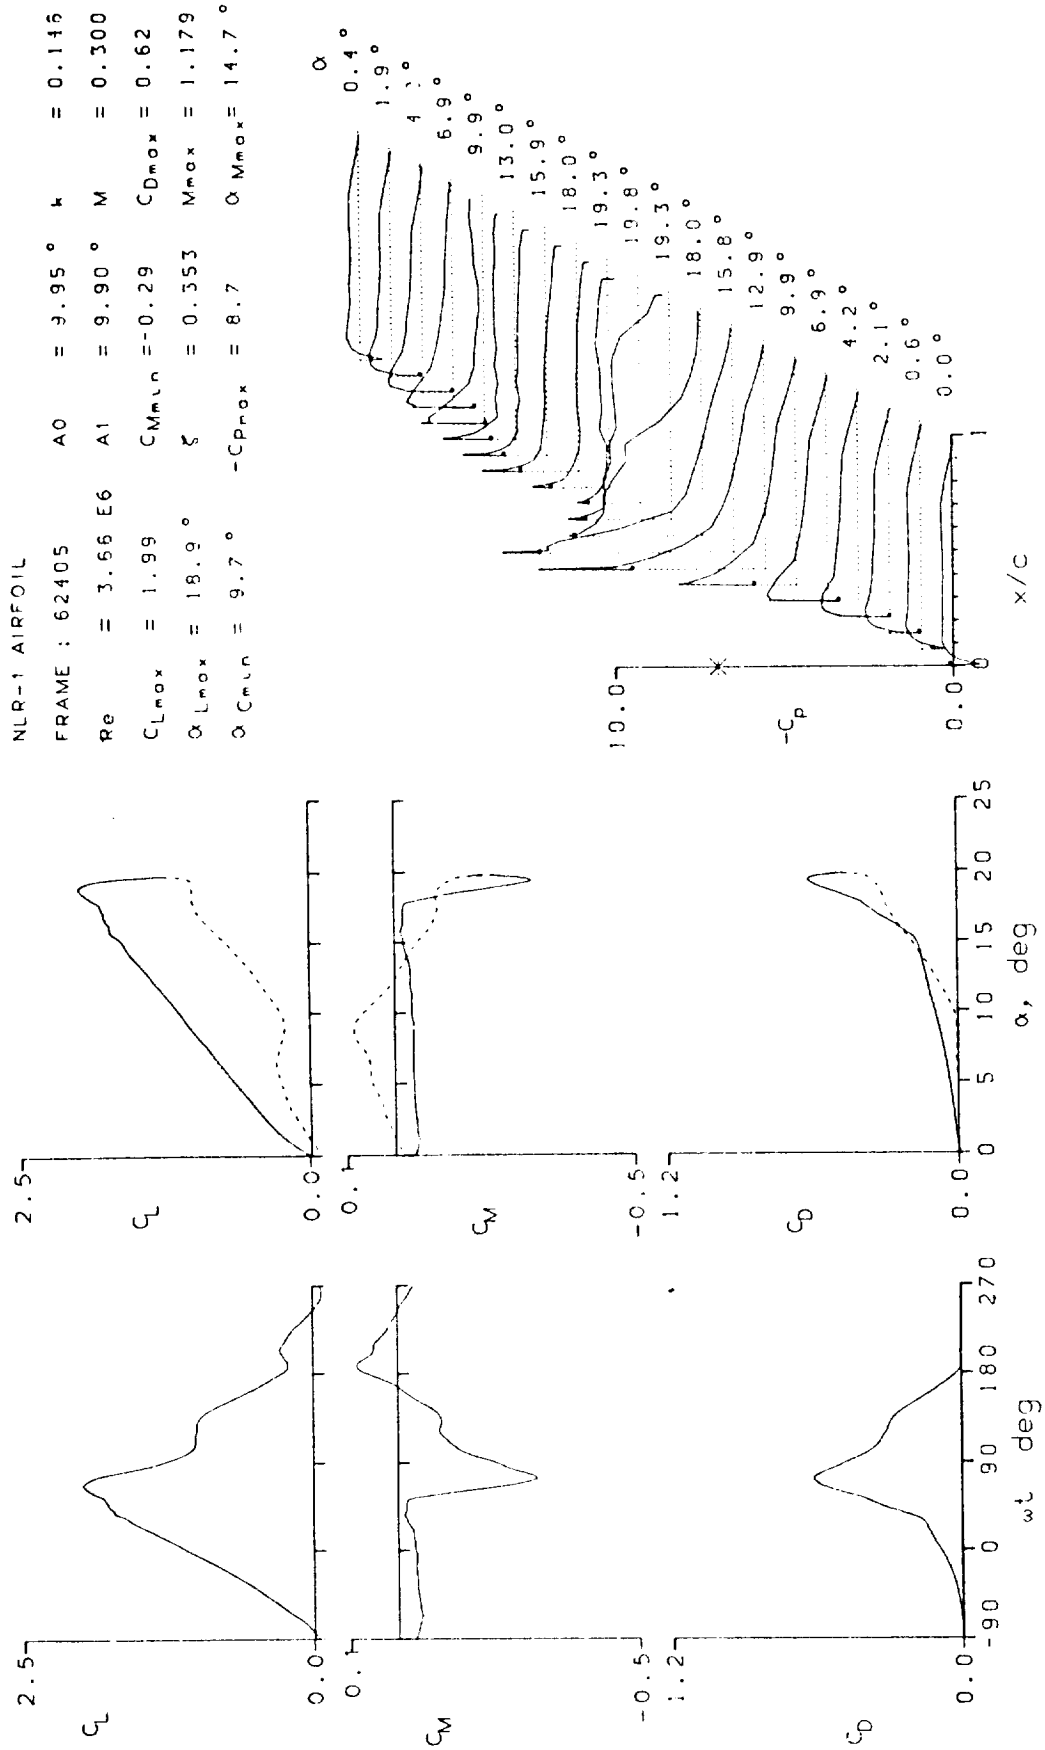


Figure 18.- Continued.

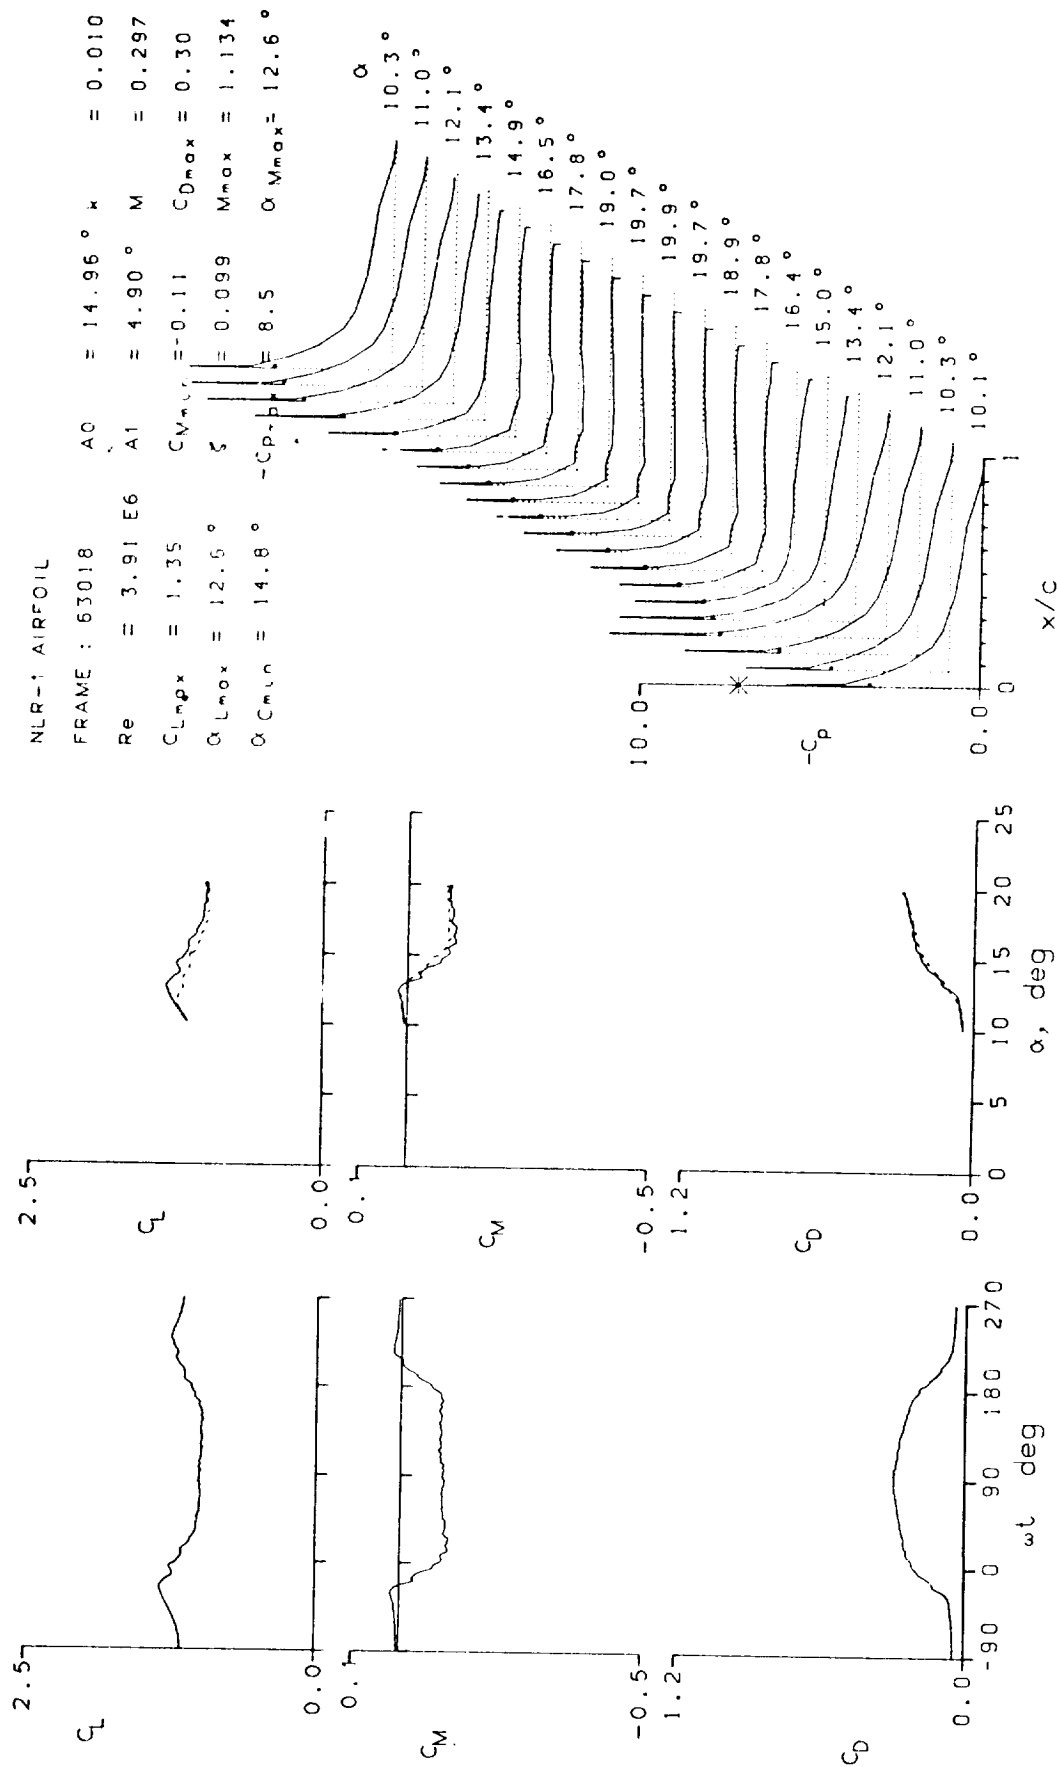


Figure 18.- Continued.

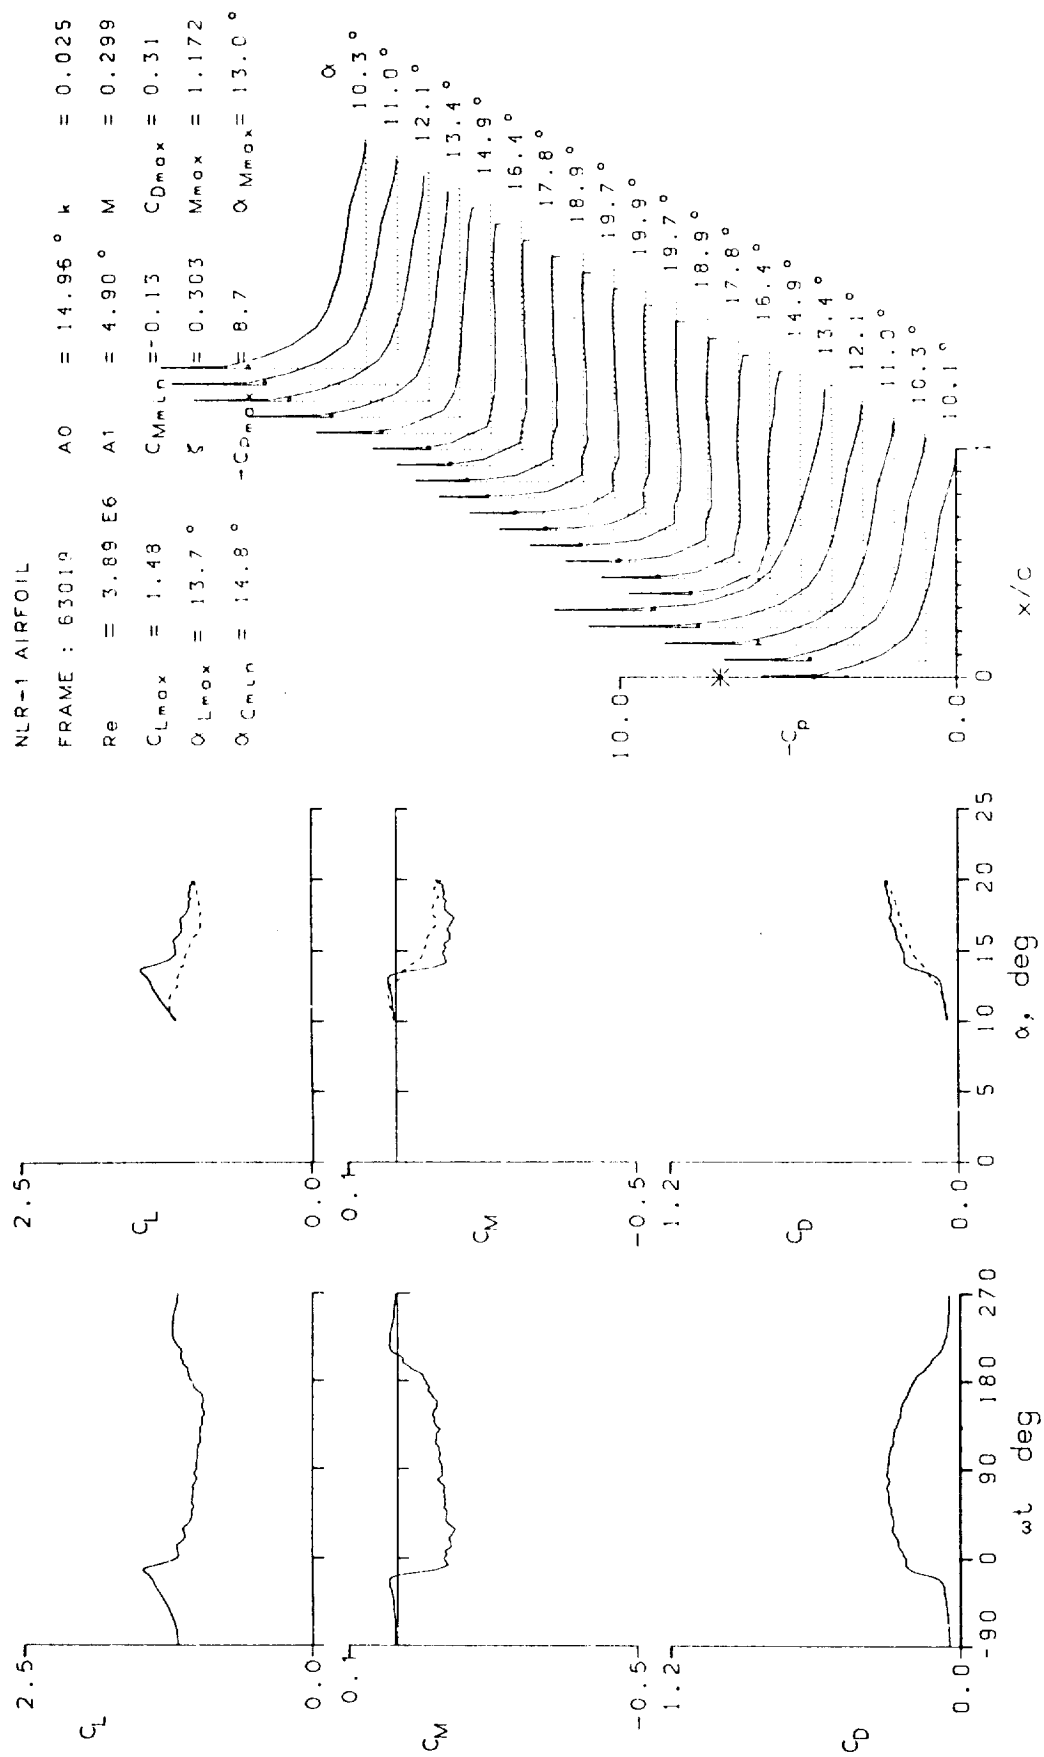


Figure 18.- Continued.

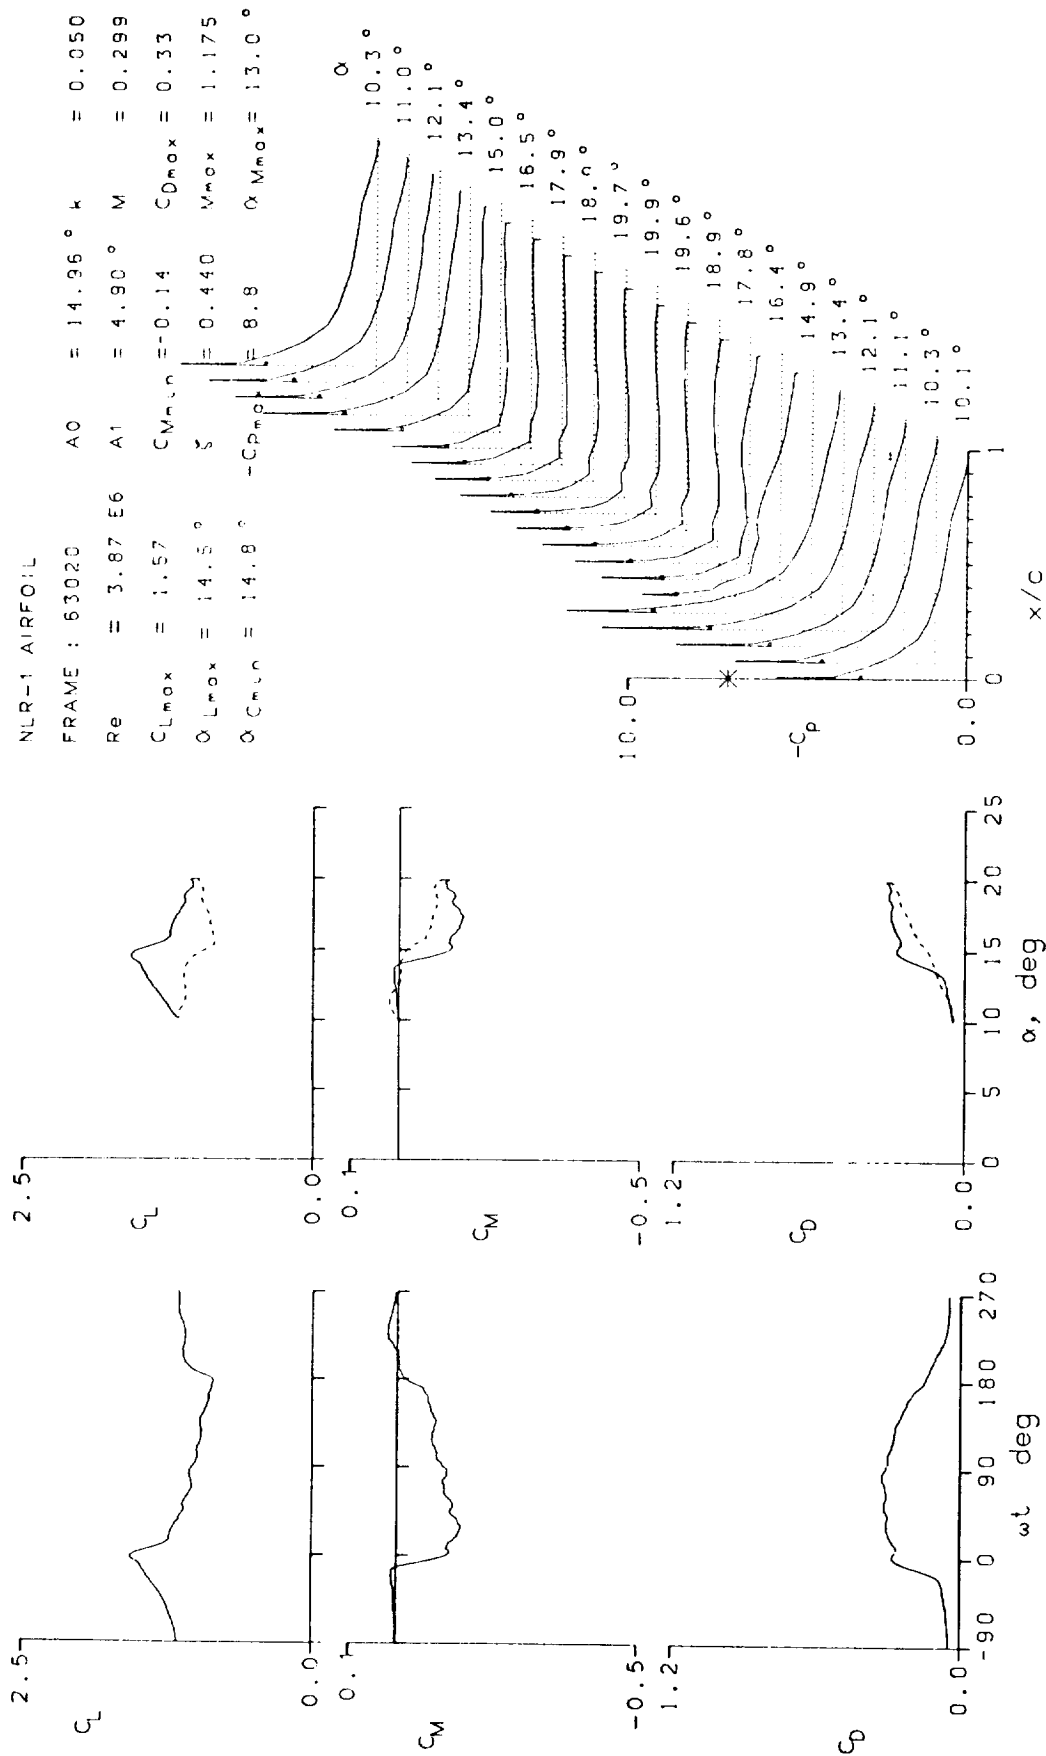


Figure 18.- Continued.

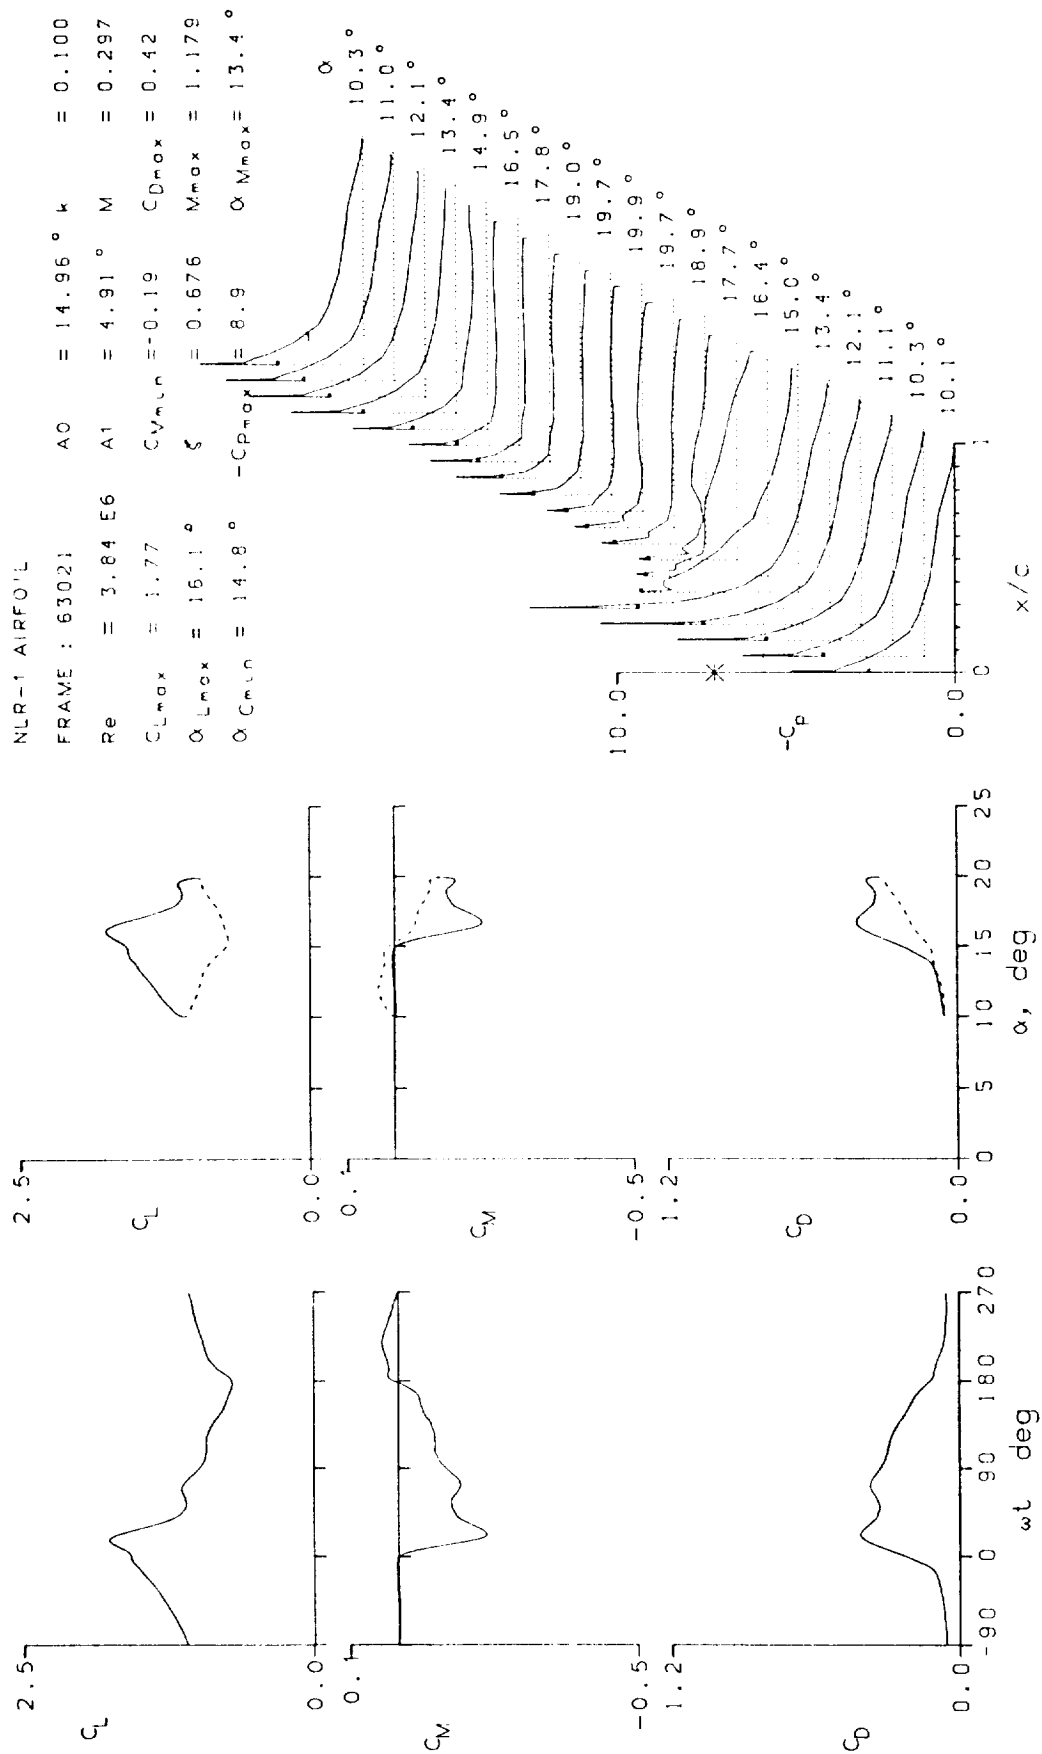


Figure 18.- Continued.

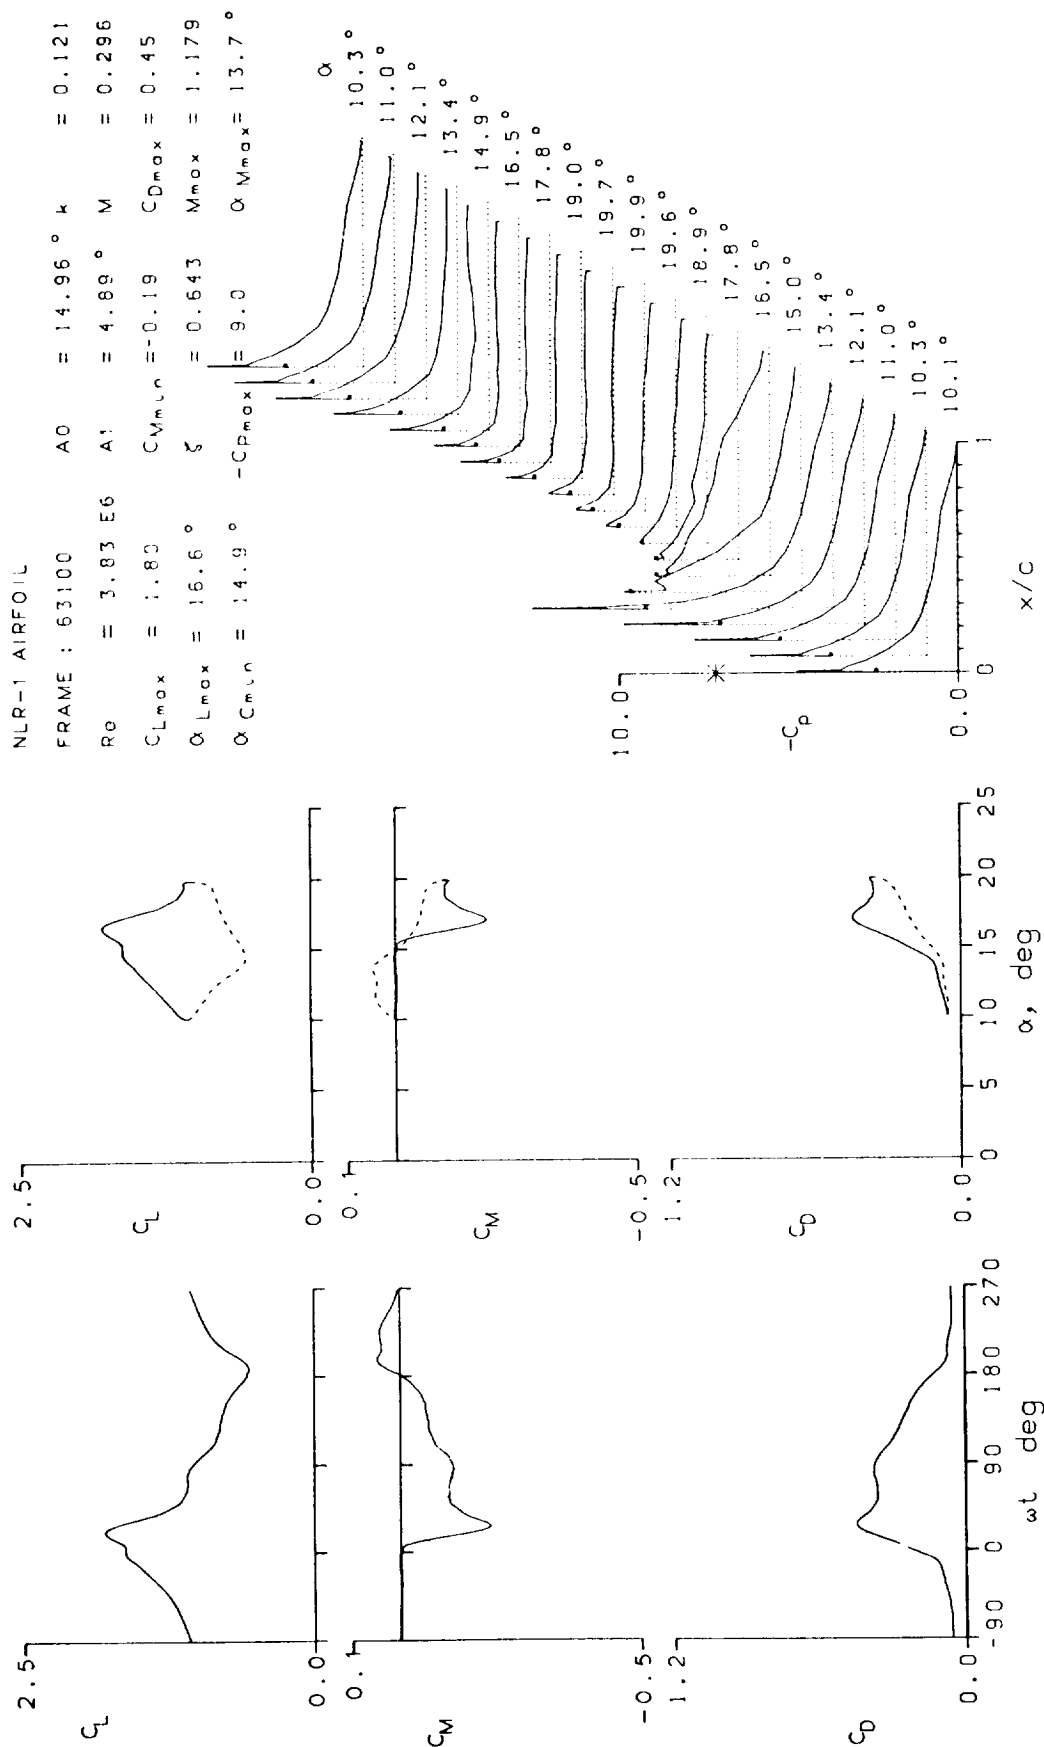


Figure 18.- Continued.

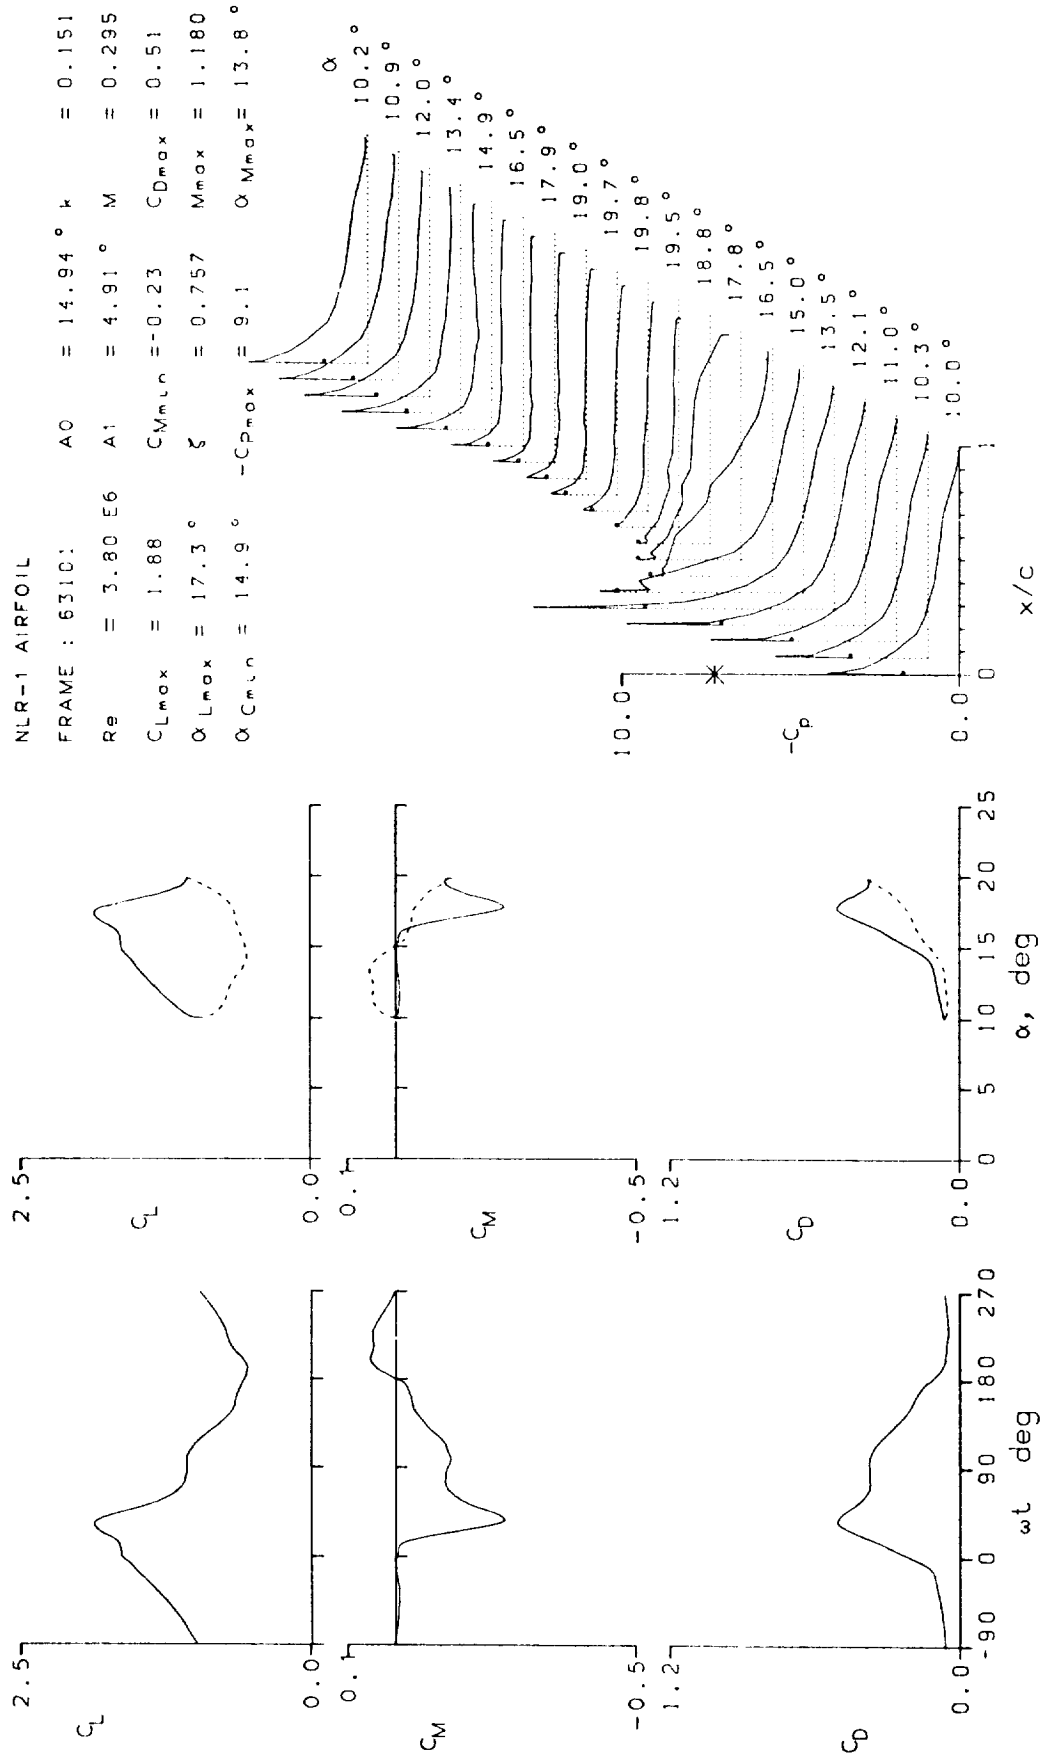


Figure 18.- Continued.

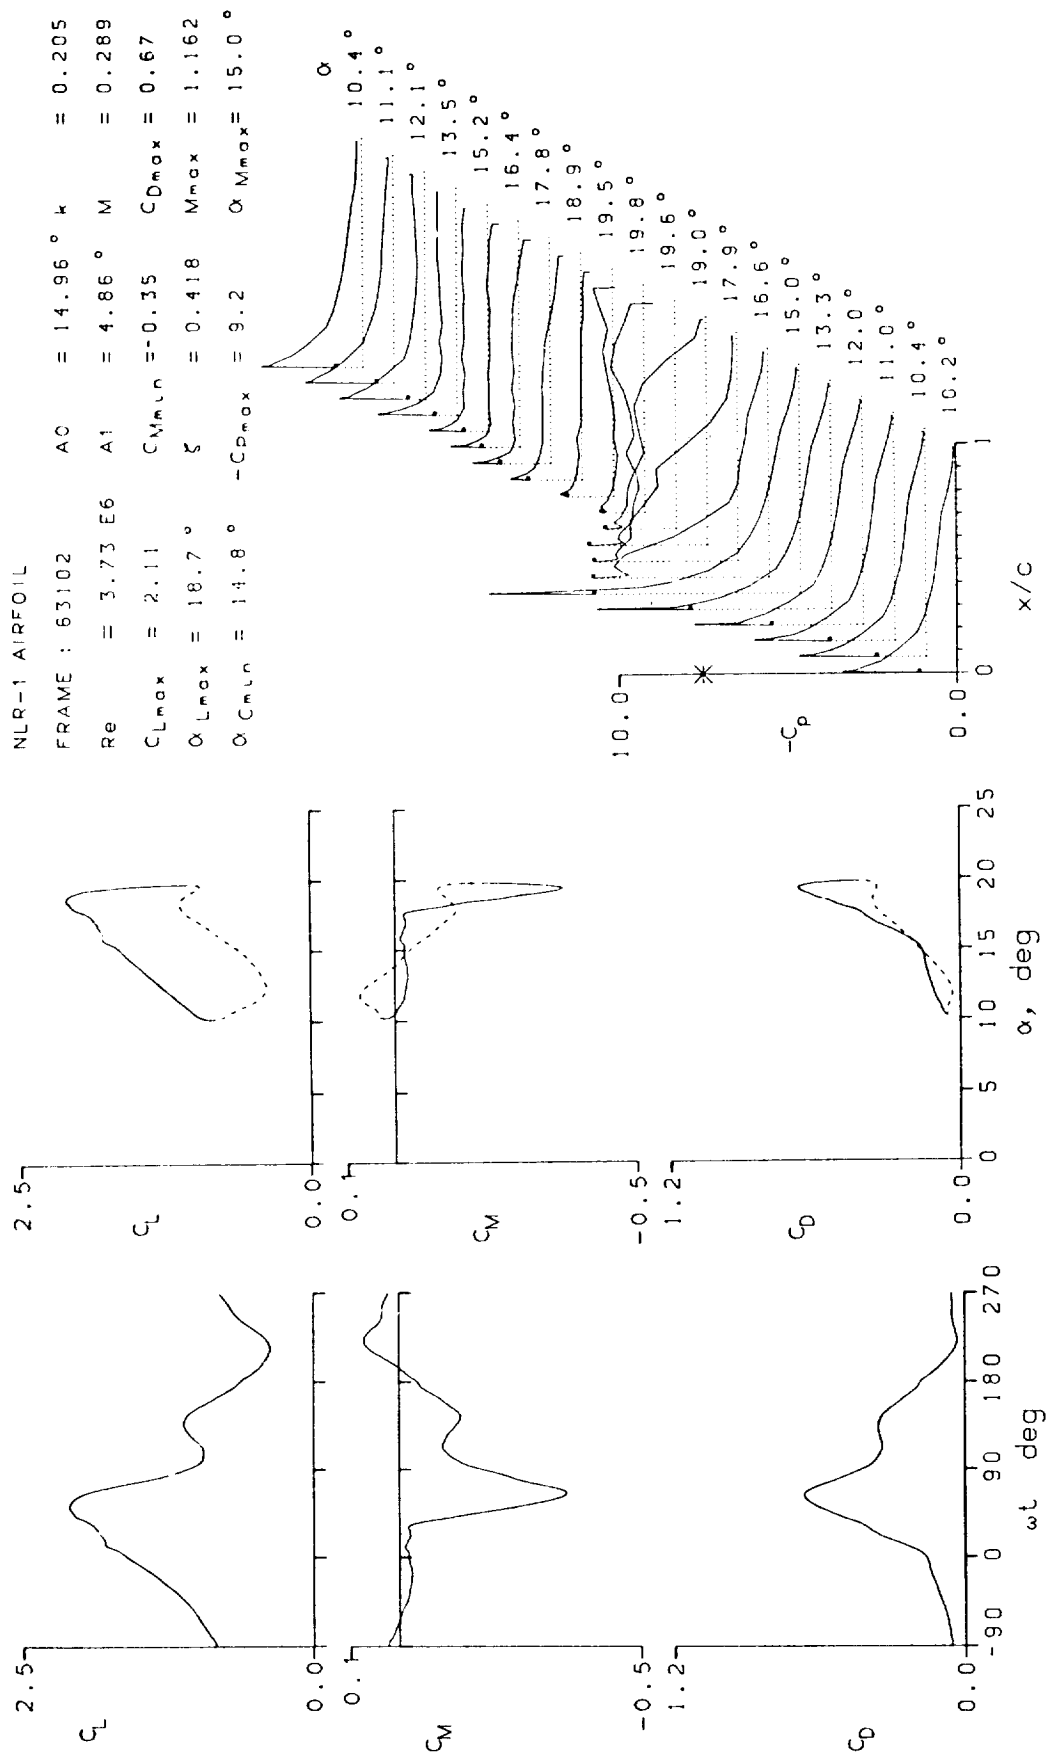
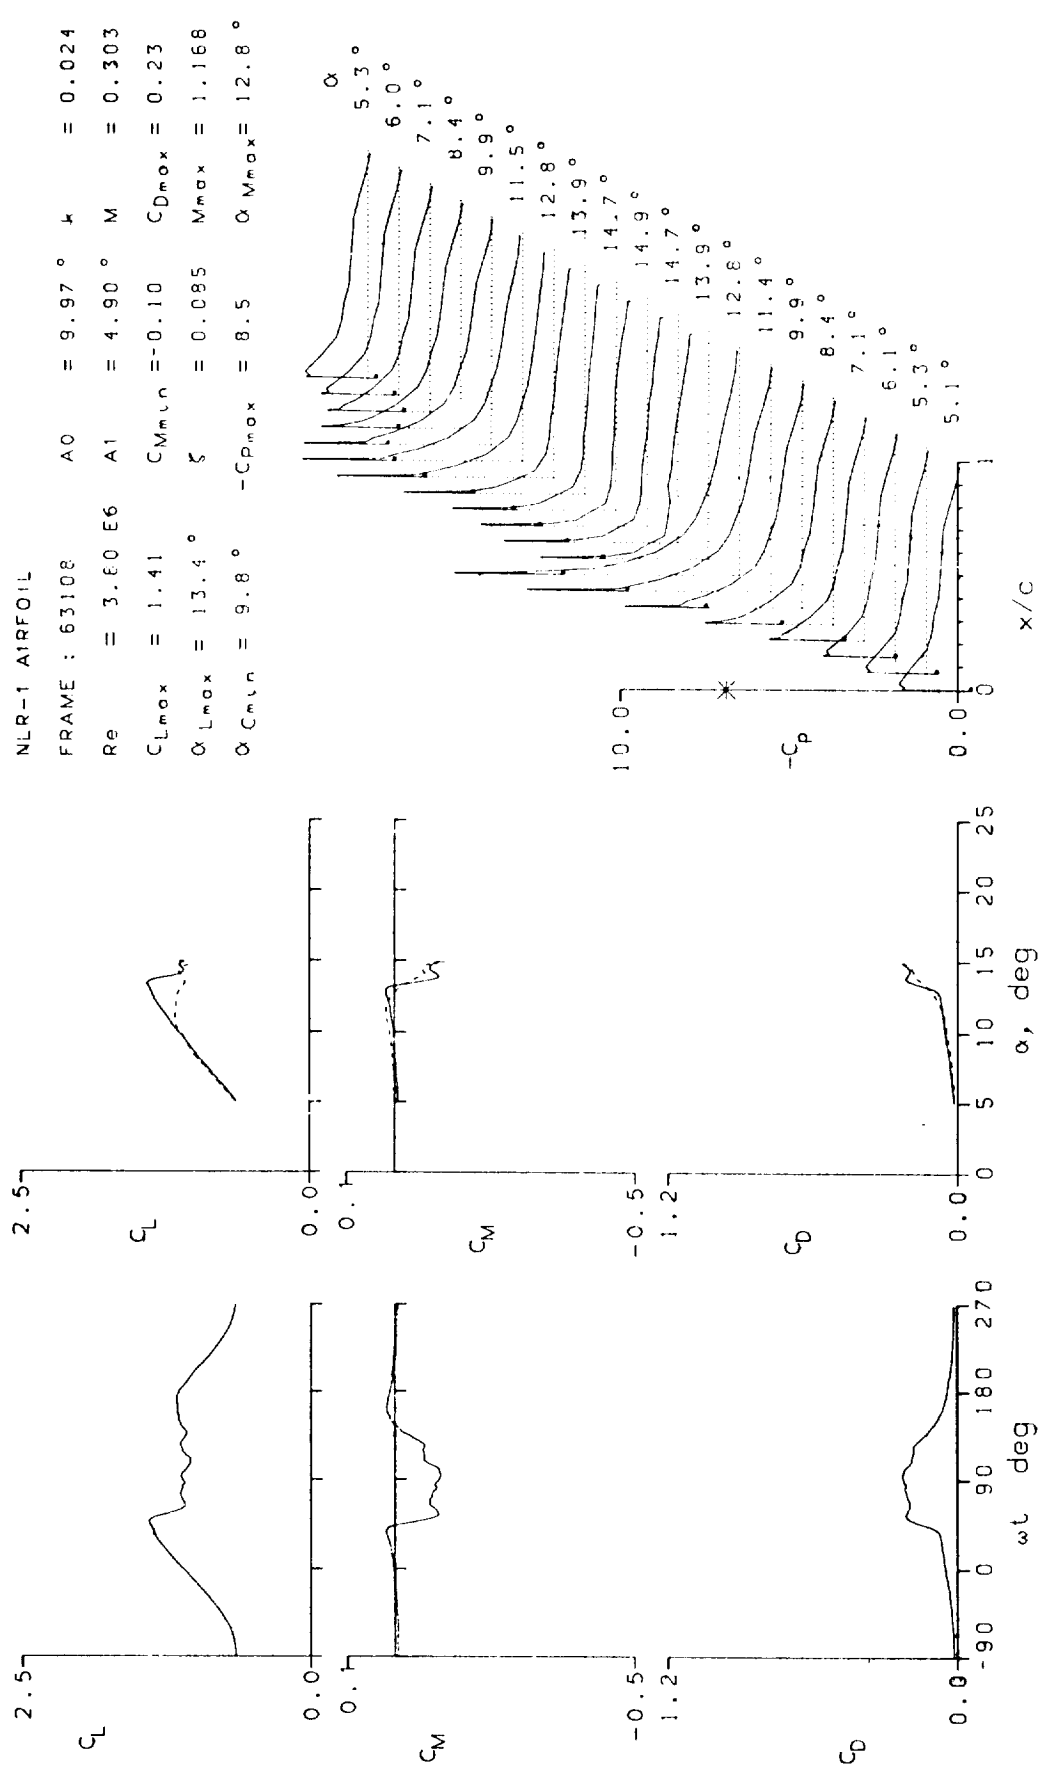


Figure 18.- Continued.



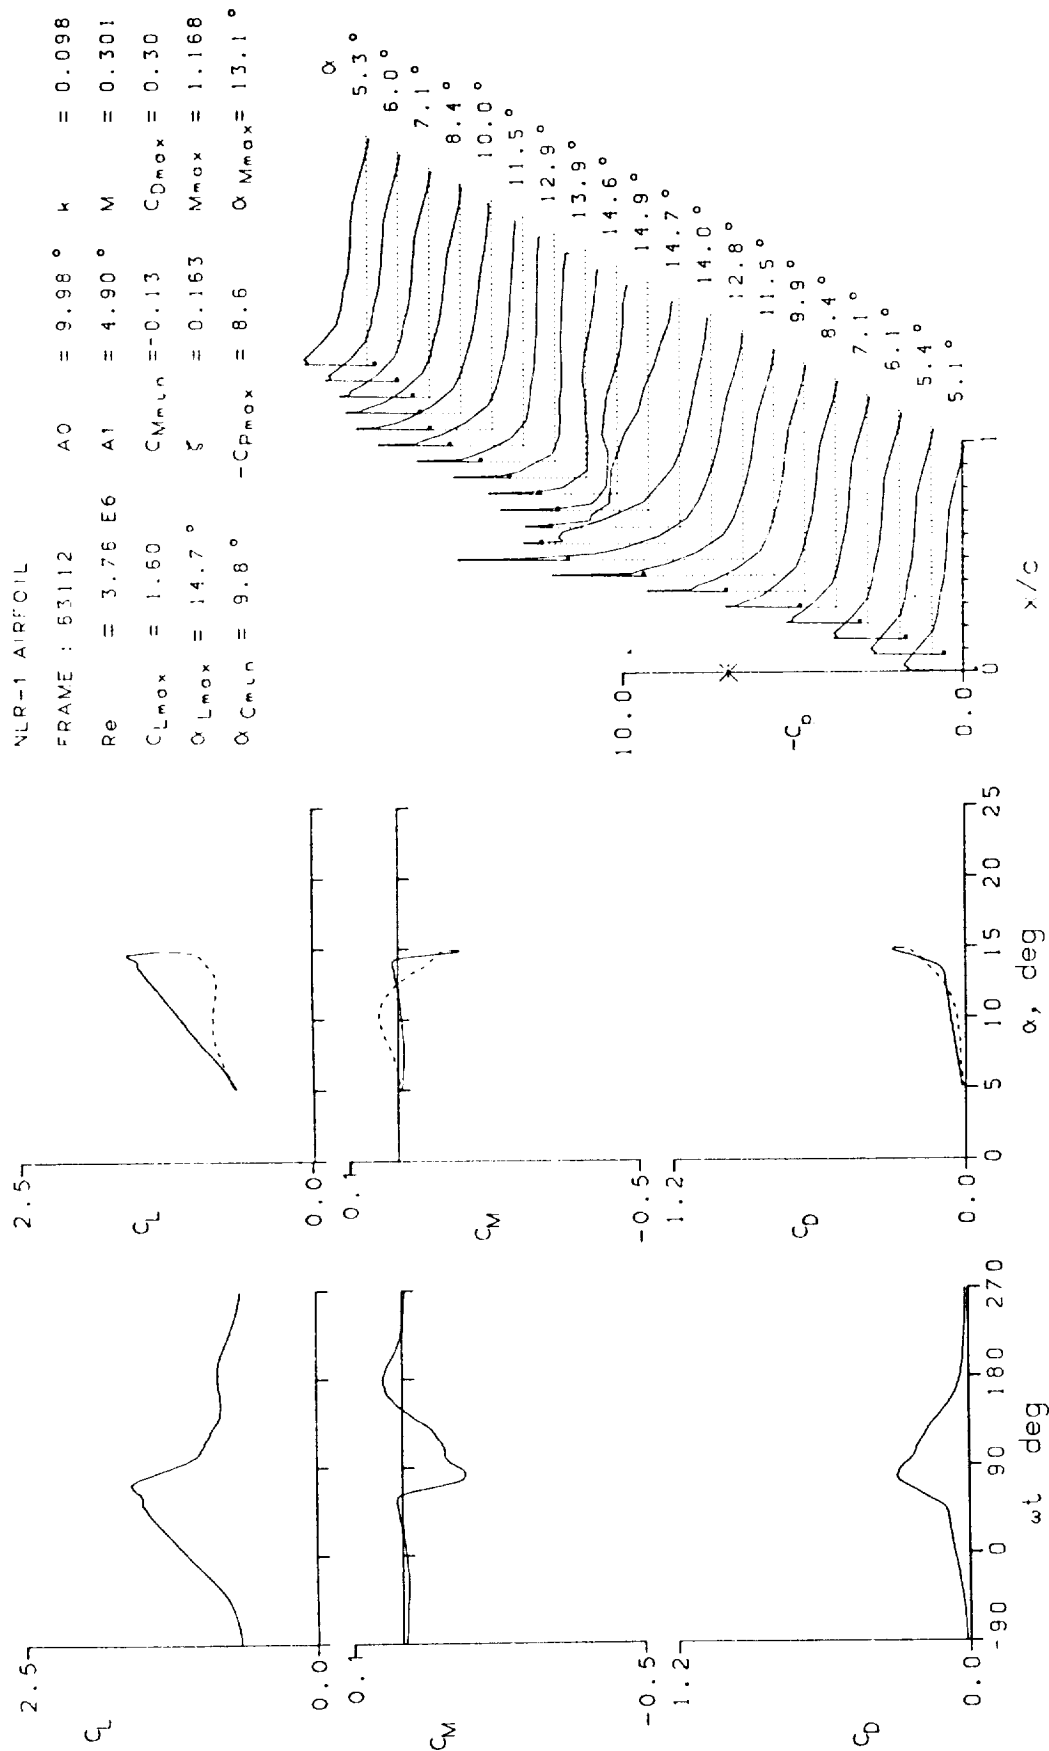


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 63114	A0 = 9.90 °	k = 0.195
Re = 3.75 E6	A1 = 4.91 °	M = 0.302
$C_{Lmax} = 1.76$	$C_{Mmin} = -0.22$	$C_{Dmax} = 0.38$
$\alpha_{Lmax} = 14.9 °$	$\xi = 0.264$	$M_{max} = 1.172$
$\alpha_{Cmin} = 9.7 °$	$-C_{Dmax} = 8.6$	$\alpha_{Mmax} = 13.3 °$

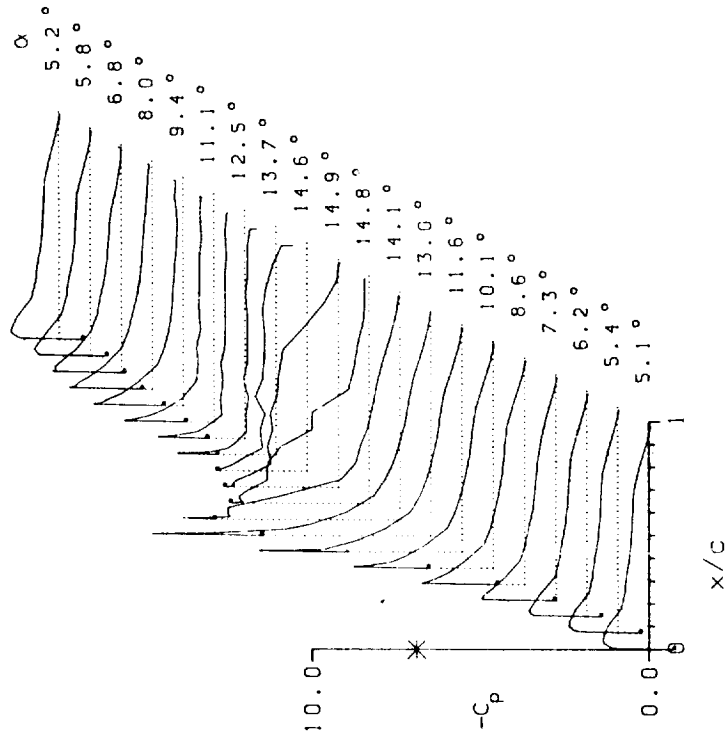
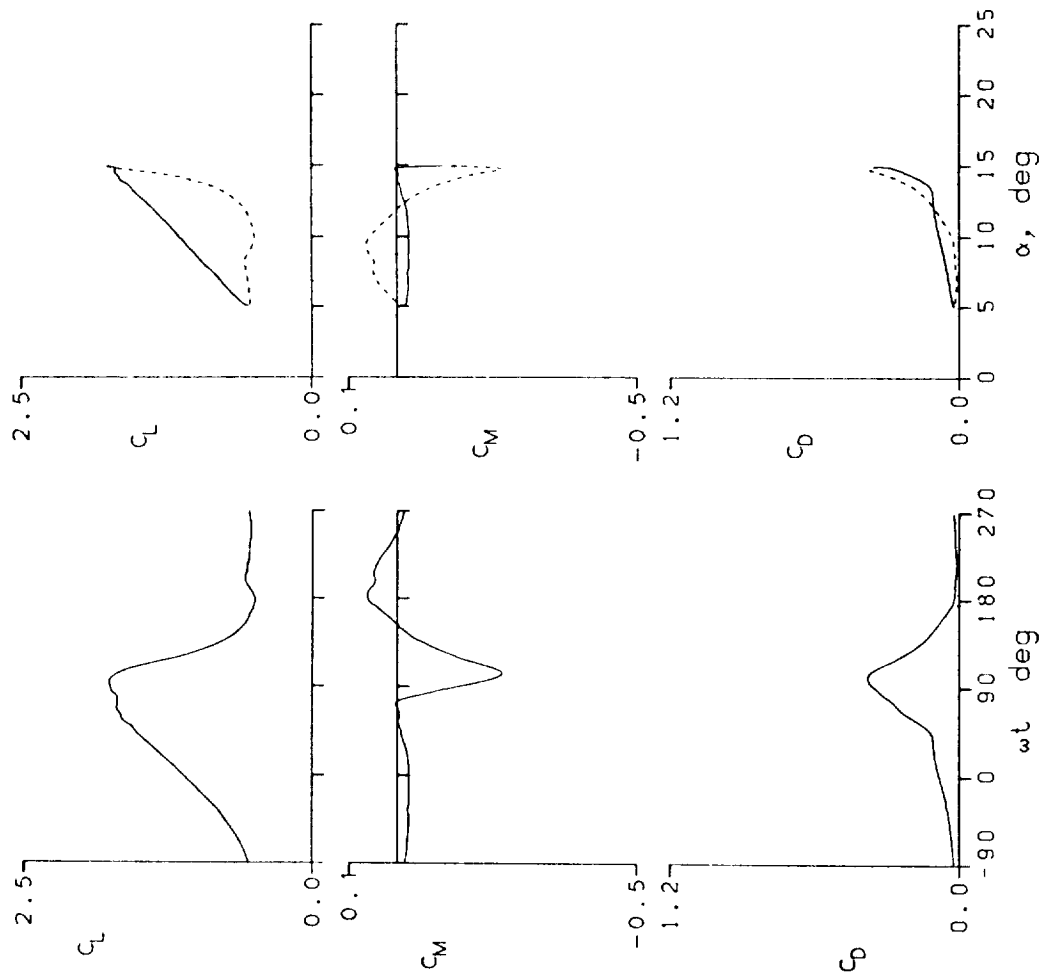


Figure 18.- Continued.

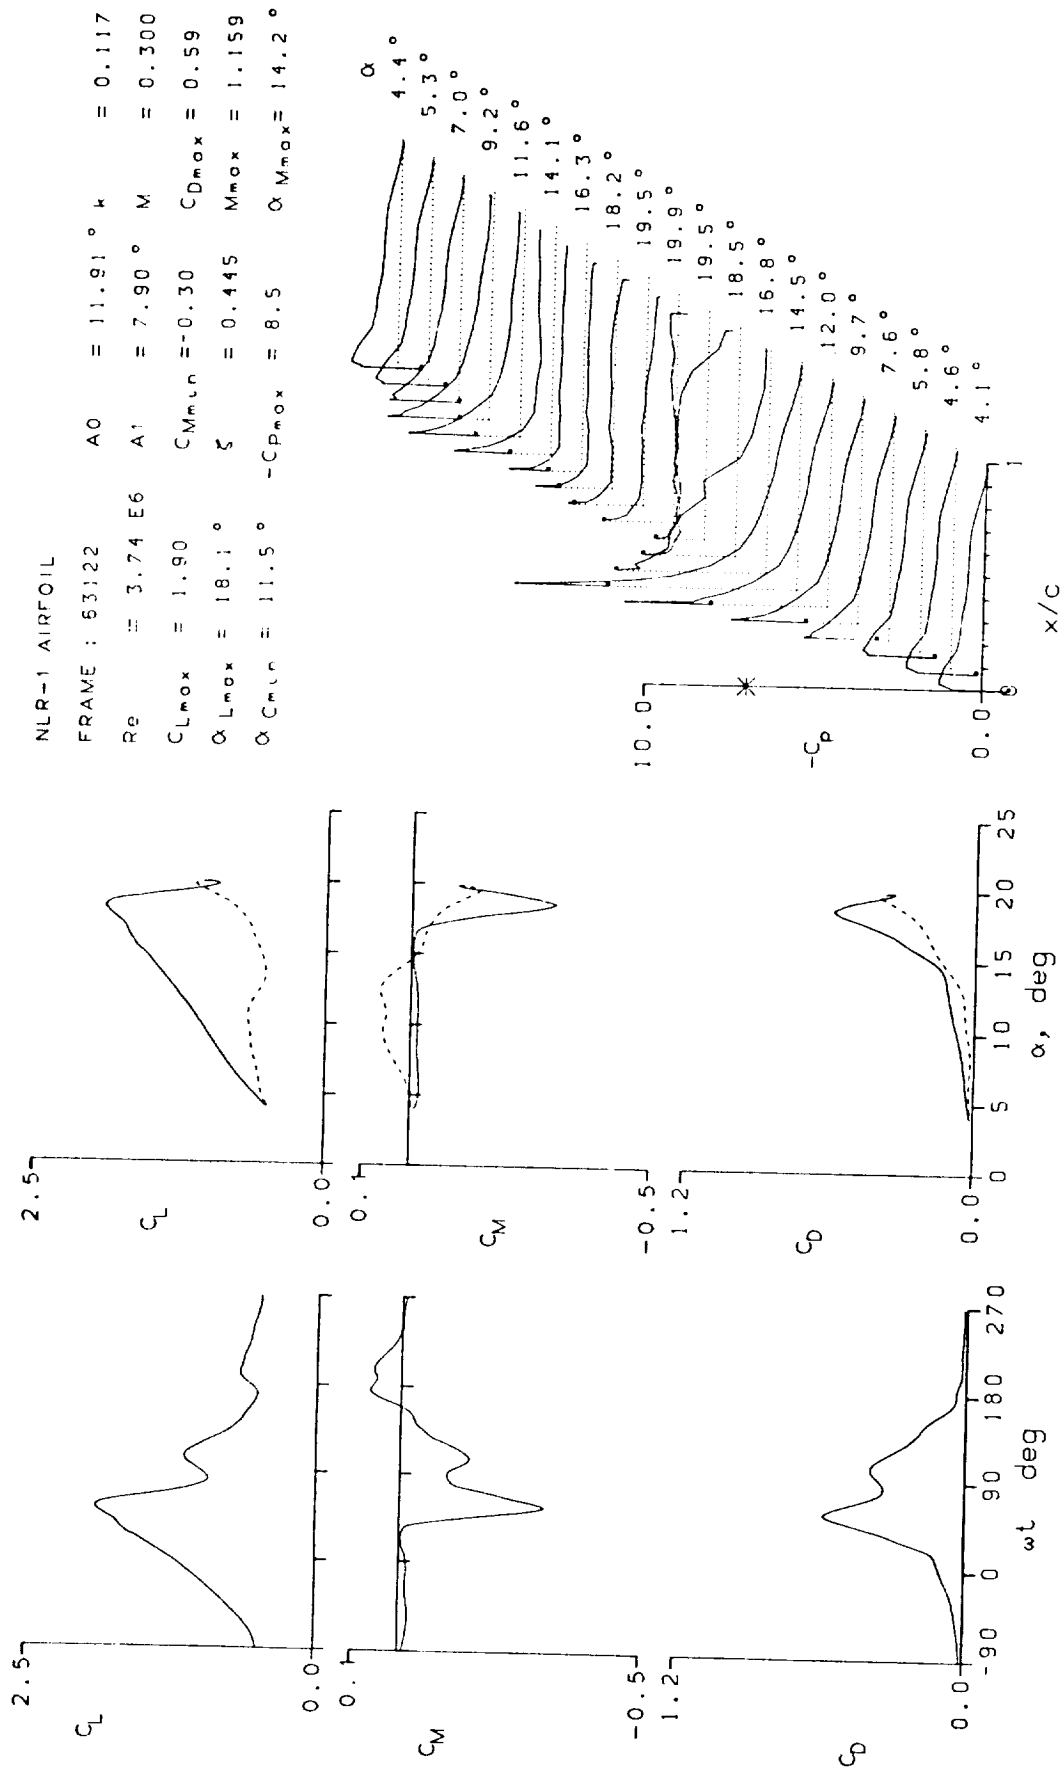


Figure 18.- Continued.

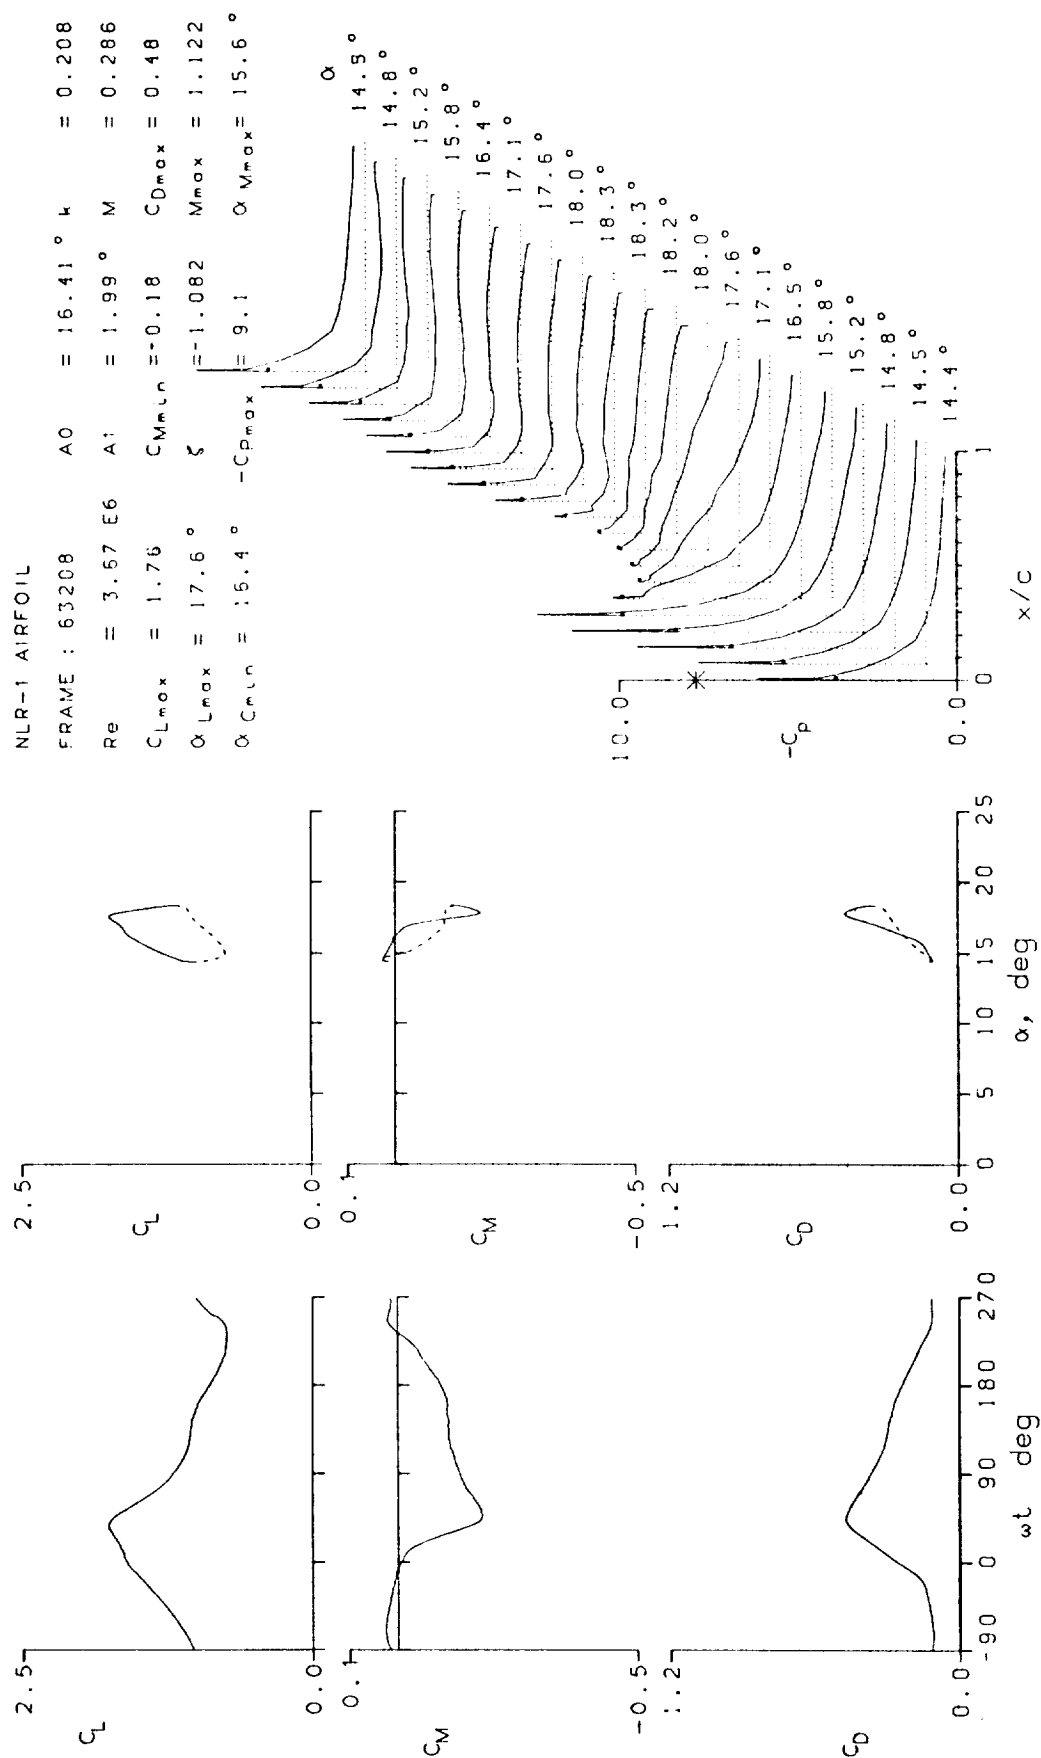


Figure 18.- Continued.

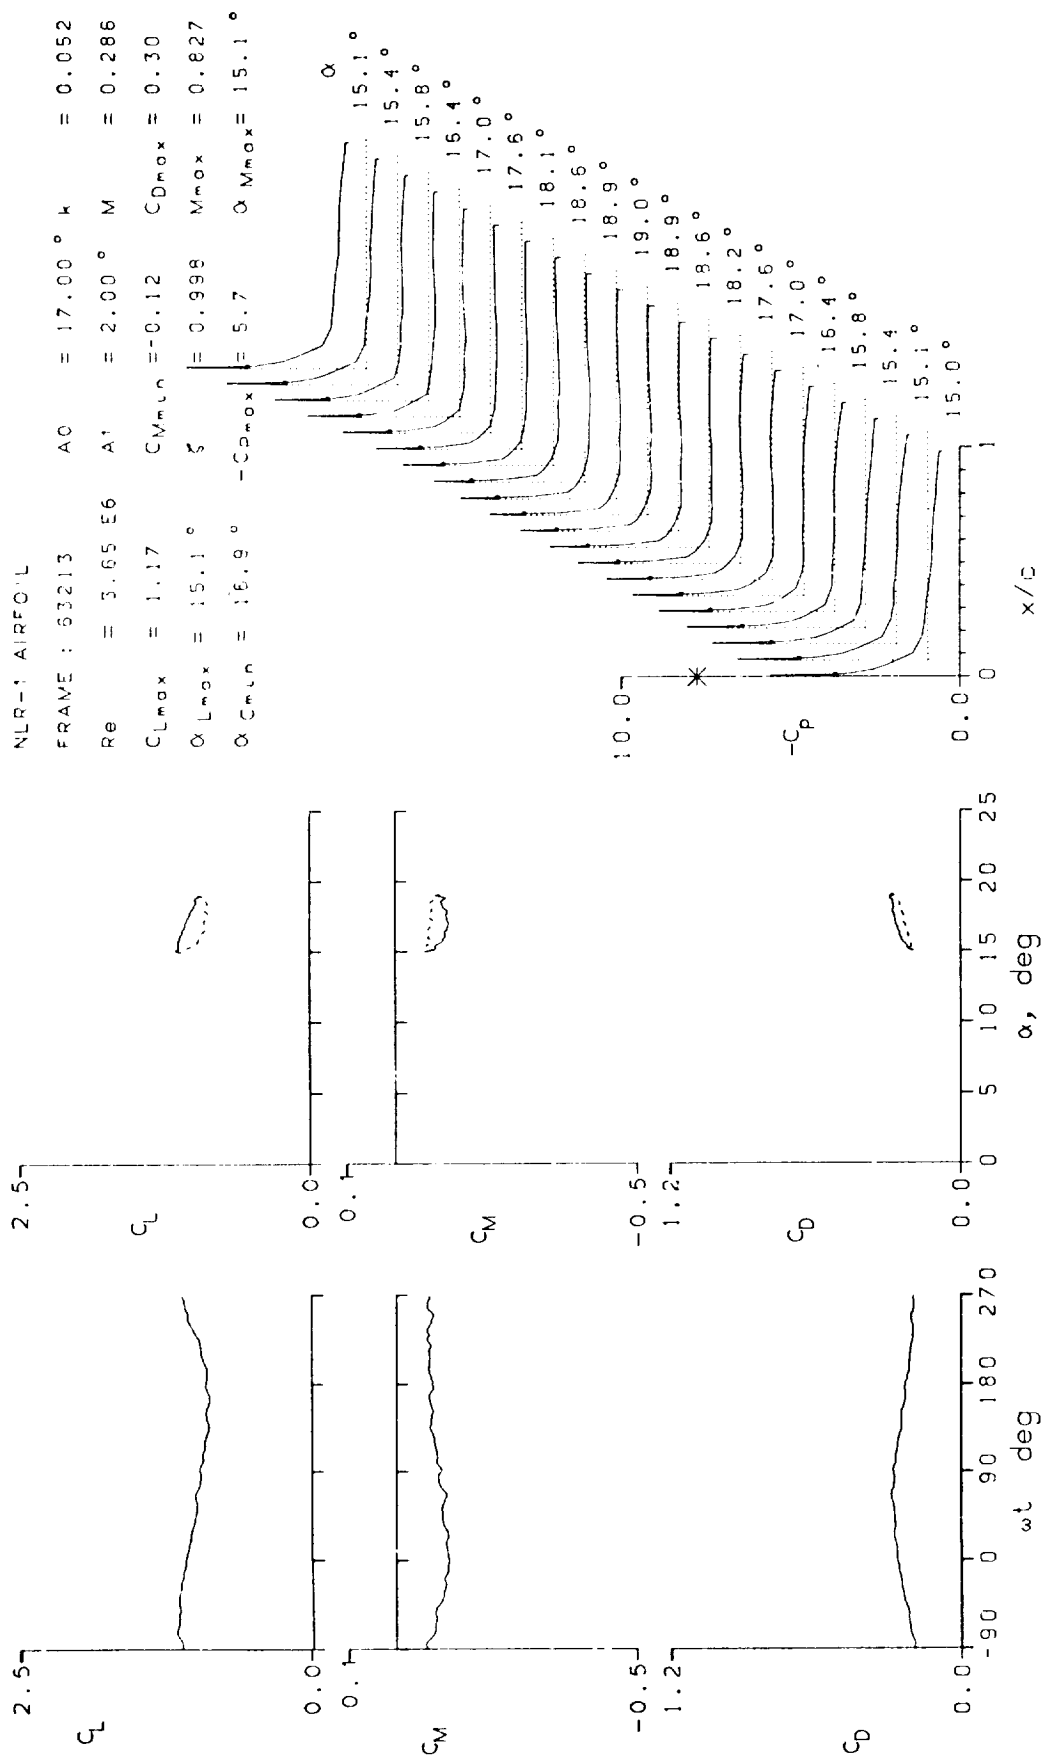


Figure 18.- Continued.

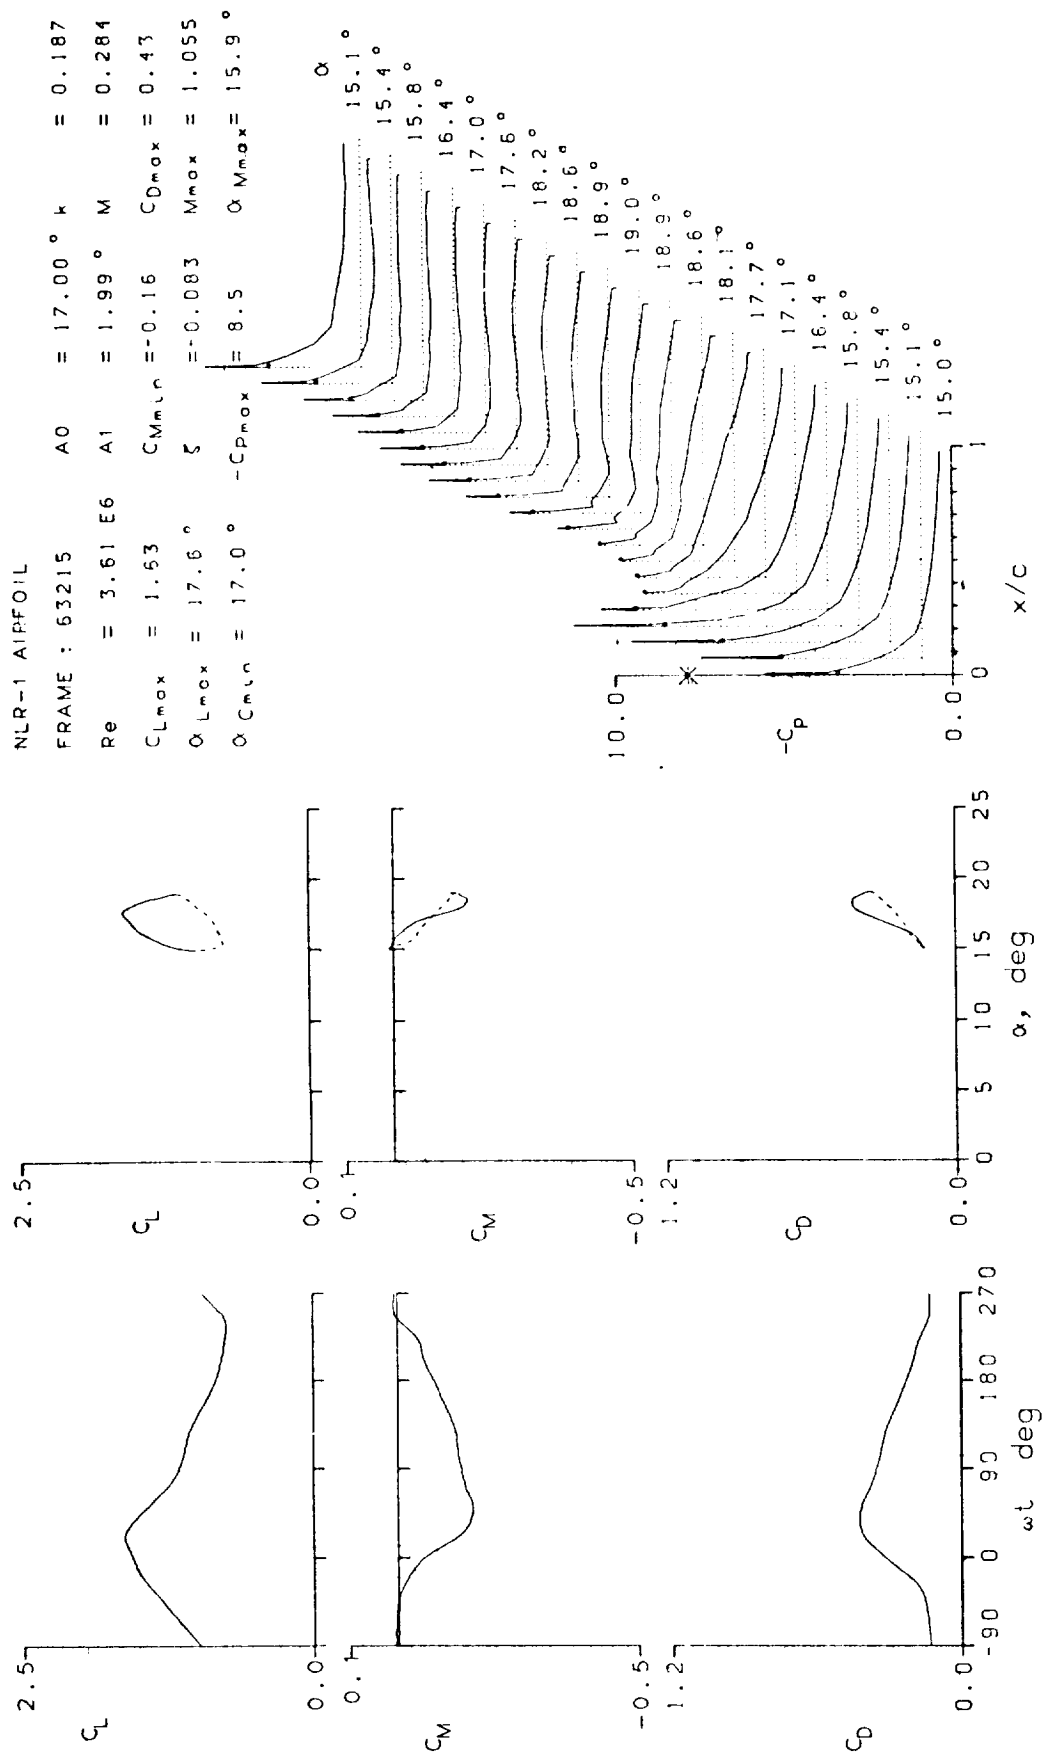


Figure 18.- Continued.

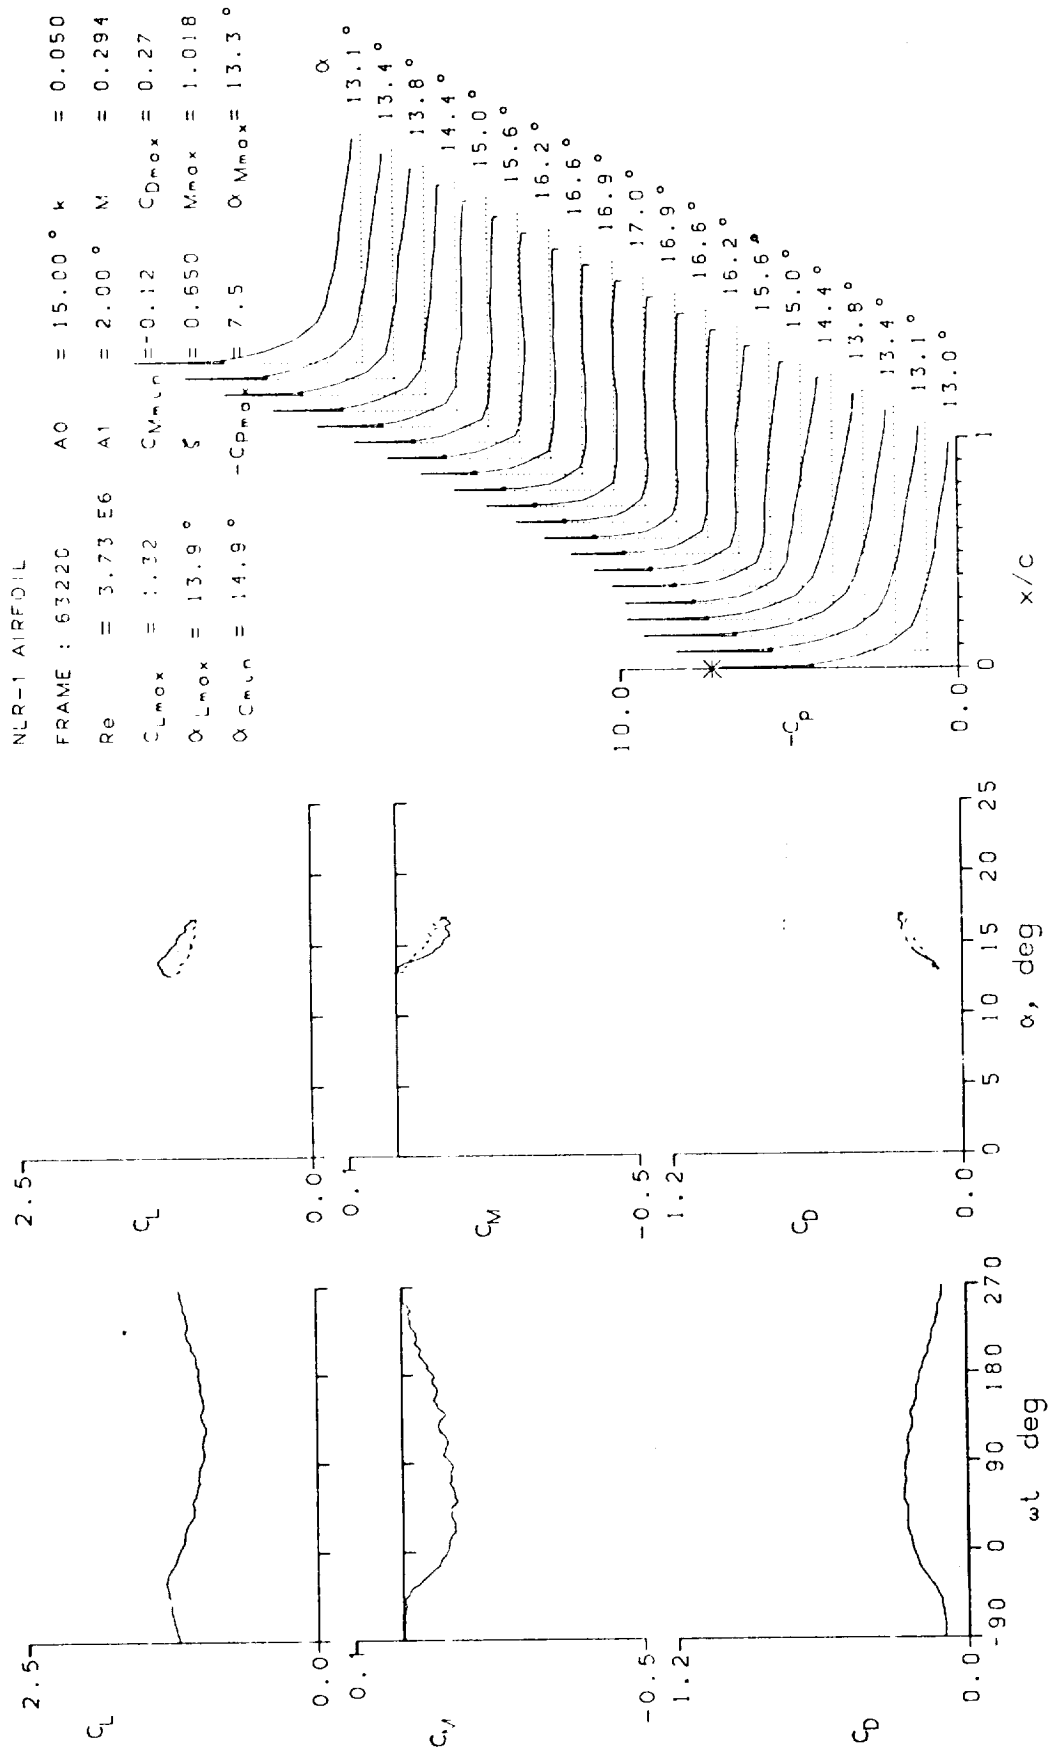


Figure 18.- Continued.

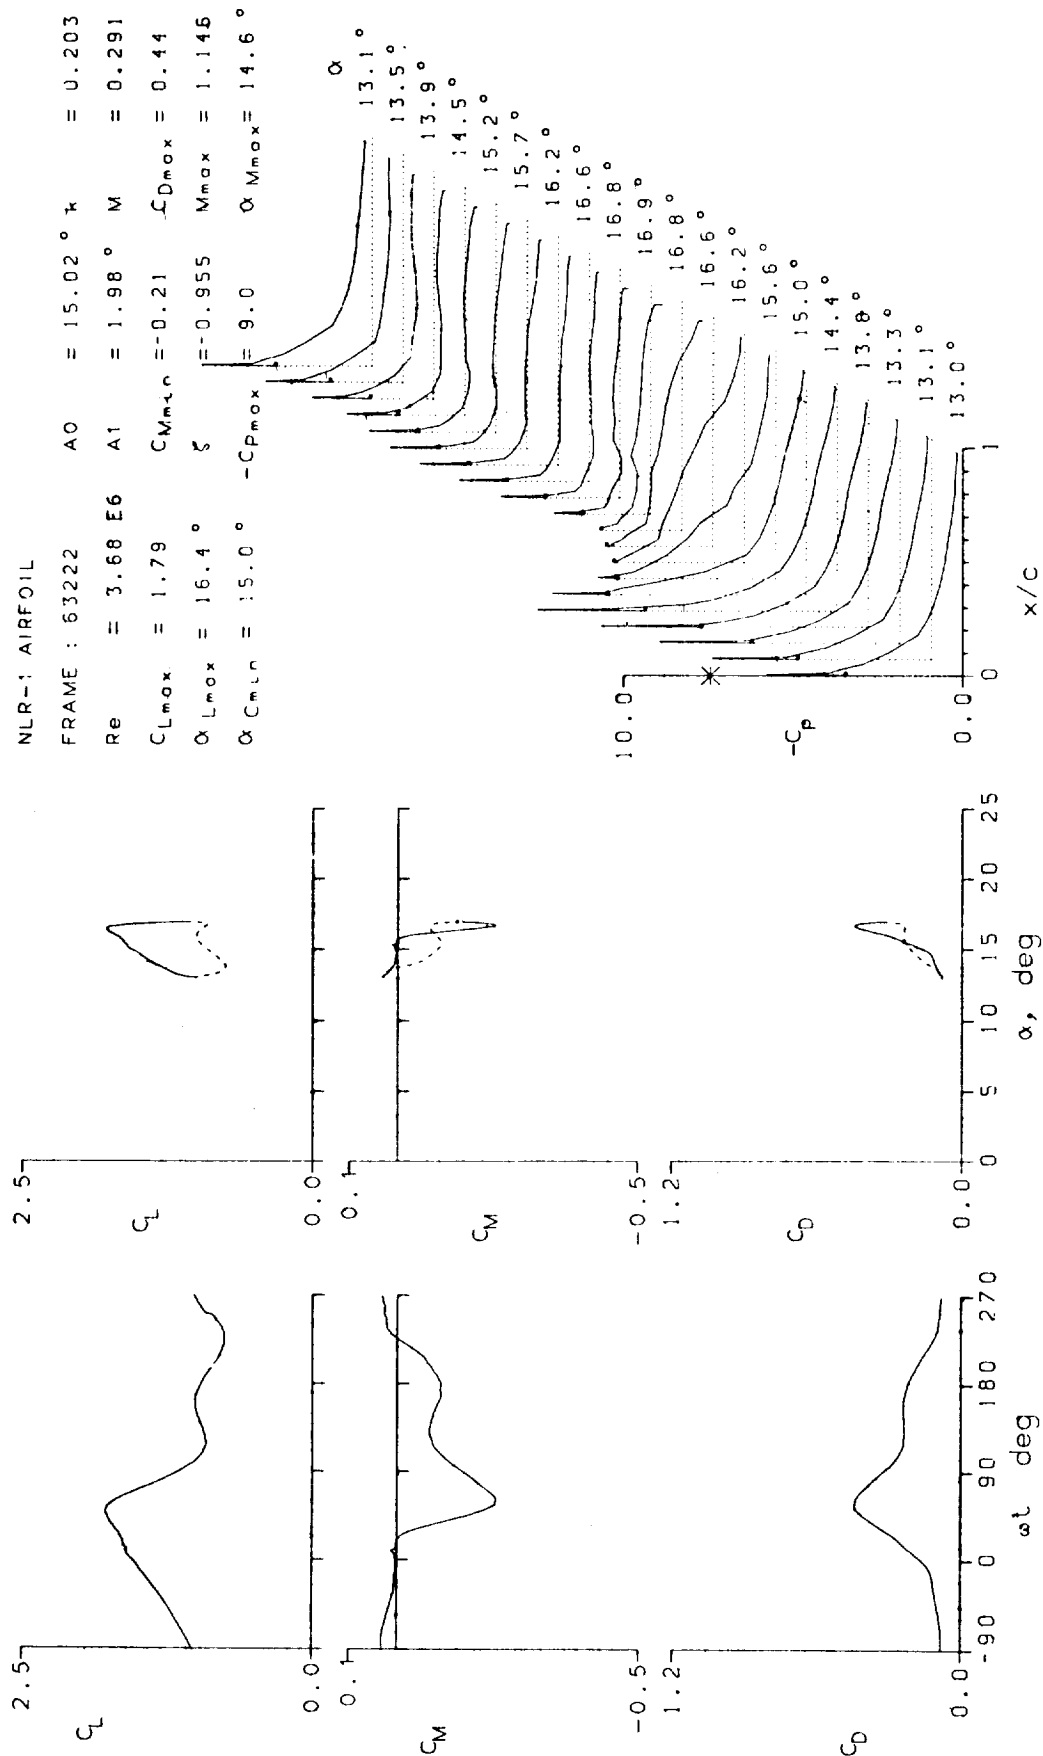


Figure 18.- Continued.

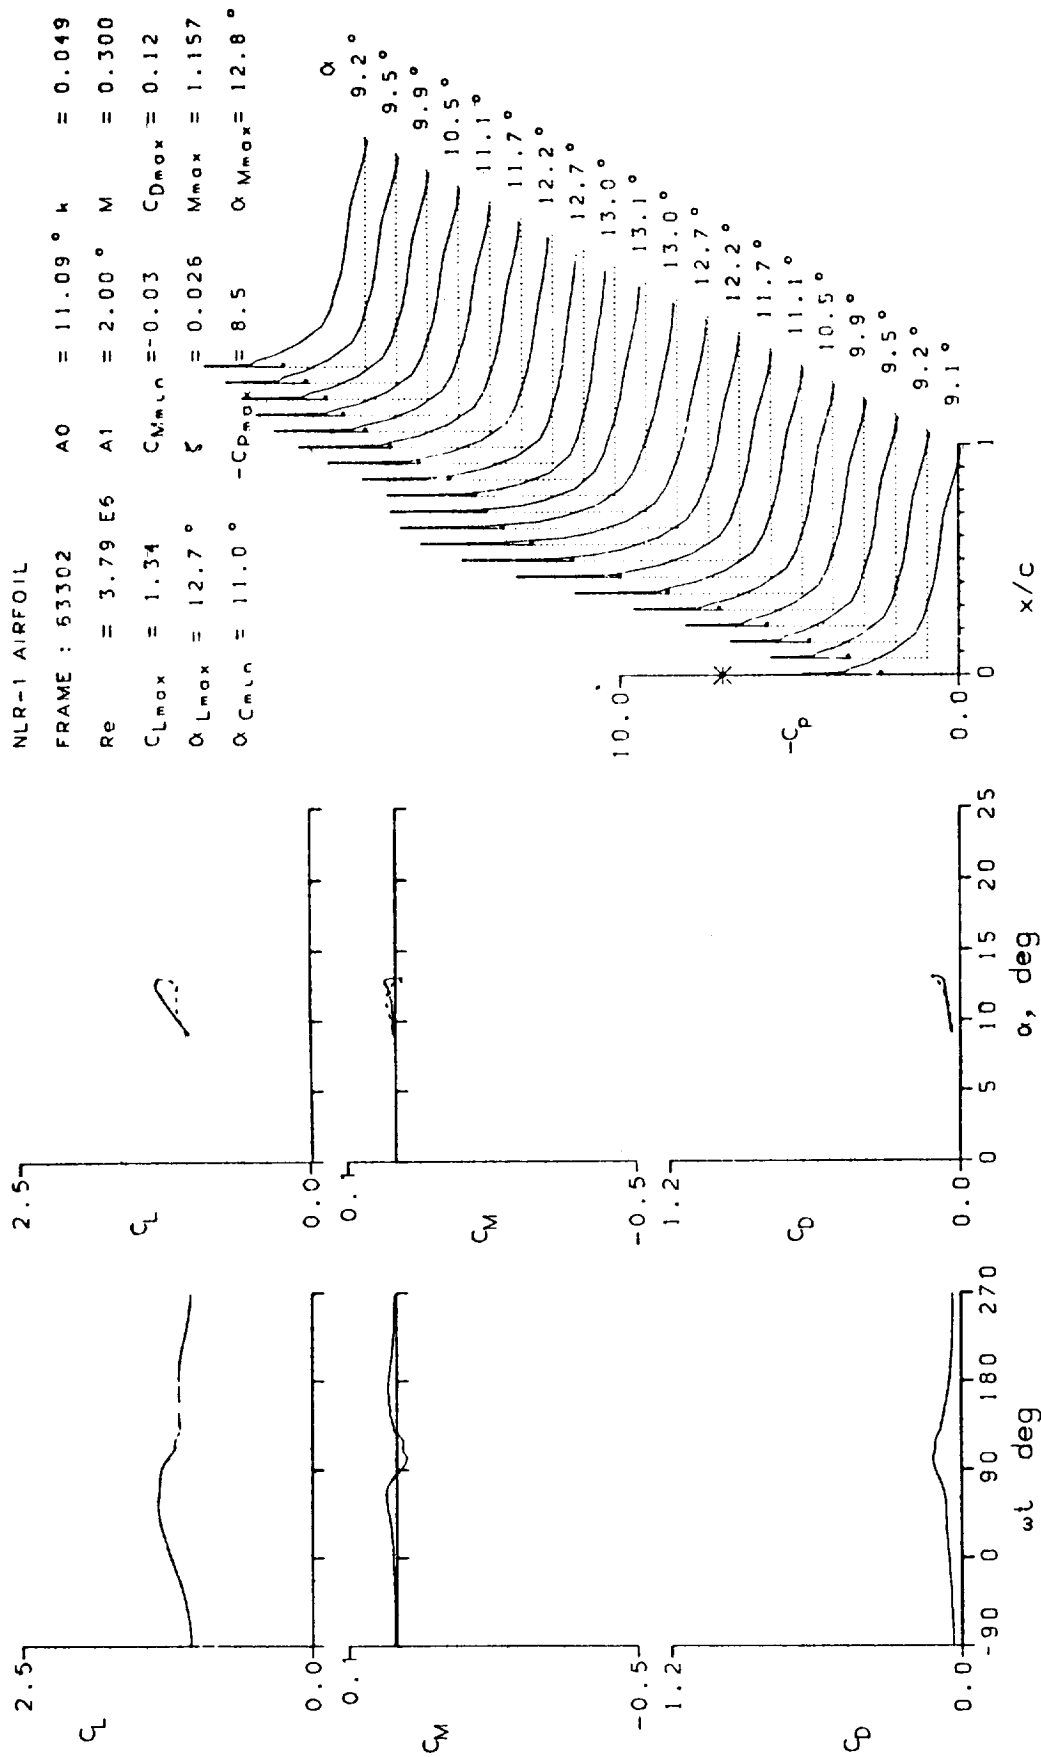


Figure 18.- Continued.

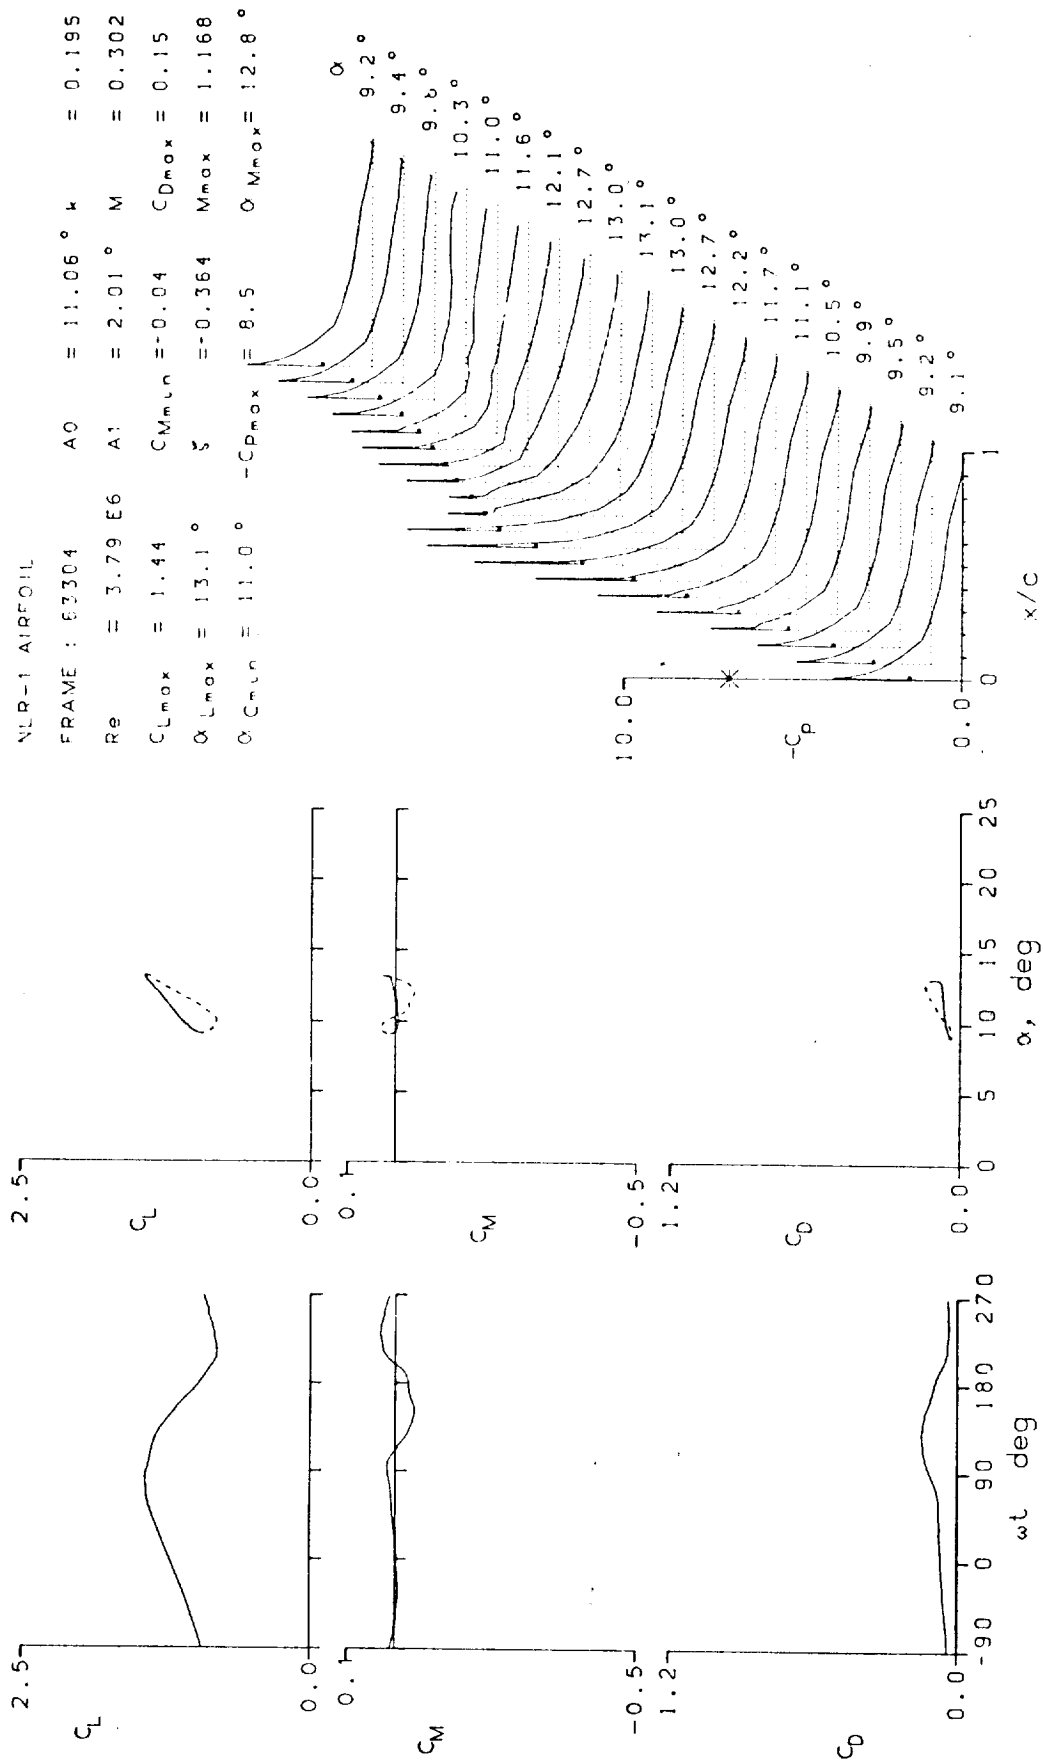


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAM1 : 6.3312	A0 = 2.35 °	h = 0.010
Re = 3.76 E6	A1 = 10.14 °	M = 0.302
C _{Lmax} = 1.29	C _{Mmin} = -0.05	C _{Dmax} = 0.09
α _{Lmax} = 12.3 °	ξ = 0.035	M _{max} = 1.116
α _{Cmin} = 2.0 °	-C _{Dmax} = 8.0	α _{Mmax} = 12.3 °



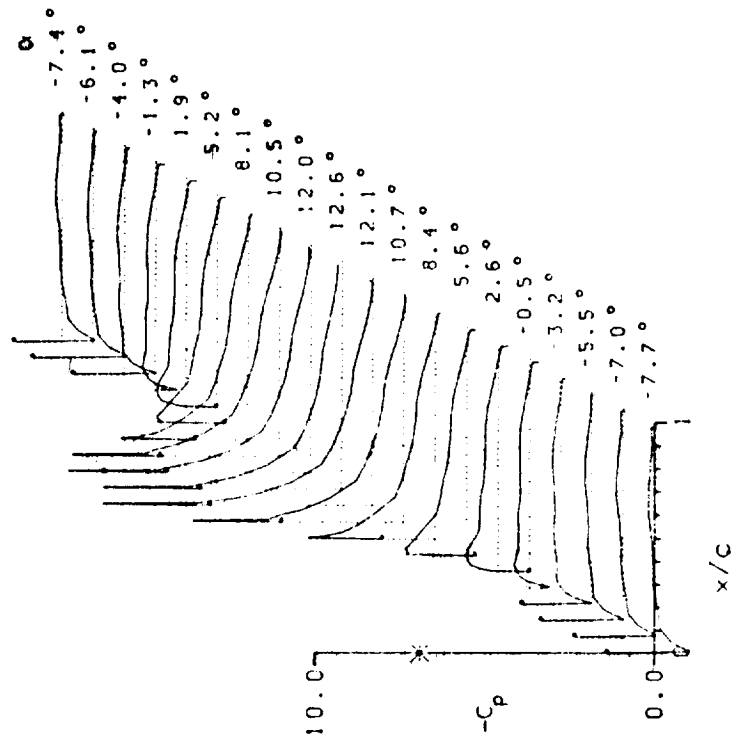


Figure 18.- Continued.

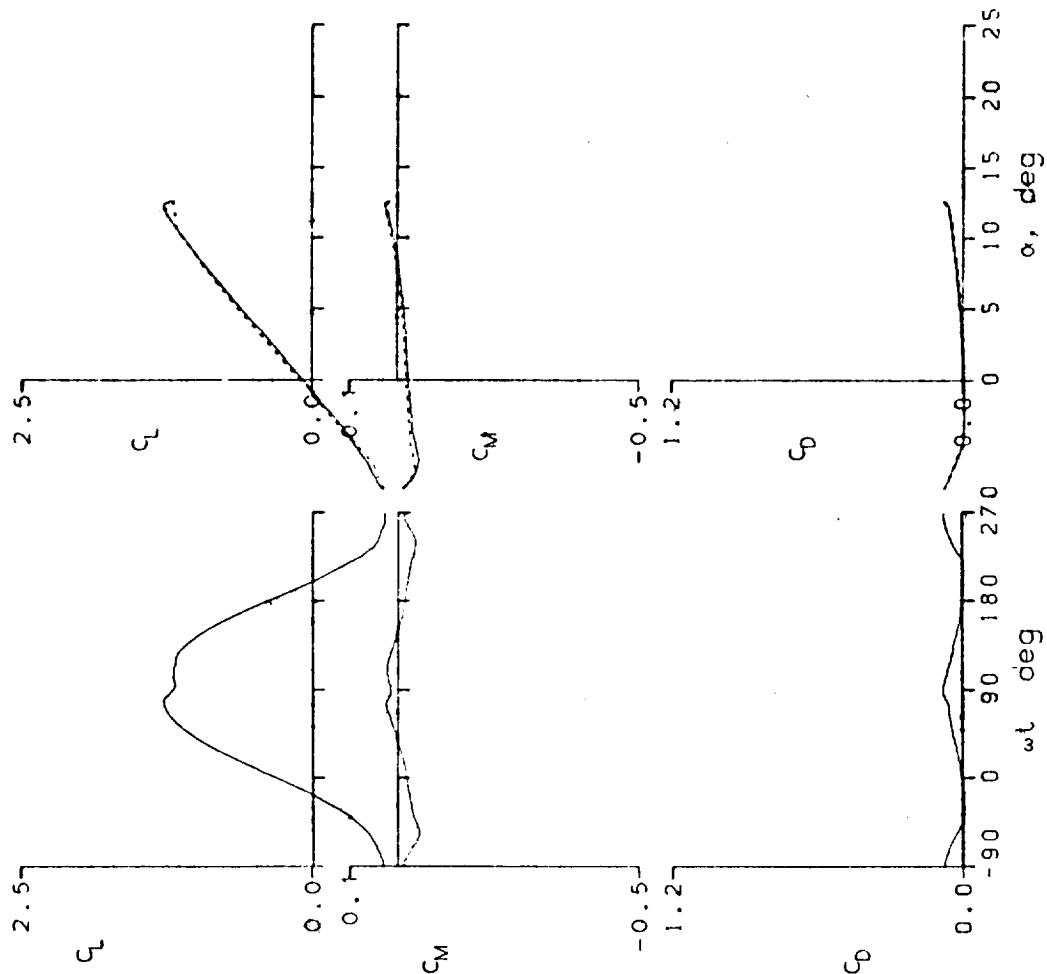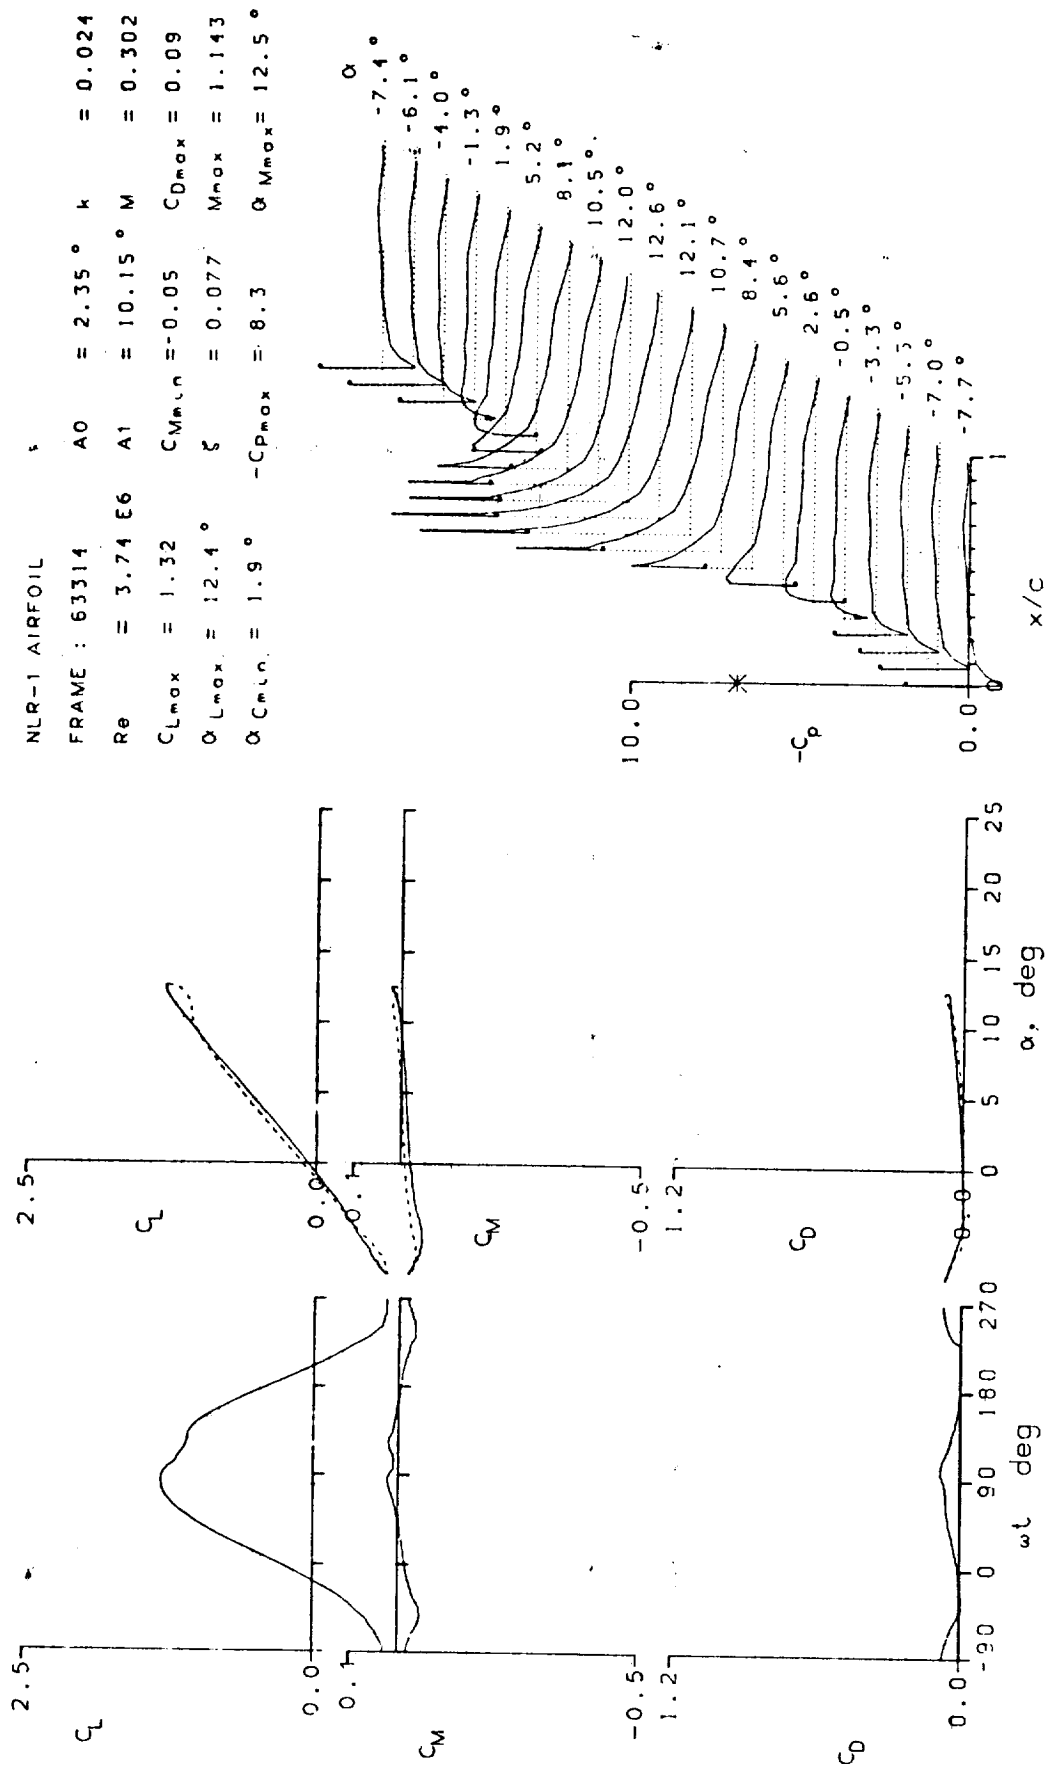

NLR-1 AIRFOIL

FRAME : 63318	A0 = 2.35 °	k = 0.049
Re = 3.76 E6	A1 = 10.15 °	M = 0.303
CLmax = 1.34	CMmin = -0.06	CDmax = 0.09
αLmax = 12.4 °	ξ = 0.148	Mmax = 1.151
αCMmin = 1.9 °	-CPmax = 8.3	αMmax = 12.6 °

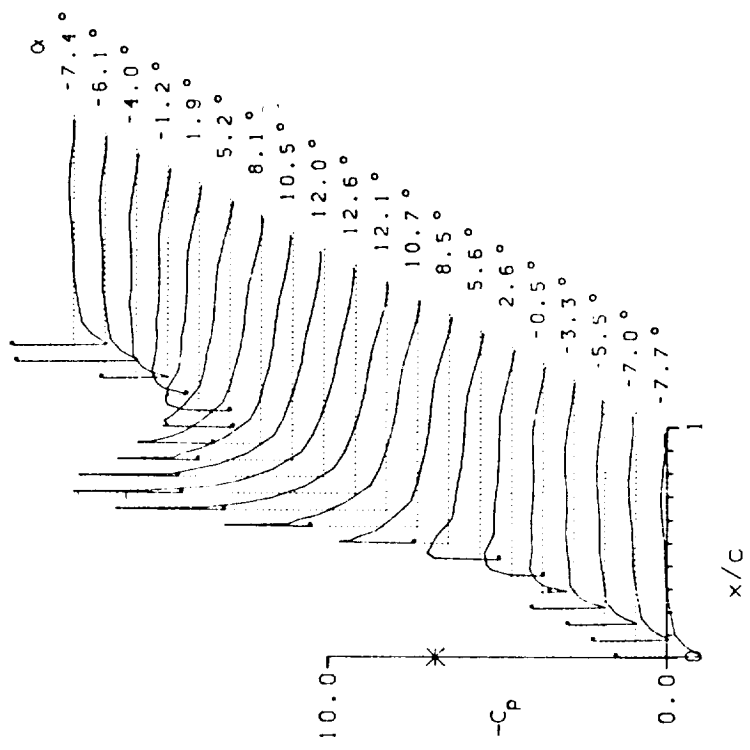
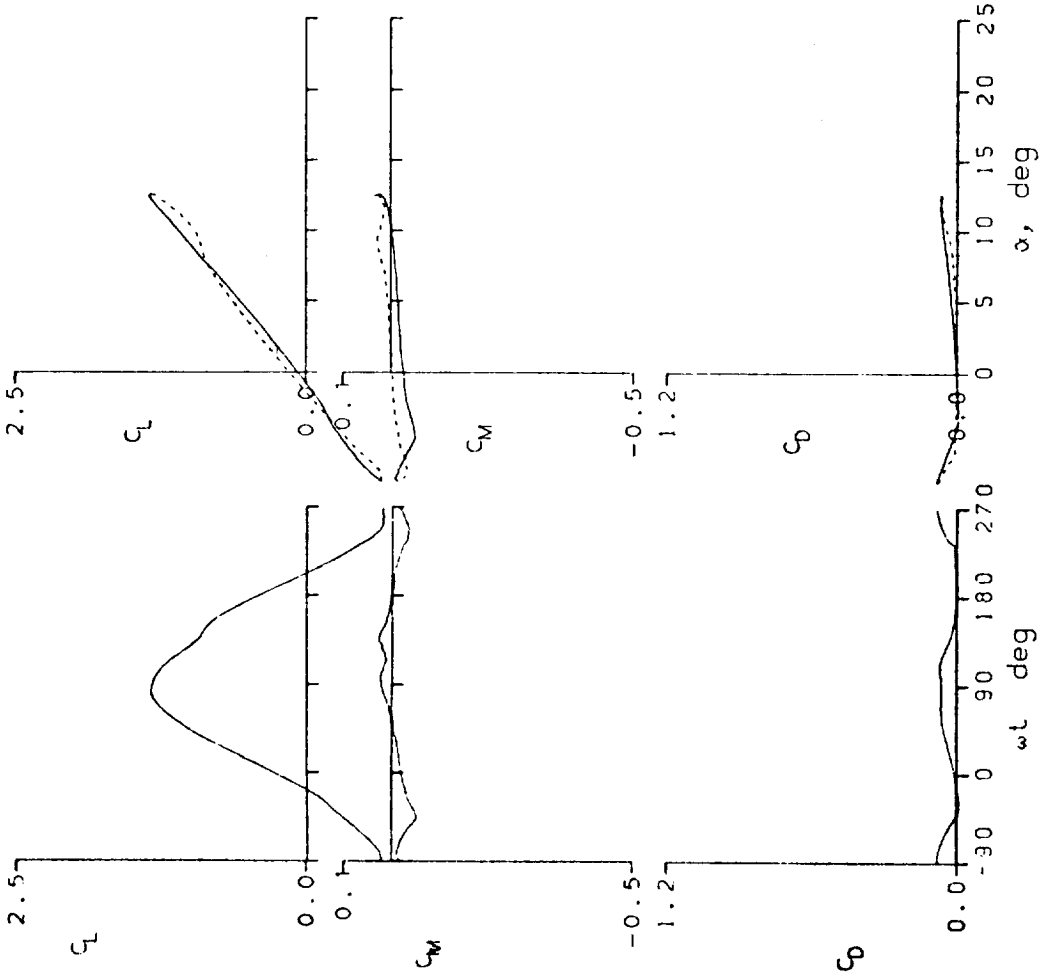


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 63320	A0 = 2.34°	h = 0.097
Re = 3.74 E6	A1 = 10.15°	M = 0.303
CLmax = 1.36	CMmin = -0.07	CDmax = 0.08
αLmax = 12.6°	ξ = 0.317	Mmax = 1.153
αCmin = 0.1°	-CDmax = 8.3	αMmax = 12.5°

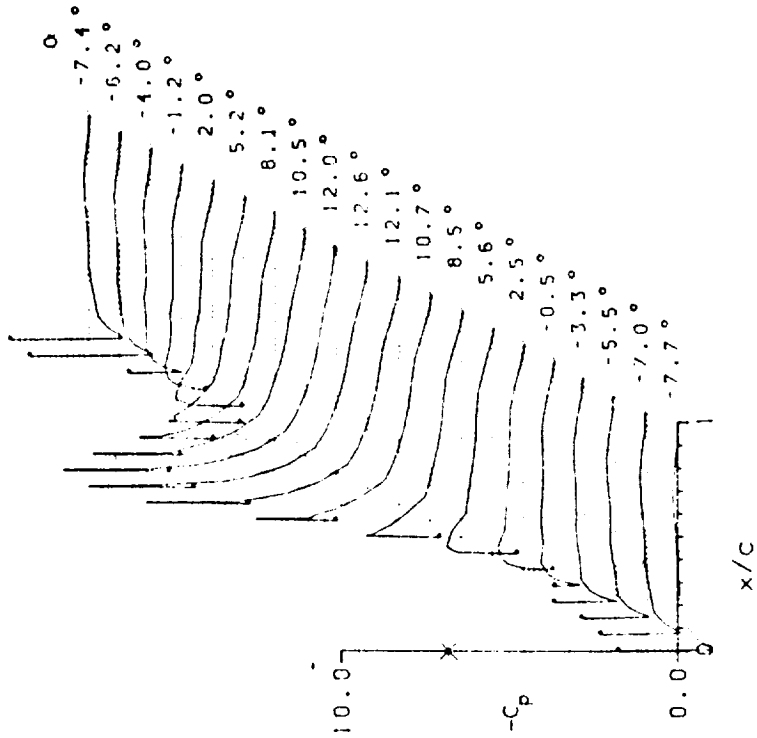
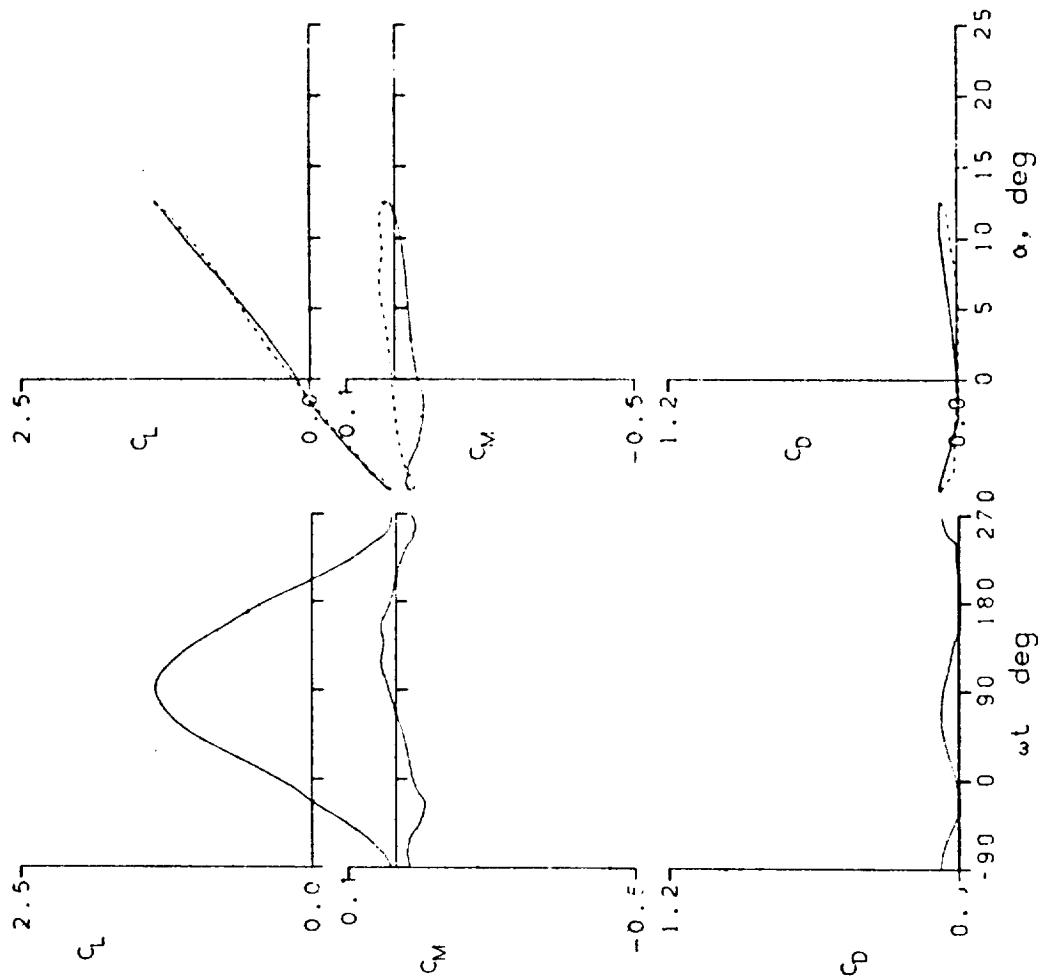


Figure 18.- Continued.

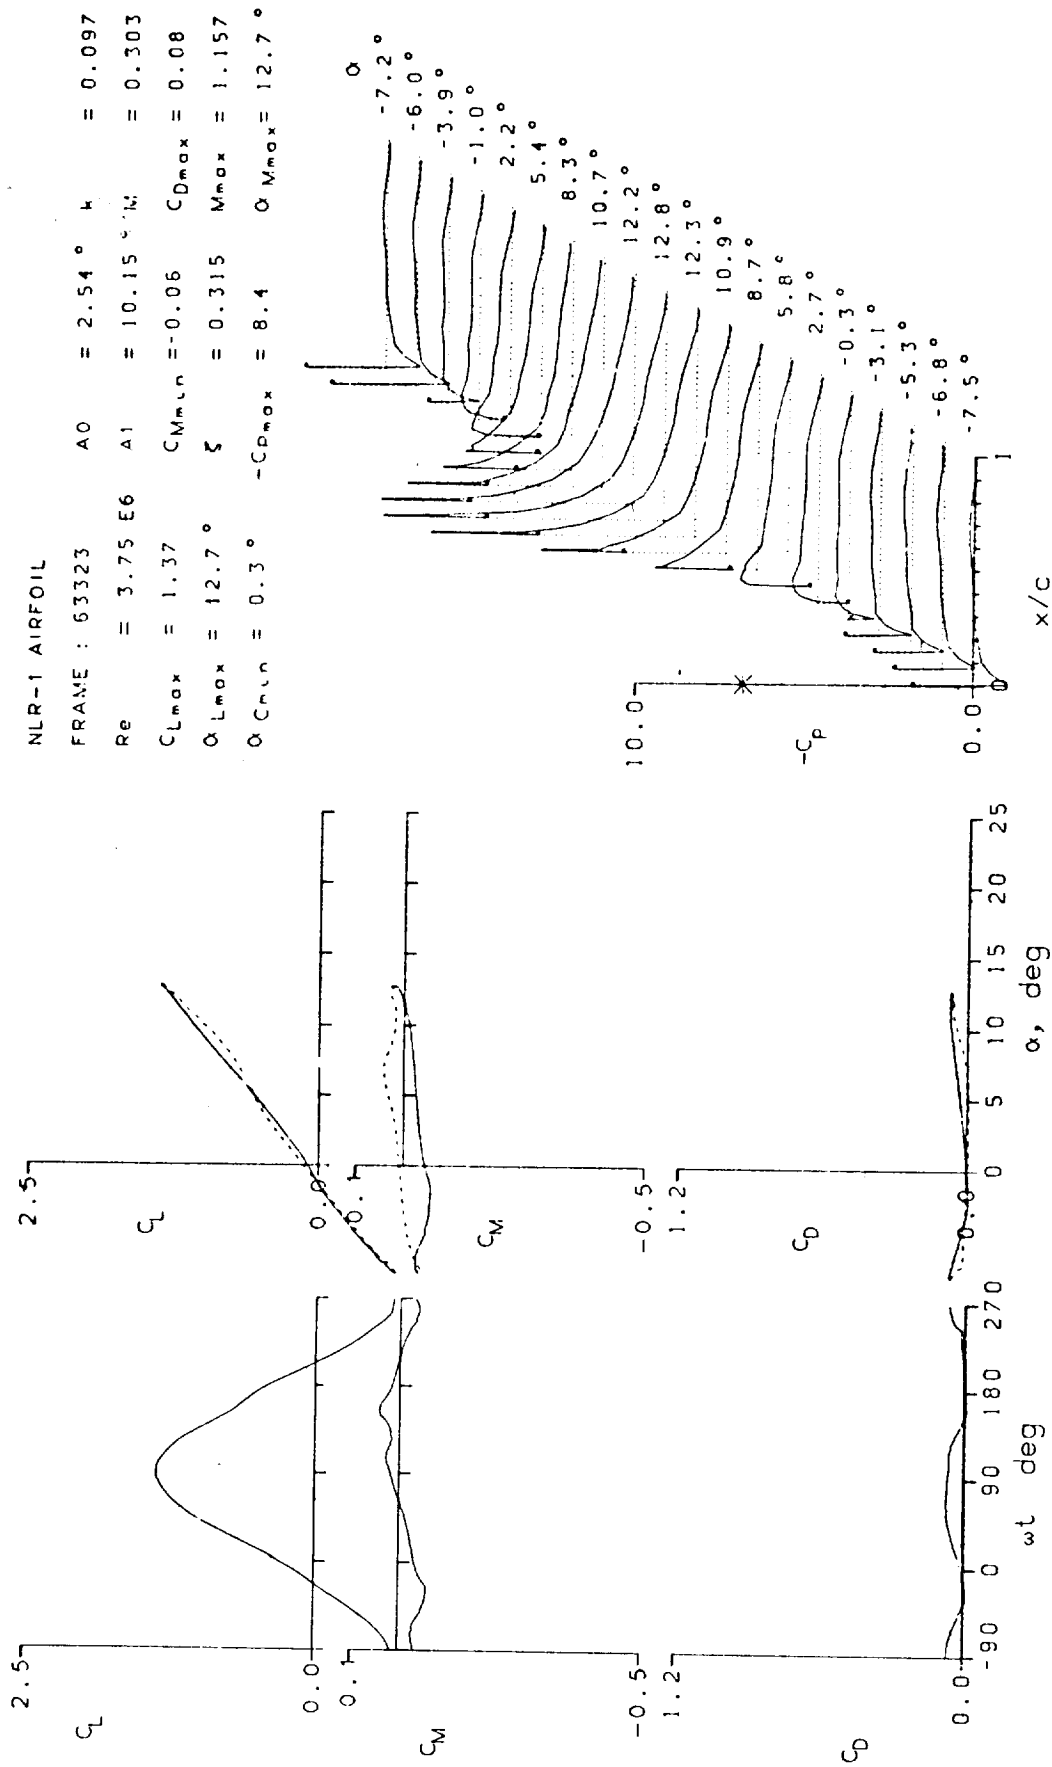


Figure 18.- Continued.

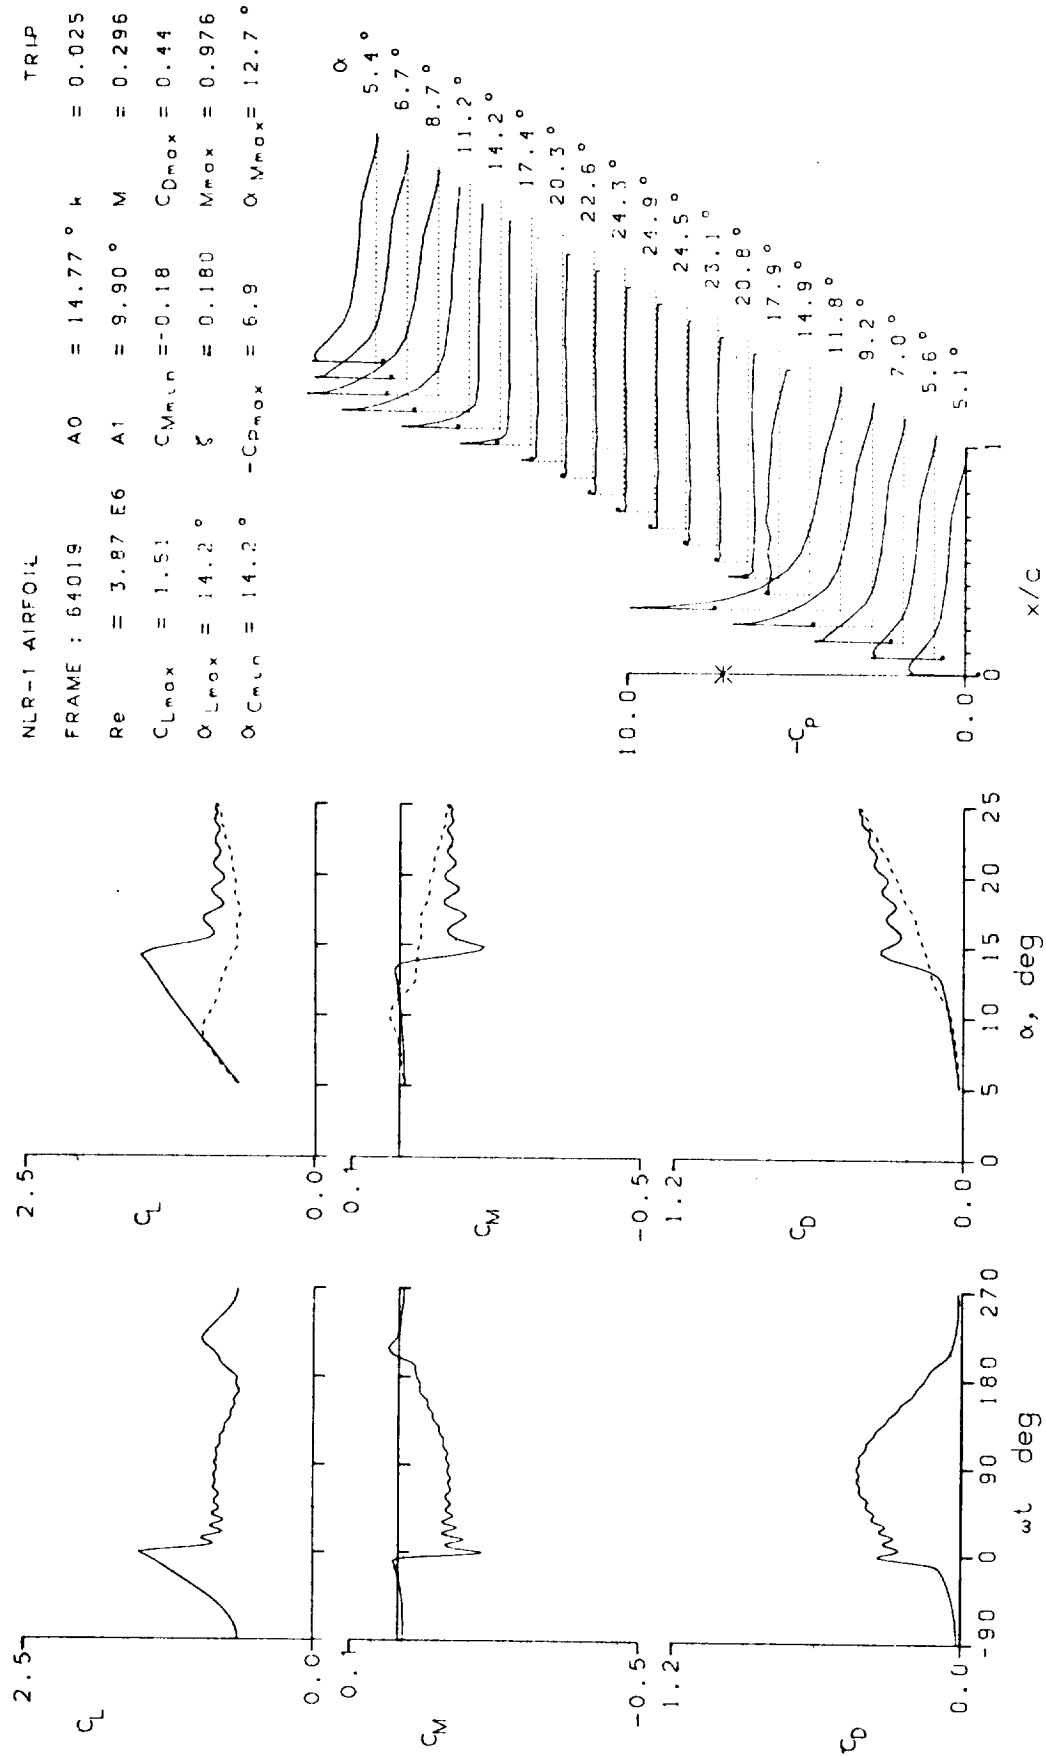


Figure 18.- Continued.

NLR-1 AIRFOIL

FRATE : 54021	A0 = 14.77 °	k = 0.049	TRIP
Re = 3.81 E6	A1 = 9.90 °	M = 0.295	
CLmax = 1.73	CMmin = -0.26	CDmax = 0.48	
α Lmax = 15.8 °	ξ = 0.384	Mmax = 0.994	
α CMmin = 14.2 °	-CDmax = 7.1	α Mmax = 13.3 °	

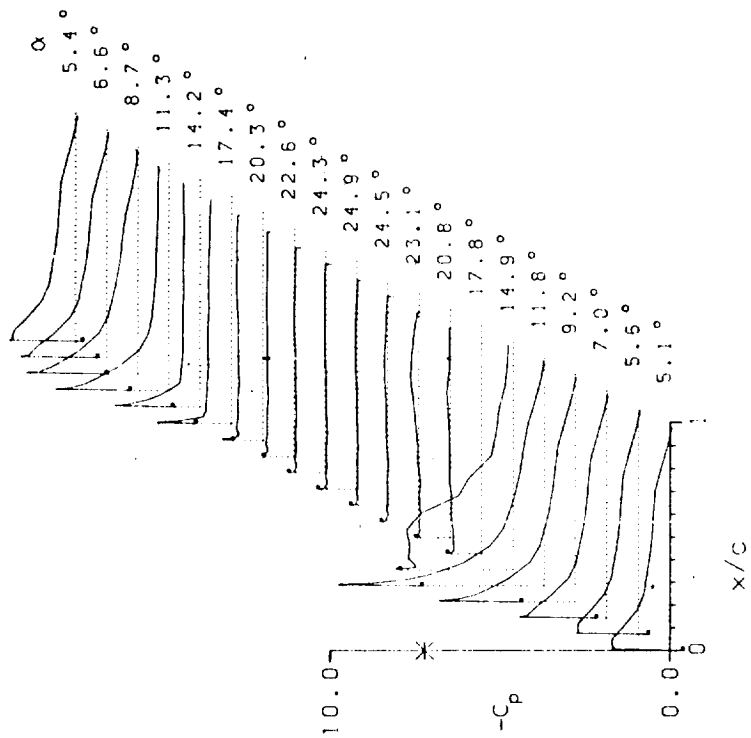
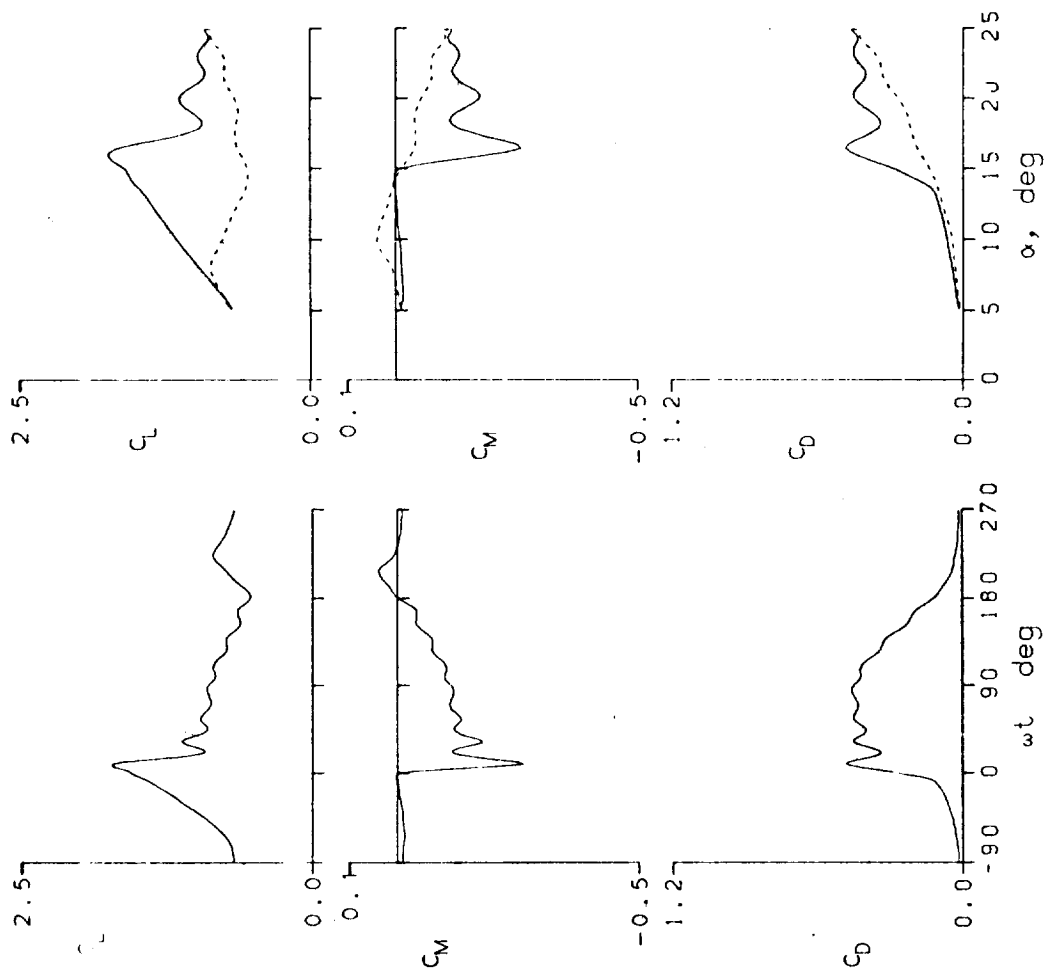


Figure 18.- Continued.

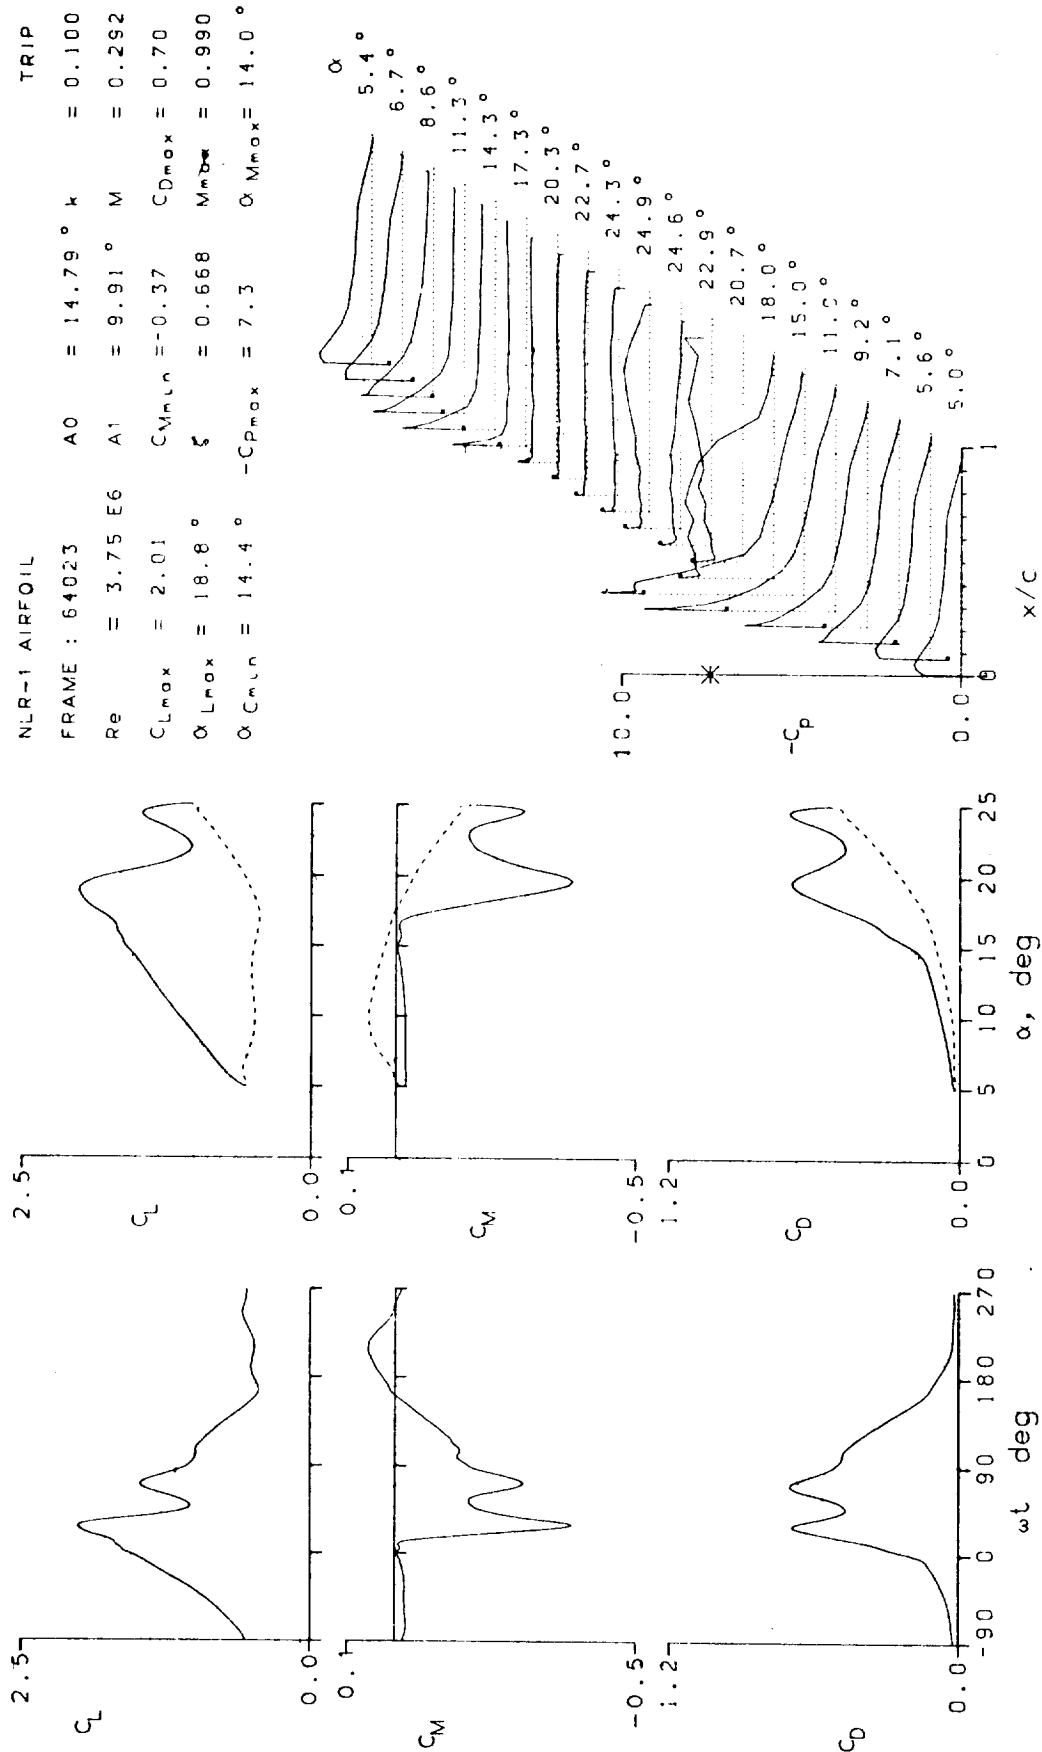


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 64107	A0 = 14.77°	k = 0.050	TRIP
Re = 2.45 E6	A1 = 9.90°	M = 0.185	
CLmax = 1.87	CMmin = -0.31	CDmax = 0.59	
αLmax = 17.9°	ξ = 0.360	Mmax = 0.618	
αCMmin = 14.3°	-CDmax = 8.8	αMmax = 15.8°	

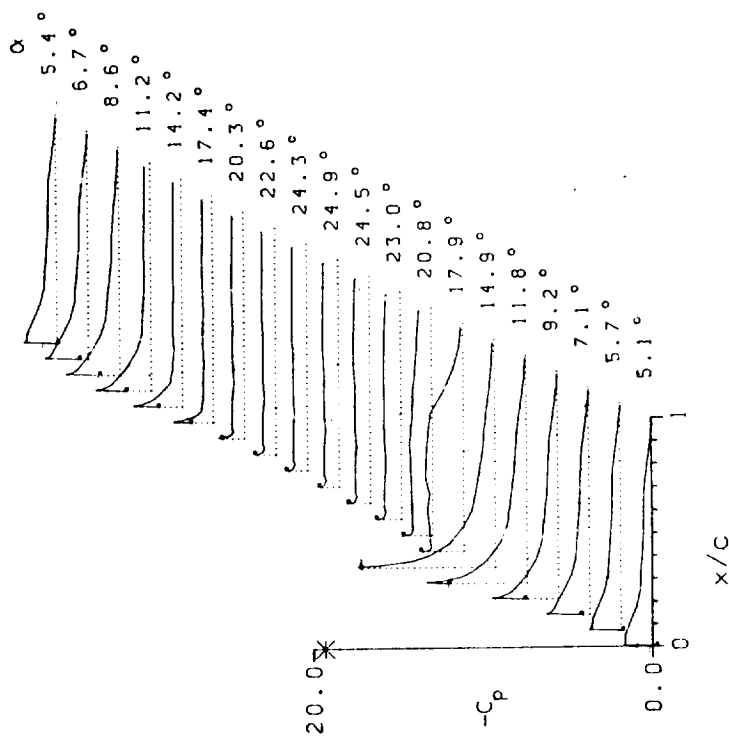
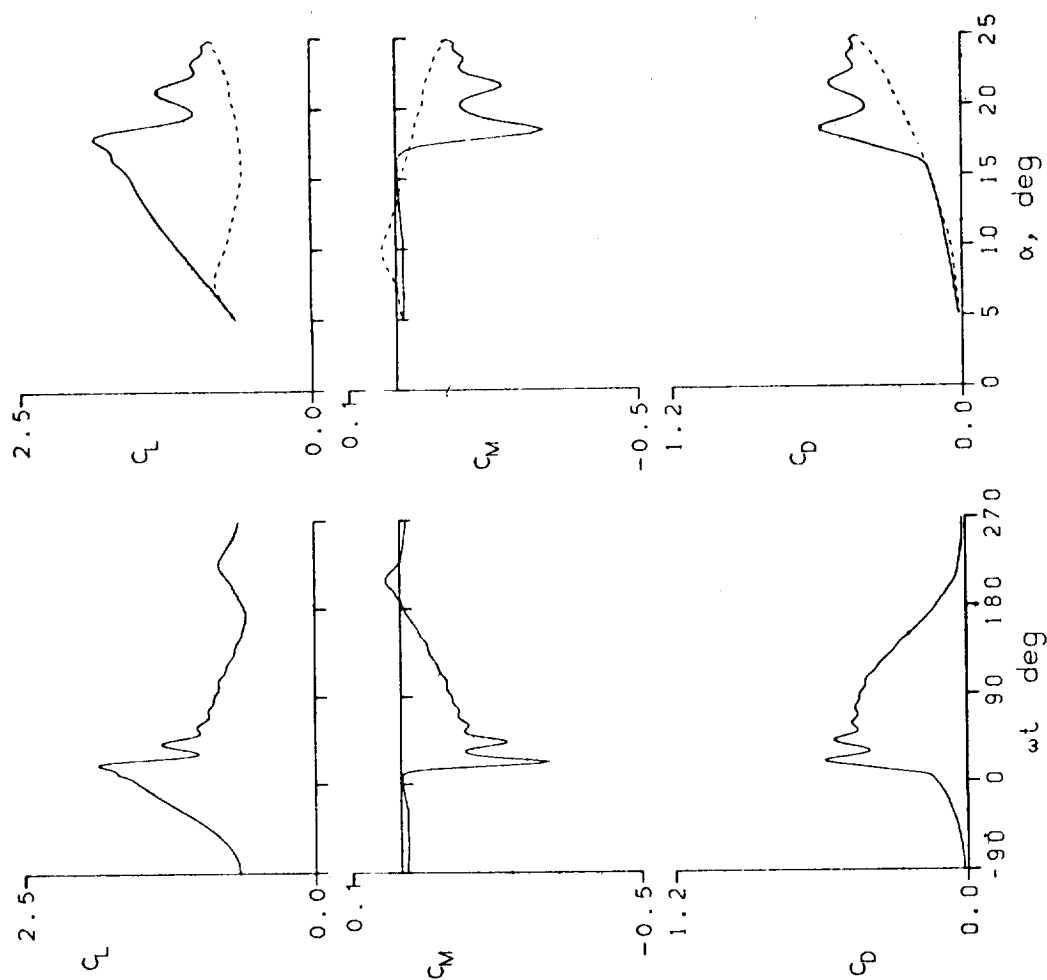


Figure 18.- Continued.

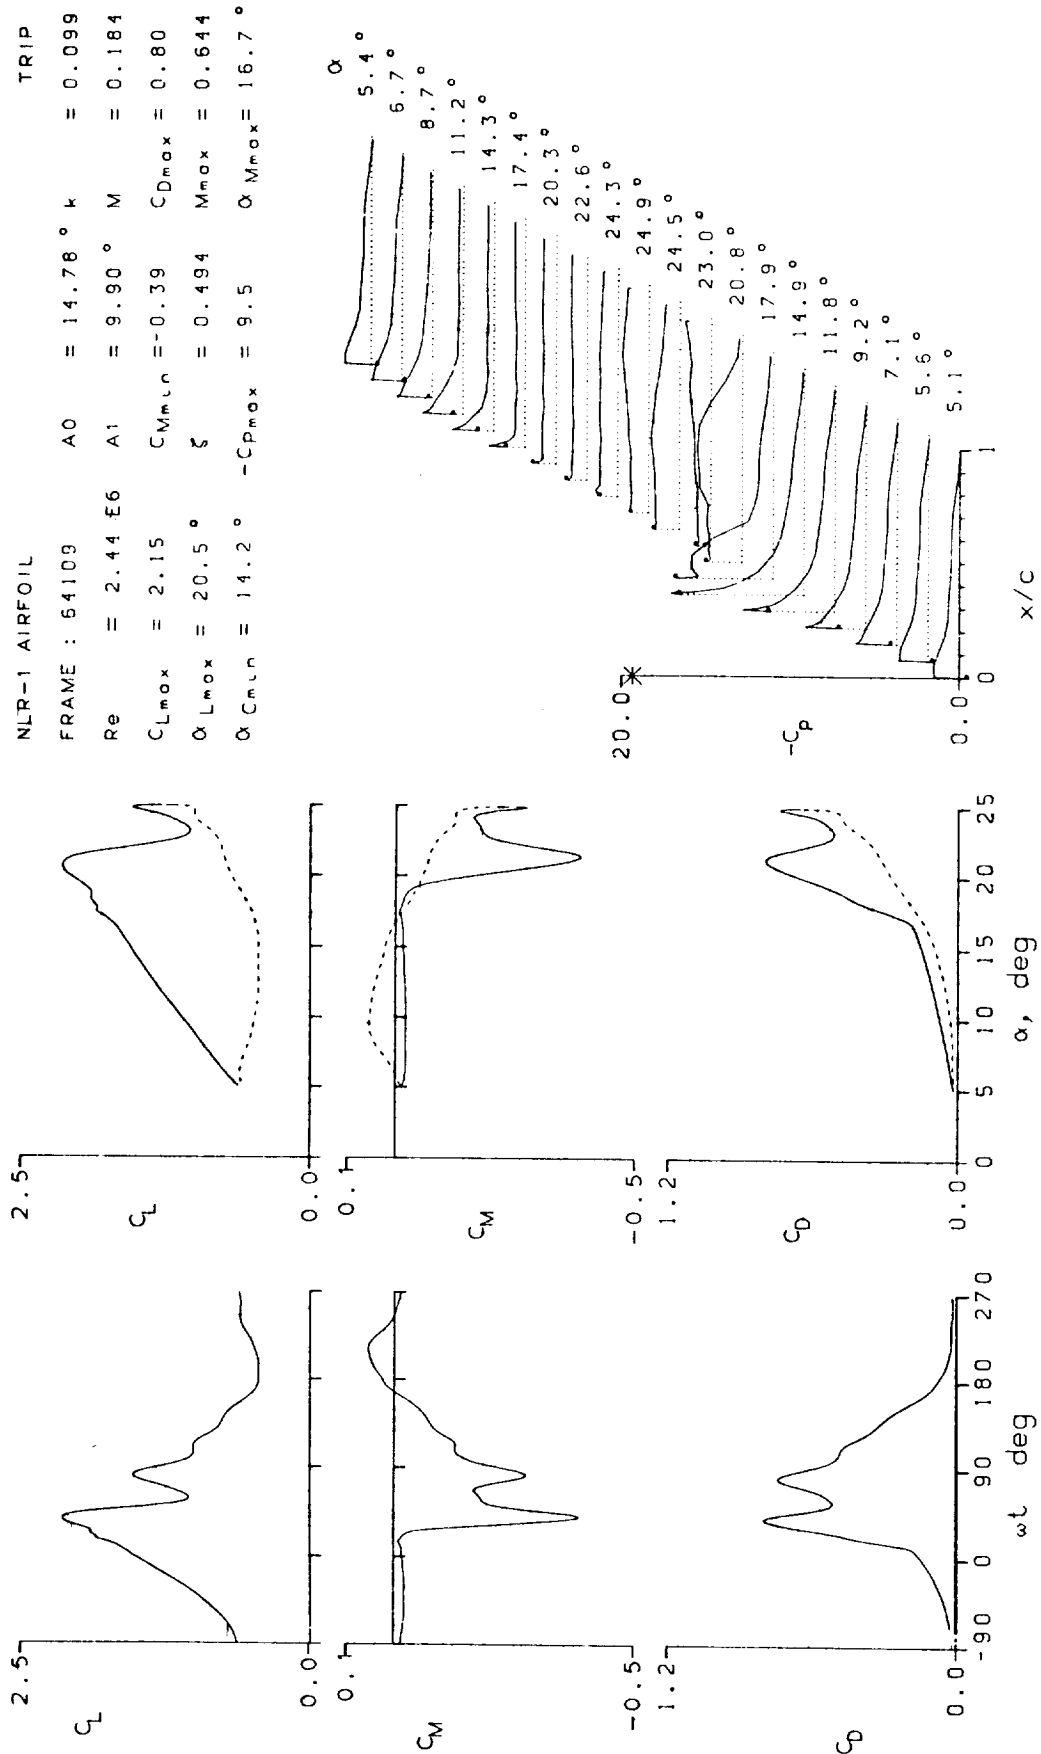
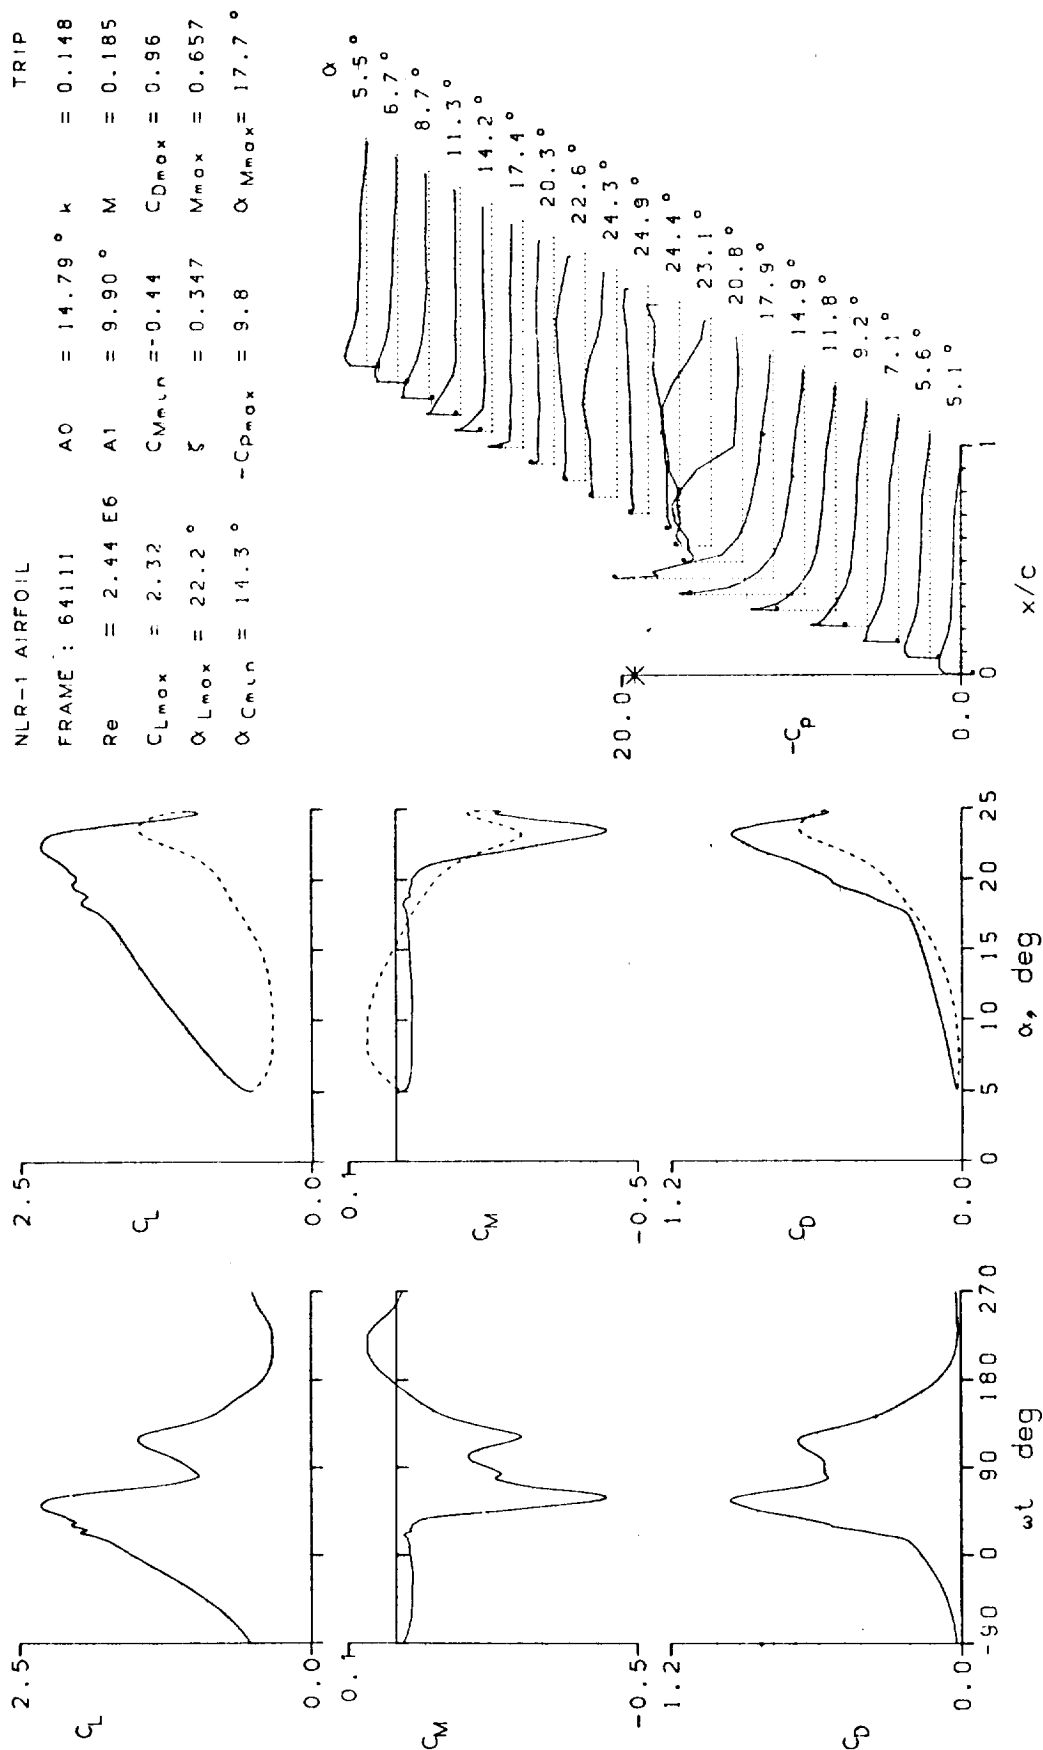


Figure 18.- Continued.



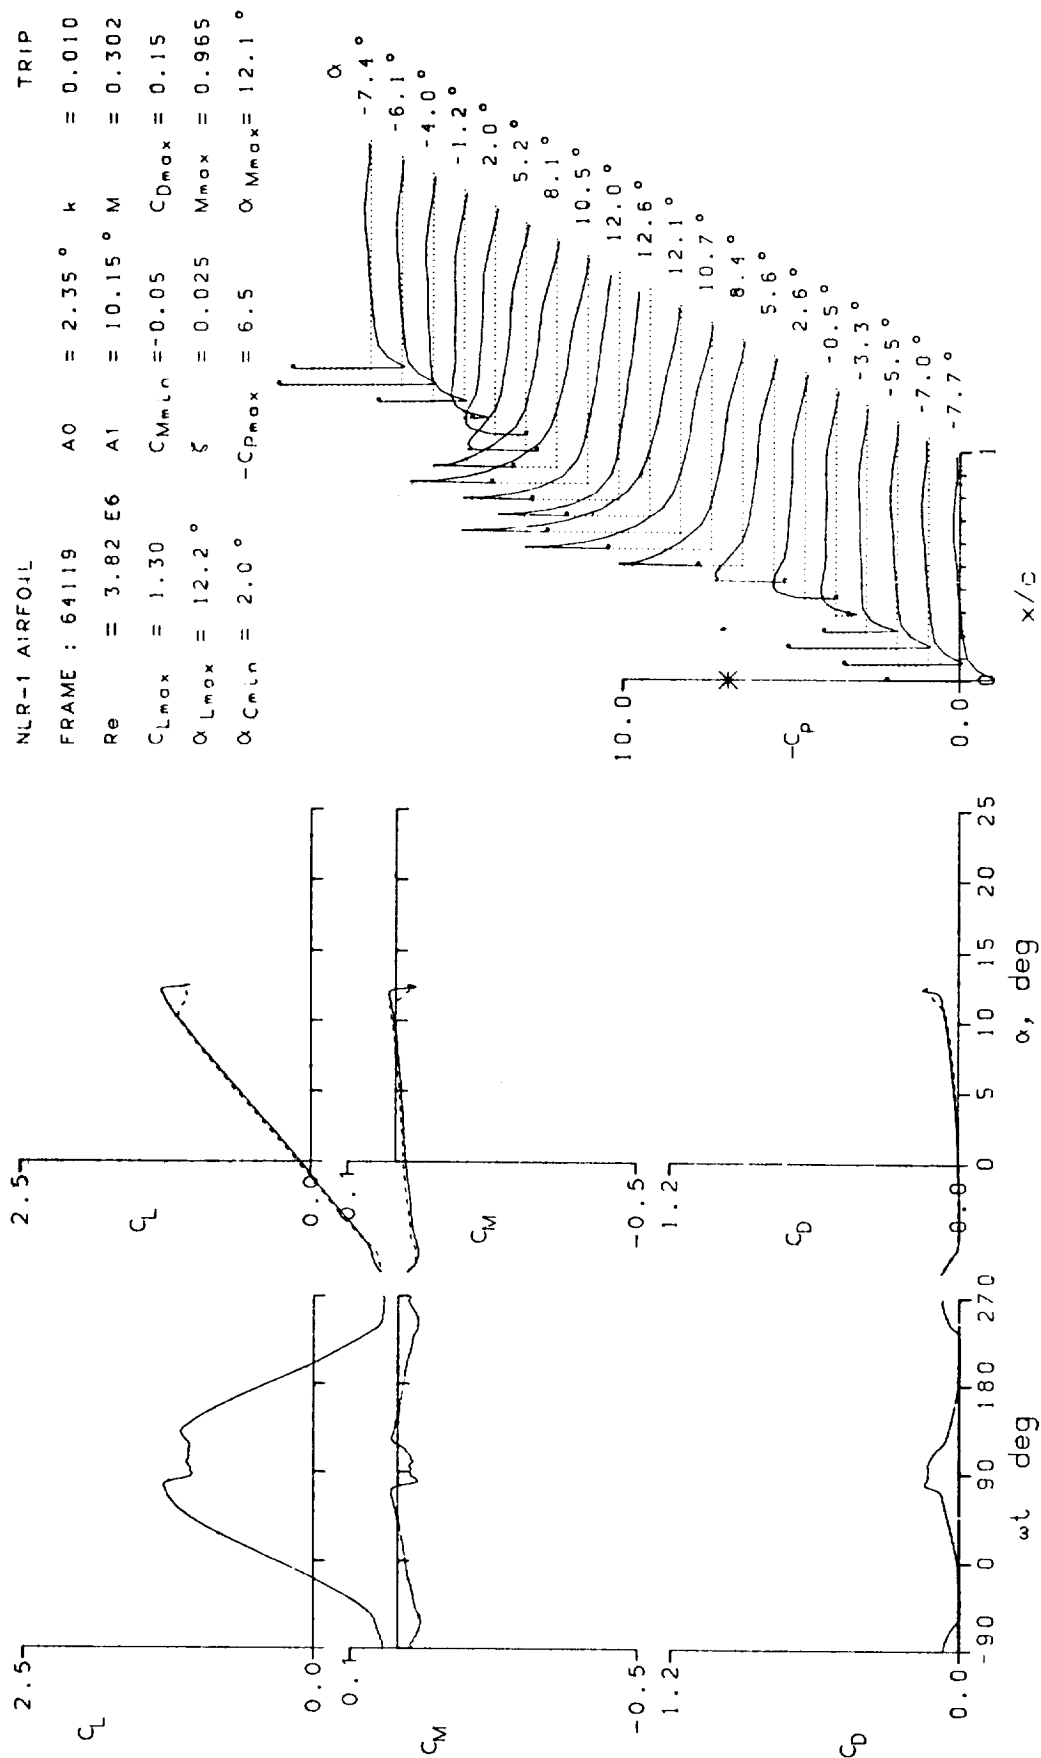


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 64121	A0 = 2.36 °	k = 0.024	TRIP
Re = 3.79 E6	A1 = 10.15 °	M = 0.302	
$C_{Lmax} = 1.35$	$C_{Mmin} = -0.08$	$C_{Dmax} = 0.20$	
$\alpha_{Lmax} = 12.5 °$	$\xi = 0.069$	$M_{max} = 0.988$	
$\alpha_{Cmin} = 2.0 °$	$-C_{pmax} = 6.8$	$\Delta M_{max} = 12.4 °$	

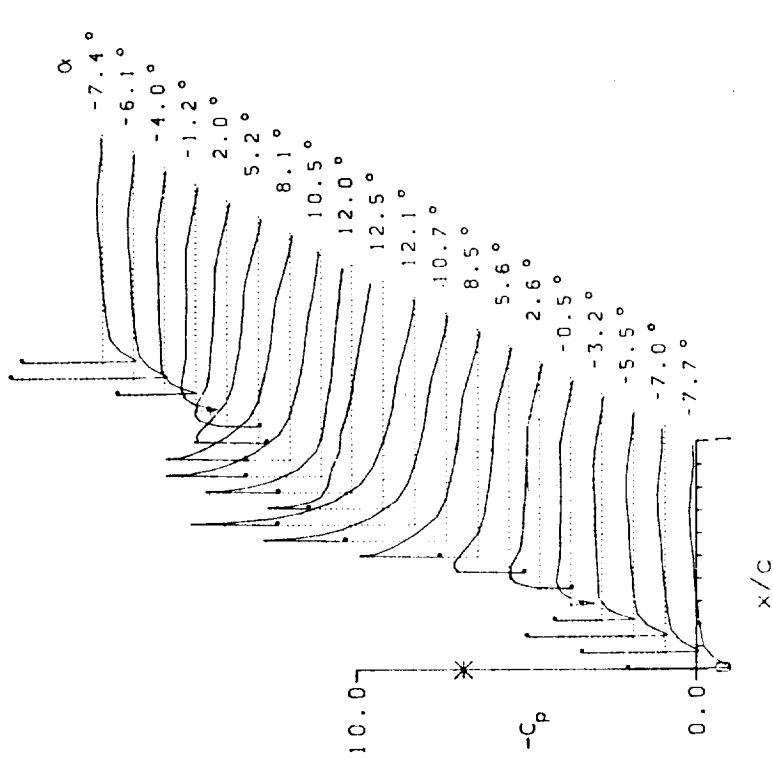
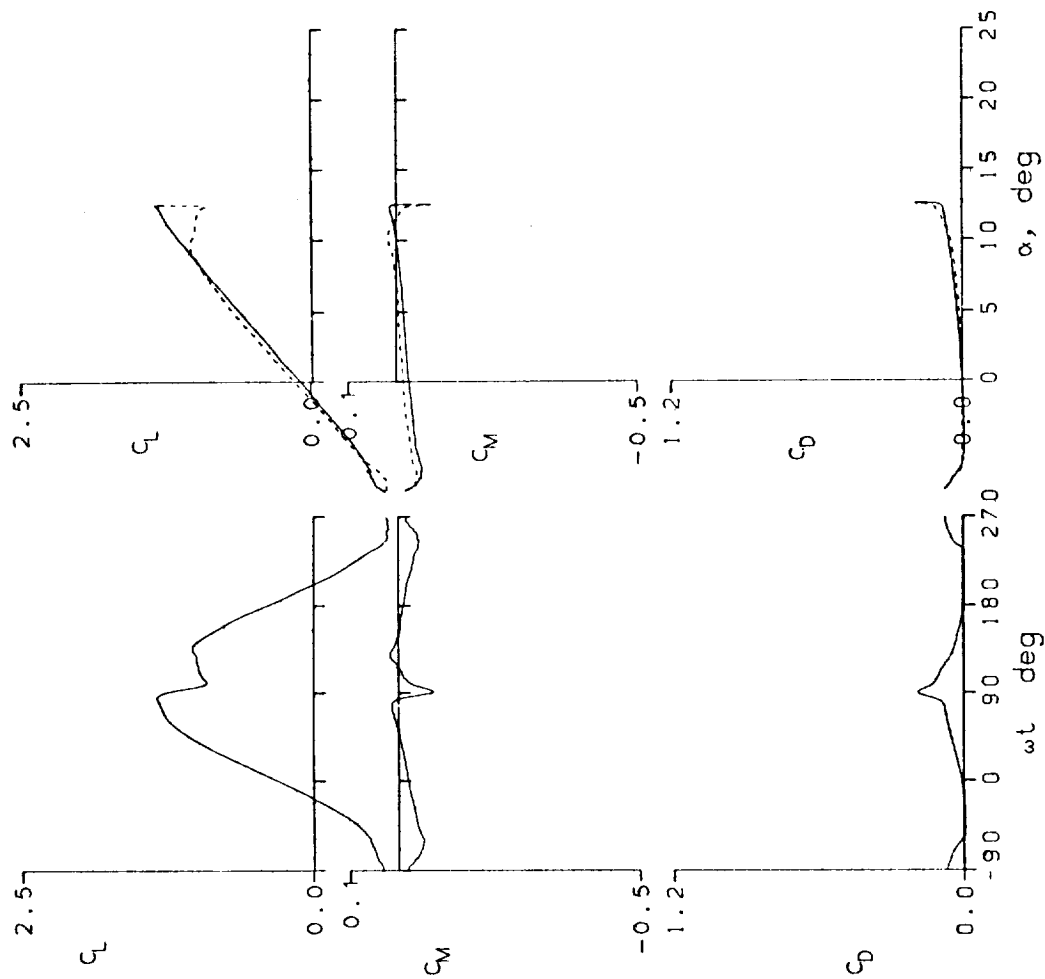


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 64202	A0 = 2.35 °	k = 0.049	TRIP
Re = 3.79 E6	A1 = 10.15 °	M = 0.303	
C _{Lmax} = 1.35	C _{Mmin} = -0.10	C _{Dmax} = 0.21	
α _{Lmax} = 12.6 °	ξ = 0.126	M _{max} = 0.999	
α _{Cmin} = 1.9 °	-C _{pmax} = 6.8	α _{Mmax} = 12.4 °	

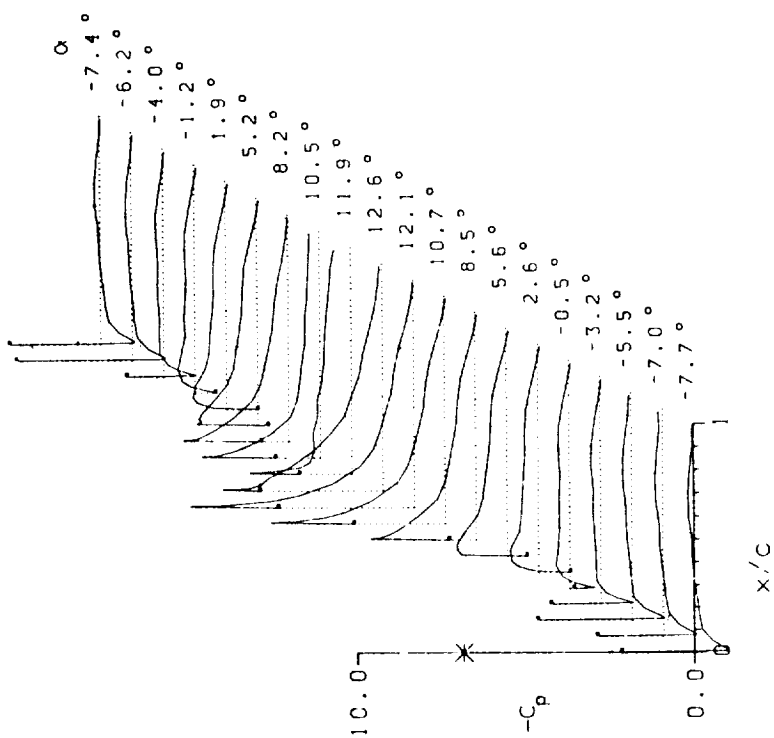
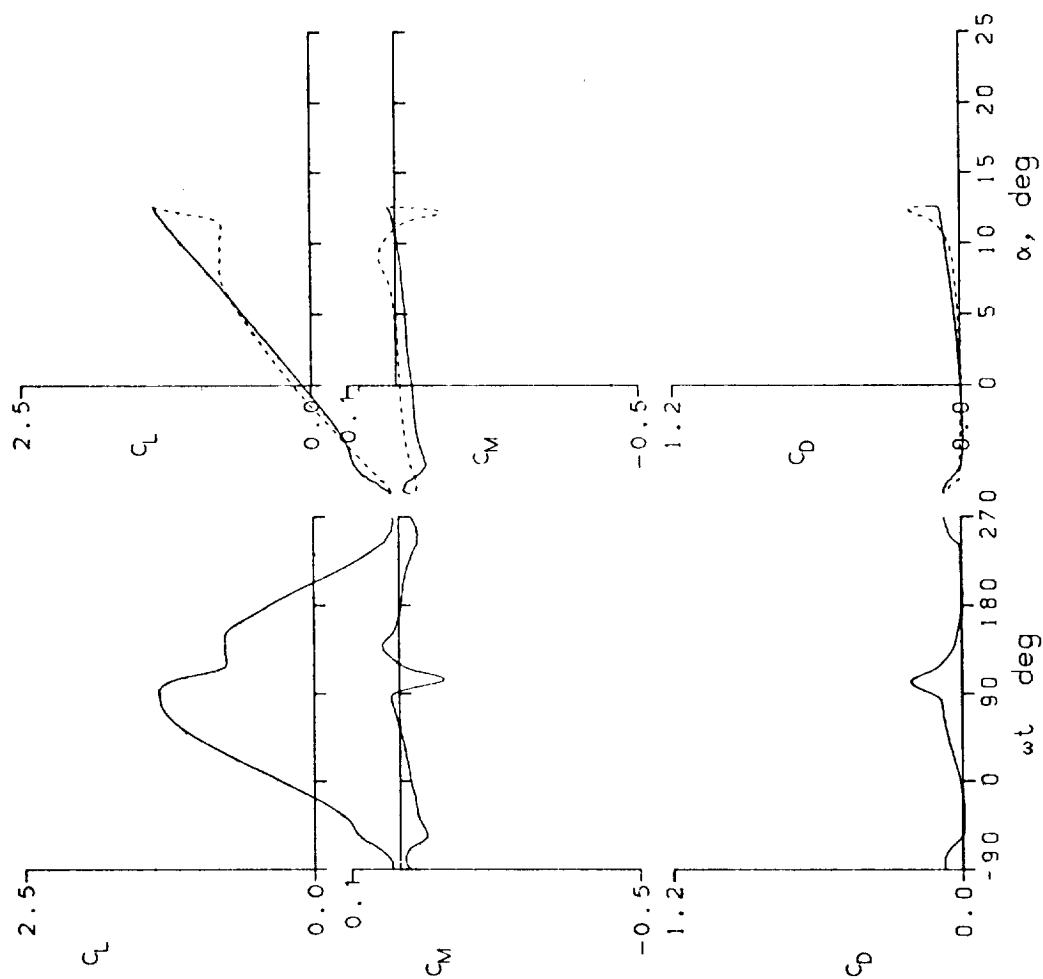


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 64204	A0	= 2.34 °	k	= 0.097	
Re	= 3.77 E6	A1	= 10.15 °	M	= 0.302
C_{Lmax}	= 1.35	C_{Mmin}	= -0.07	C_{Dmax}	= 0.14
α_{Lmax}	= 12.6 °	ξ	= 0.293	M_{max}	= 1.003
α_{Cmin}	= 0.5 °	$-C_{Dmax}$	= 5.9	α_{Mmax}	= 12.5 °

TRIP



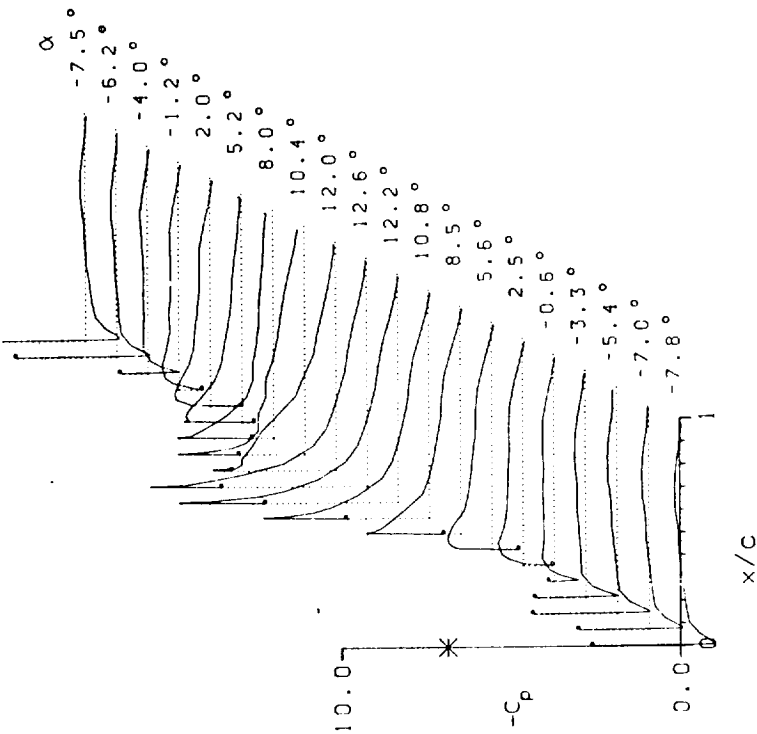


Figure 18.- Continued.

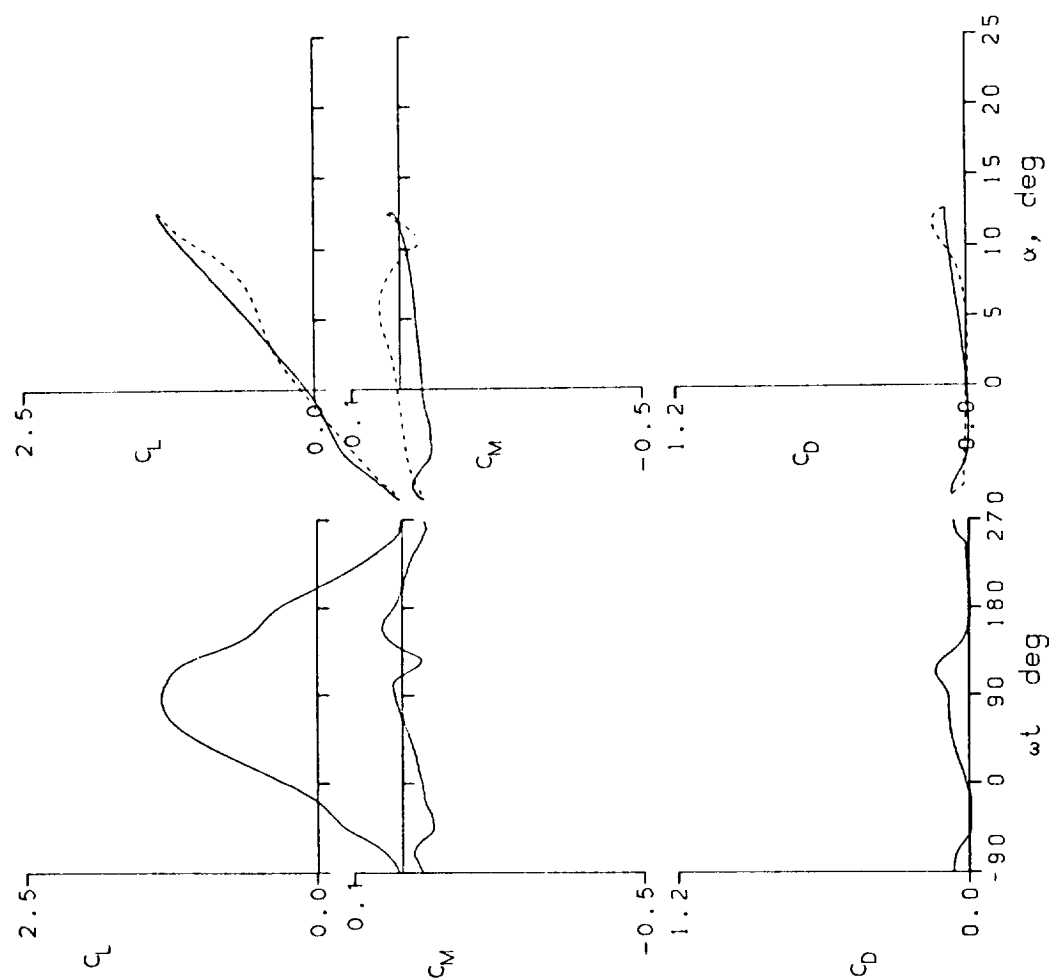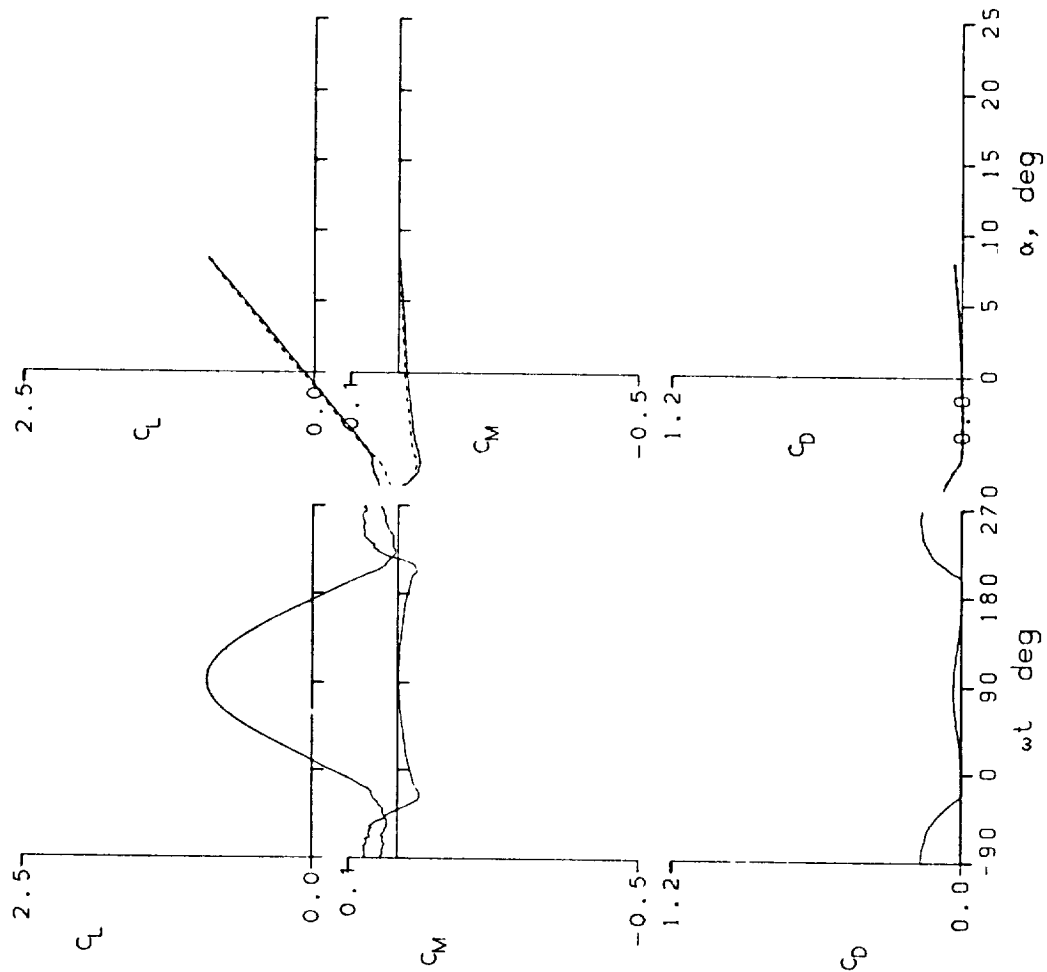

NLR-1 AIRFOIL

FRAME : 64212 A0 = -2.19 ° k = 0.010

Re = 3.72 E6 A1 = 10.00 ° M = 0.302

$C_{Lmax} = 0.92$ $C_{Mmin} = -0.05$ $C_{Dmax} = 0.17$

$\alpha_{Lmax} = 8.0 °$ $\zeta = 0.044$ $M_{max} = 0.685$

$\alpha_{Cmin} = -2.7 °$ $-C_{Dmax} = 3.5$ $\alpha_{Mmax} = -6.3 °$

TRIP

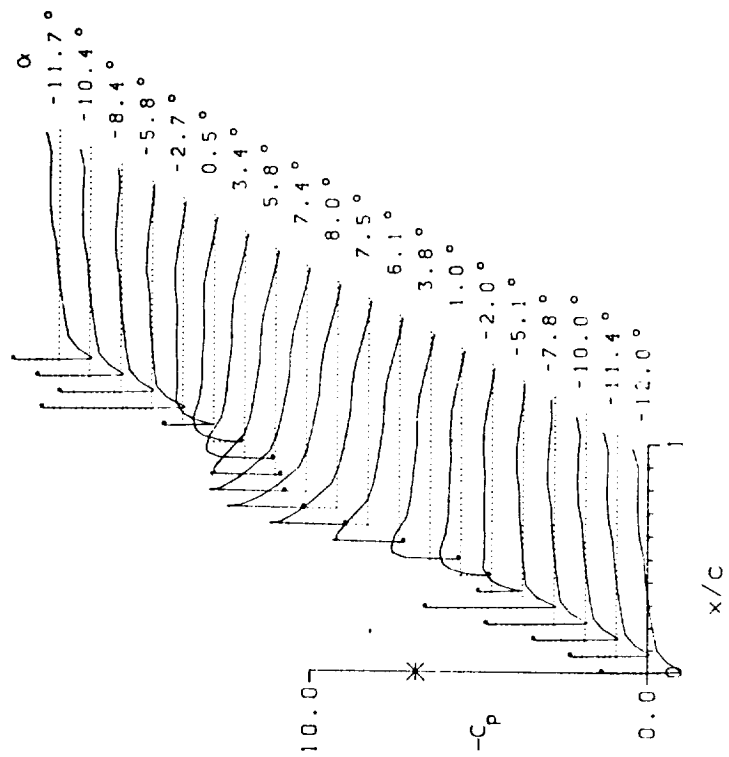


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 64213	A0	= -2.19 °	k	= 0.024	
Re	= 3.70 E6	A1	= 10.00 °	M	= 0.303
C_{Lmax}	= 0.92	C_{Mmin}	= -0.06	C_{Dmax}	= 0.18
α_{Lmax}	= 3.0 °	ξ	= 0.094	M_{max}	= 0.711
α_{Cmin}	= -2.7 °	$-C_{Pmax}$	= 3.8	α_{Mmax}	= -6.6 °

TRIP

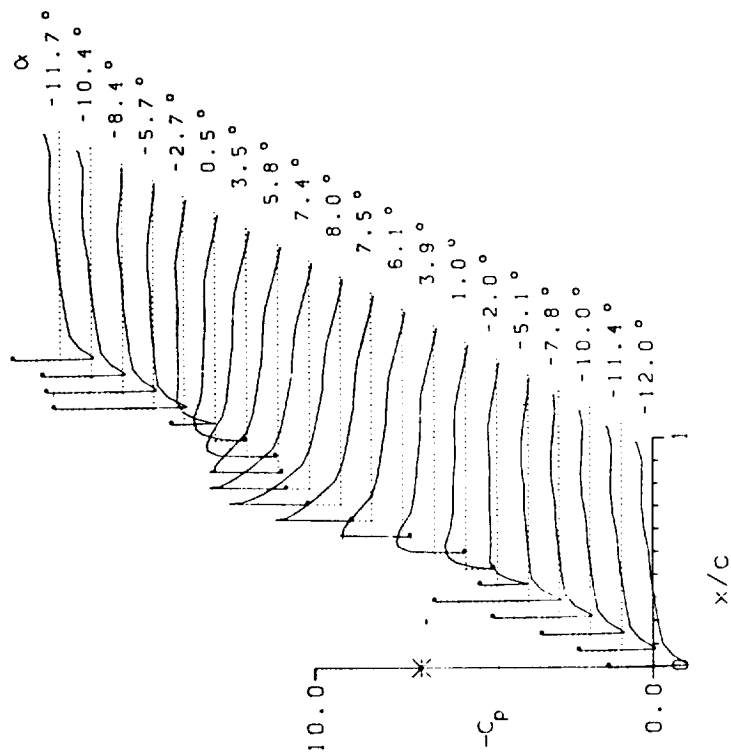
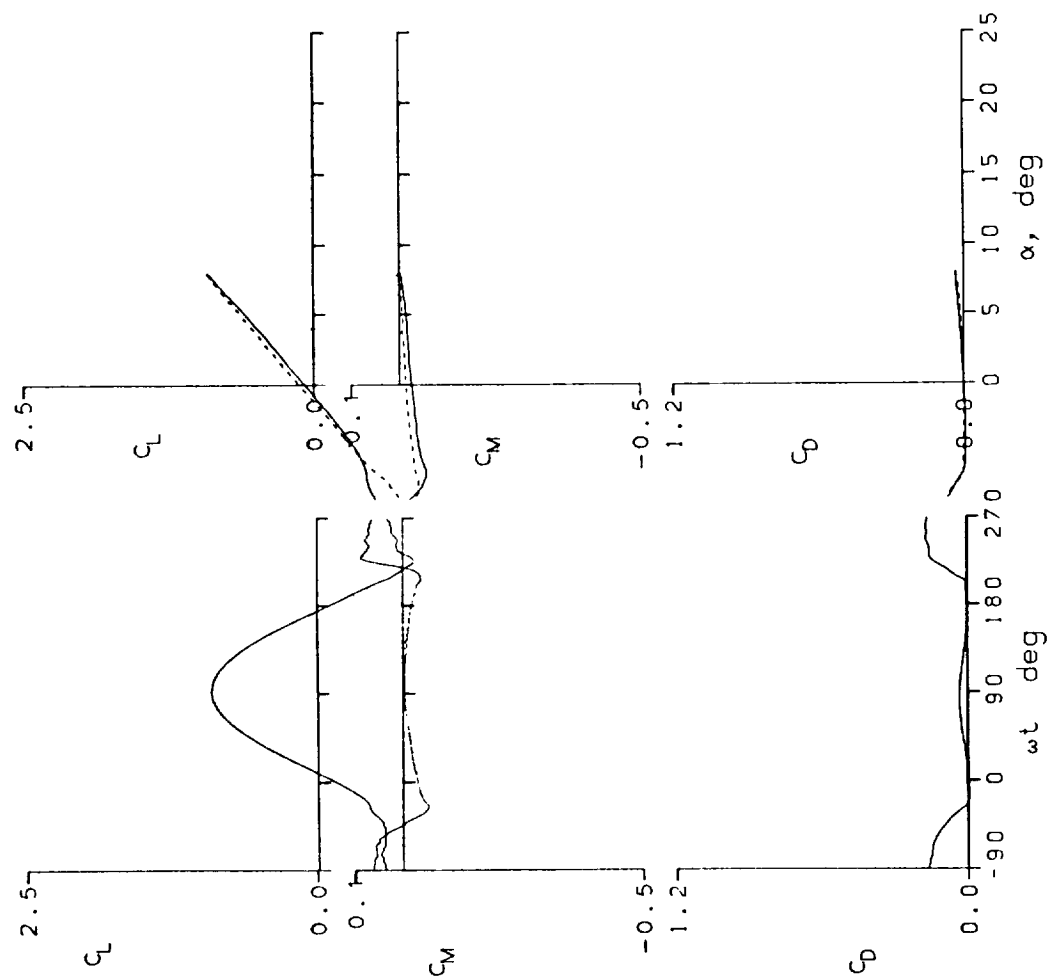


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 64214	A0	= -2.18 °	k	= 0.048	
Re	= 3.69 E6	A1	= 10.00 °	M	= 0.302
C _{Lmax}	= 0.91	C _{Mmin}	= -0.06	C _{Dmax}	= 0.20
α _{Lmax}	= 8.0 °	ξ	= 0.137	M _{max}	= 0.753
α _{Cmin}	= -2.7 °	-C _{pmax}	= 4.2	α _{Mmax}	= -7.5 °

TRIP

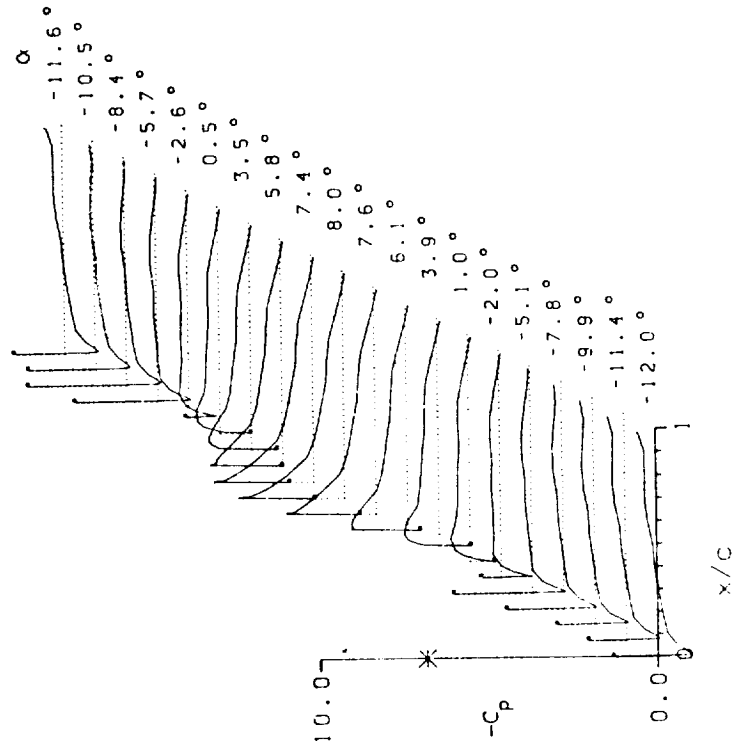
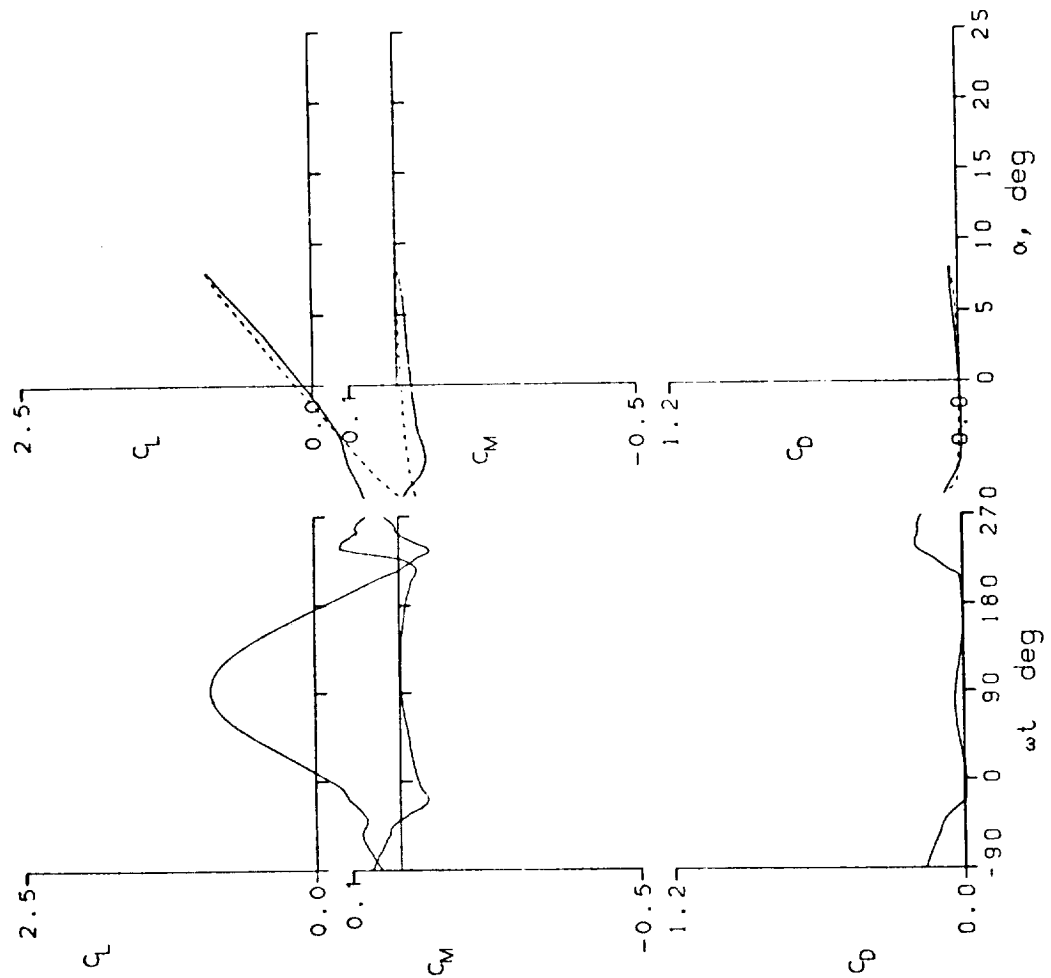
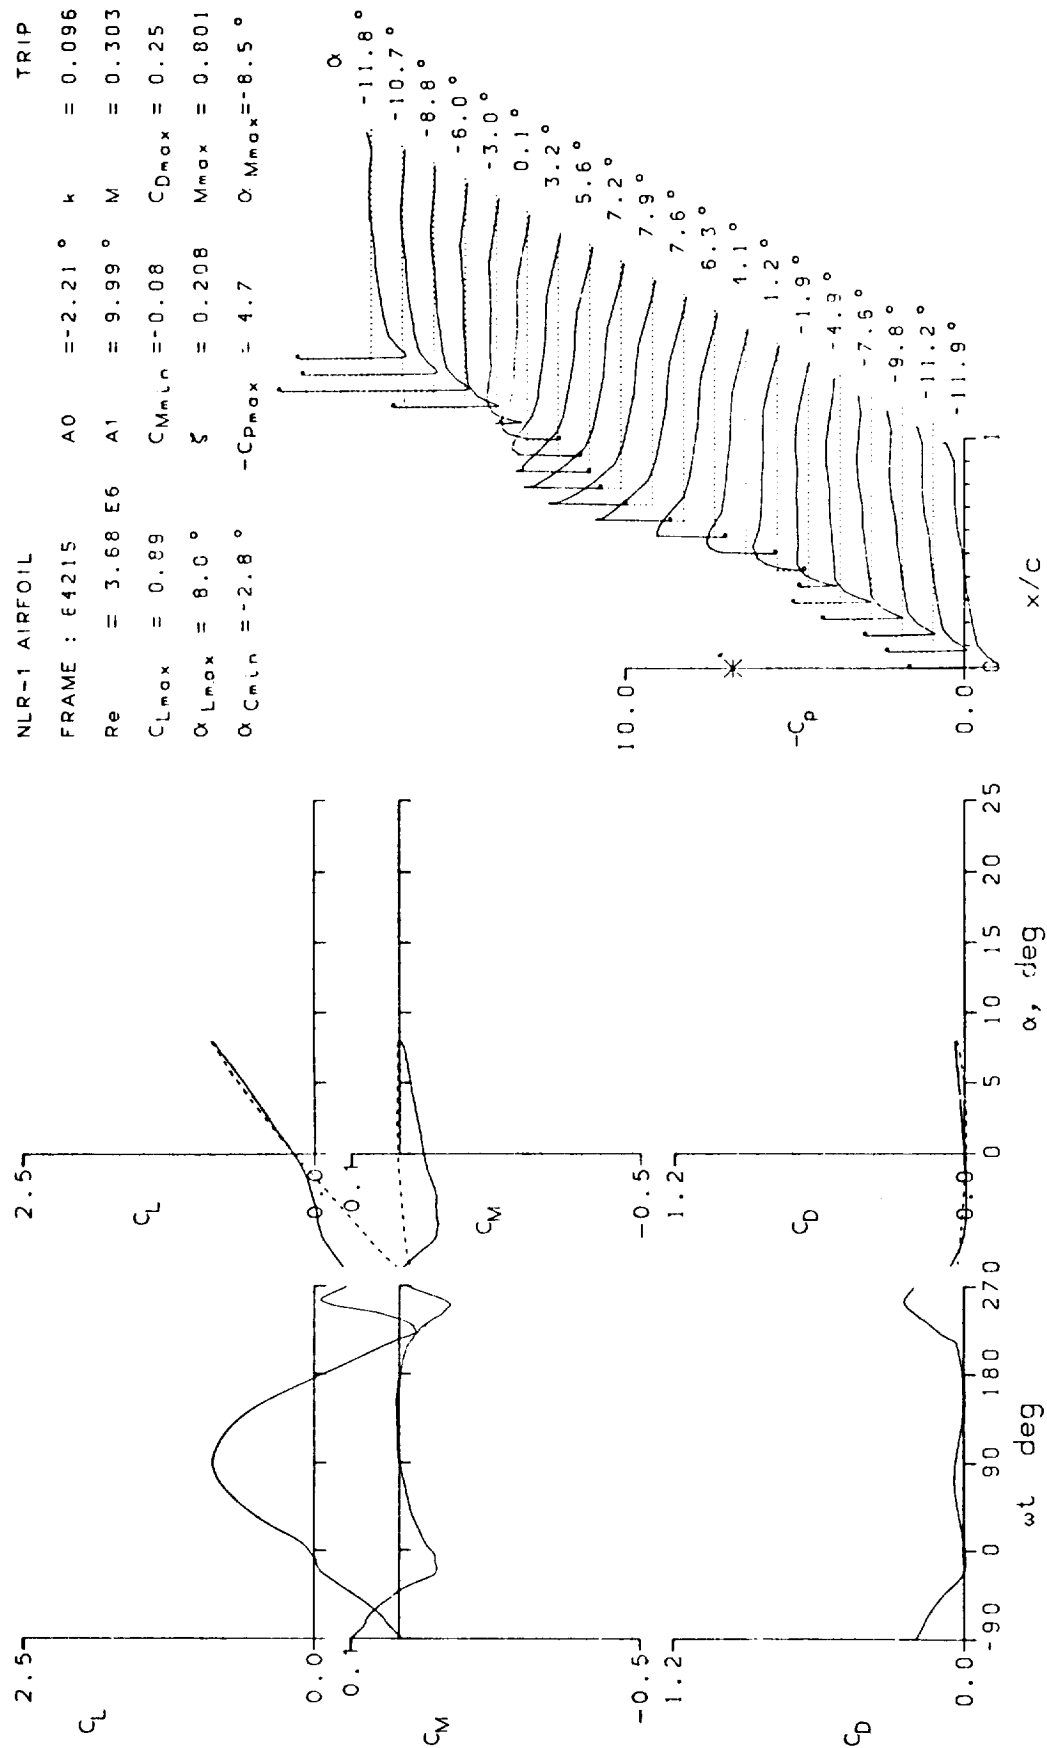


Figure 18.- Continued.



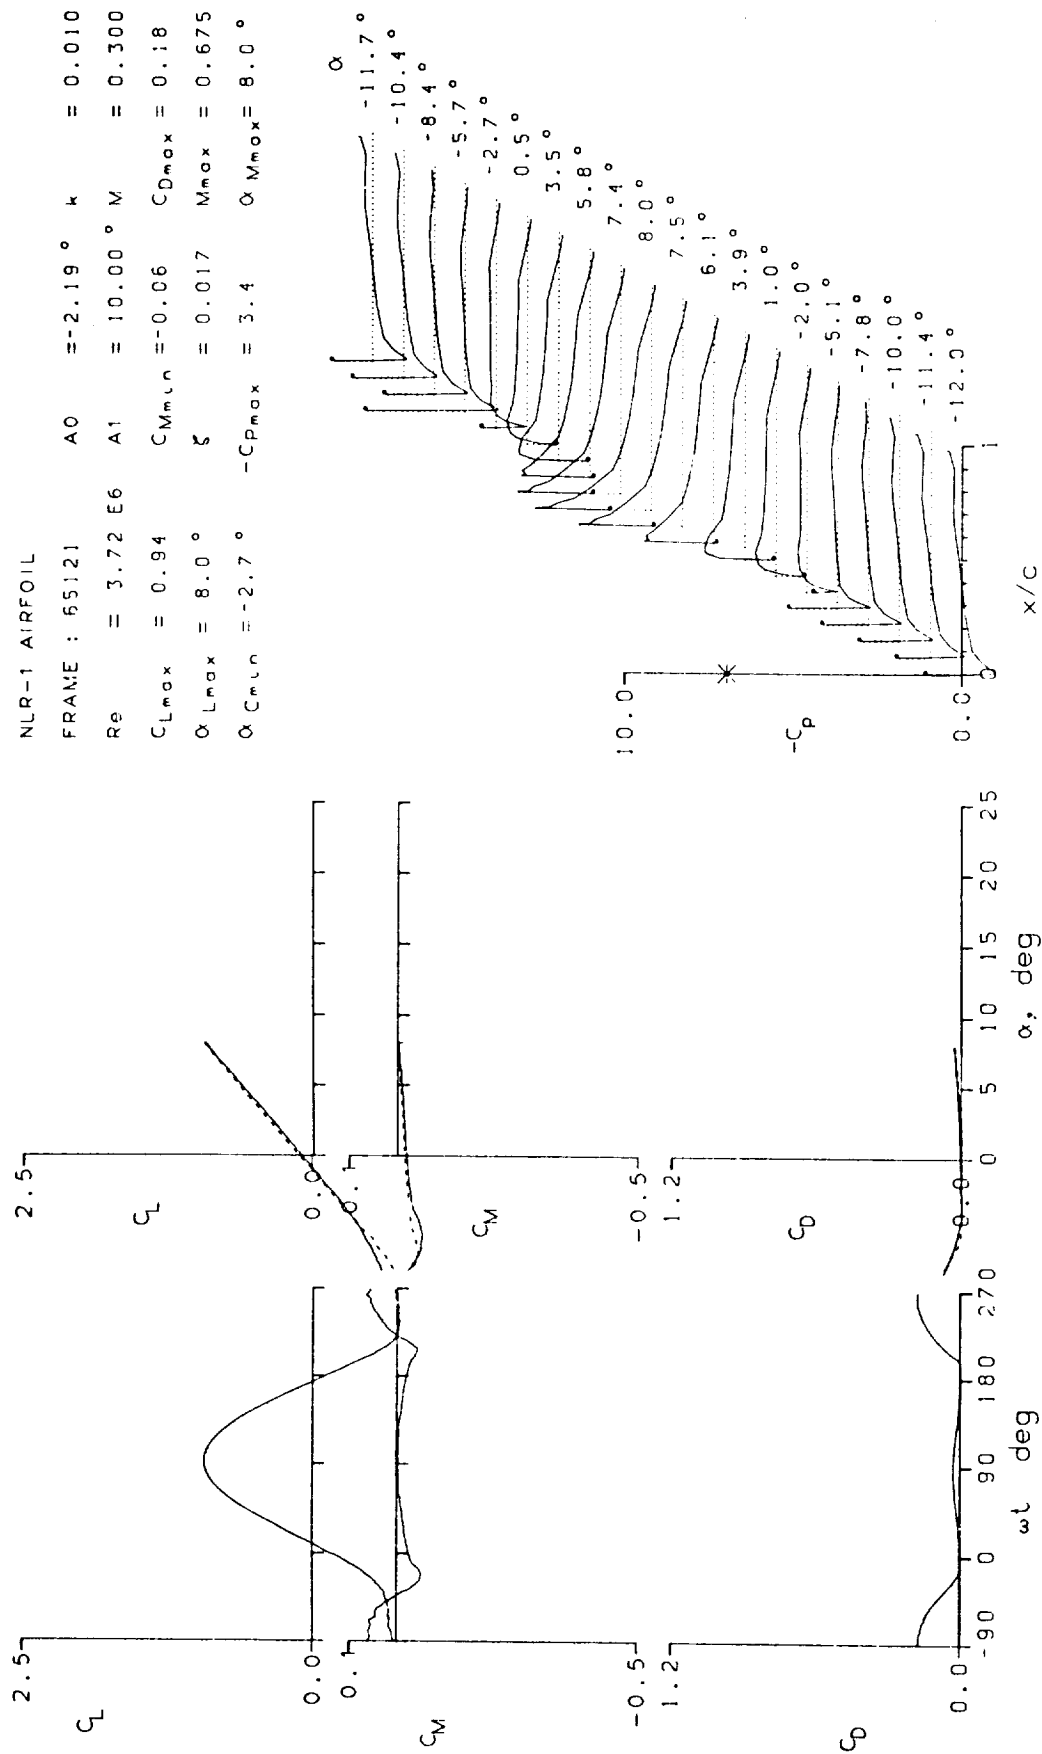


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 65122	A0	= -2.18 °	k	= 0.024	
Re	= 3.70 E6	A1	= 10.00 °	M	= 0.301
C_{Lmax}	= 0.95	C_{Mmin}	= -0.06	C_{Dmax}	= 0.18
α_{Lmax}	= 8.0 °	ξ	= 0.040	M_{max}	= 0.680
α_{Cmin}	= -2.5 °	$-C_{Dmax}$	= 3.5	α_{Mmax}	= 8.0 °



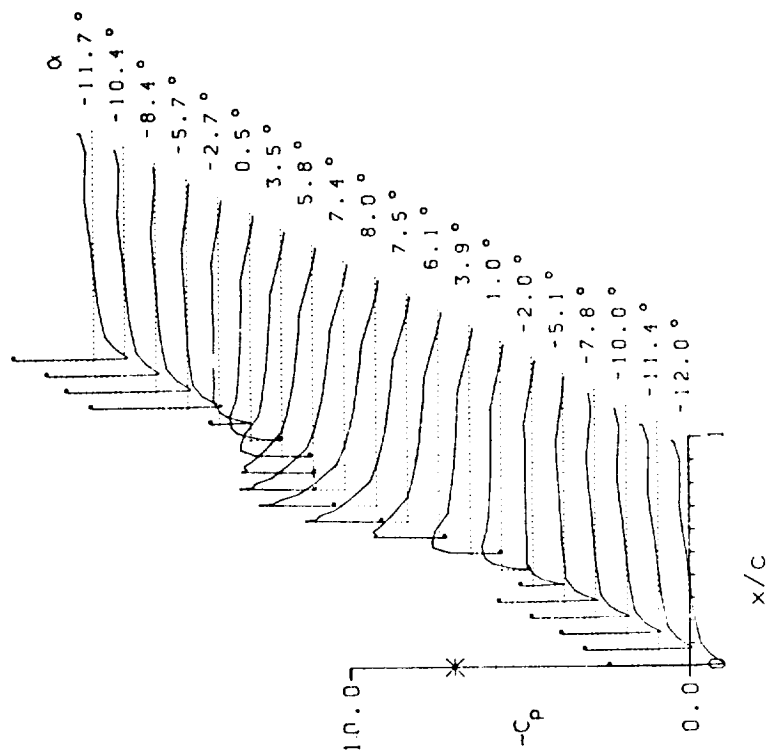


Figure 18.- Continued.

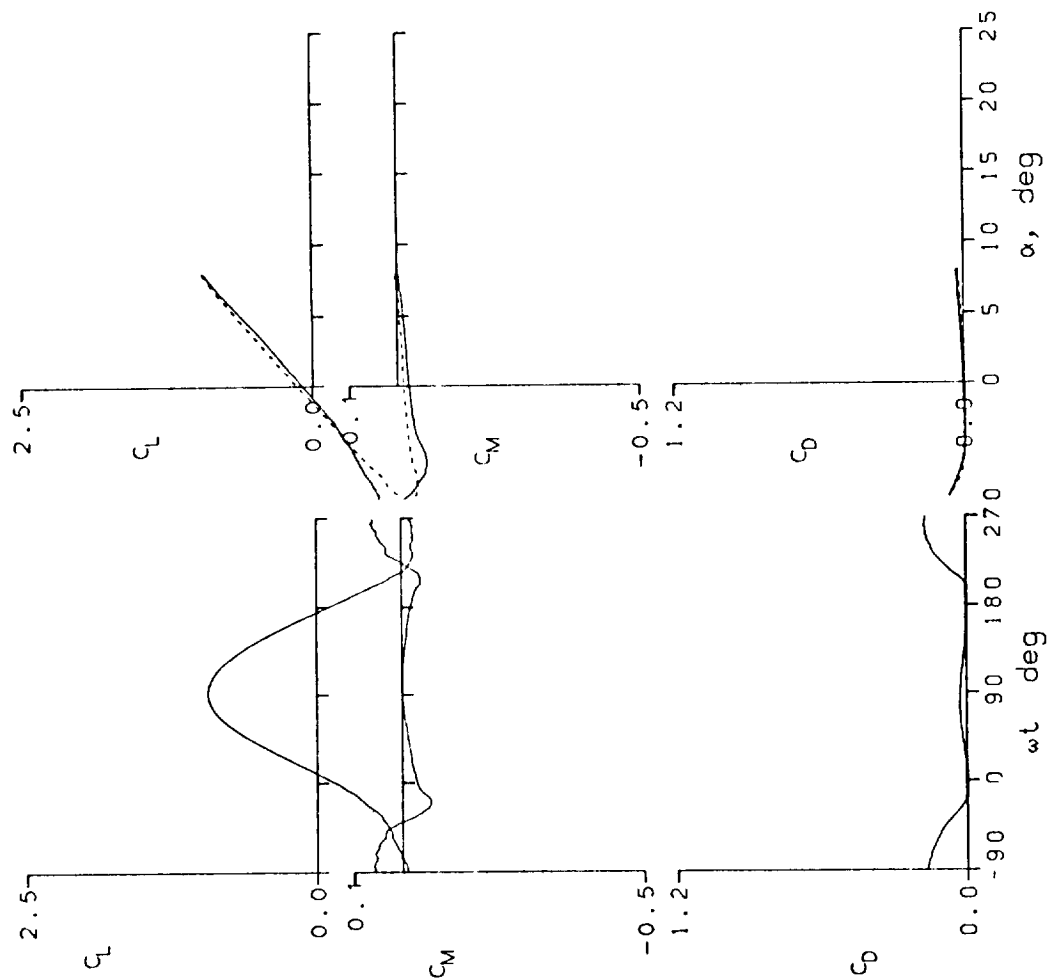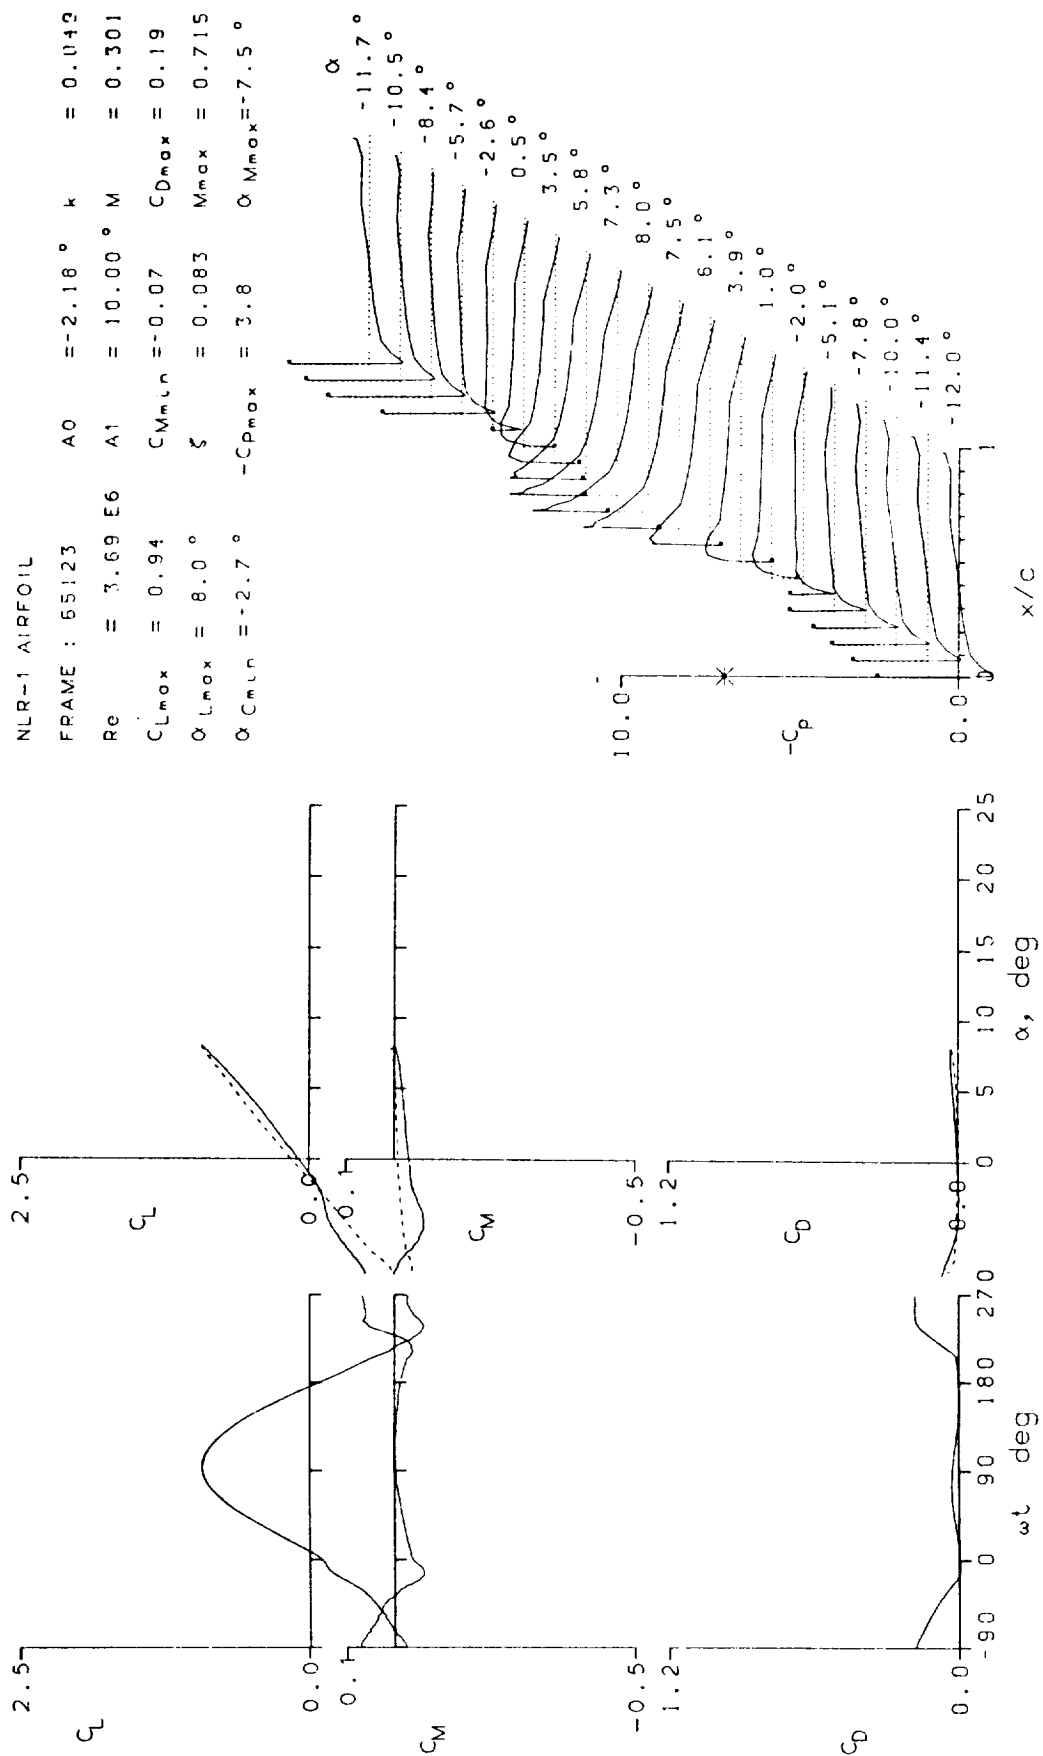

NLR-1 AIRFOIL
 FRAME : 65200 A0 = -2.20 ° k = 0.097
 Re = 3.69 E6 A1 = 10.00 ° M = 0.302
 CLmax = 0.92 CMmin = -0.08 CDmax = 0.23
 αLmax = 8.0 ° ζ = 0.188 Mmax = 0.740
 αCMmin = -11.9 ° -CPmax = 4.1 αMmax = -8.2 °

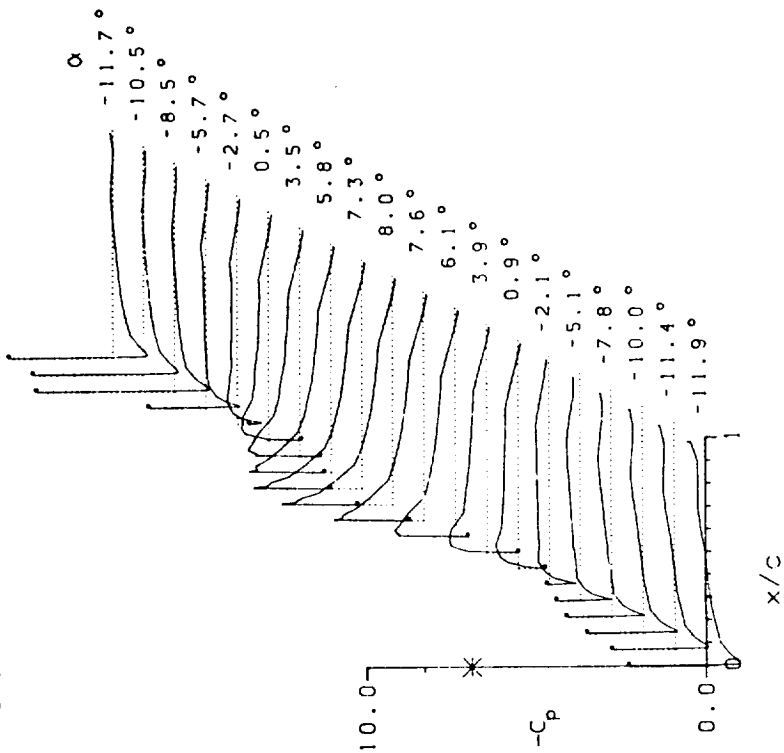
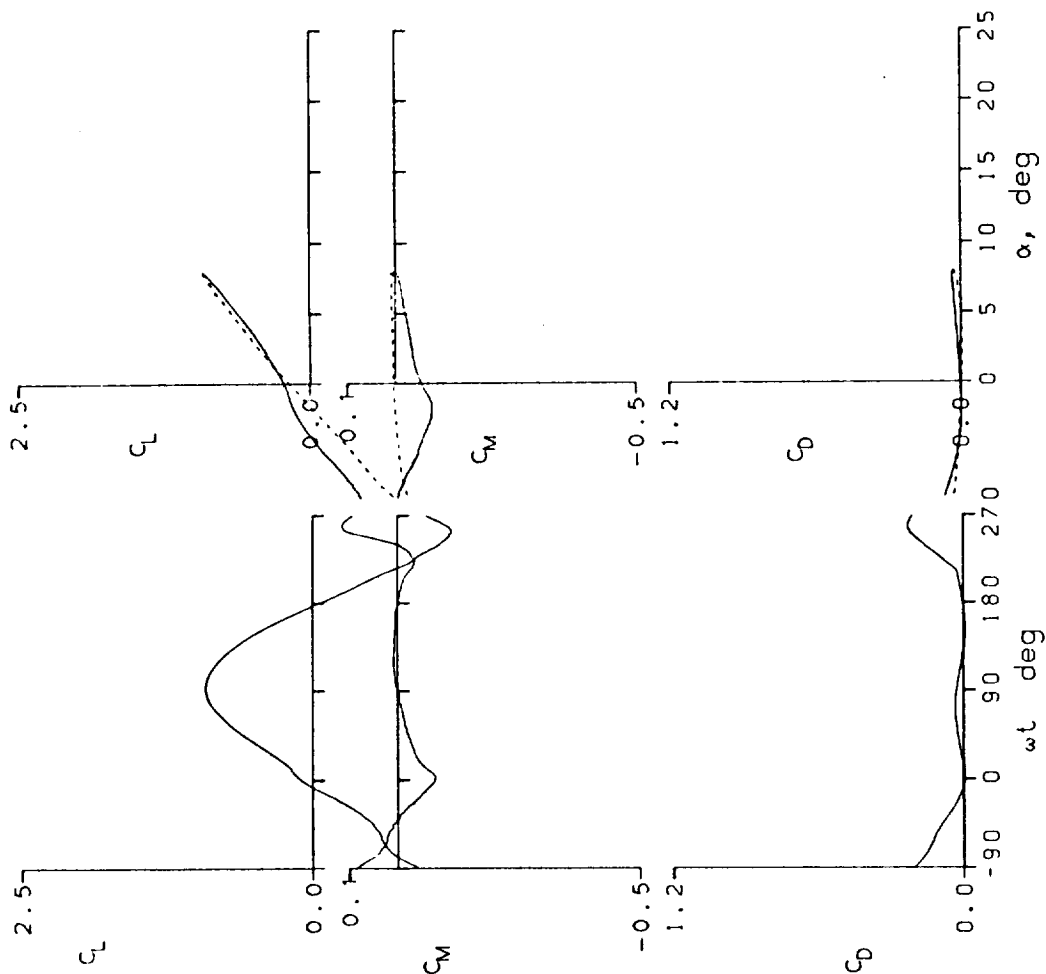


Figure 18.- Continued.

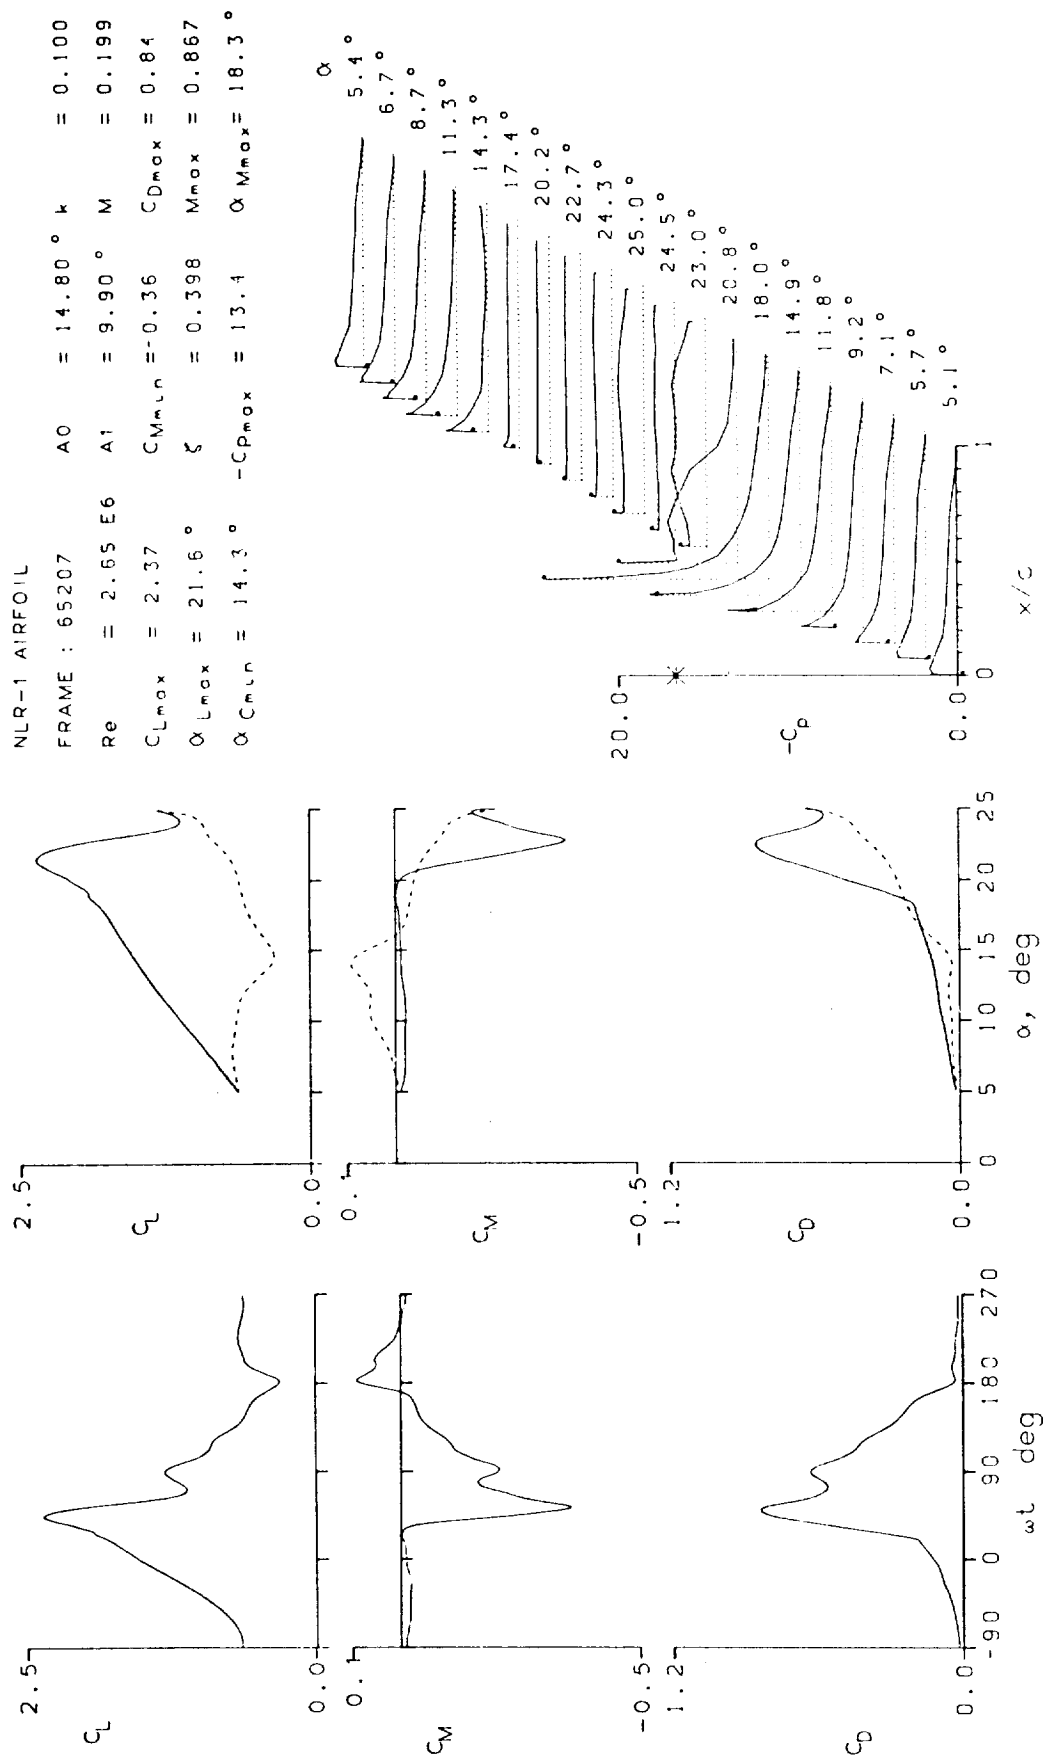


Figure 18.- Continued.


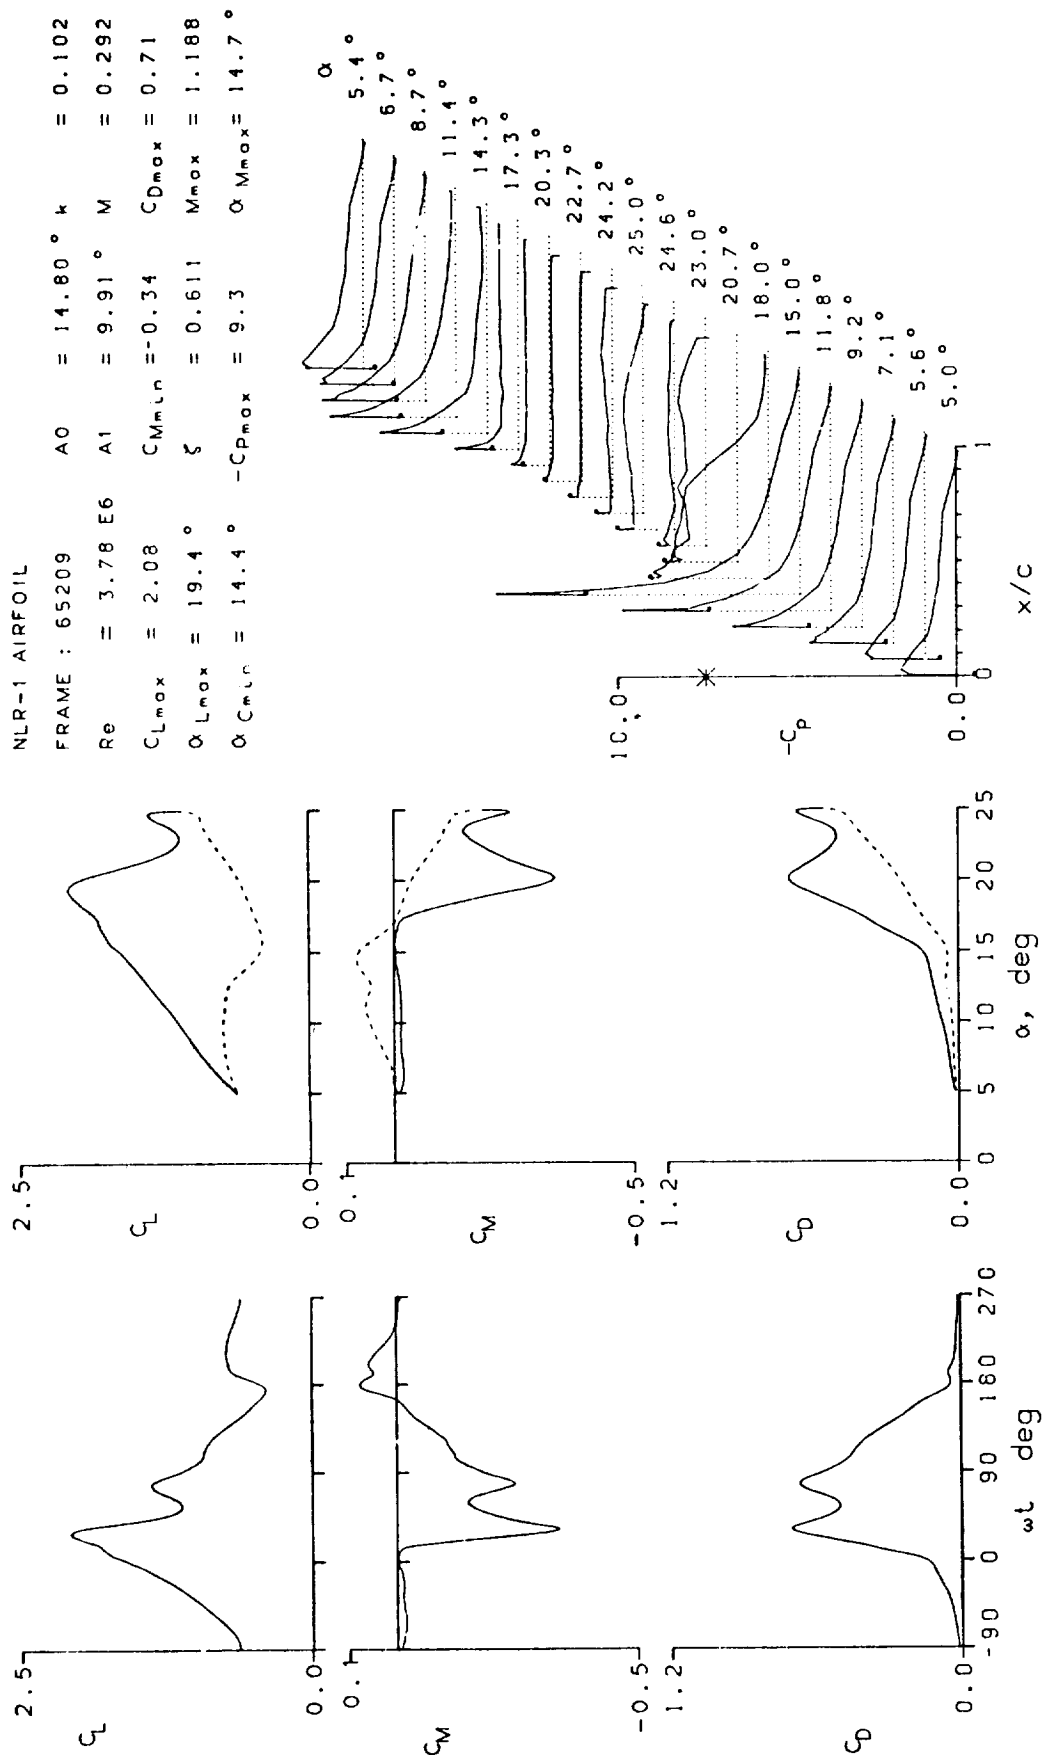


Figure 18.-- Continued.

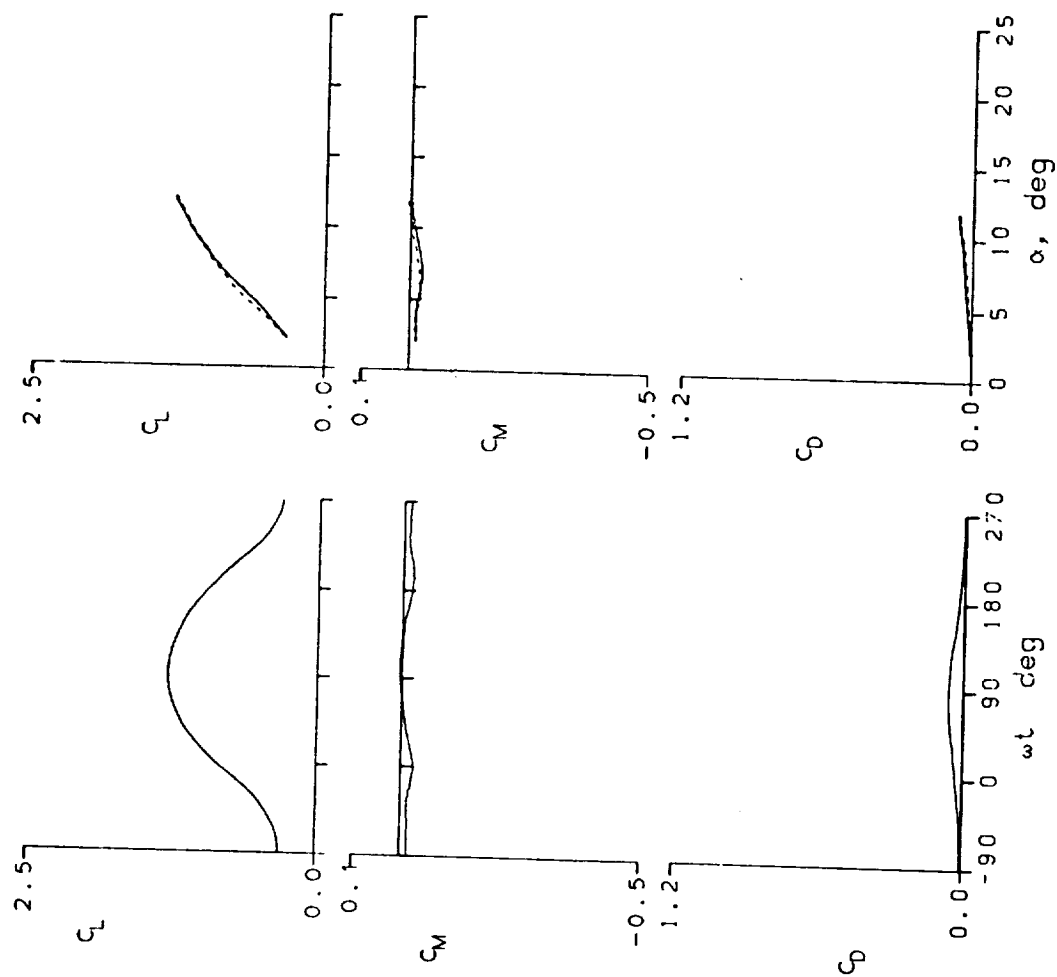

NLR-1 AIRFOIL
 FRAME : 65223
 $Re = 1.48 \text{ E}6$
 $C_{Lmax} = 1.30$
 $\alpha_{Lmax} = 11.9^\circ$
 $\alpha_{Cmin} = 6.8^\circ$
 $A0 = 6.96^\circ$
 $A1 = 4.90^\circ$
 $C_{Mmin} = -0.03$
 $\xi = 0.056$
 $-C_{Dmax} = 6.9$
 $k = 0.025$
 $M = 0.109$
 $C_{Dmax} = 0.07$
 $M_{max} = 0.311$
 $\alpha_{Mmax} = 11.9^\circ$

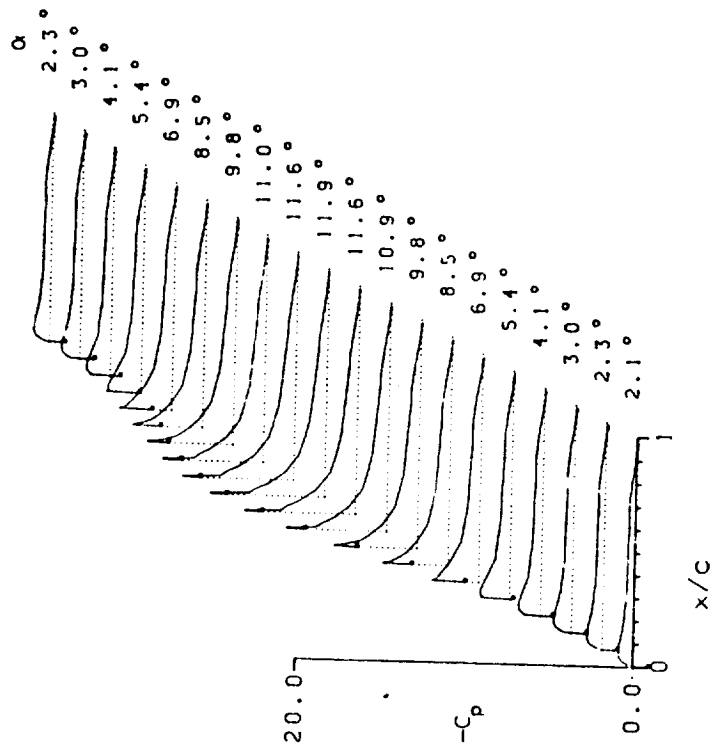


Figure 18.- Continued.

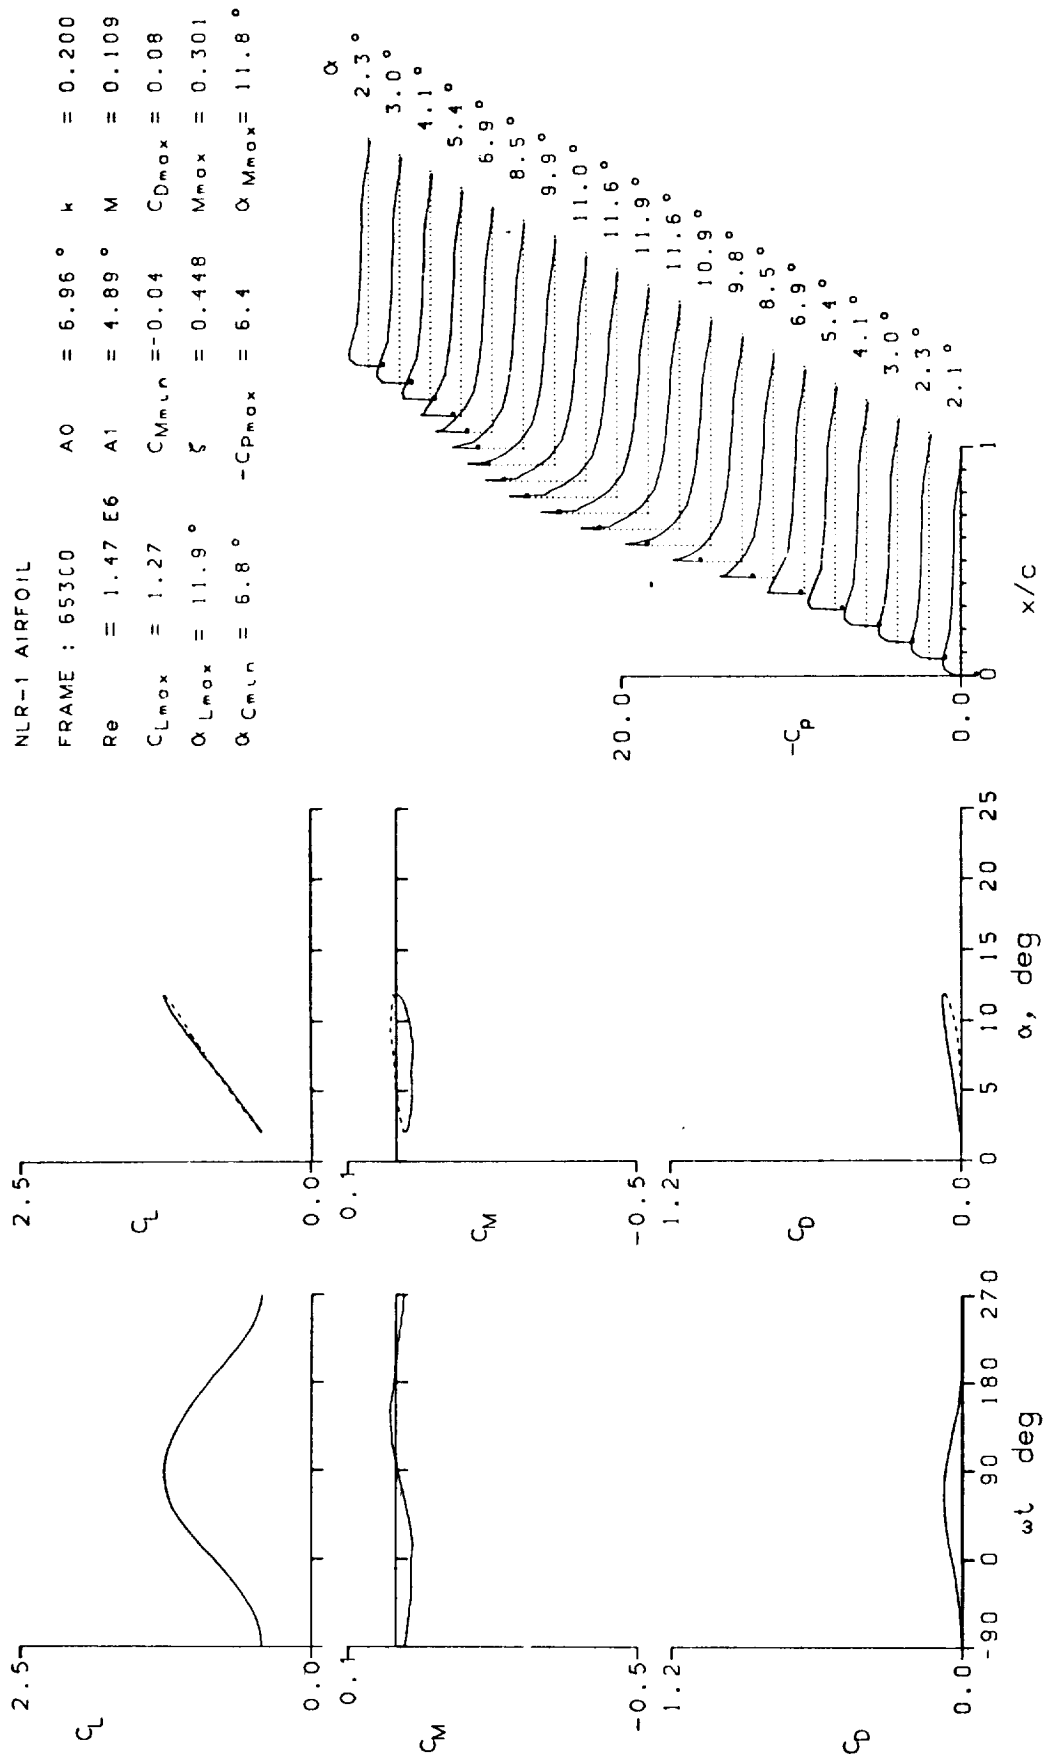


Figure 18.- Continued.

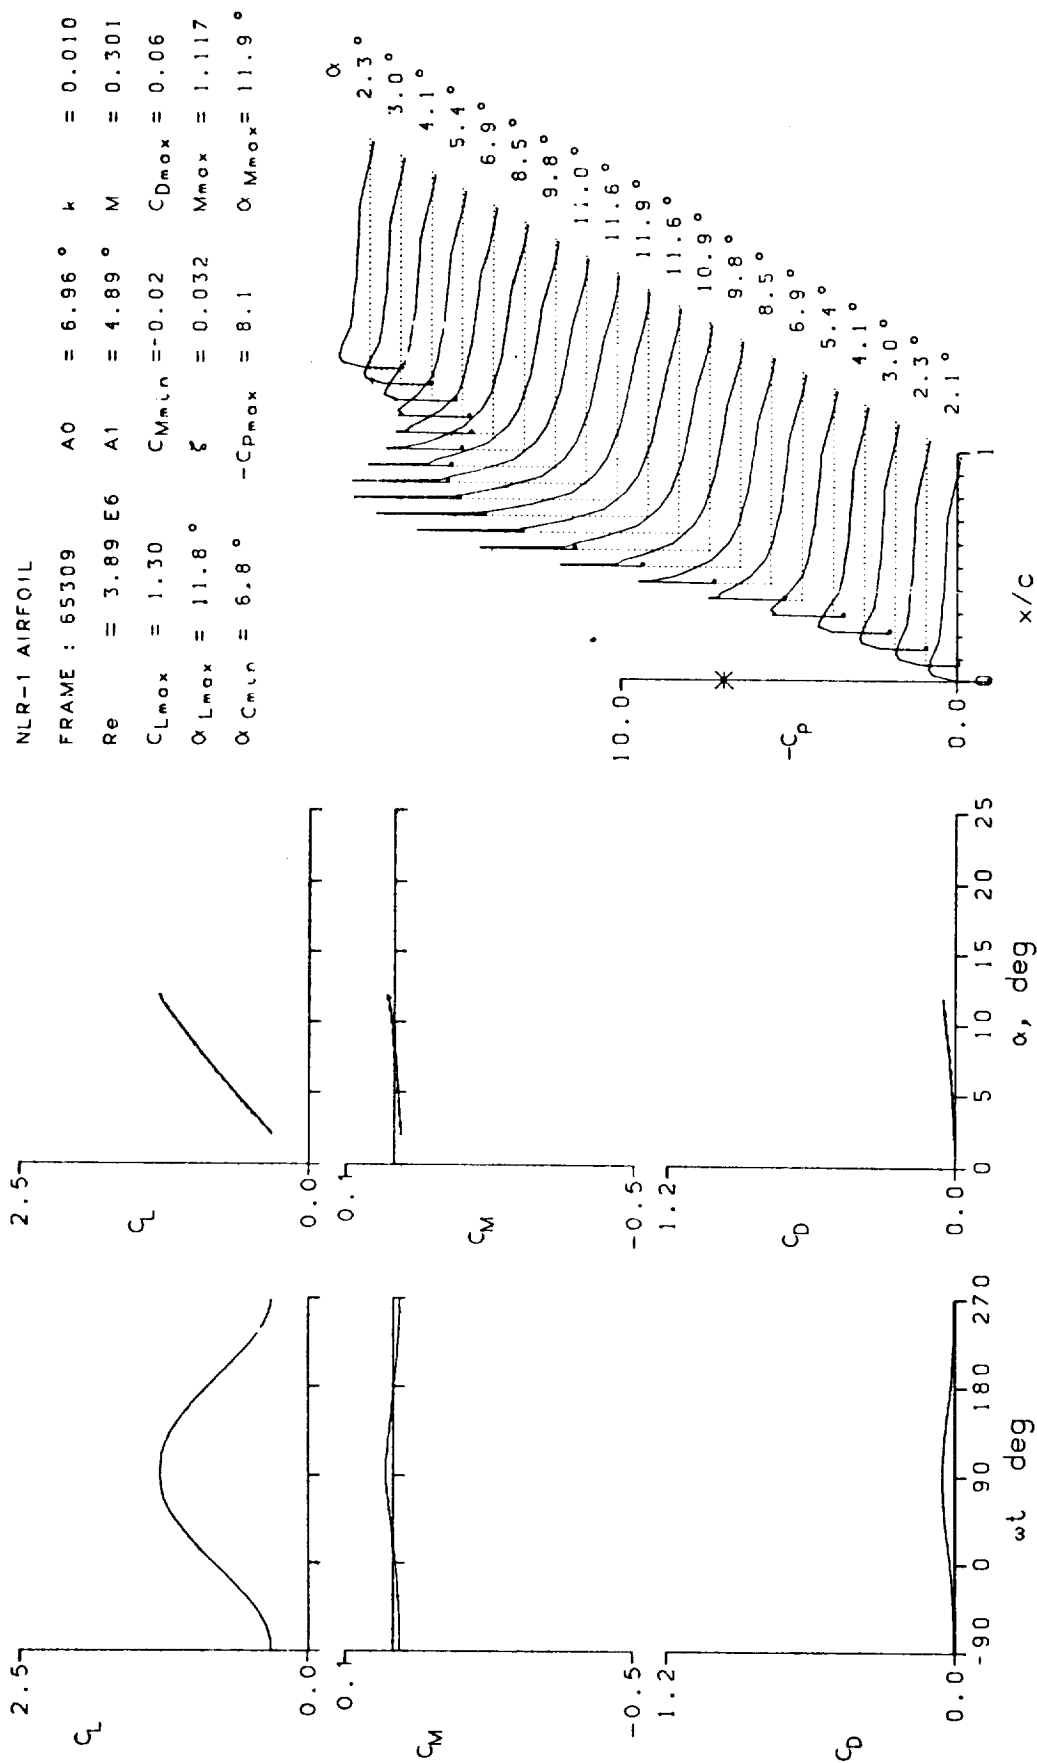


Figure 18.- Continued.

NLR-1 AIRFOIL

FRAME : 65311	A0 = 6.98 °	k = 0.197
Re = 3.86 E6	A1 = 4.90 °	M = 0.301
CLmax = 1.38	CMmin = -0.04	CDmax = 0.07
αLmax = 11.9 °	ζ = 0.616	Mmax = 1.176
αCmin = 6.8 °	-CPmax = 8.6	αMmax = 11.8 °

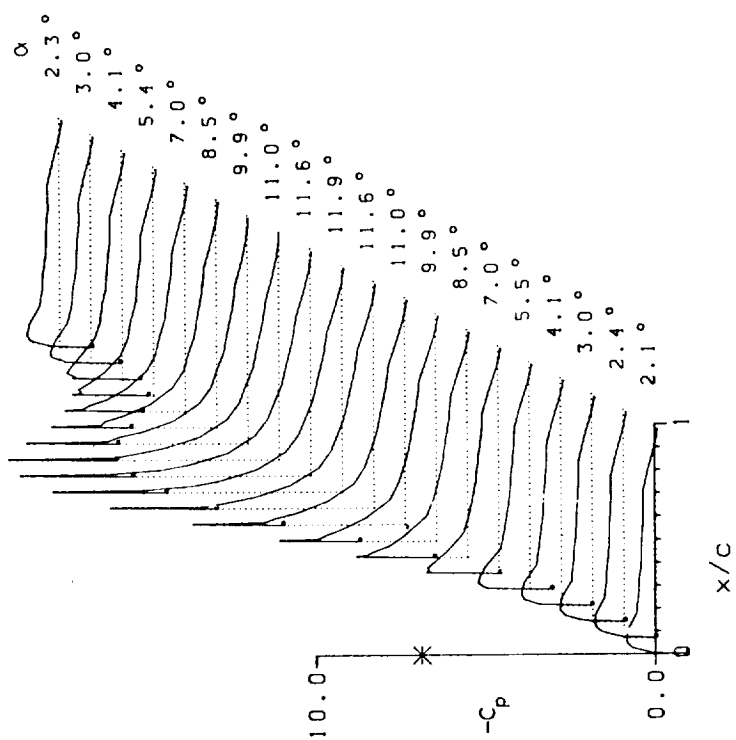
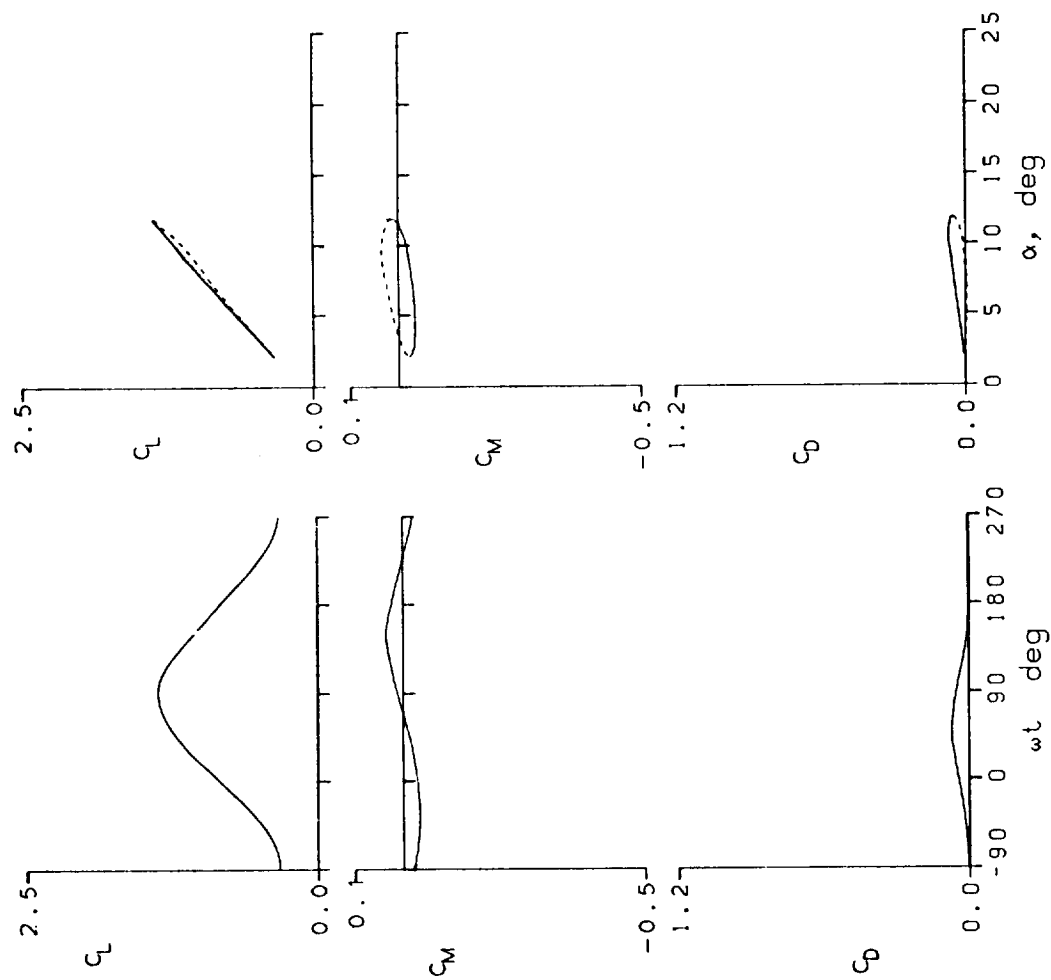


Figure 18.- Concluded.

NLR-7301 AIRFOIL TRIP

FRAME : 67C19 A0 = 14.79 ° k = 0.025

Re = 2.44 E6 A1 = 9.90 ° M = 0.183

C_{Lmax} = 1.93 C_{Mmin} = -0.26 C_{Dmax} = 0.49

α_{Lmax} = 19.2 ° ξ = 0.097 M_{max} = 0.622

α_{Cmin} = 14.2 ° $-C_{Dmax}$ = 9.0 α_{Mmax} = 18.3 °

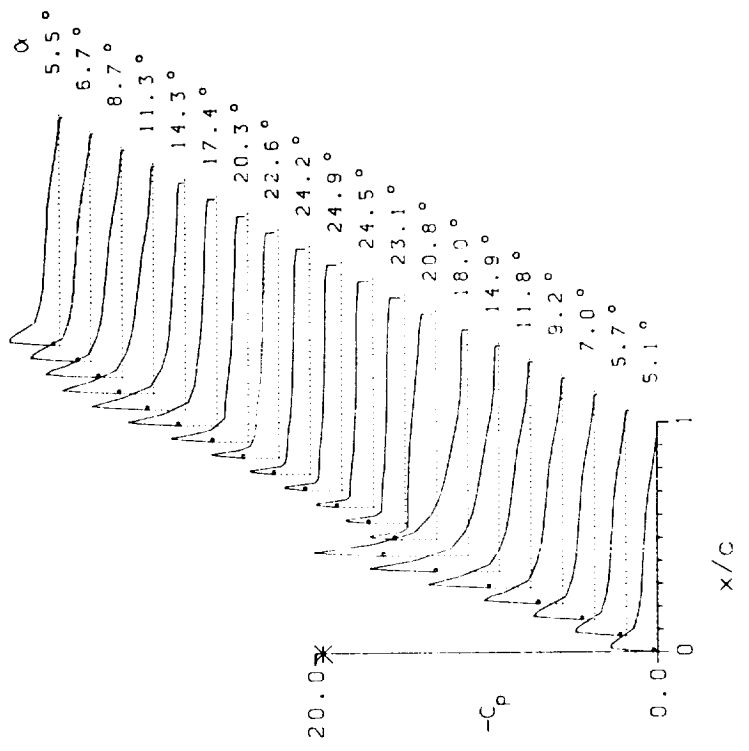
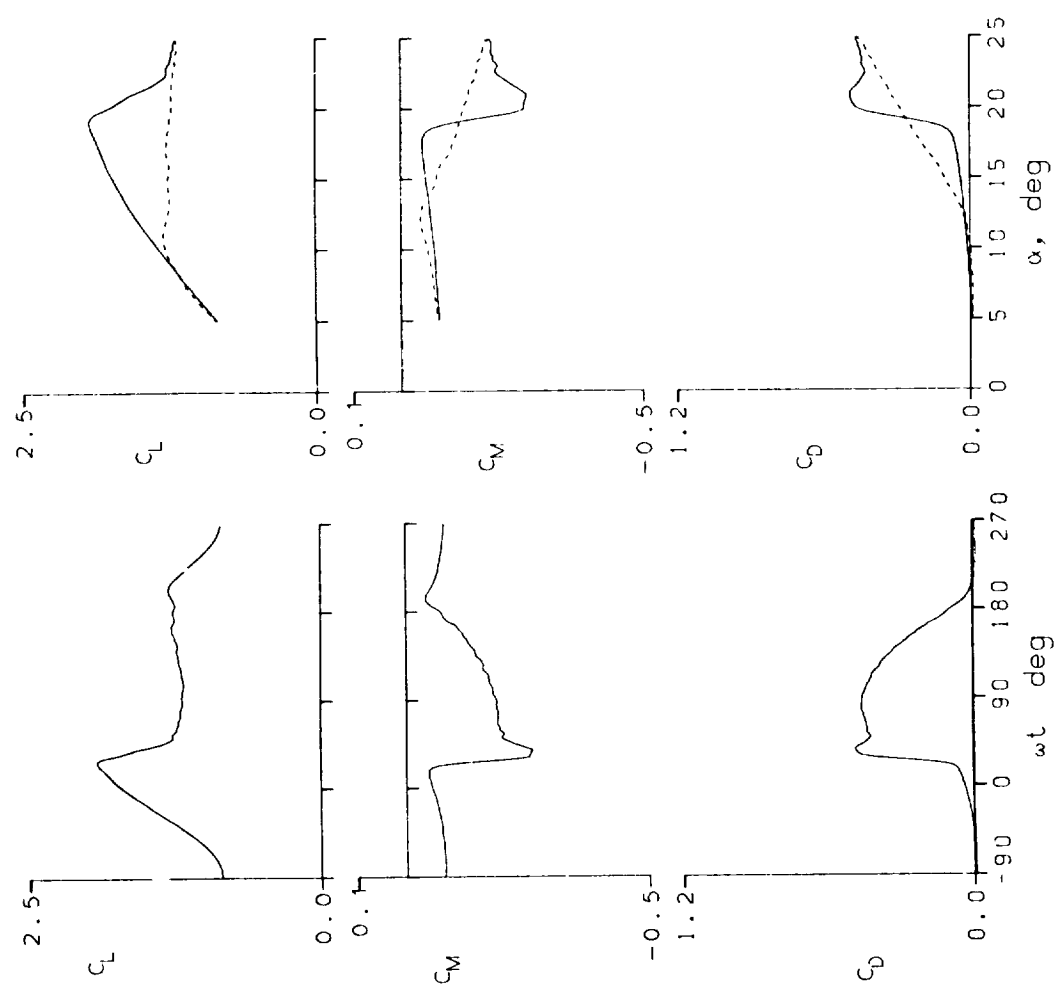


Figure 19.- Dynamic data for NLR-7301 airfoil.

NLR-7301 AIRFOIL

FRAME : 67021	A0 = 14.80 °	k = 0.099	TRIP
Re = 2.43 E6	A1 = 9.90 °	M = 0.184	
CLmax = 2.31	CMmin = -0.49	CDmax = 0.91	
αLmax = 24.1 °	ξ = 0.060	Mmax = 0.697	
αCMln = 14.2 °	-CPmax = 11.0	αMmax = 21.8 °	

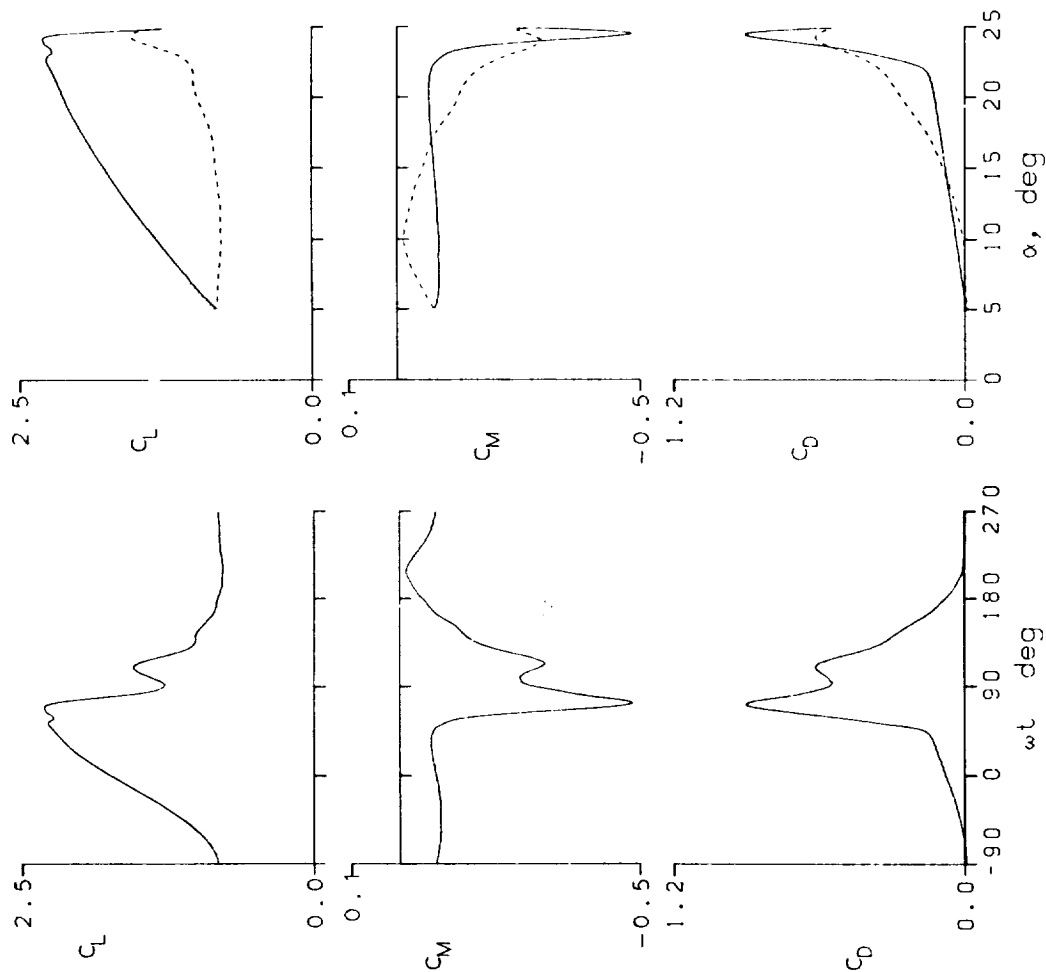


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 67023	A0 = 14.79 °	k = 0.198	TRIP
Re = 2.43 E6	A1 = 9.90 °	M = 0.183	
CLmax = 2.44	CMmin = -0.50	CDmax = 0.94	
αLmax = 24.2 °	ξ = -0.289	Mmax = 0.719	
αCmin = 14.3 °	-CPmax = 11.7	αMmax = 22.9 °	

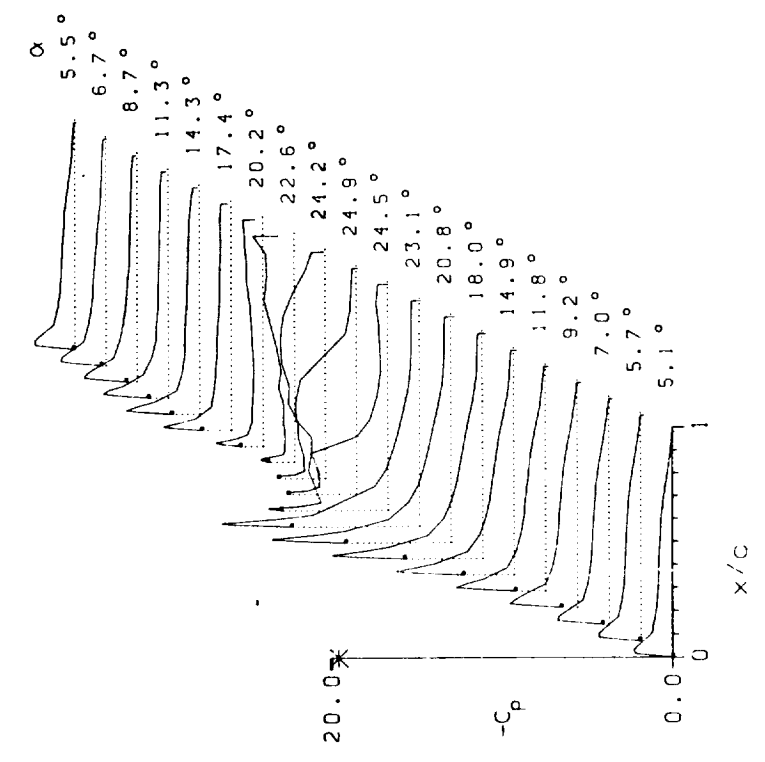
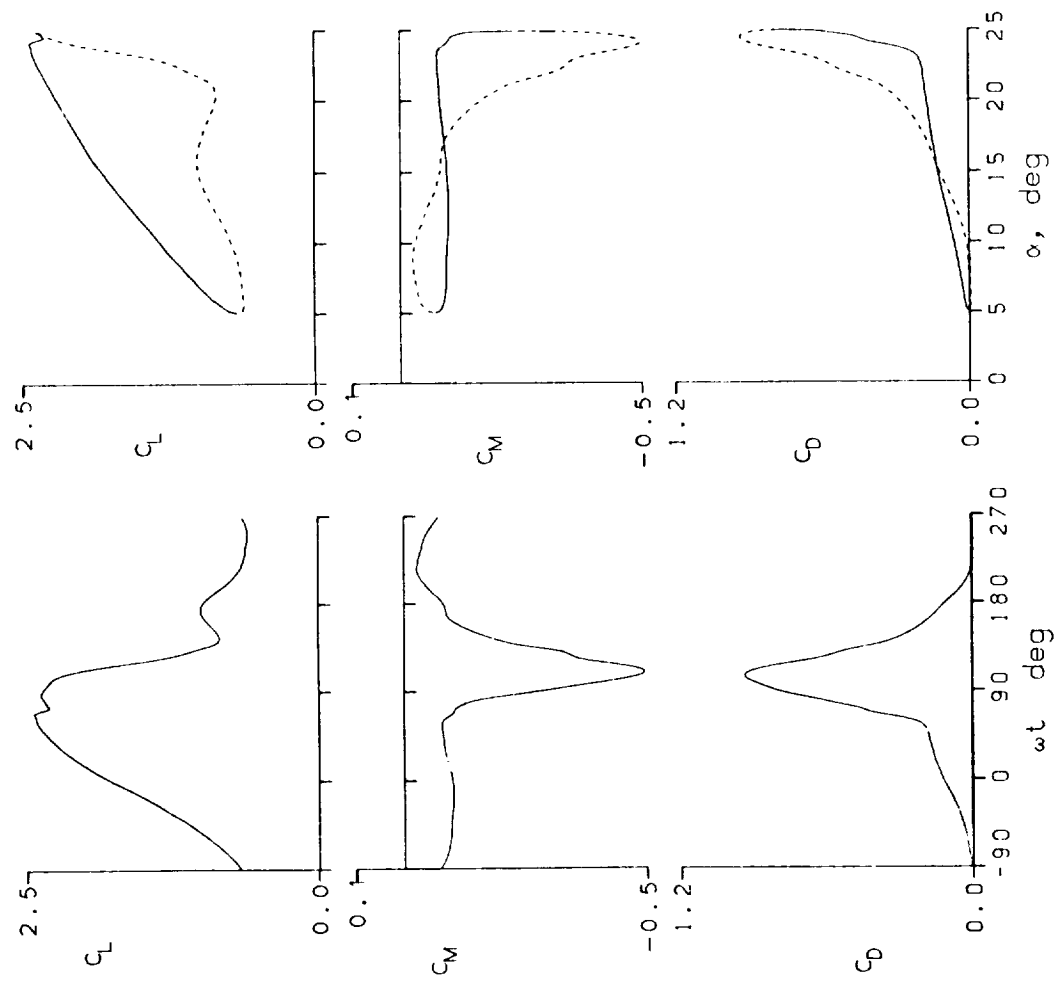


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 67108	A0	= 9.98 °	k	= 0.024	
Re	= 3.81 E6	A1	= 4.90 °	M	= 0.301
CLmax	= 1.58	CMmin	= -0.18	CDmax	= 0.23
αLmax	= 14.5 °	ζ	= -0.217	Mmax	= 1.131
αCmin	= 9.8 °	-CDmax	= 8.2	αMmax	= 14.5 °

TRIP

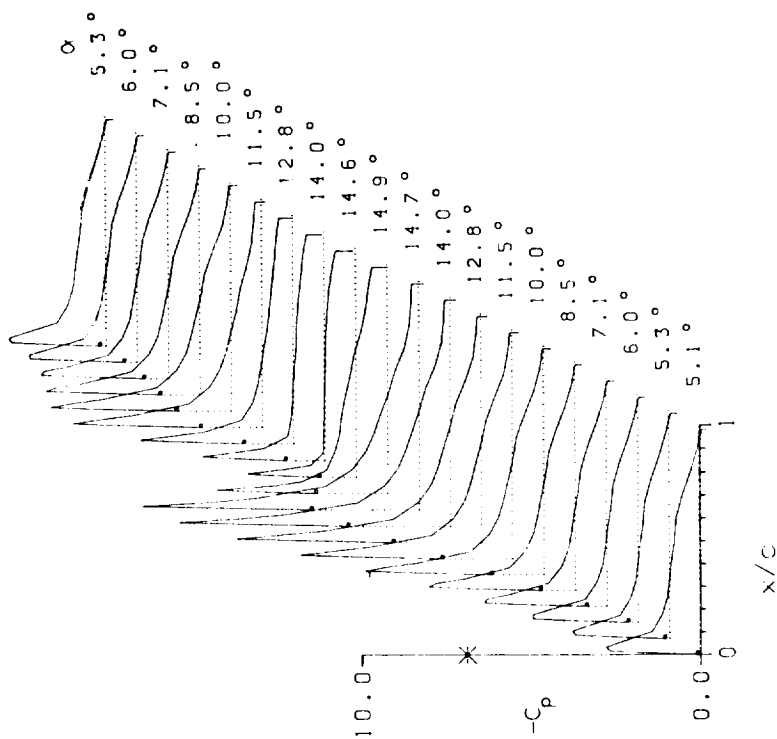
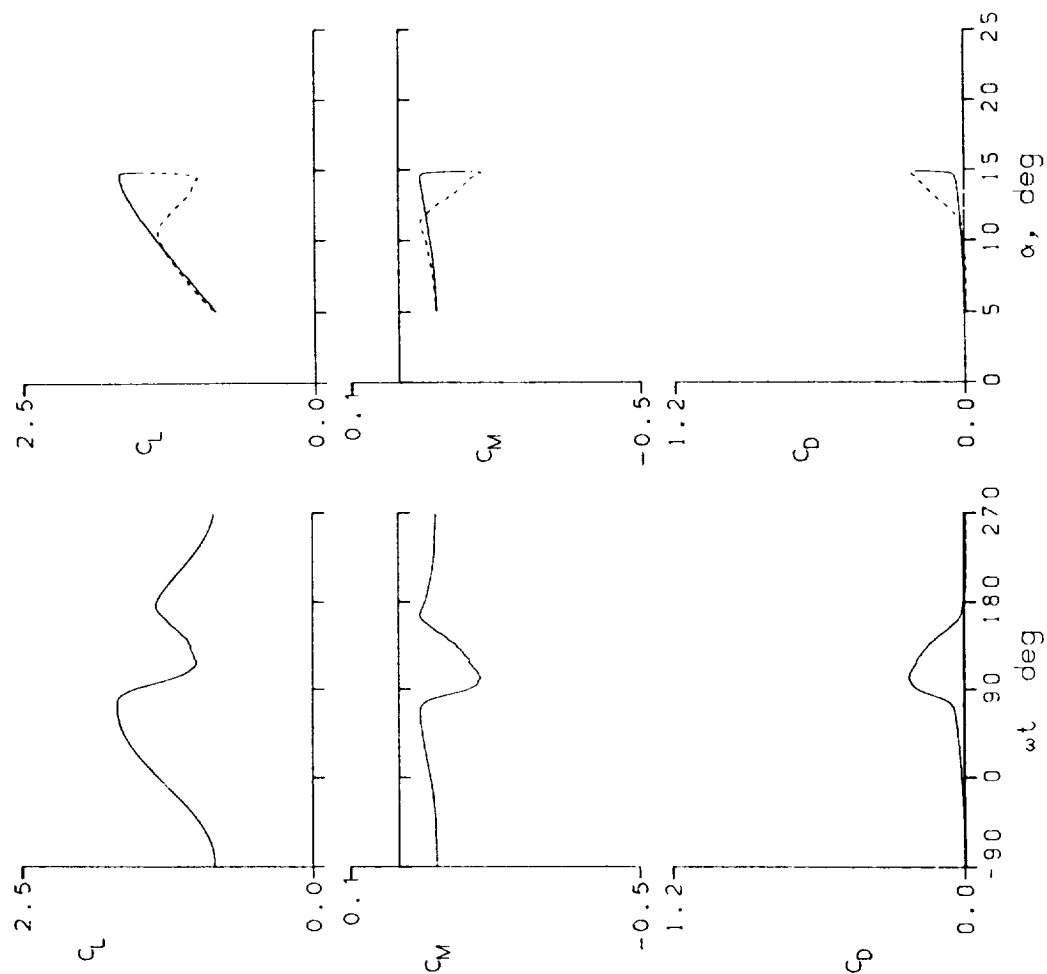


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 67110	A0 = 9.98 °	k = 0.049	TRIP
Re = 3.75 E6	A1 = 4.90 °	M = 0.298	
$C_{Lmax} = 1.72$	$C_{Mmin} = -0.16$	$C_{Dmax} = 0.19$	
$\alpha_{Lmax} = 14.7 °$	$\zeta = -0.158$	$M_{max} = 1.143$	
$\alpha_{Cmin} = 9.8 °$	$-C_{Dmax} = 8.5$	$\alpha_{Mmax} = 14.9 °$	

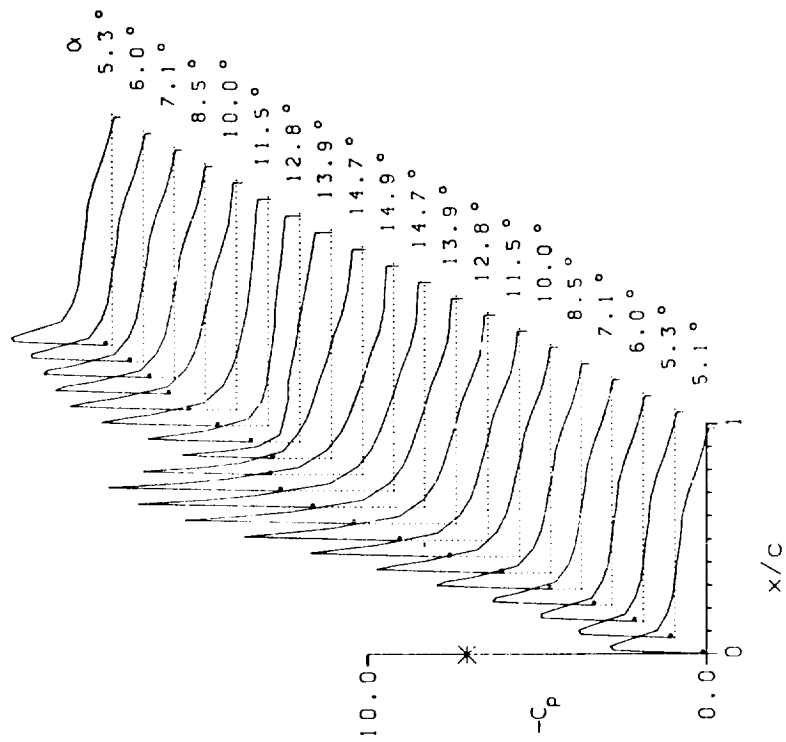
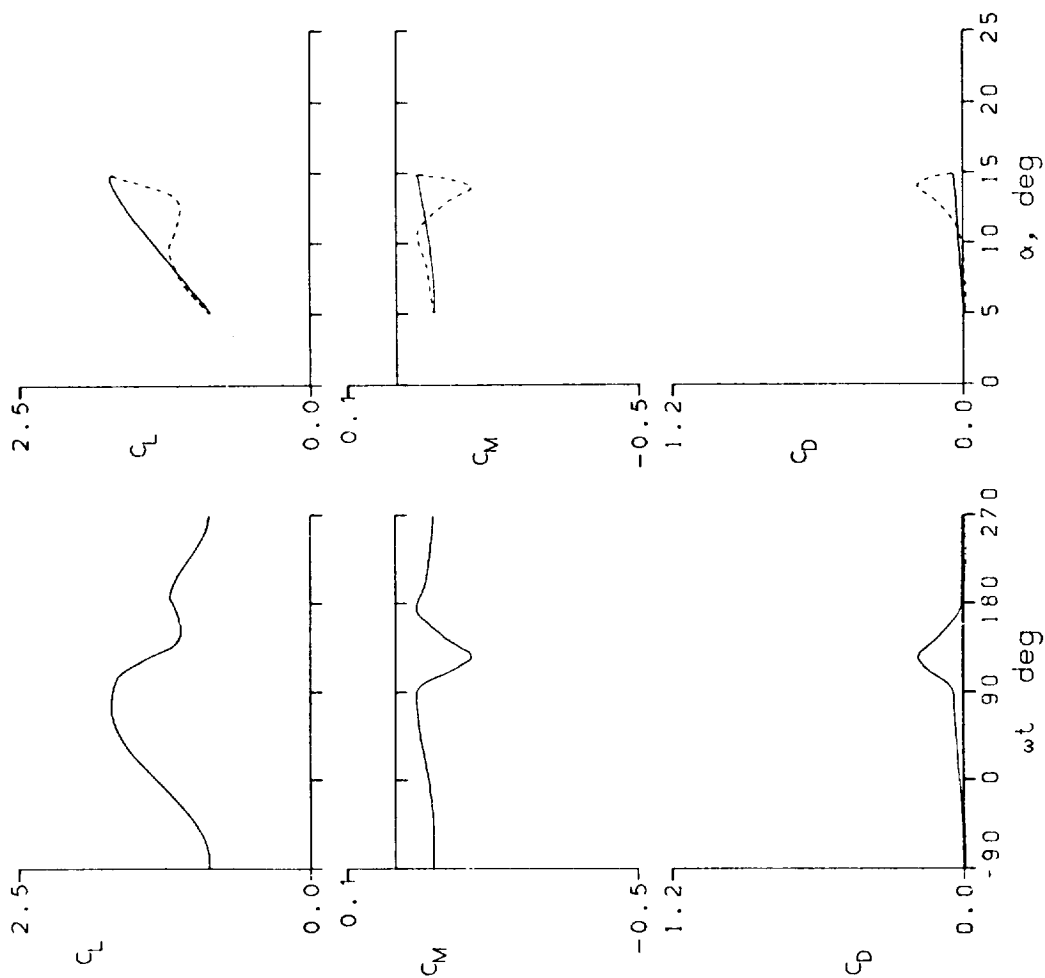


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 67112	A0 = 9.97 °	k = 0.099
Re = 3.74 E6	A1 = 4.90 °	M = 0.298
CLmax = 1.75	CMmin = -0.09	CDmax = 0.04
αLmax = 14.8 °	ζ = 0.193	Mmax = 1.162
αCMln = 9.8 °	-CDmax = 8.7	αMmax = 14.9 °

TRIP

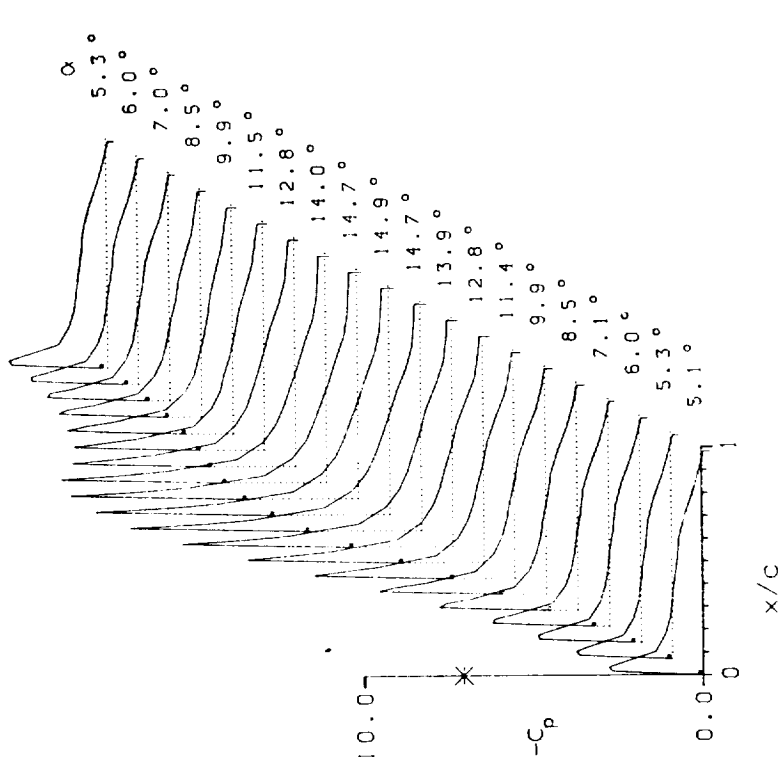
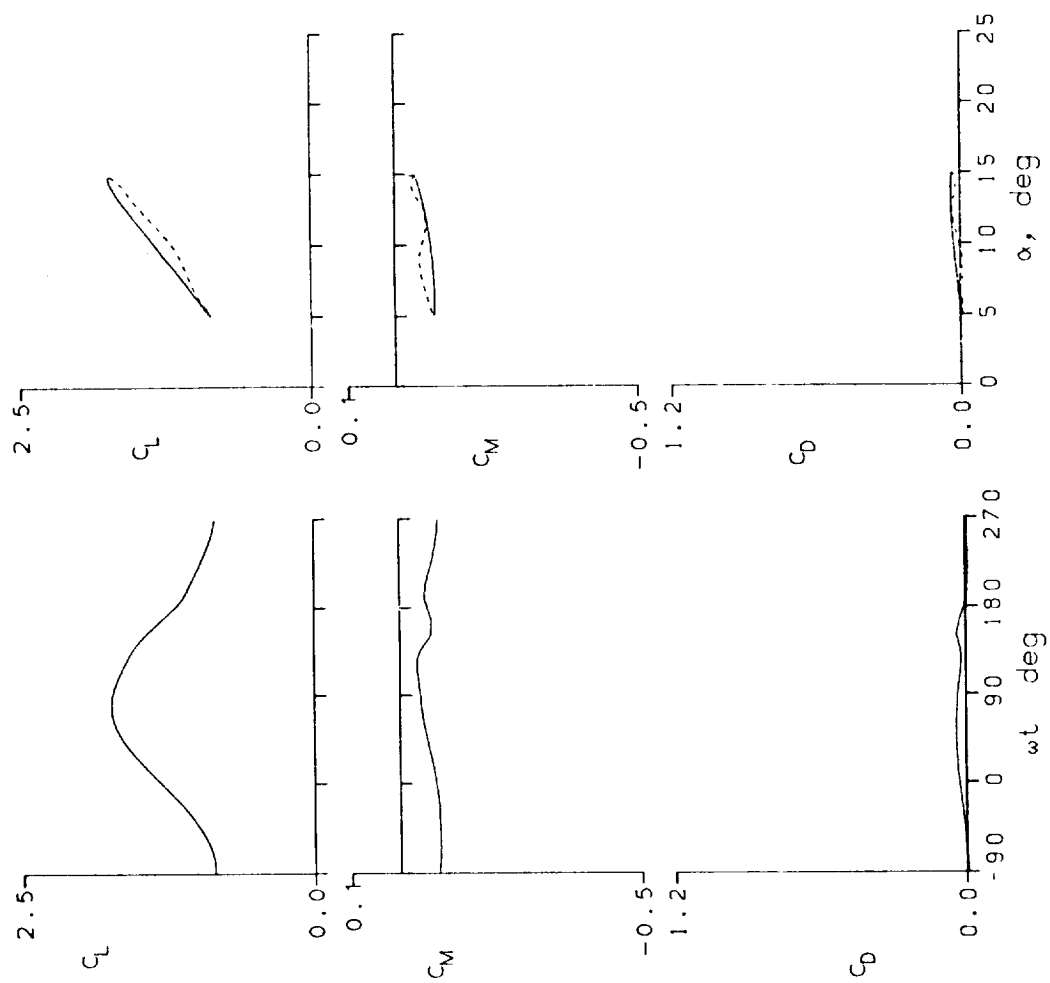


Figure 19.- Continued.

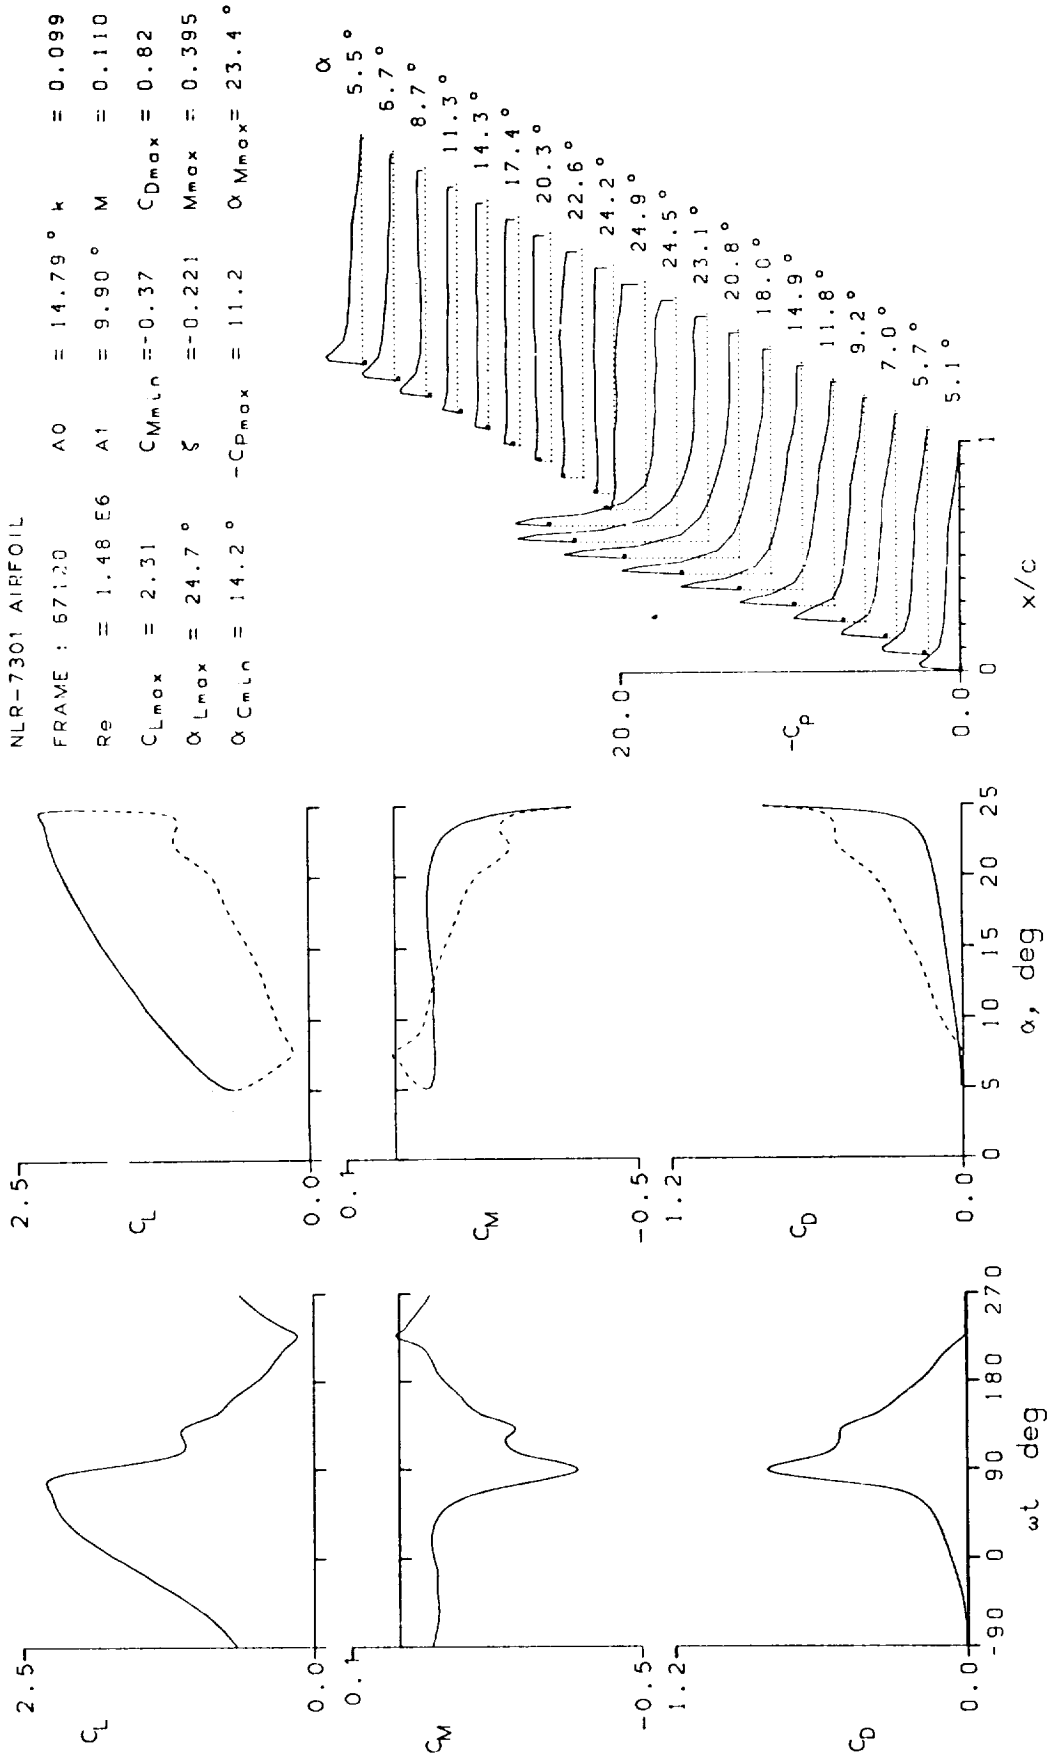


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 67201	A0	= 9.80 °	k	= 0.099	
Re	= 1.48 E6	A1	= 9.90 °	M	= 0.110
C_{Lmax}	= 1.99	C_{Mmin}	= -0.09	C_{Dmax}	= 0.09
α_{Lrox}	= 19.6 °	ζ	= 0.227	M_{max}	= 0.368
α_{Cmin}	= 9.3 °	$-C_{Dmax}$	= 9.7	α_{Mmax}	= 19.8 °

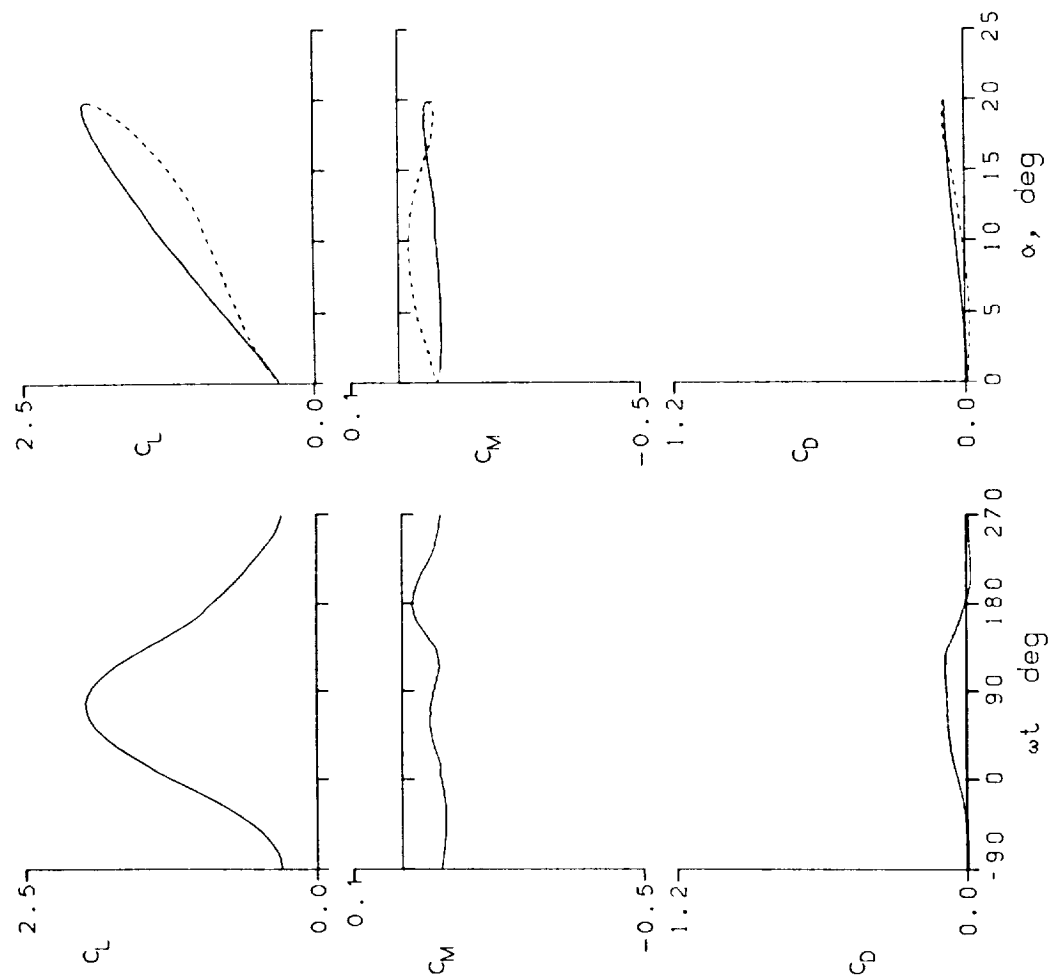


Figure 19.- Continued.


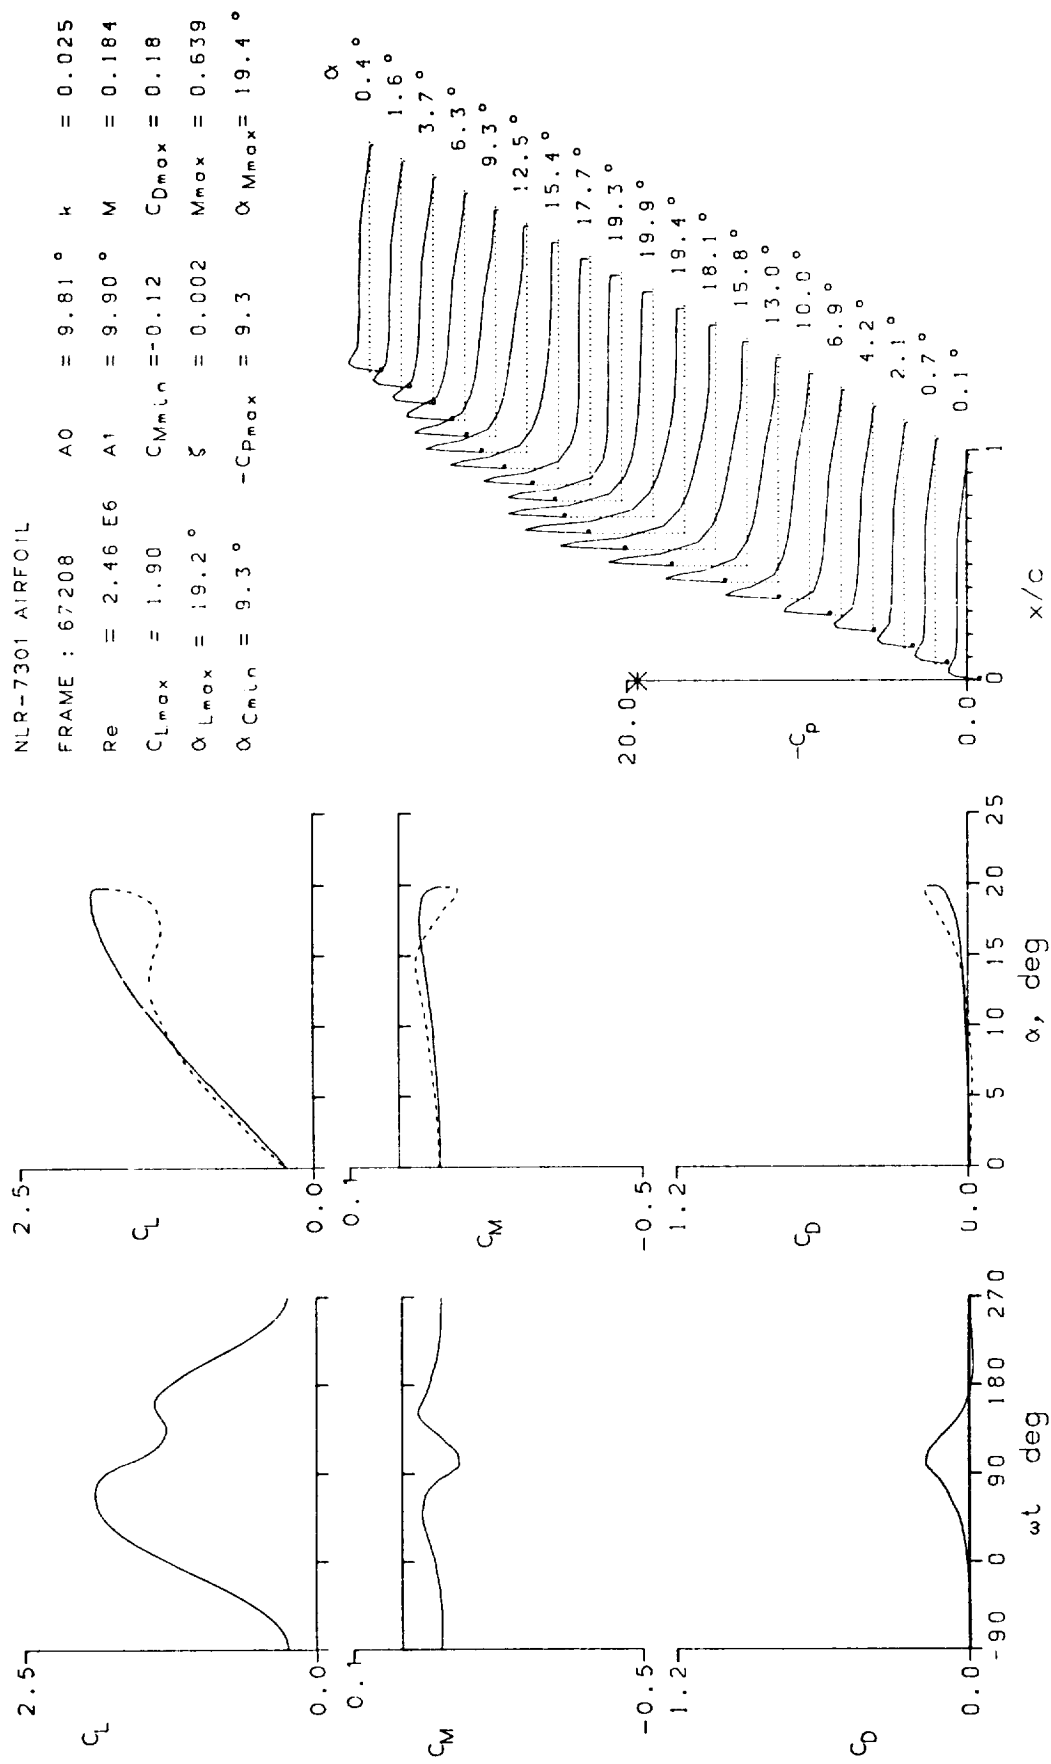


Figure 19.- Continued.

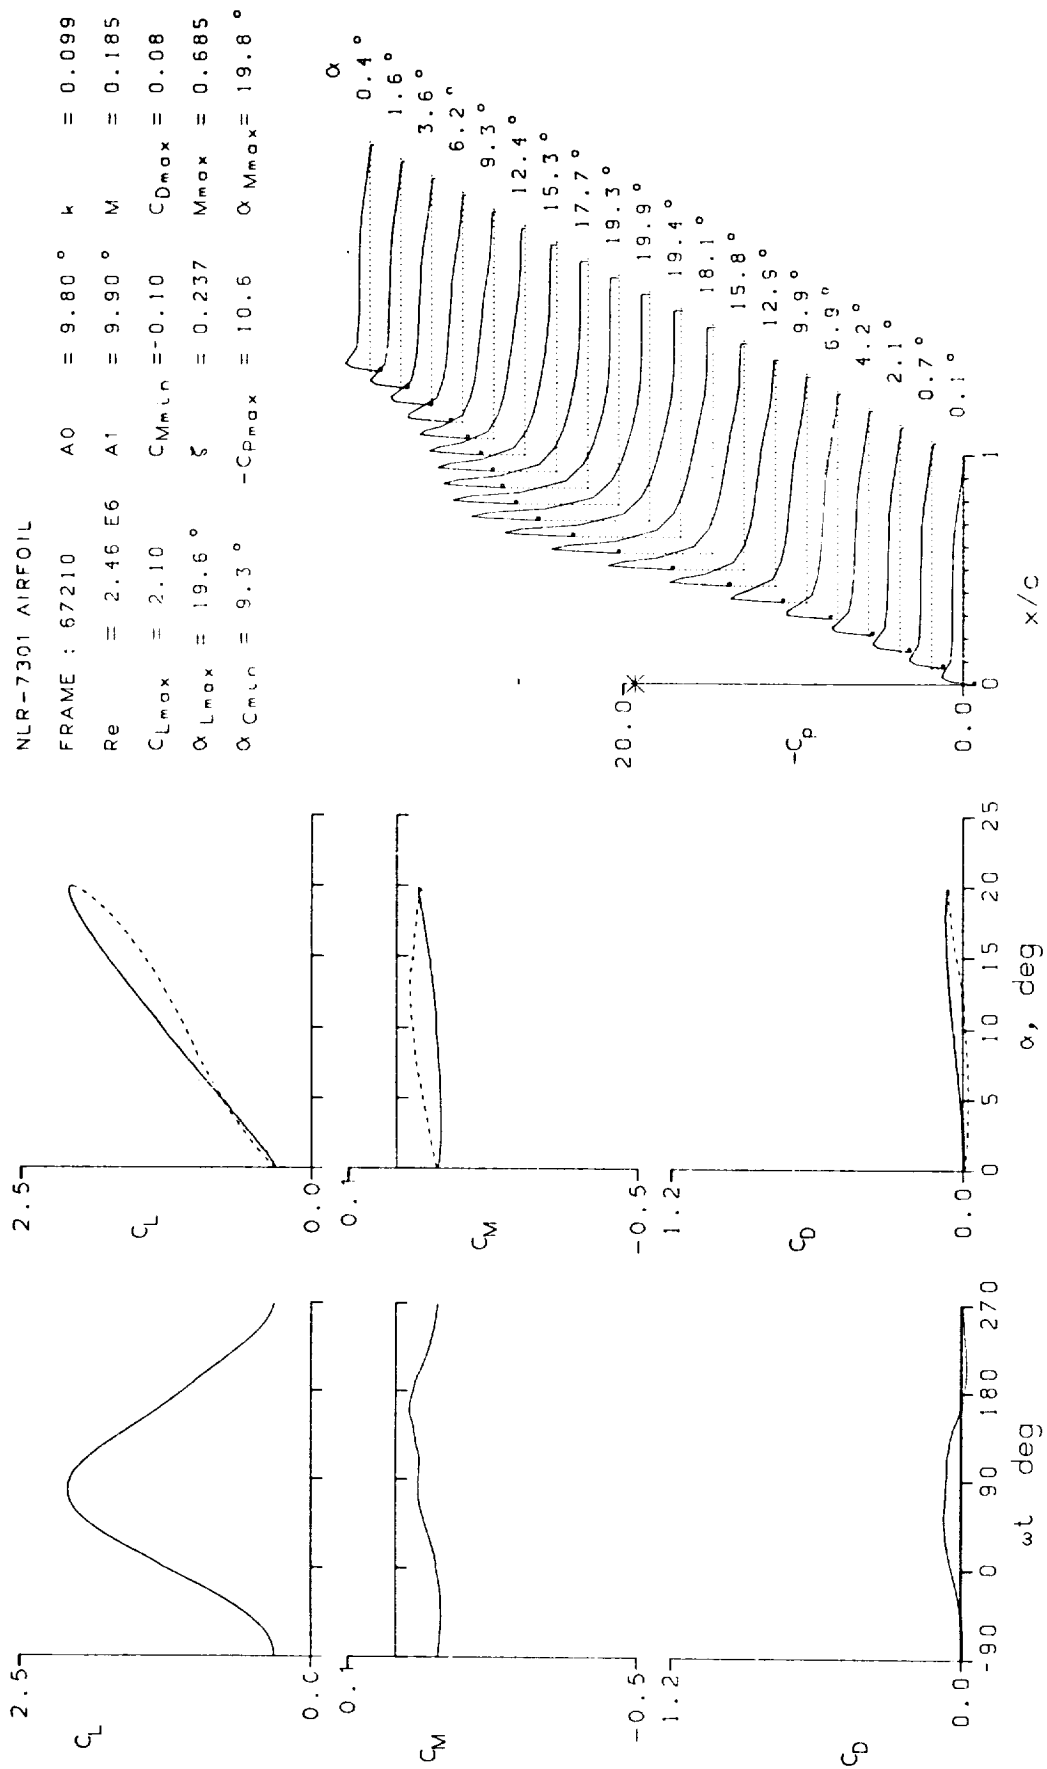

NLR-7301 AIRFOIL

FRAME : 67212	A0	= 9.79 °	k	= 0.198	
Re	= 2.45 E6	A1	= 9.90 °	M	= 0.184
C_{Lmax}	= 2.15	C_{Mmin}	= -0.12	C_{Dmax}	= 0.12
α_{Lmax}	= 19.7 °	ζ	= 0.533	M_{max}	= 0.697
α_{Cmin}	= 9.3 °	$-C_{Pmax}$	= 10.9	α_{Mmax}	= 19.9 °

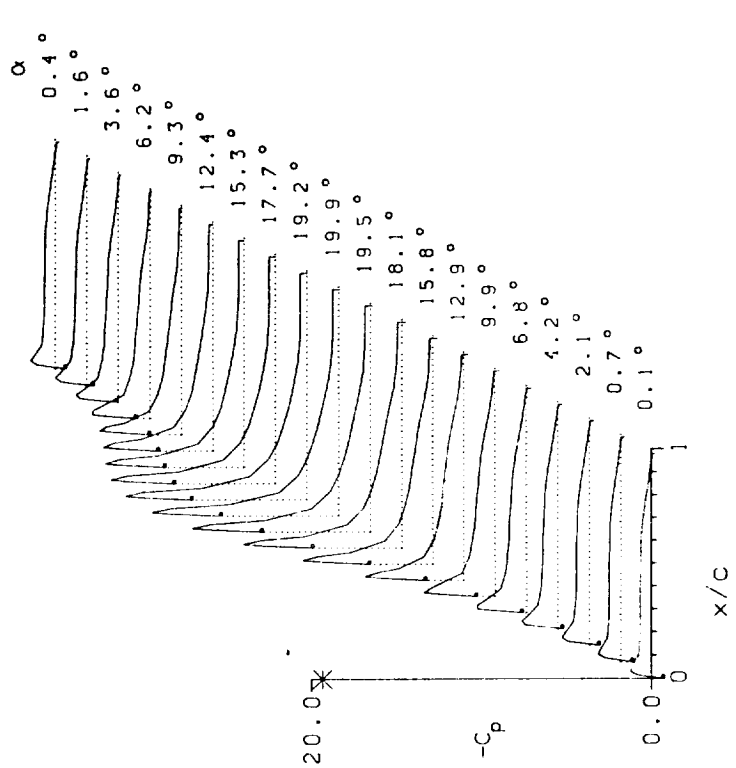
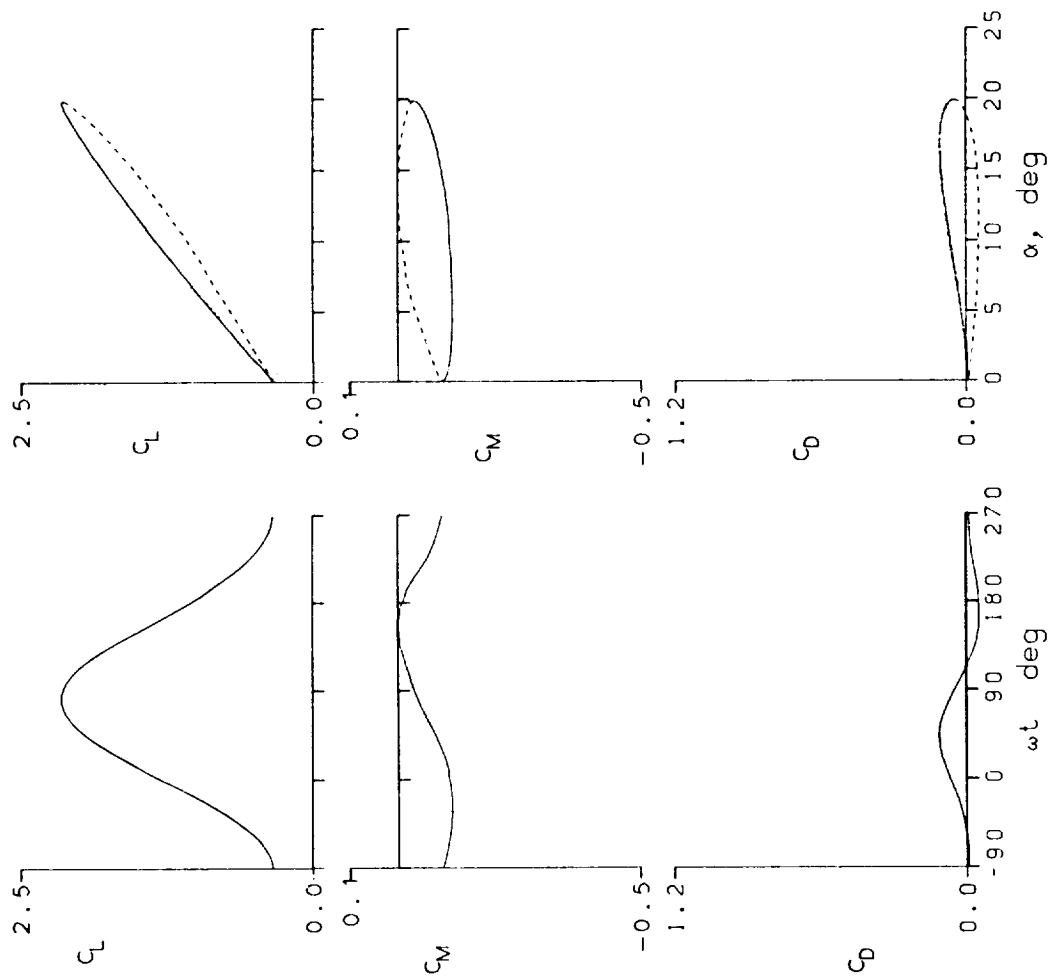


Figure 19.- Continued.

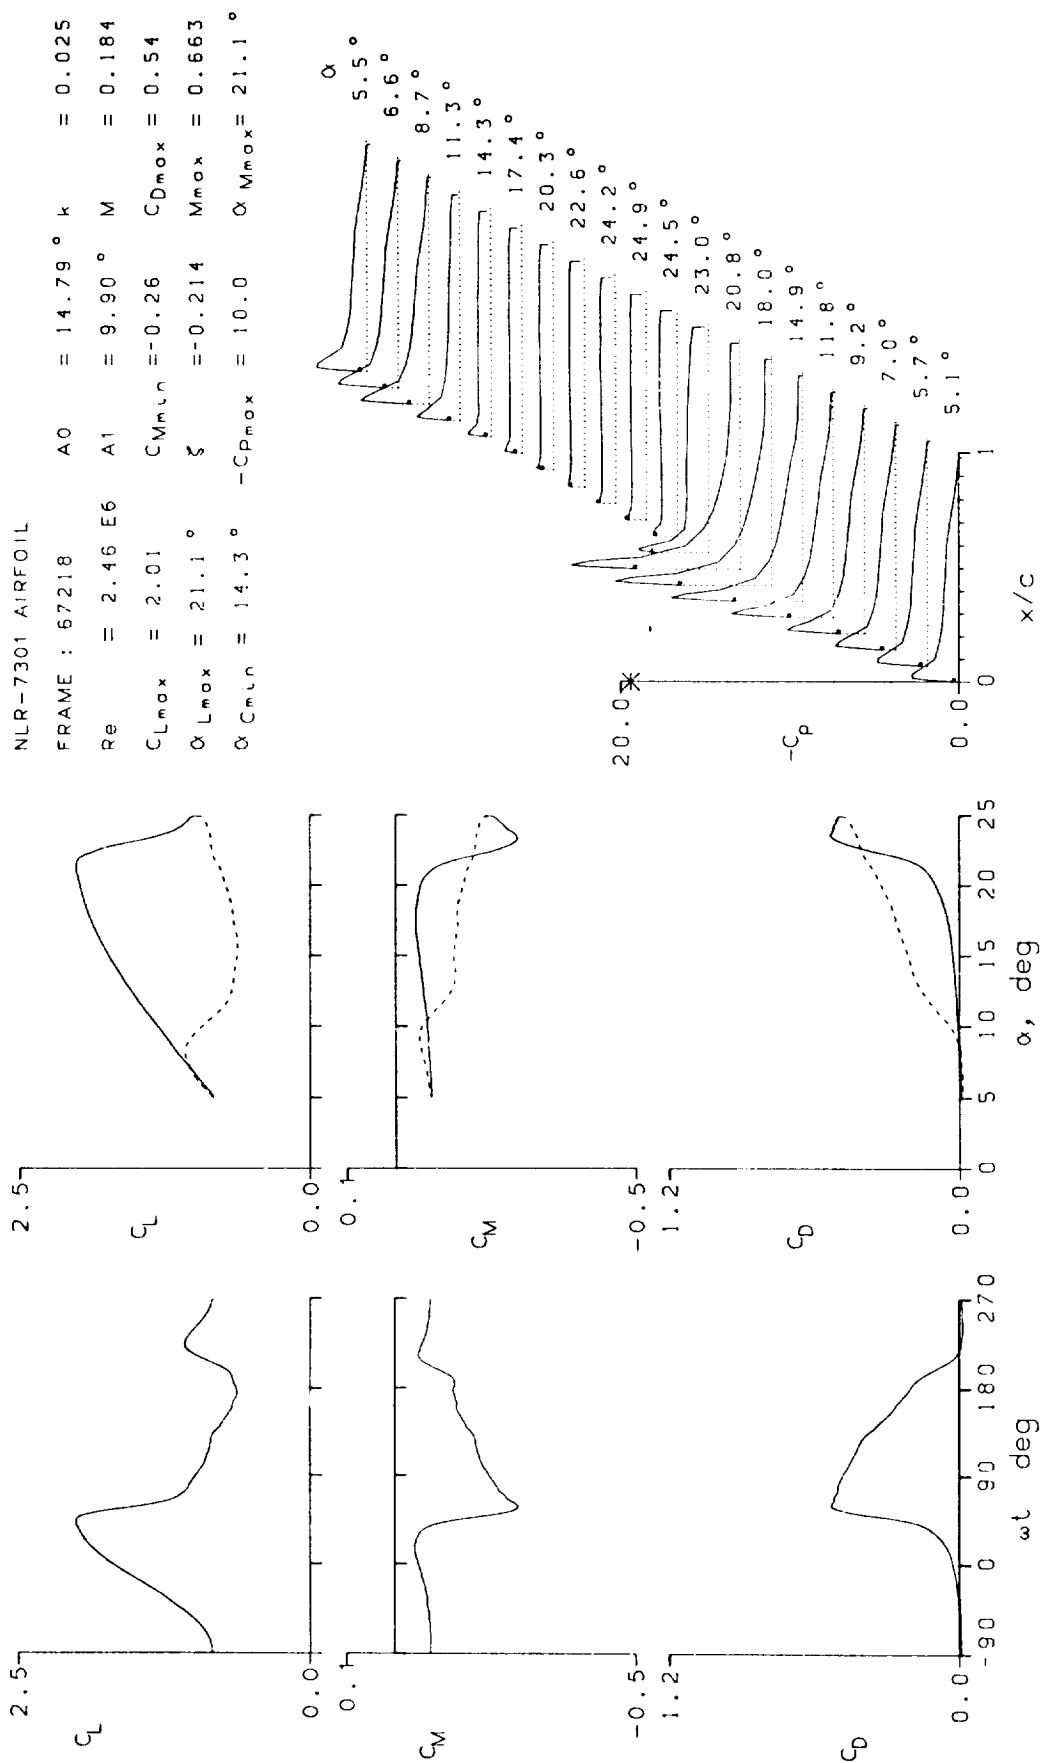


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 67220	A0 = 14.80 °	k = 0.099
Re = 2.45 E6	A1 = 9.90 °	M = 0.184
CLmax = 2.36	CMmin = -0.31	CDmax = 0.65
α Lmax = 24.3 °	ξ = -0.384	Mmax = 0.755
α Cmin = 14.2 °	-CPmax = 12.5	α Mmax = 23.9 °

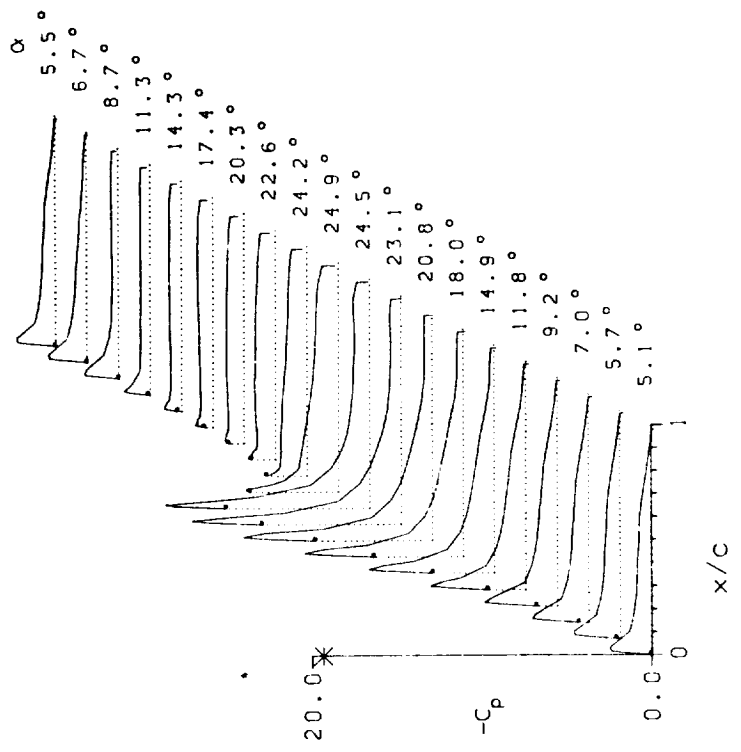
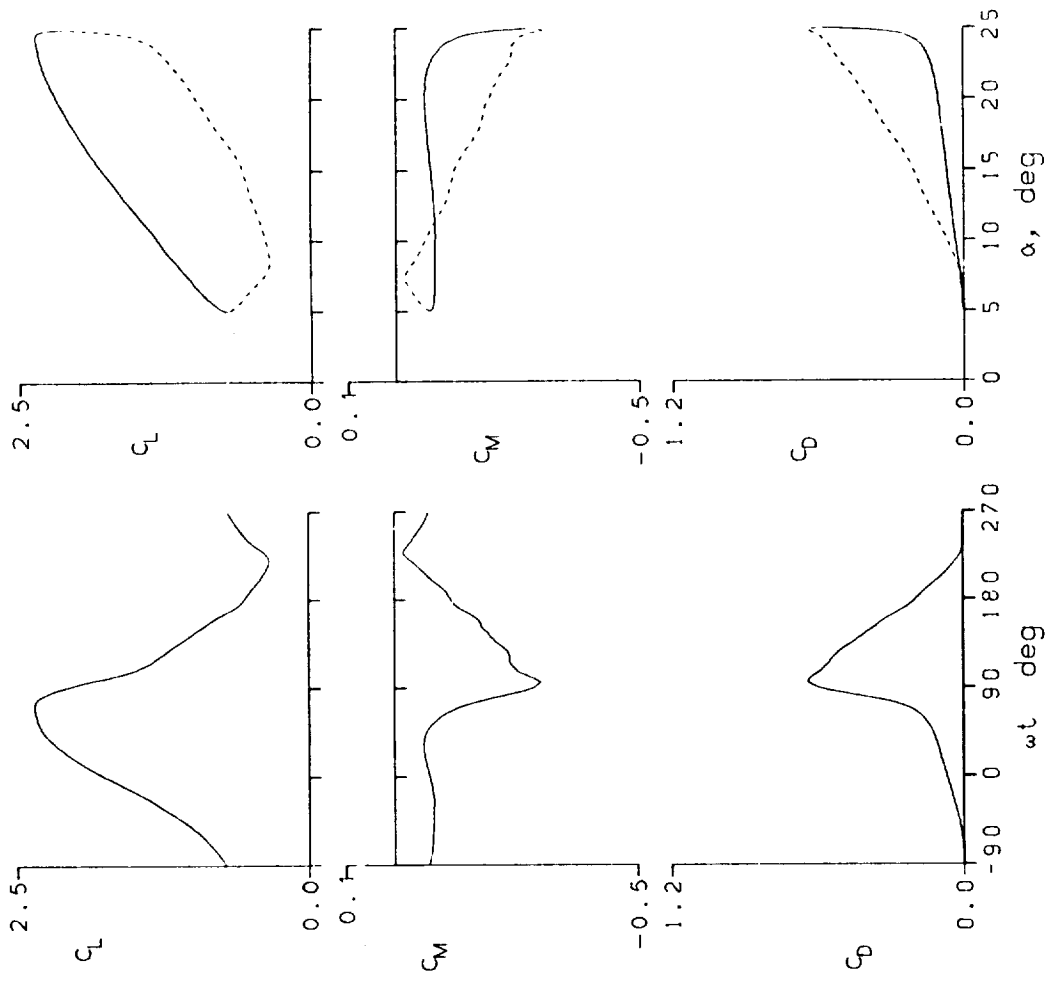


Figure 19.- Continued.

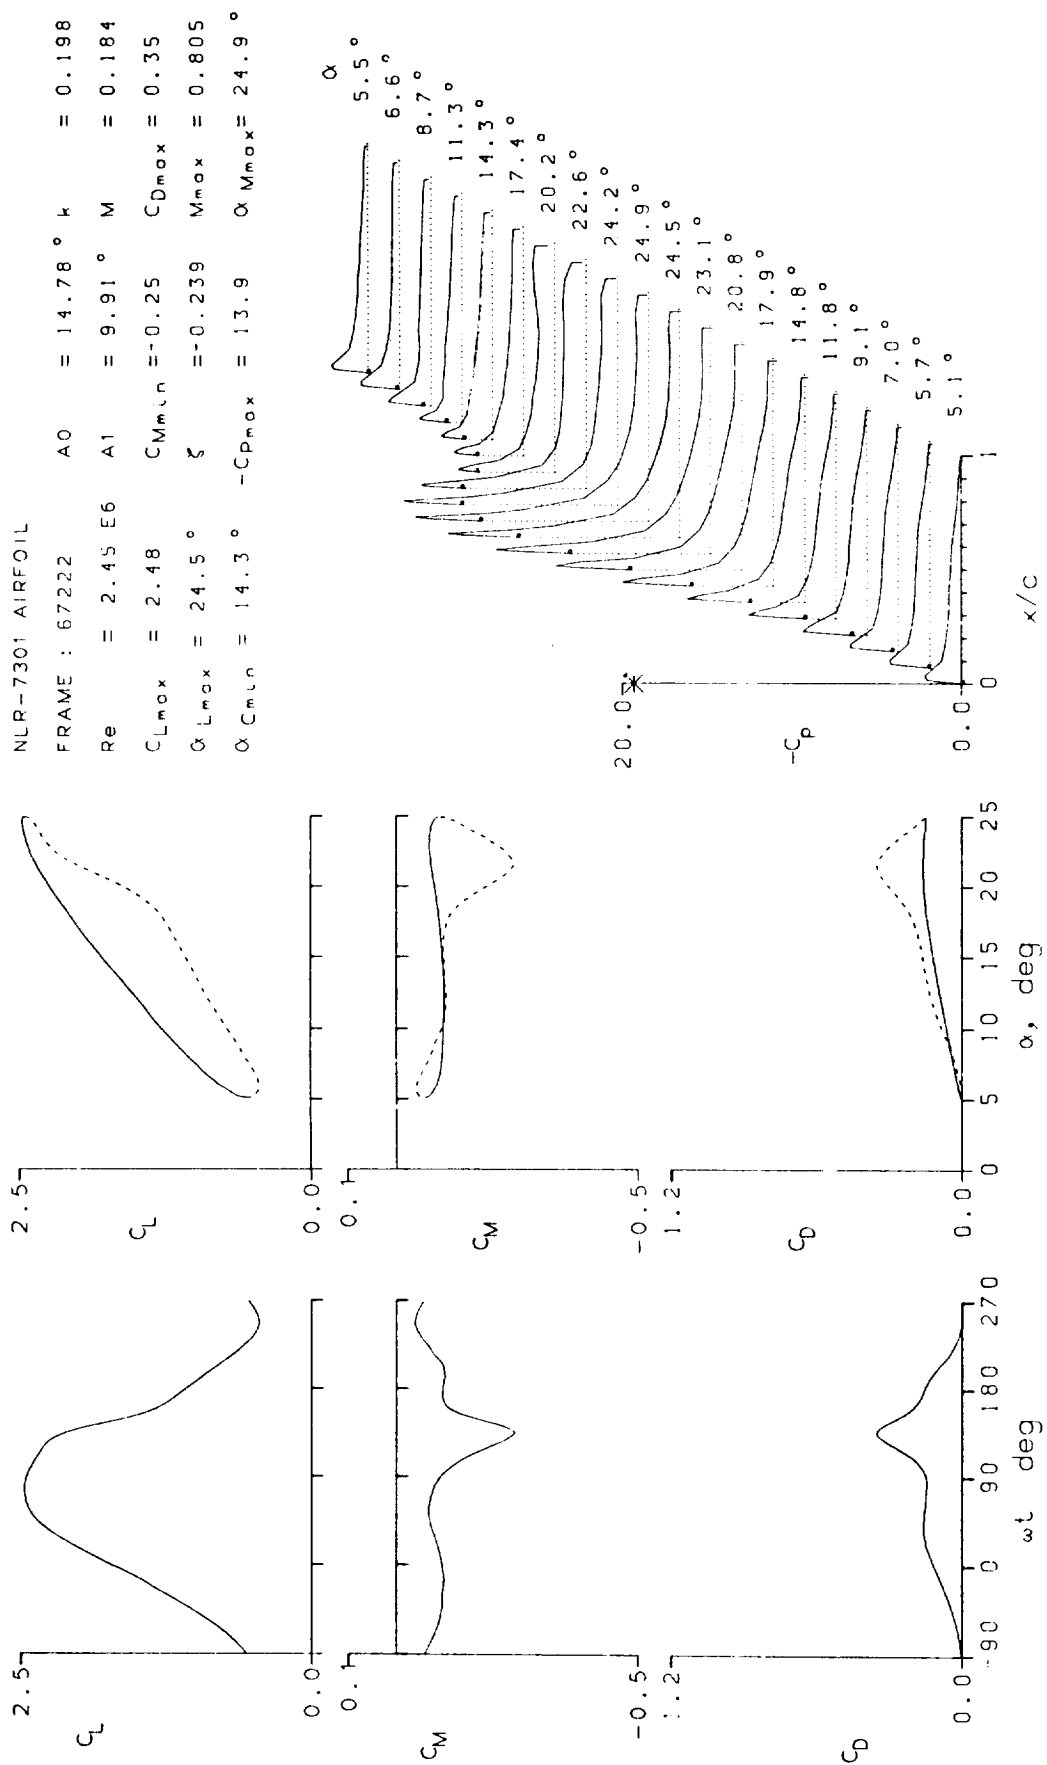
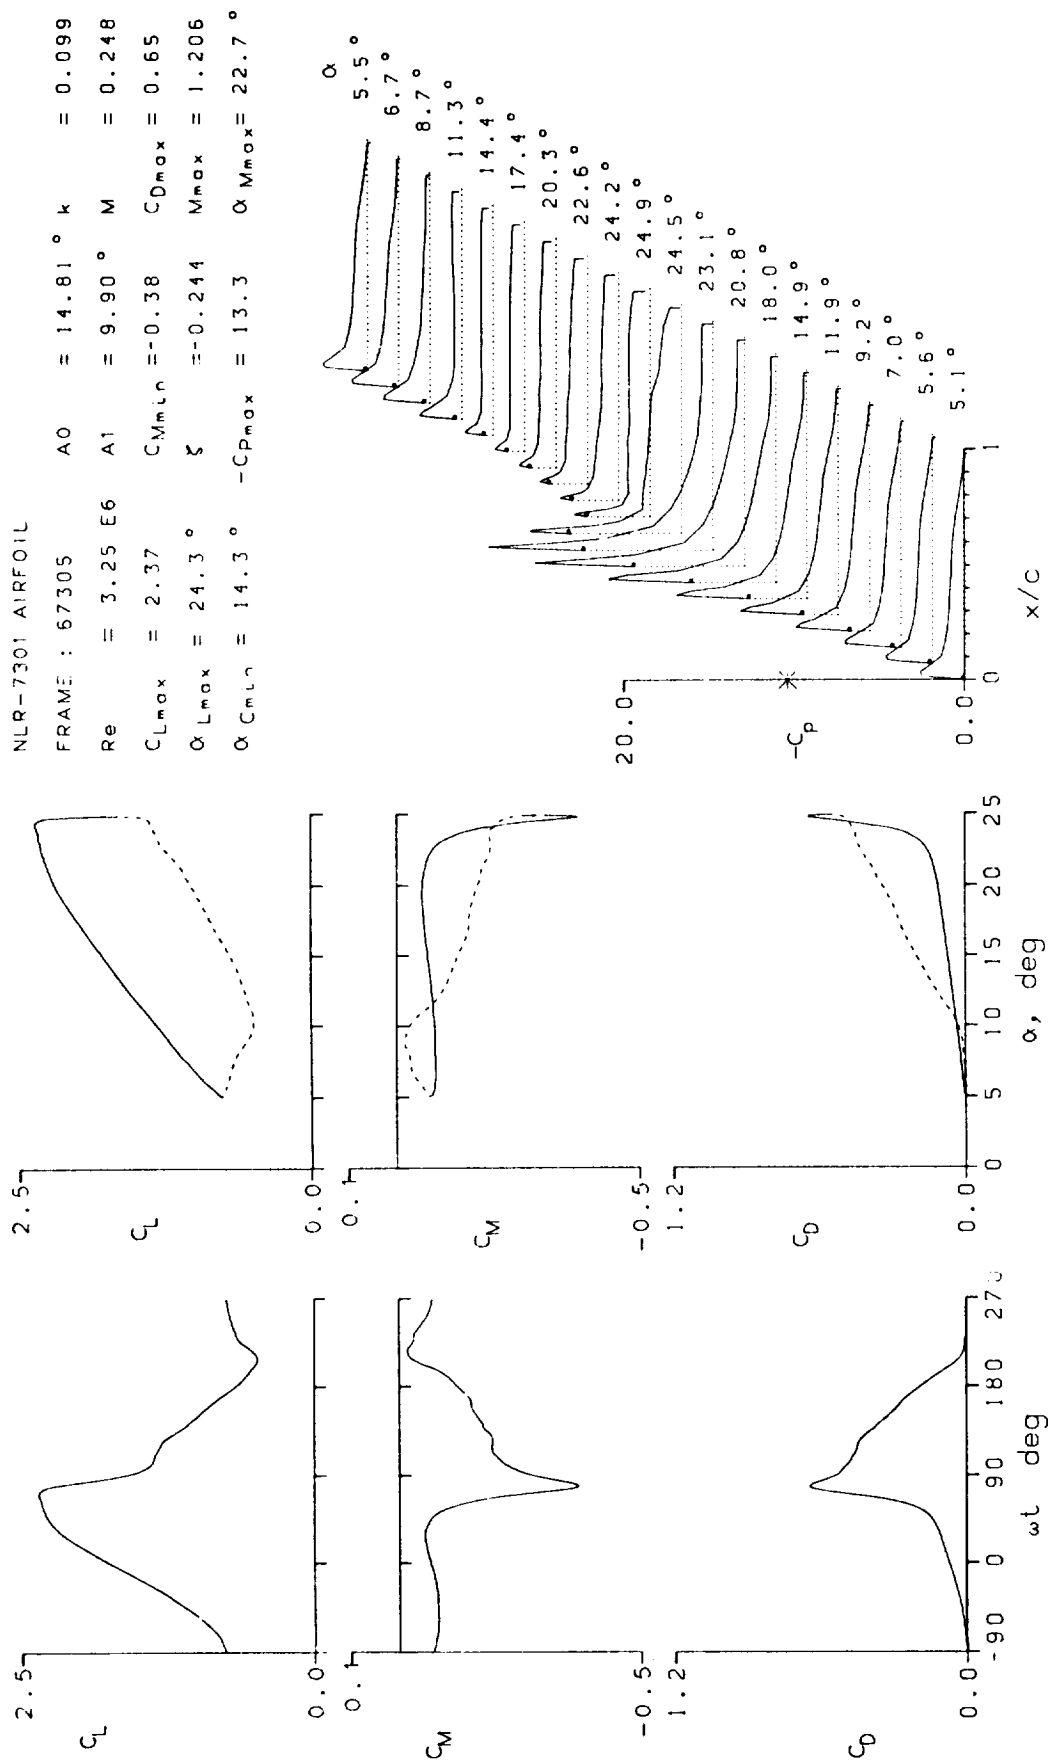
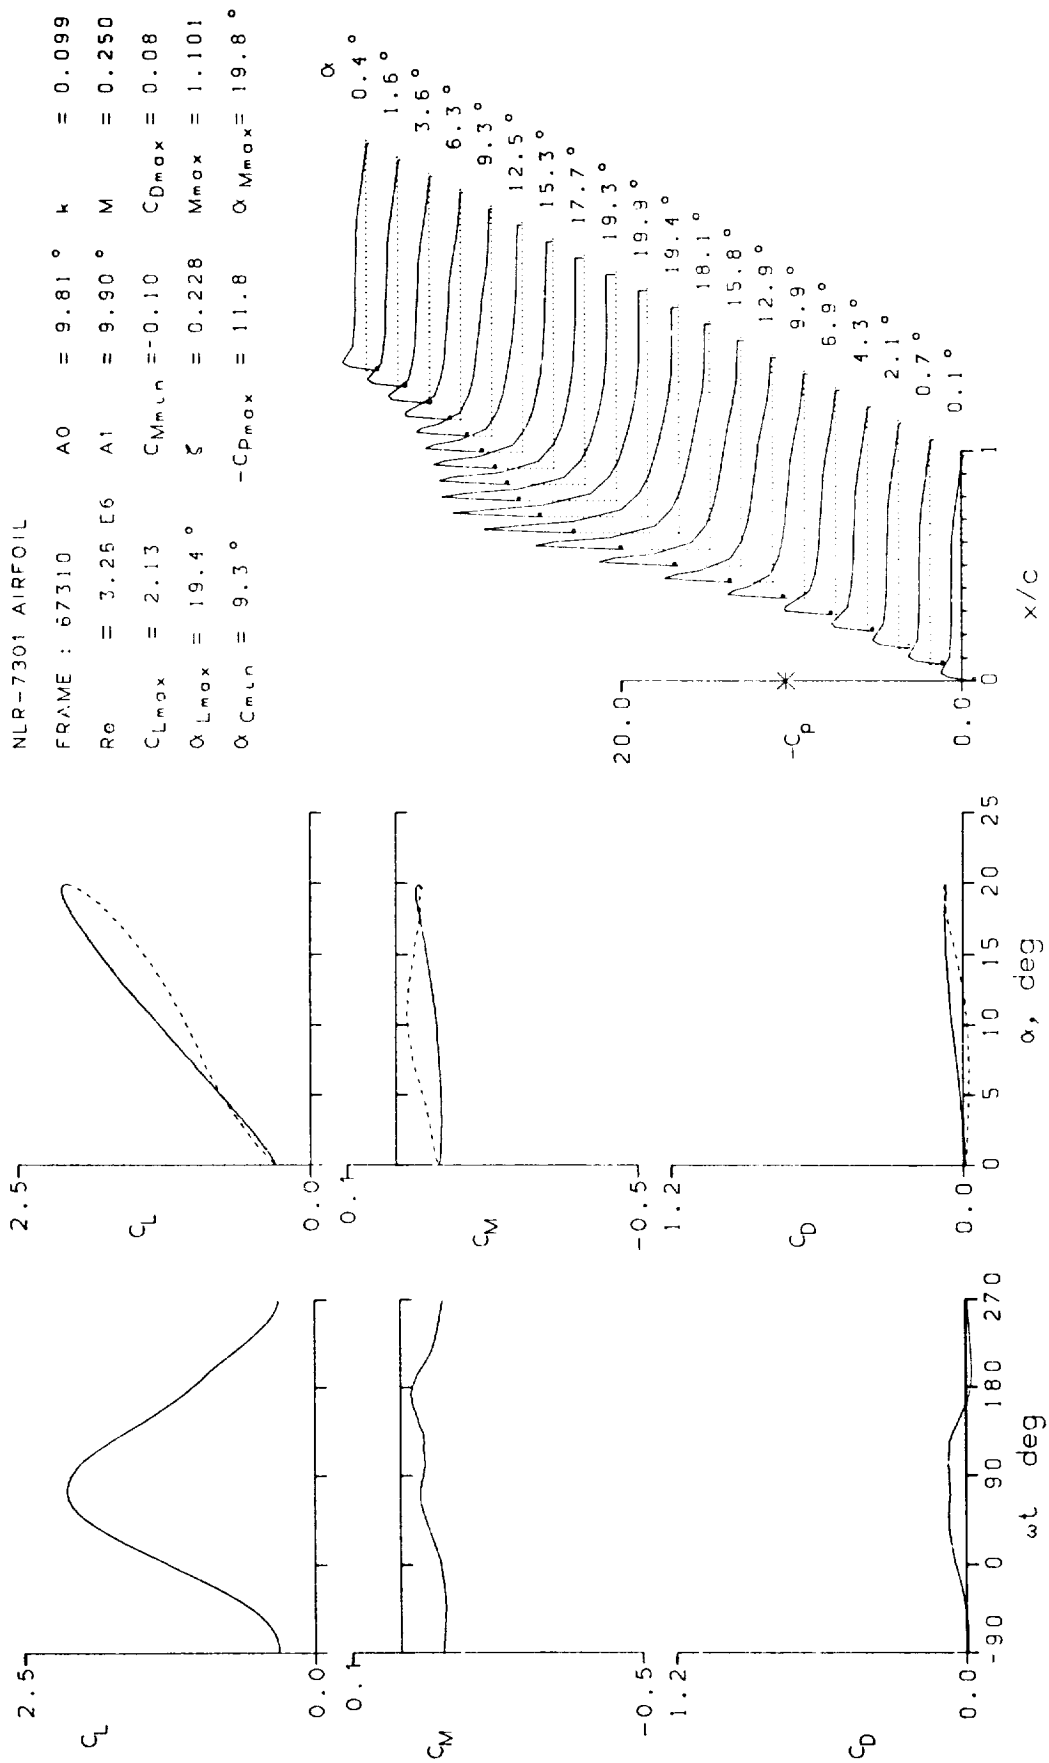


Figure 19.- Continued.





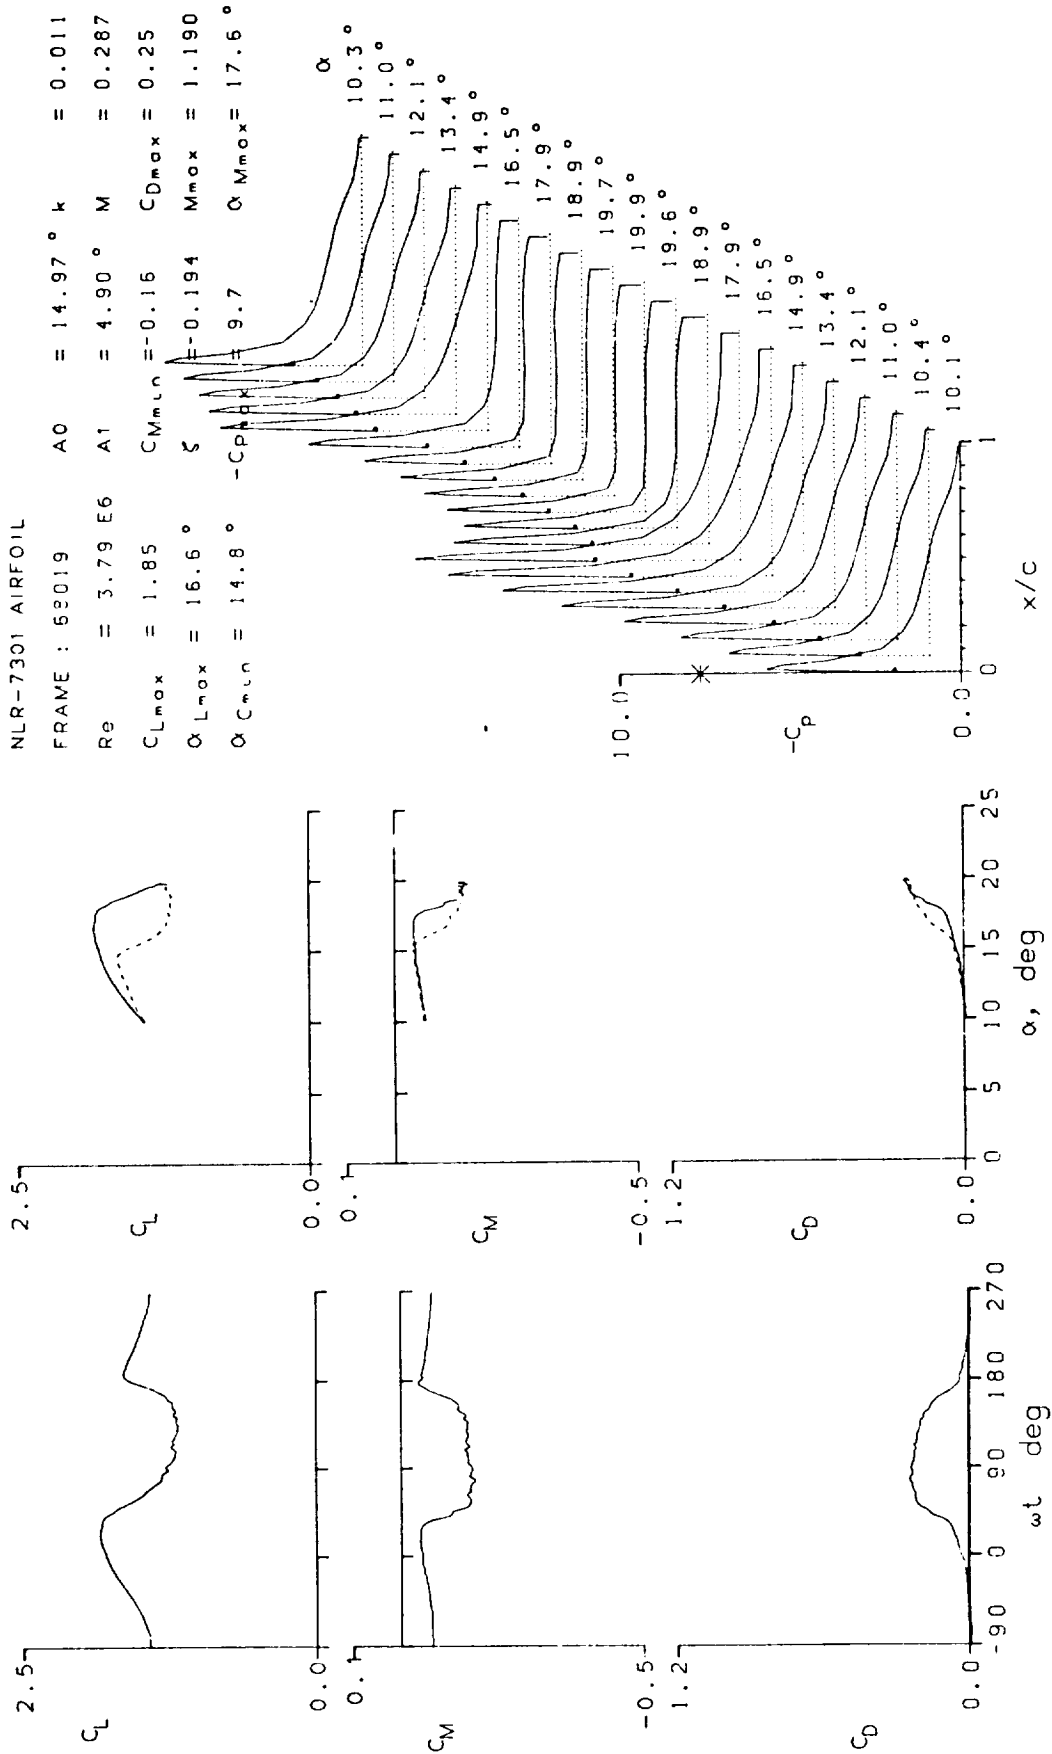


Figure 19.- Continued.

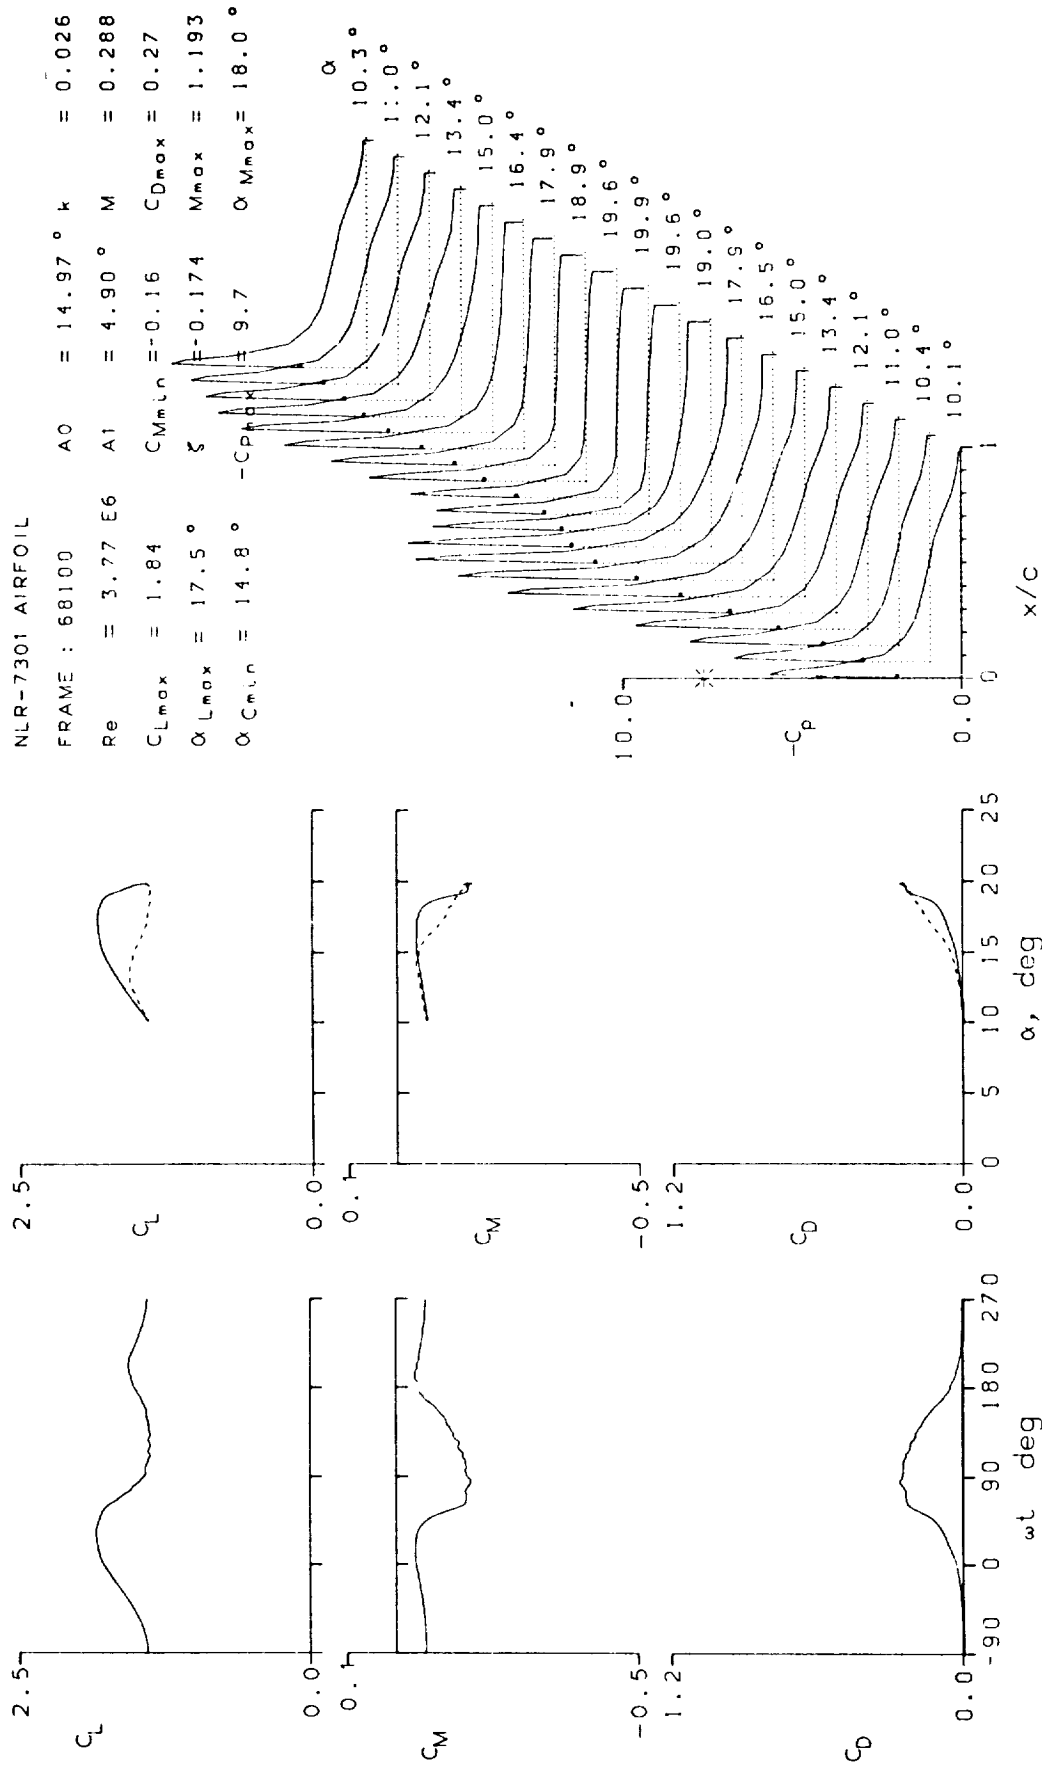


Figure 19.- Continued.


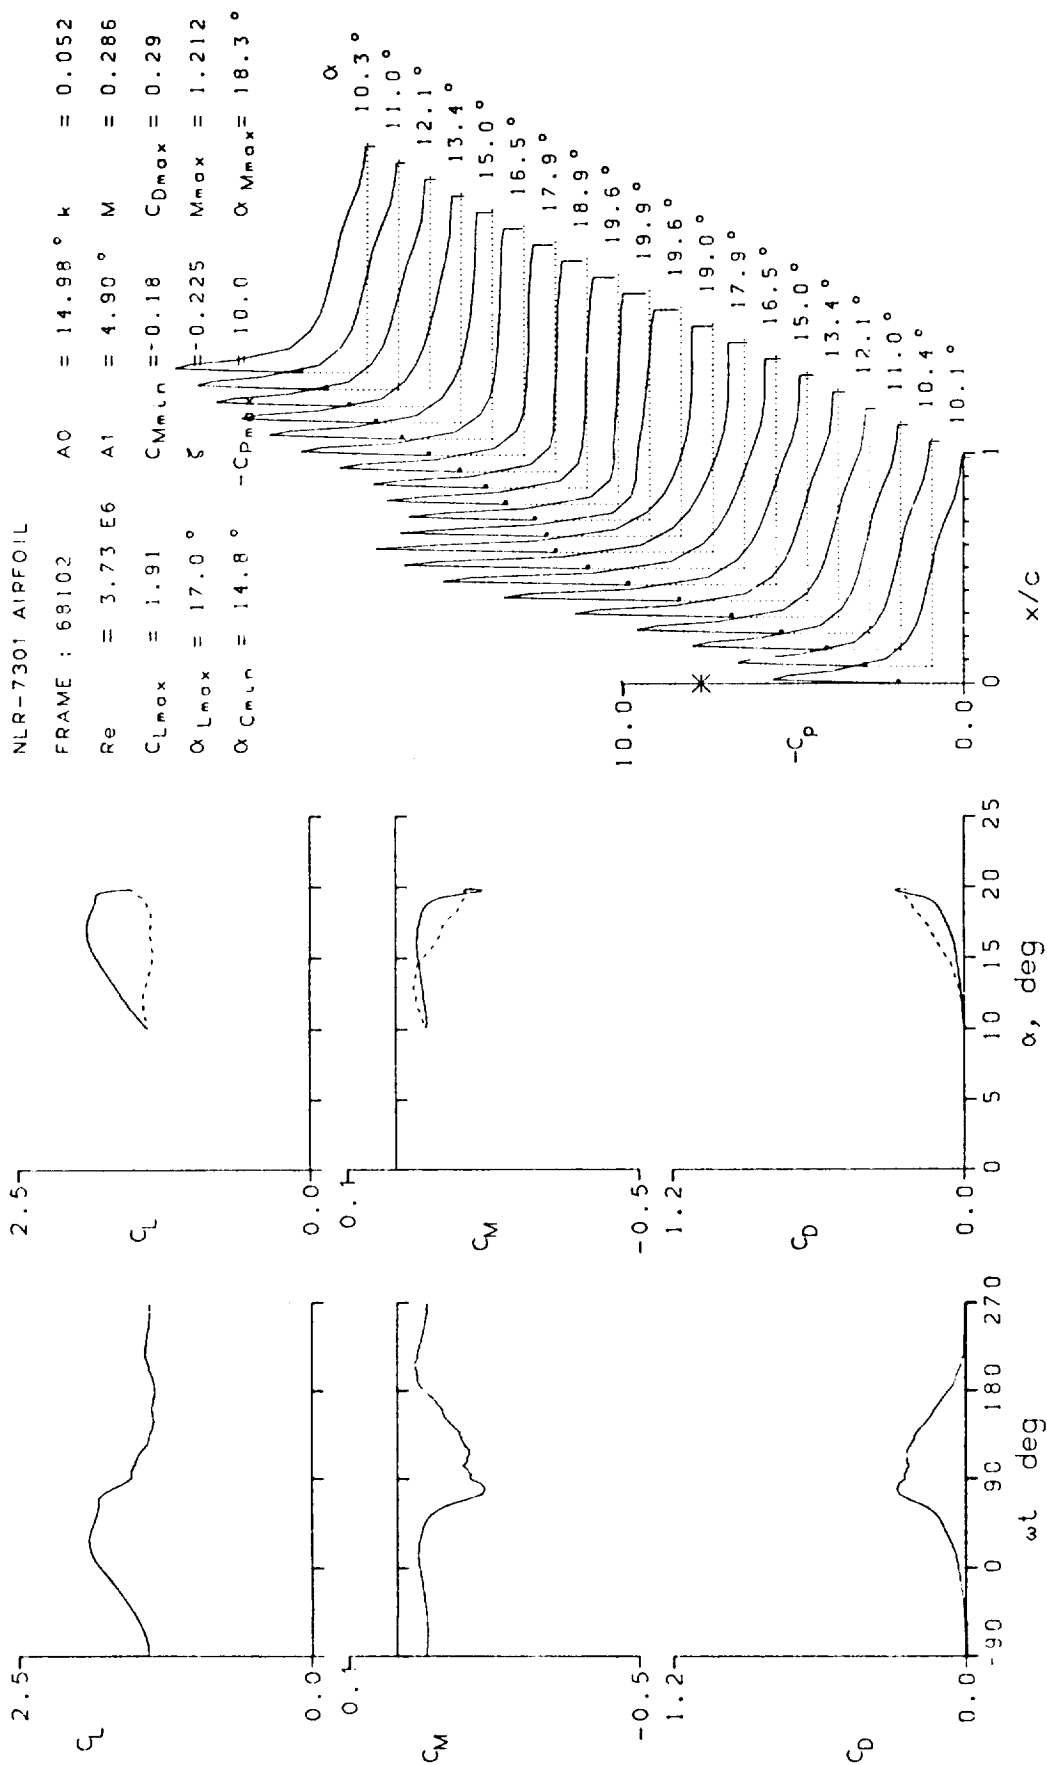


Figure 19.- Continued.

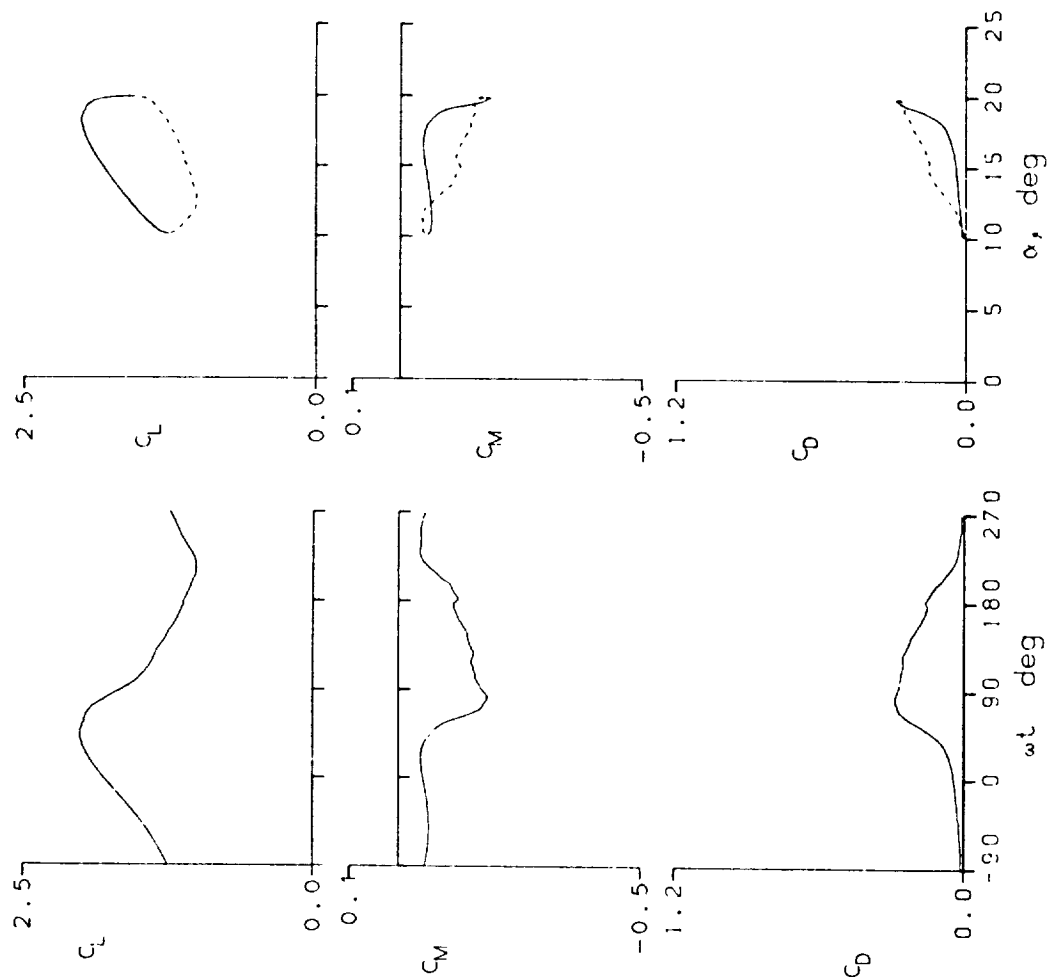

NLR-7301 AIRFOIL

FRAME : 68104 $A_0 = 14.97^\circ$ $k = 0.104$
 $R_0 = 3.73 E6$ $A_1 = 4.90^\circ$ $M = 0.287$
 $C_{Lmax} = 2.02$ $C_{Mmin} = -0.19$ $C_{Dmax} = 0.29$
 $\alpha_{Lmax} = 18.2^\circ$ $\xi = -0.578$ $M_{max} = 1.256$
 $\alpha_{Cmin} = 14.8^\circ$ $-C_{pmax} = 10.3$ $\alpha_{Mmax} = 18.0^\circ$

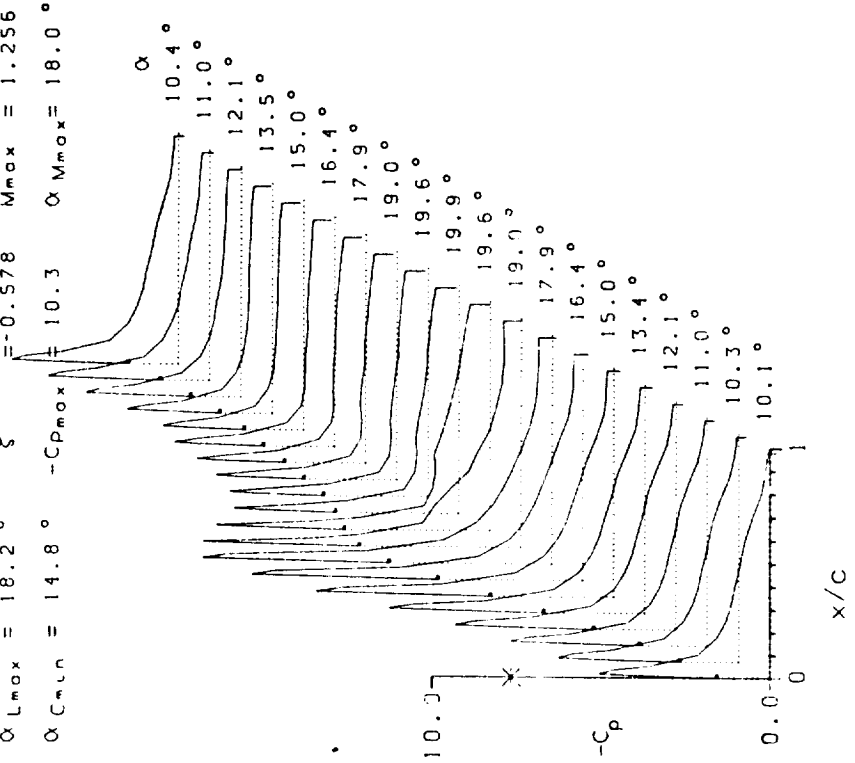


Figure 19.- Continued.

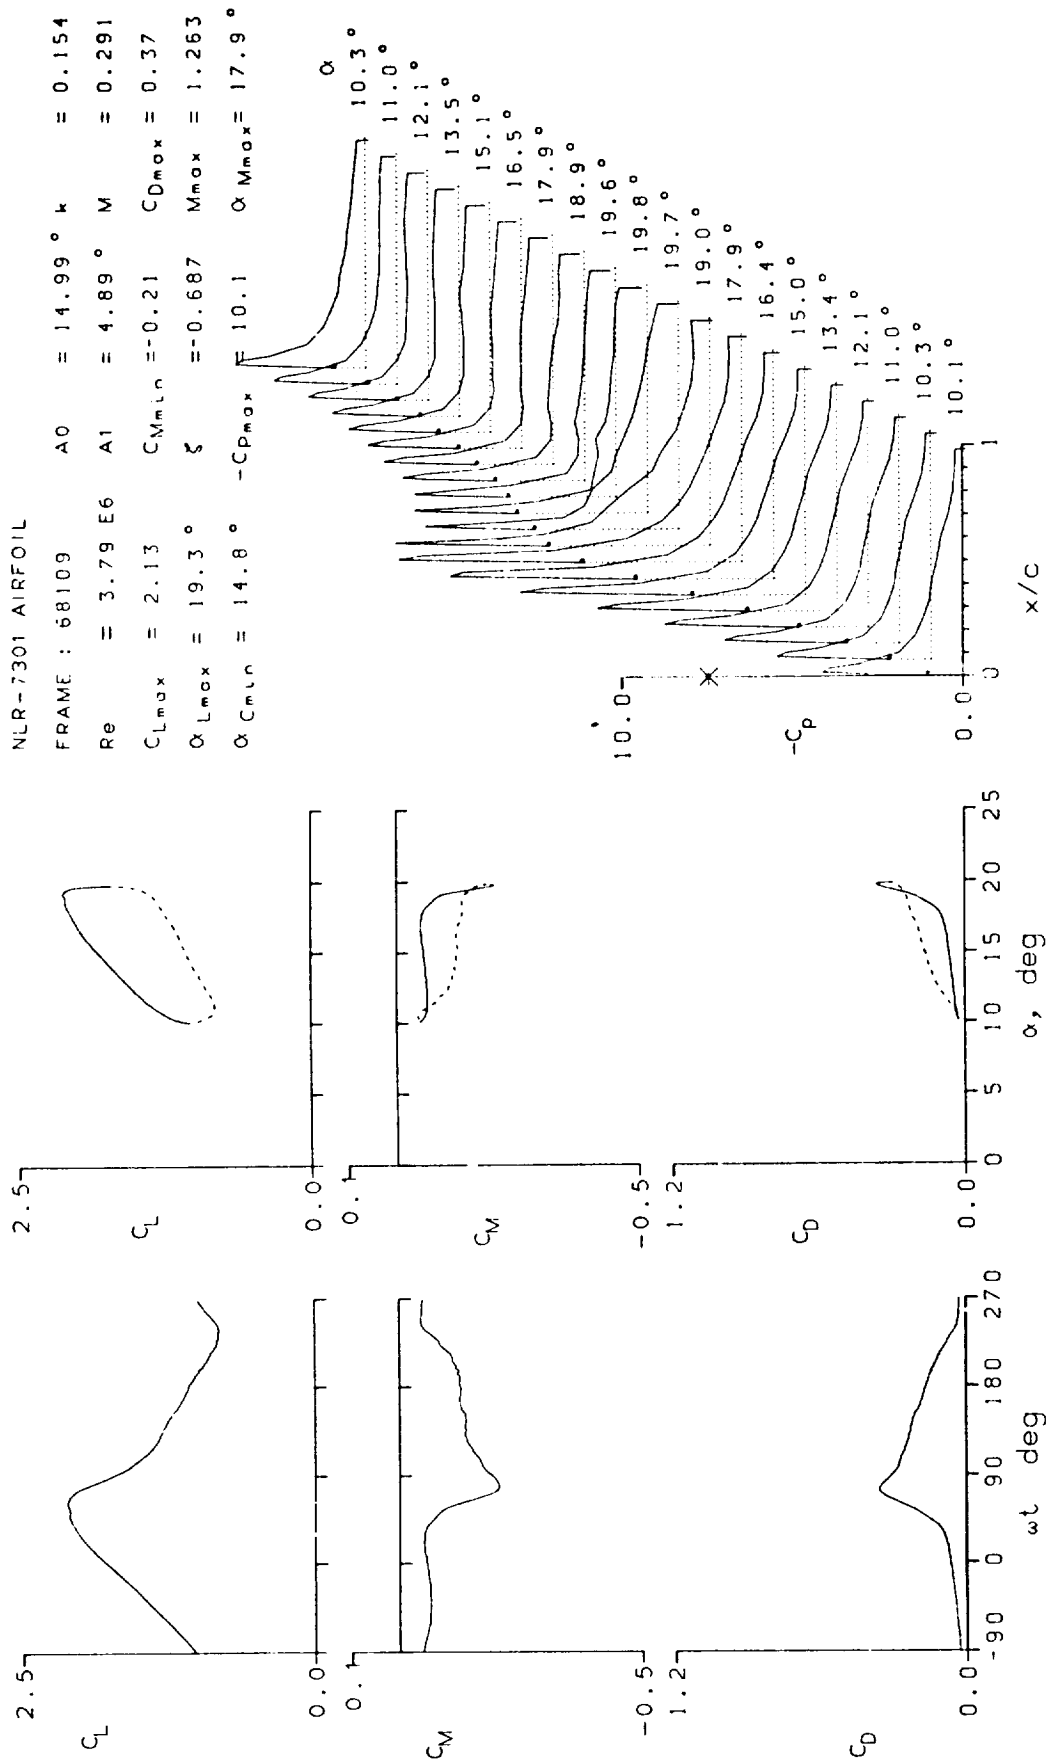


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 68111	A0 = 14.97 °	k = 0.203
Re = 3.79 E6	A1 = 4.90 °	M = 0.293
$C_{Lmax} = 2.21$	$C_{Mmin} = -0.25$	$C_{Dmax} = 0.46$
$\alpha_{Lmax} = 19.7 °$	$\xi = -0.404$	$M_{max} = 1.268$
$\alpha_{Cmin} = 14.8 °$	$-C_{Pmax} = 10.0$	$\alpha_{Mmax} = 17.8 °$

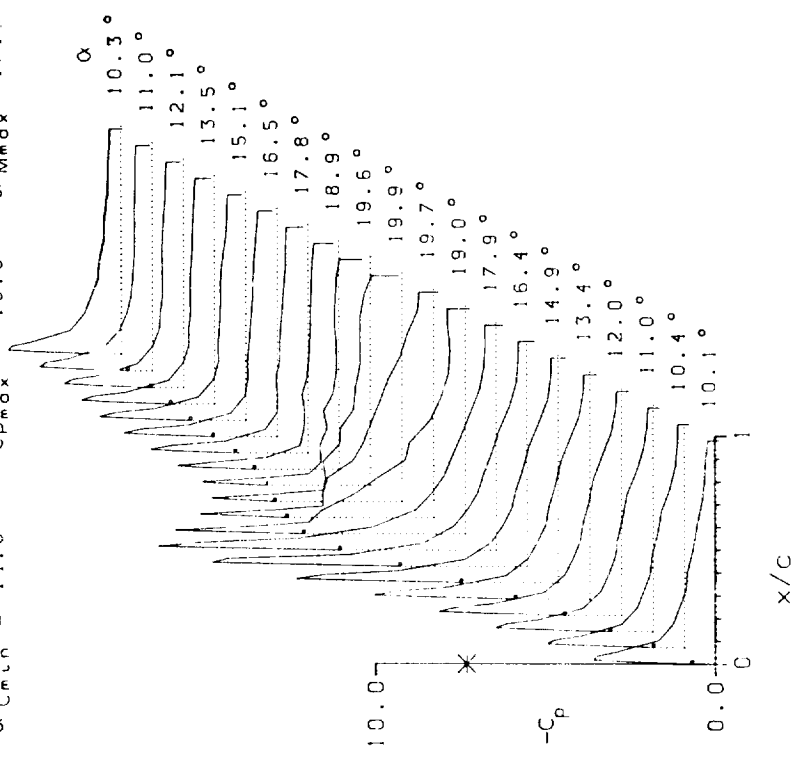
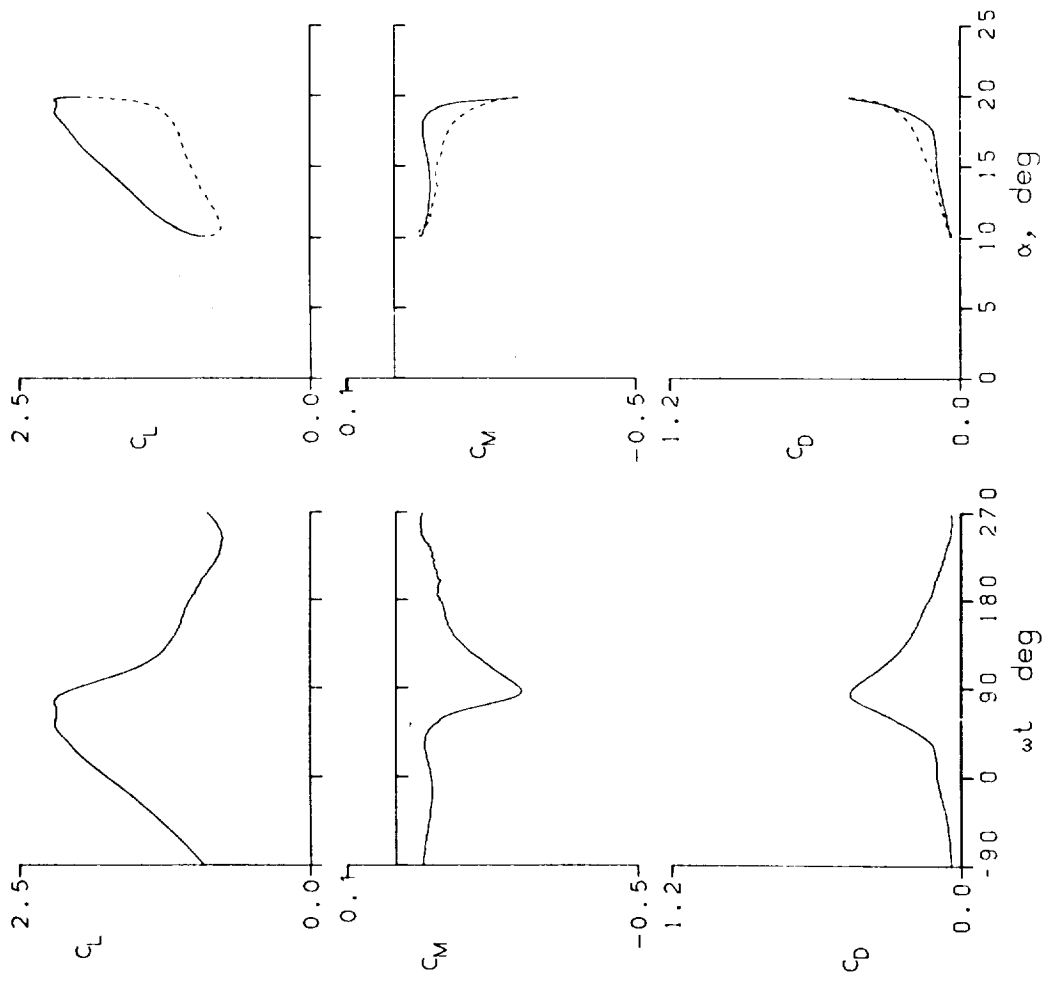


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 68113	A0 = 9.96 °	k = 0.010
Re = 3.81 E6	A1 = 4.90 °	M = 0.297
$C_{Lmax} = 1.71$	$C_{Mmin} = -0.08$	$C_{Dmax} = 0.04$
$\alpha_{Lmax} = 14.9 °$	$\zeta = 0.013$	$M_{max} = 1.117$
$\alpha_{Cmin} = 9.8 °$	$-C_{pmax} = 8.3$	$\alpha_{Mmax} = 14.9 °$

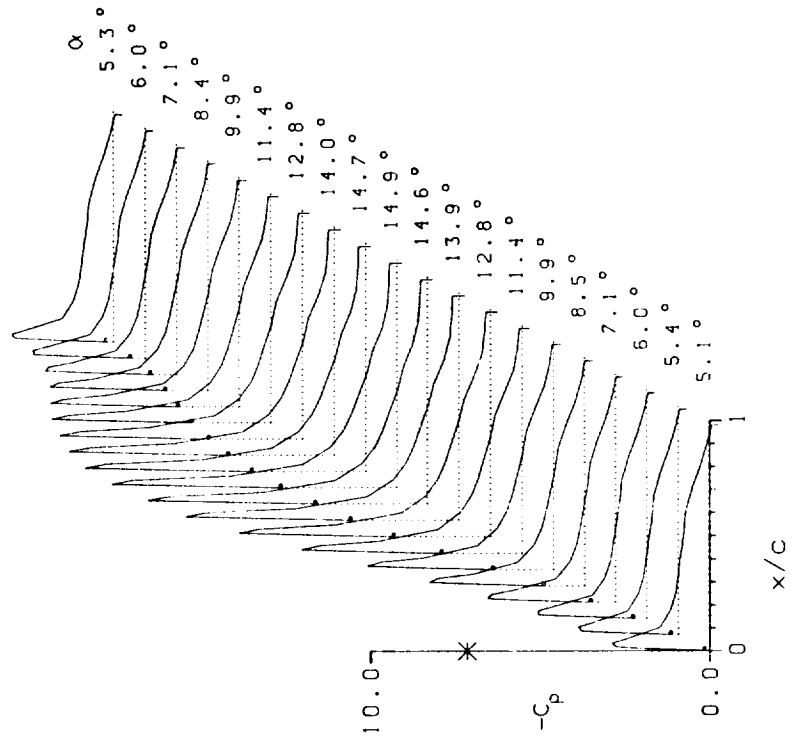
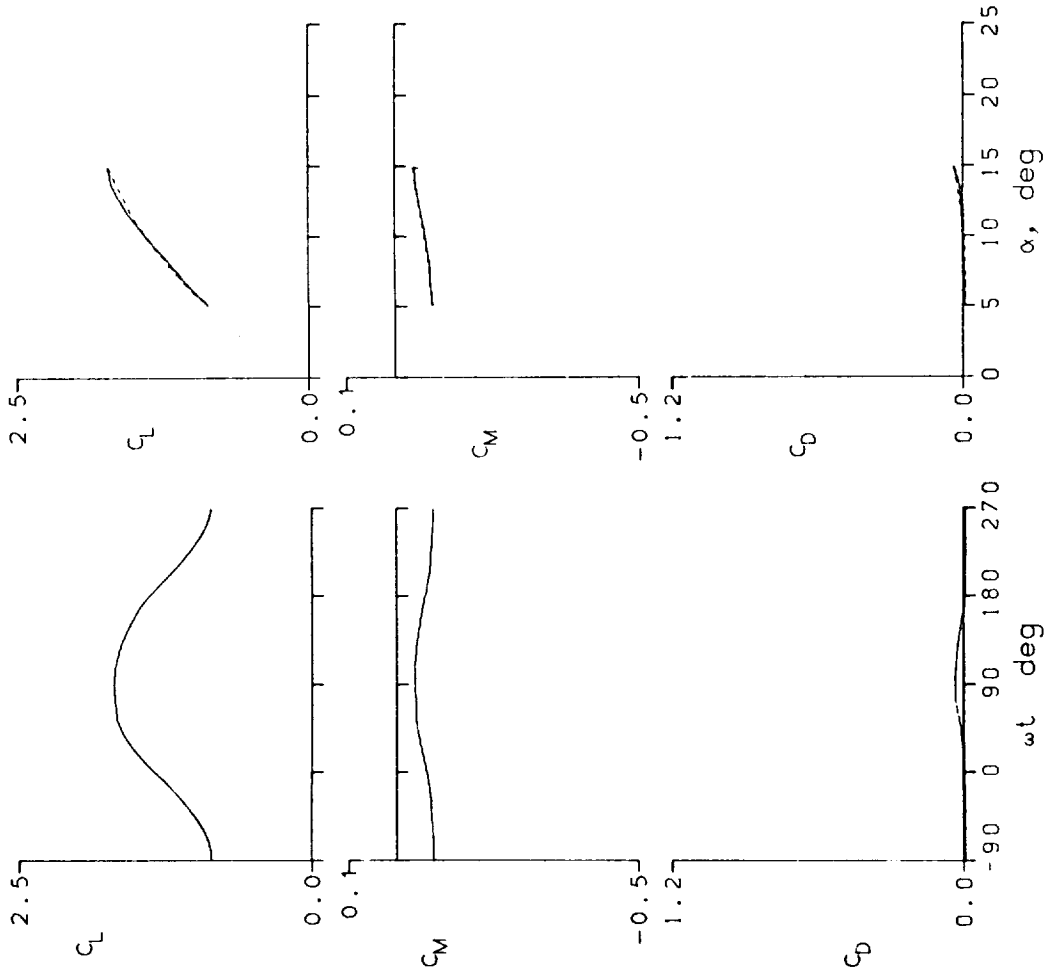


Figure 19.- Continued.

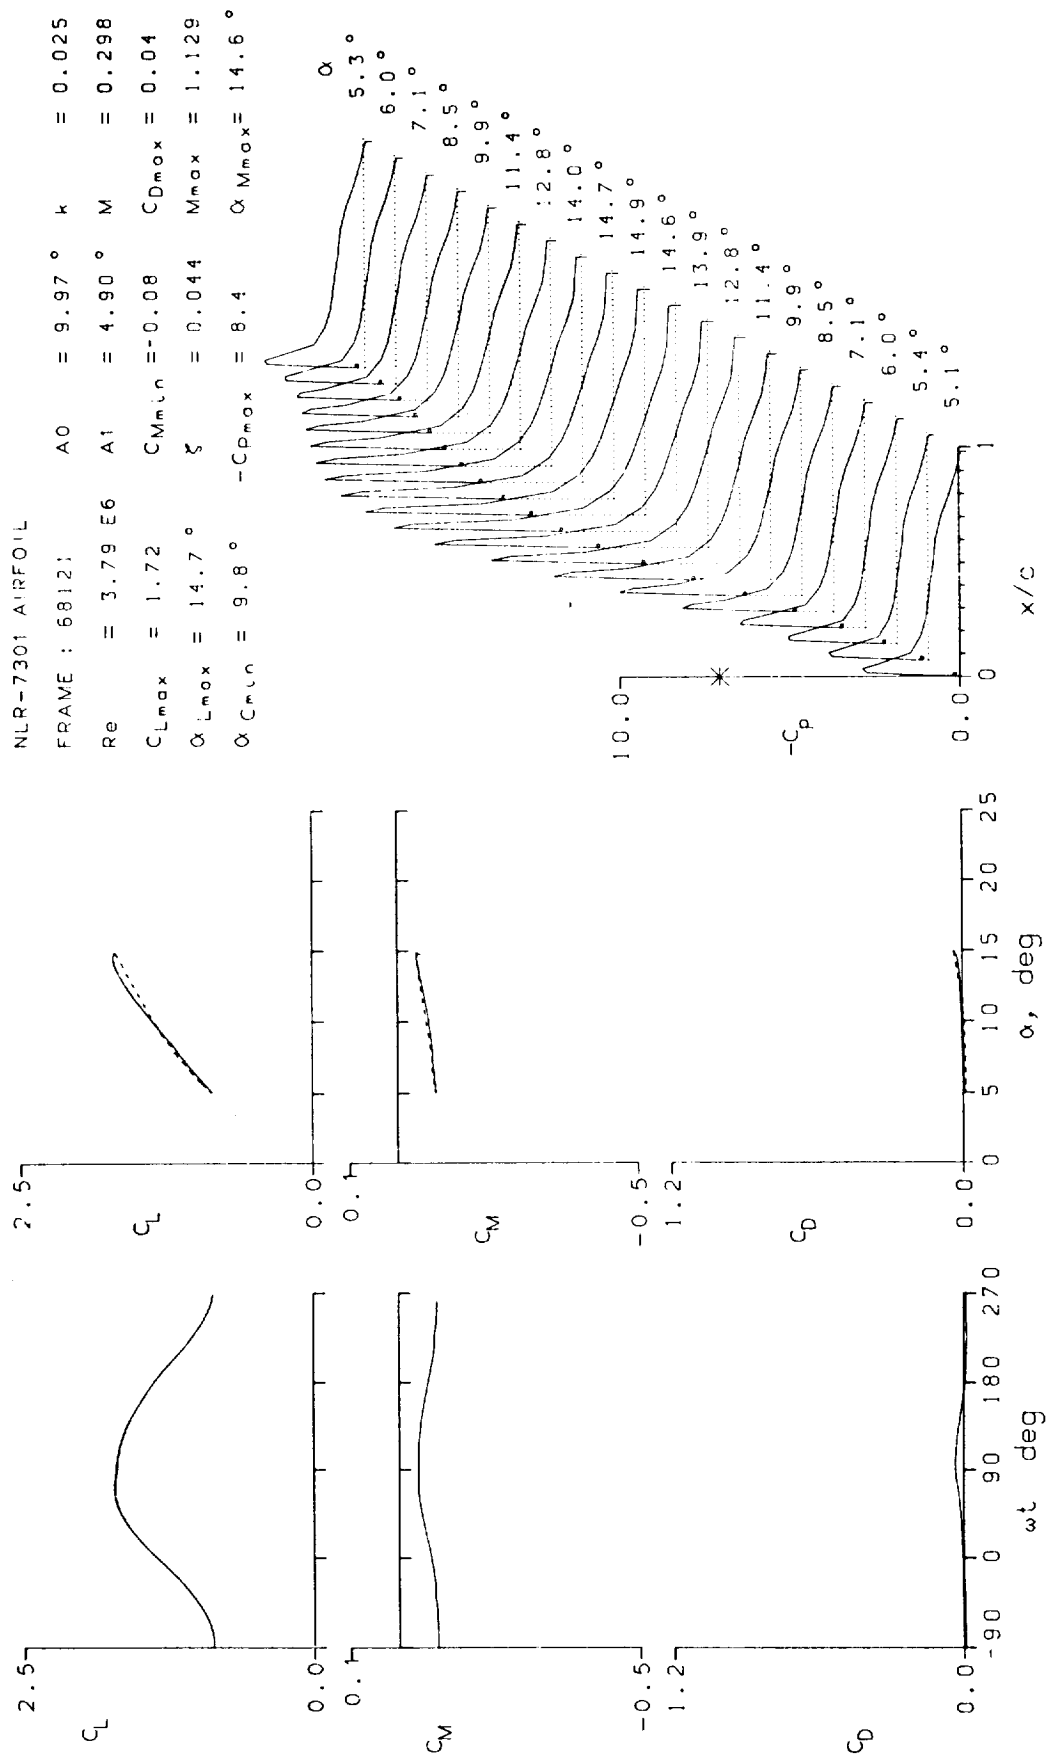


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 68123	A0 = 9.97 °	k = 0.049
Re = 3.79 E6	A1 = 4.90 °	M = 0.299
CLmax = 1.76	CMmin = -0.09	CDmax = 0.04
αLmax = 14.6 °	ξ = 0.112	Mmax = 1.152
αCMmin = 9.8 °	-CPmax = 8.6	αMmax = 14.8 °

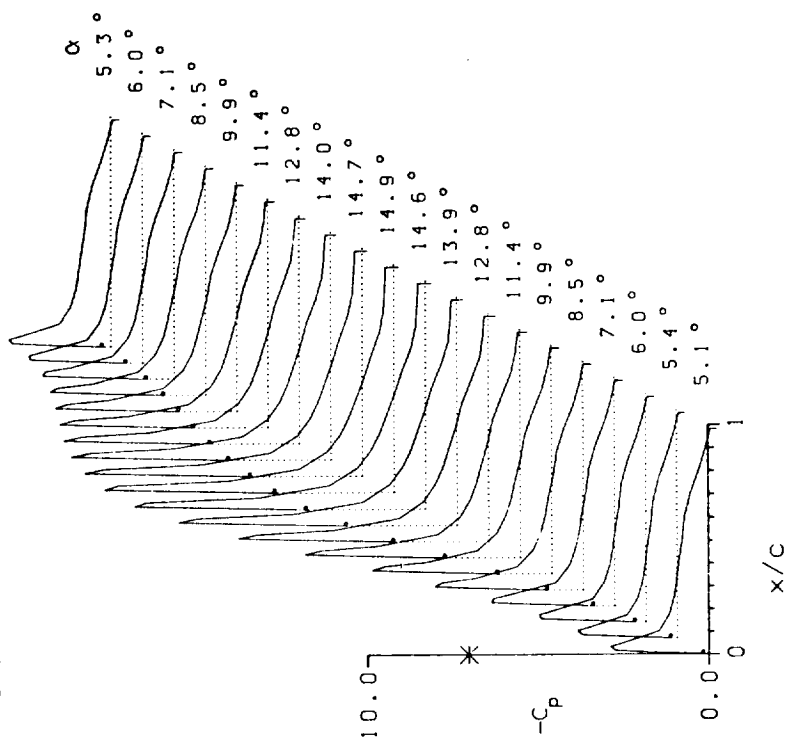
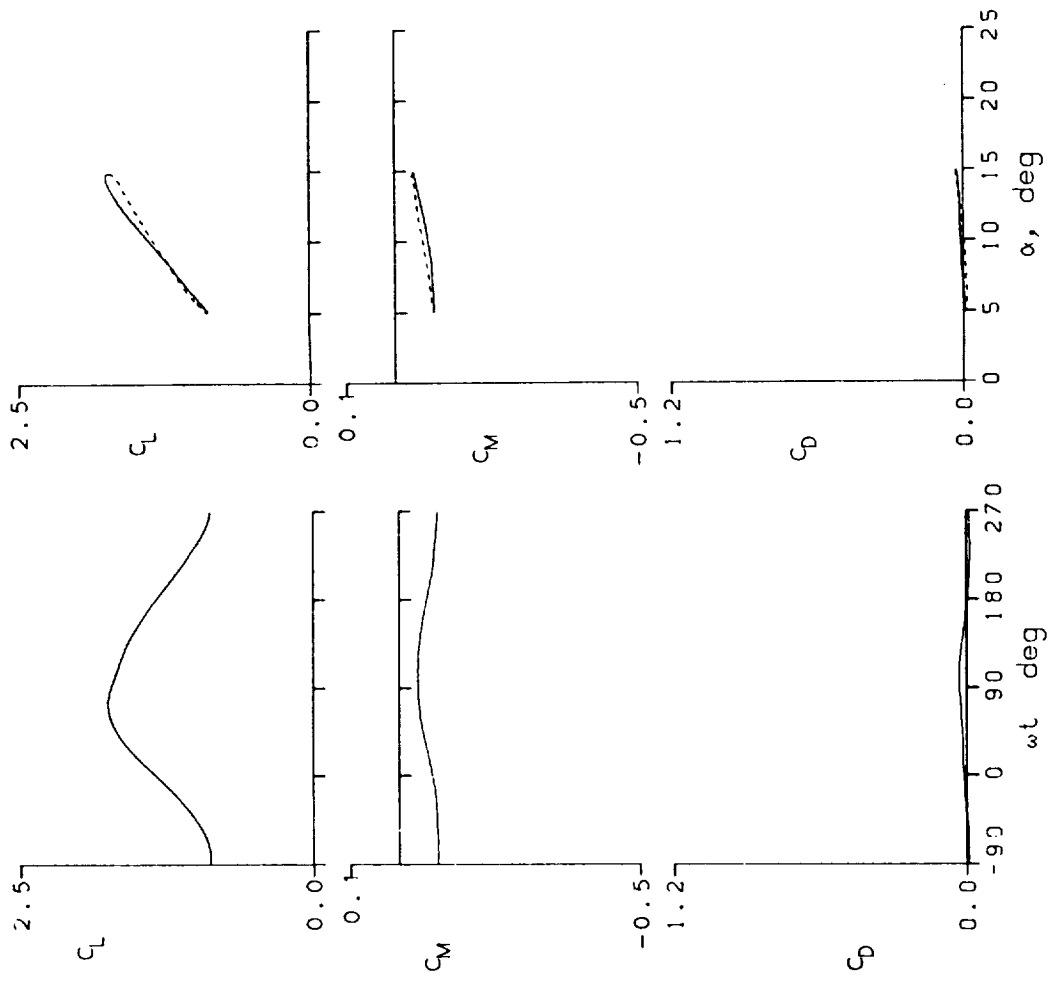


Figure 19.- Continued.

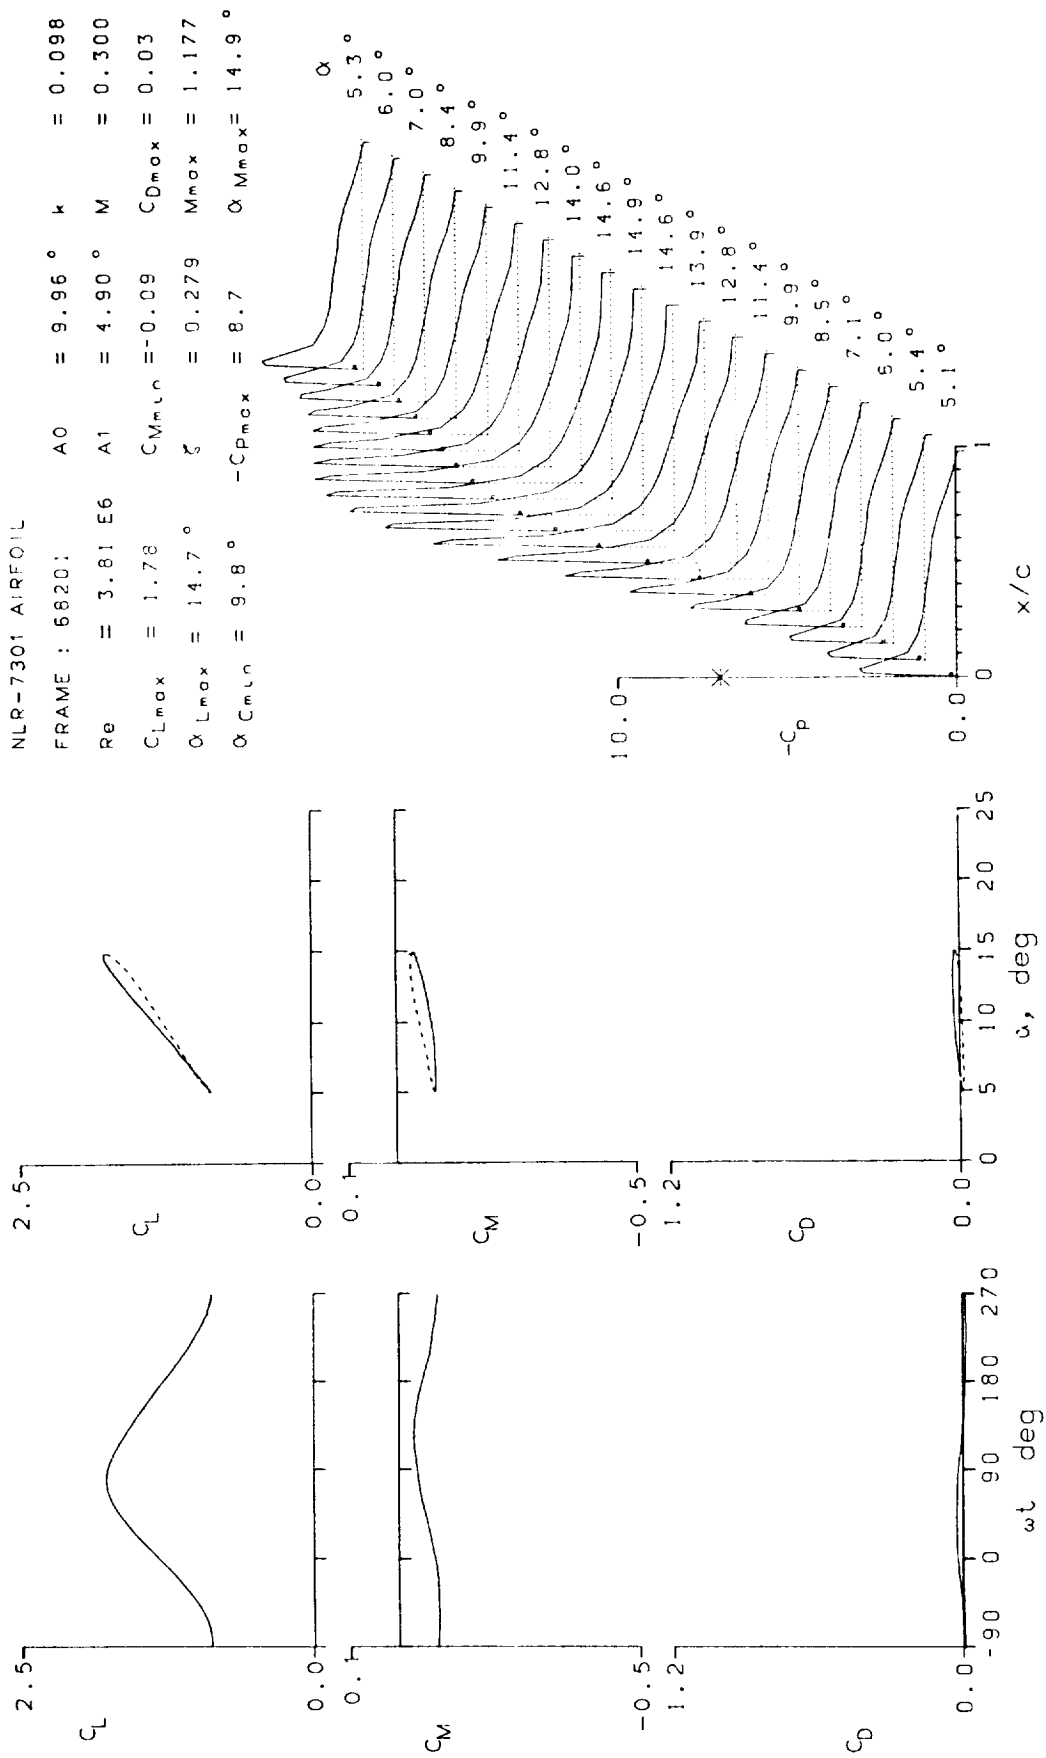


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 68203	A0 = 9.98 °	k = 0.196
Re = 3.82 E6	A1 = 4.90 °	M = 0.302
CLmax = 1.87	CMmin = -0.10	CDmax = 0.05
αLmax = 14.8 °	ξ = 0.674	Mmax = 1.228
αCMmin = 9.8 °	-CDmax = 9.1	αMmax = 14.9 °

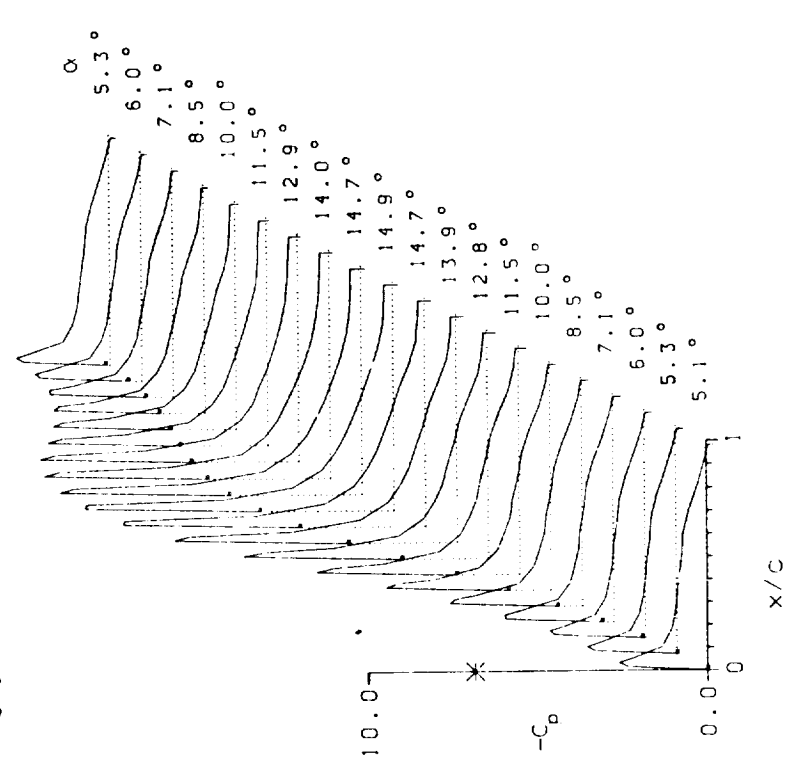
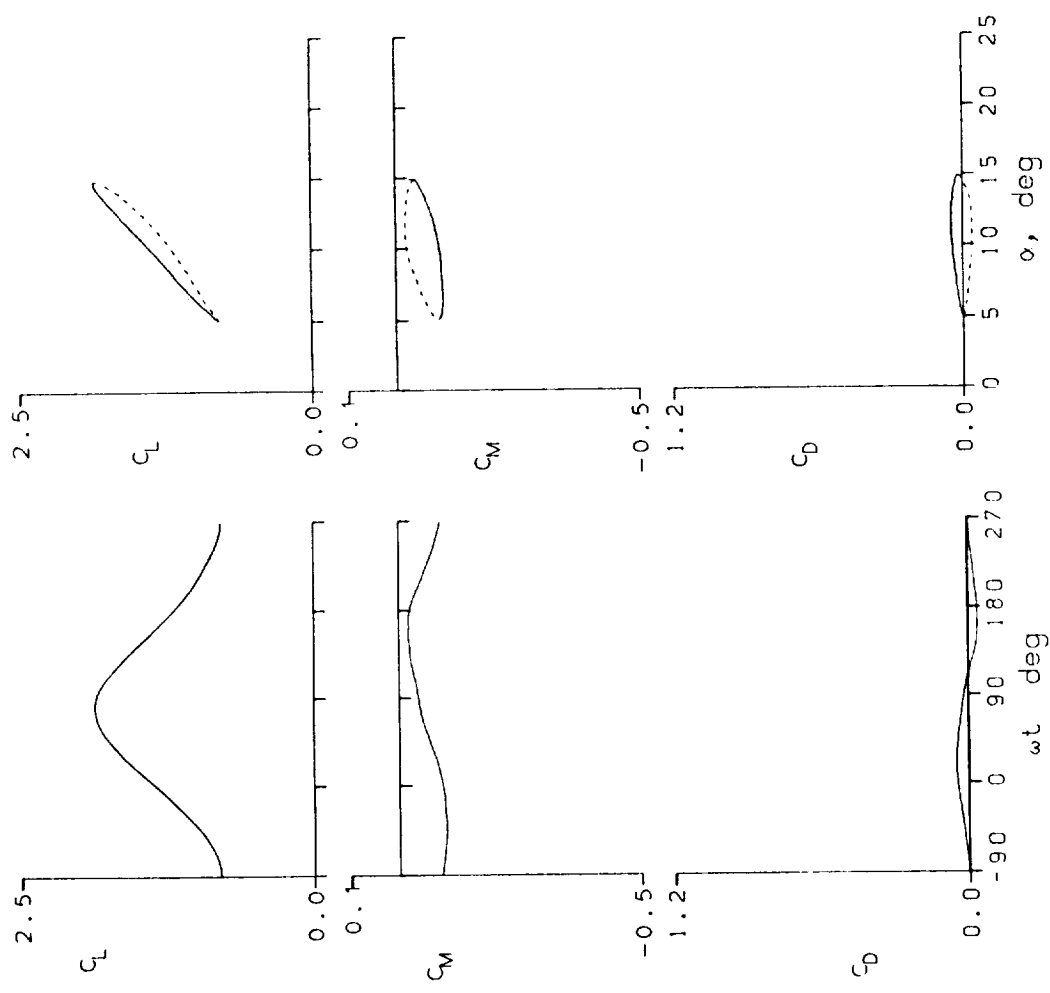


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 68211	A0	= 4.96 °	k	= 0.198	
Re	= 3.84 E6	A1	= 5.00 °	M	= 0.299
CLmax	= 1.36	CMmin	= -0.10	CDmax	= 0.03
α Lmax	= 10.0 °	ξ	= 0.495	Mmax	= 0.868
α Cmin	= 4.8 °	-CPmax	= 5.6	α Mmax	= 9.9 °

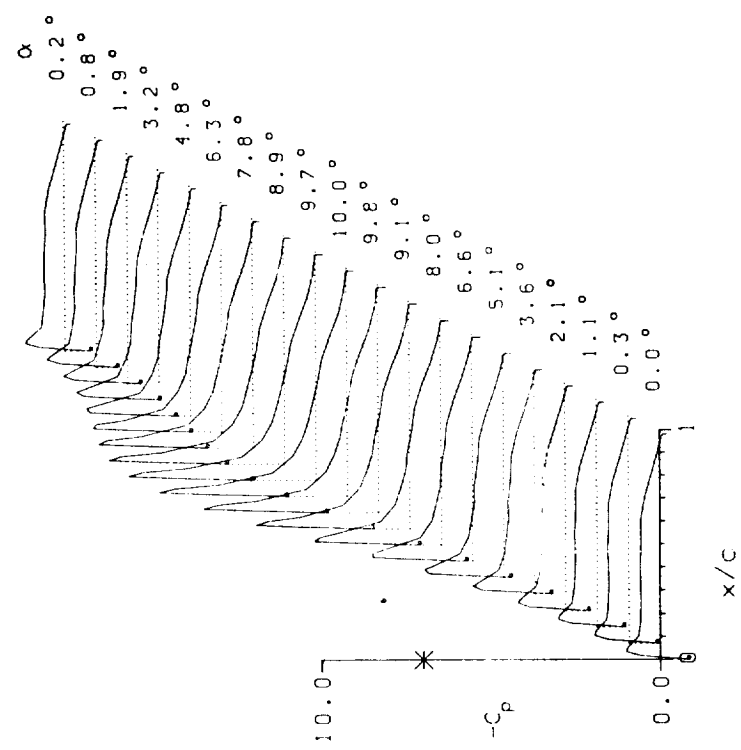
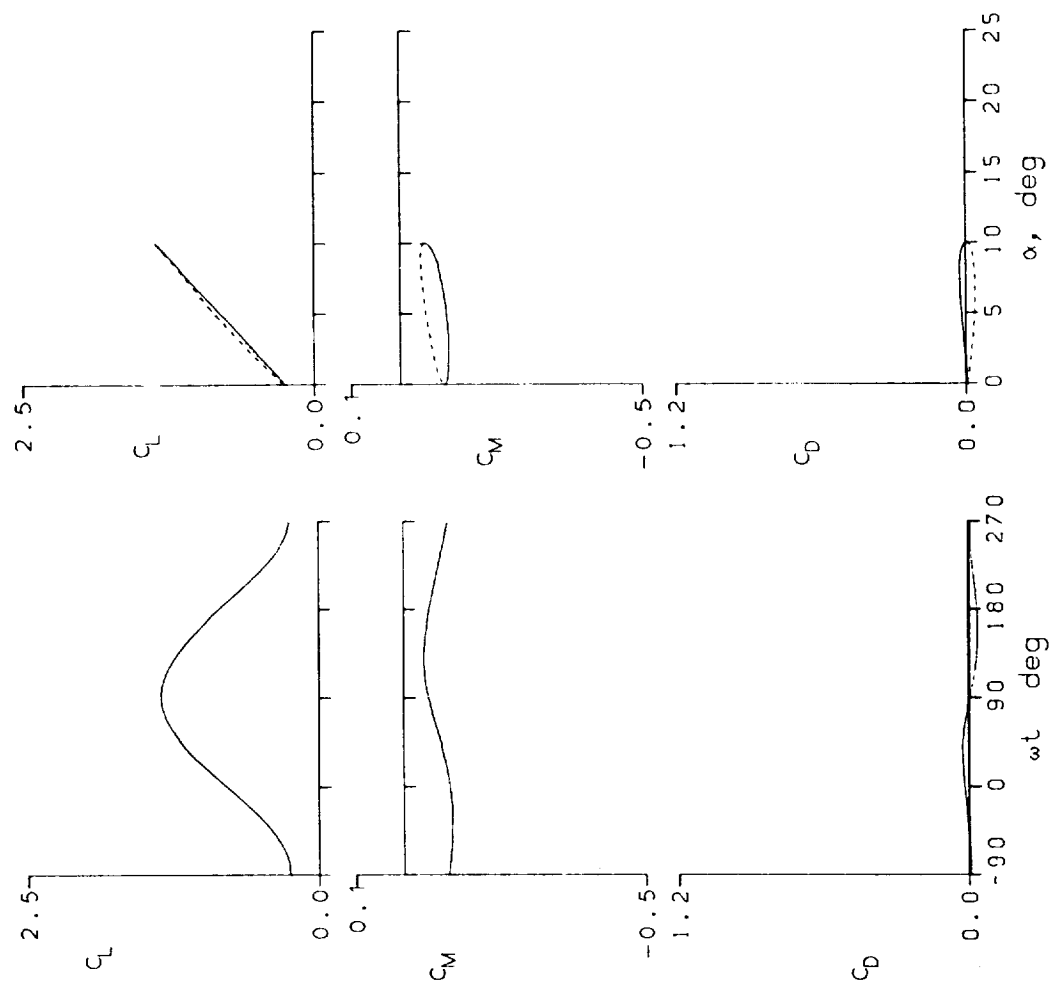


Figure 19.- Continued.

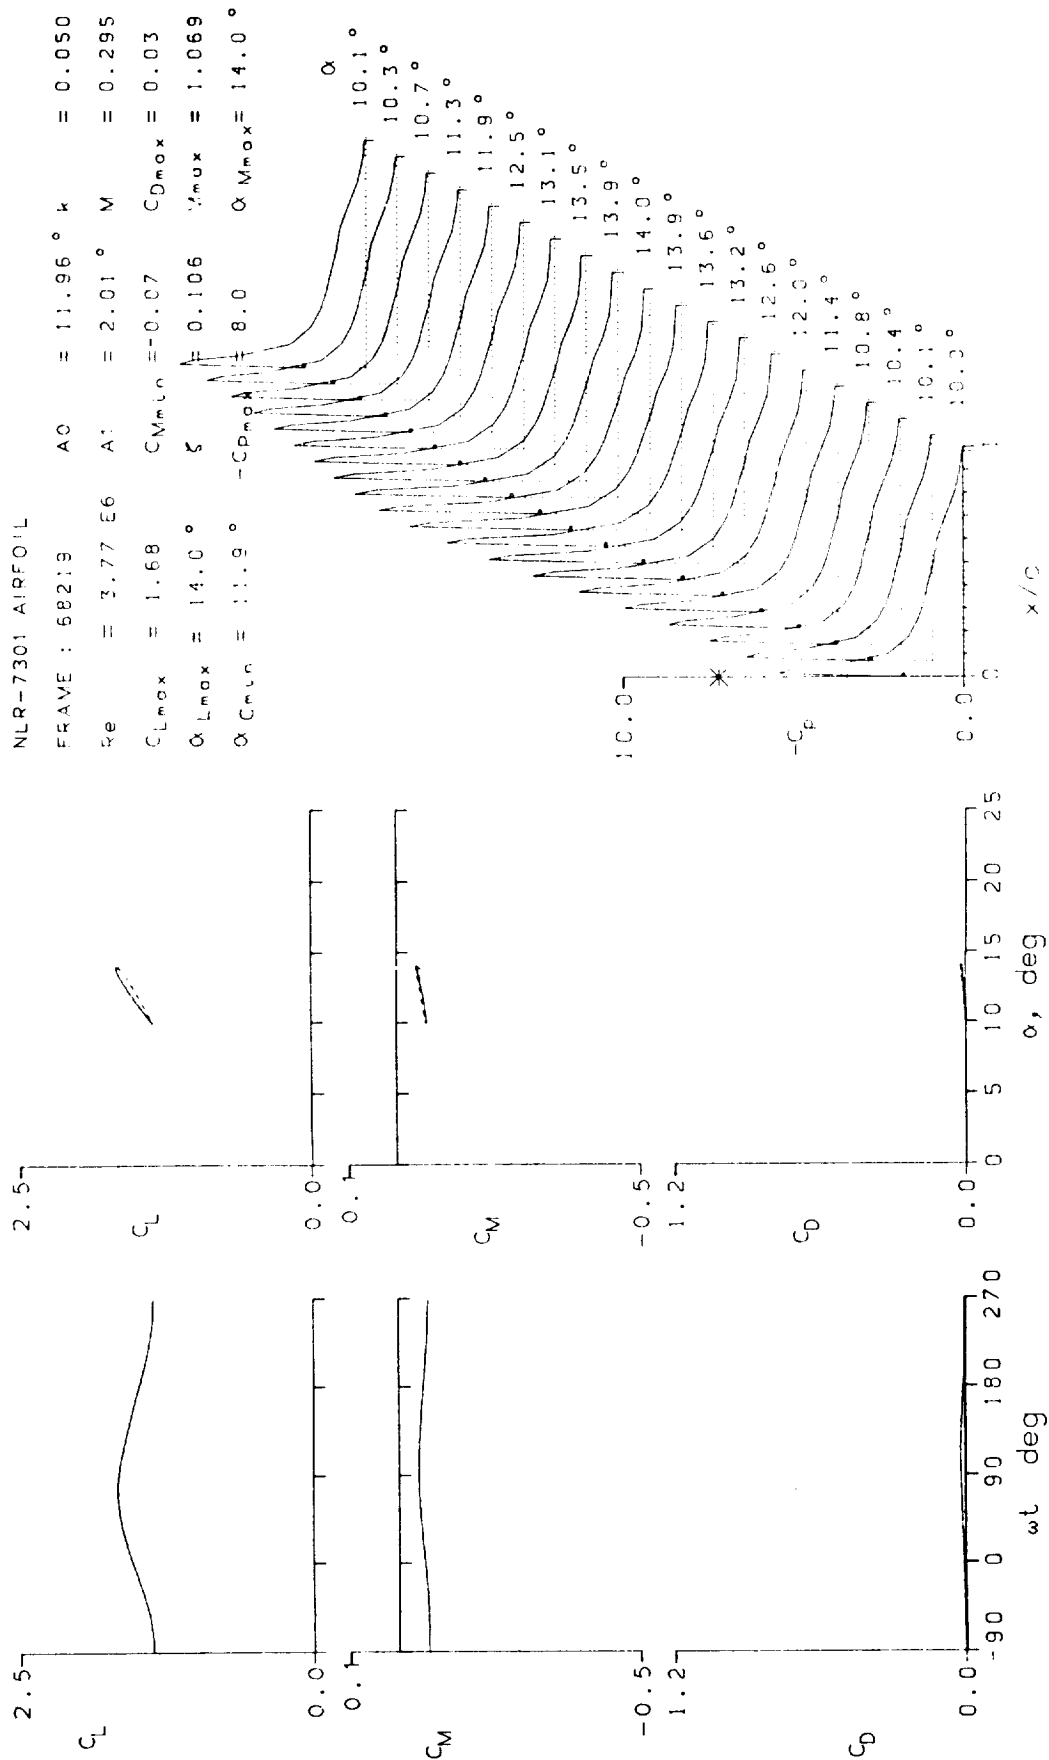


Figure 19.- Continued.

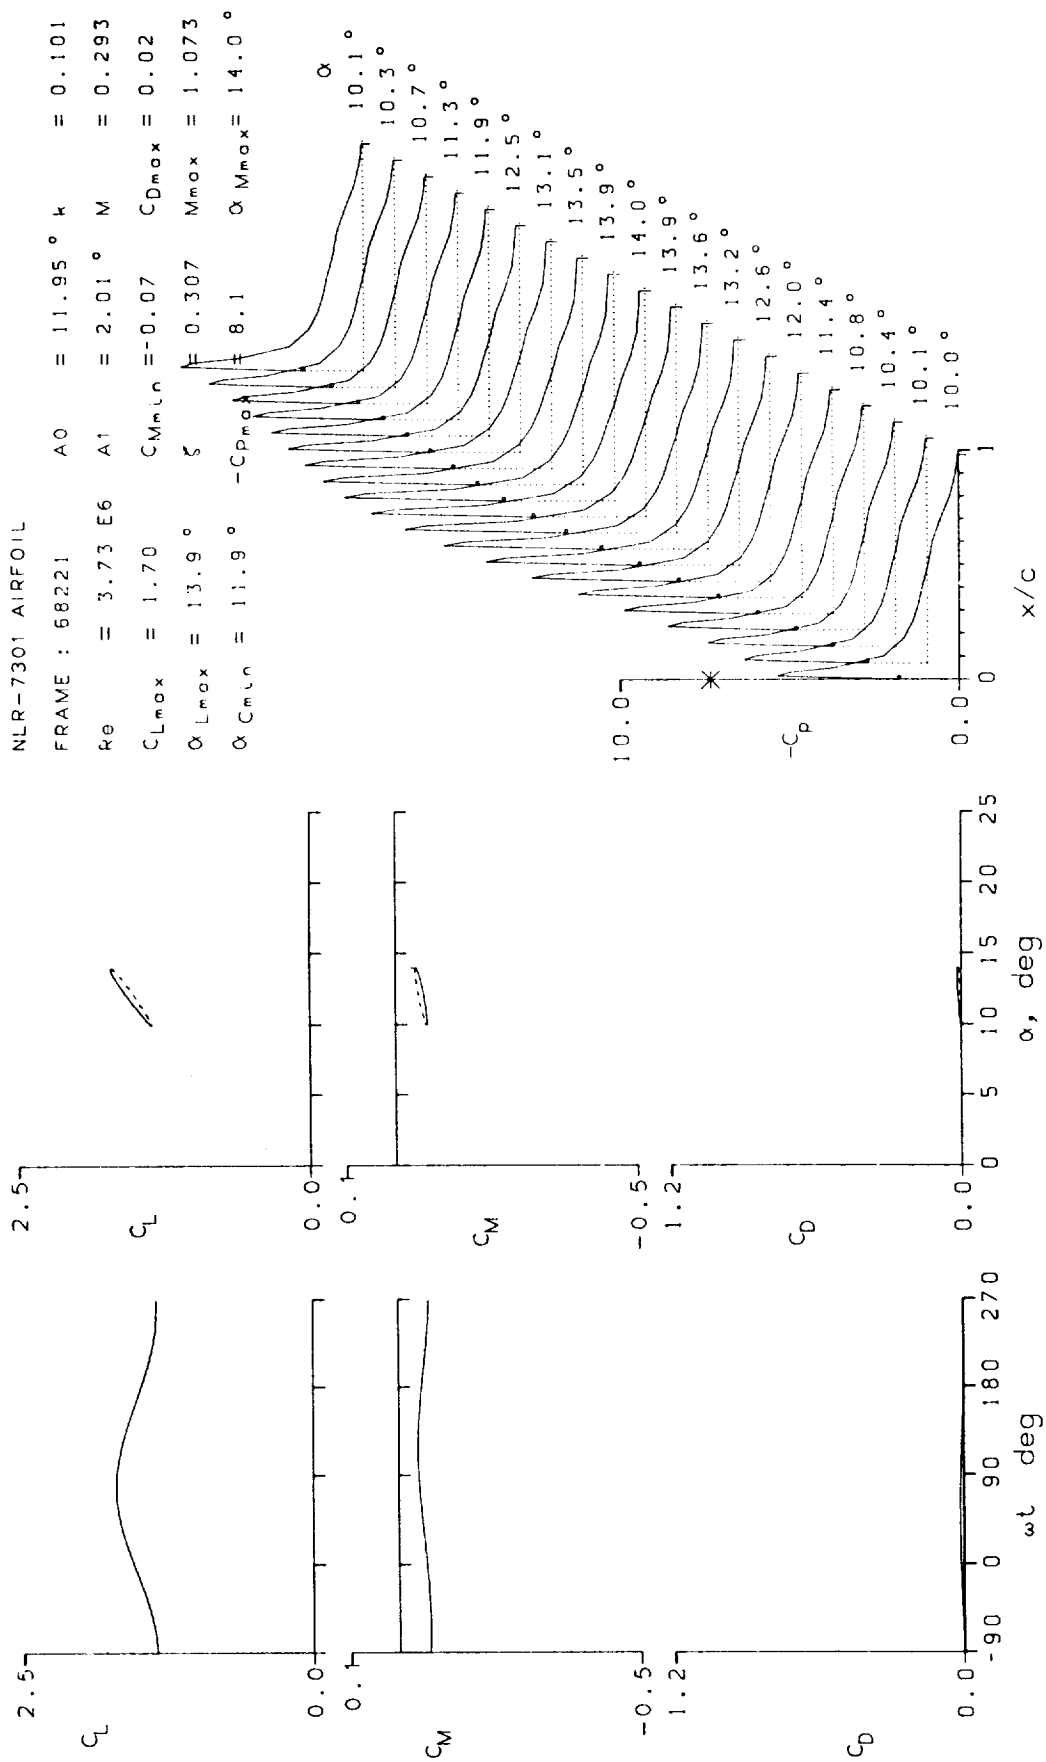


Figure 19.- Continued.

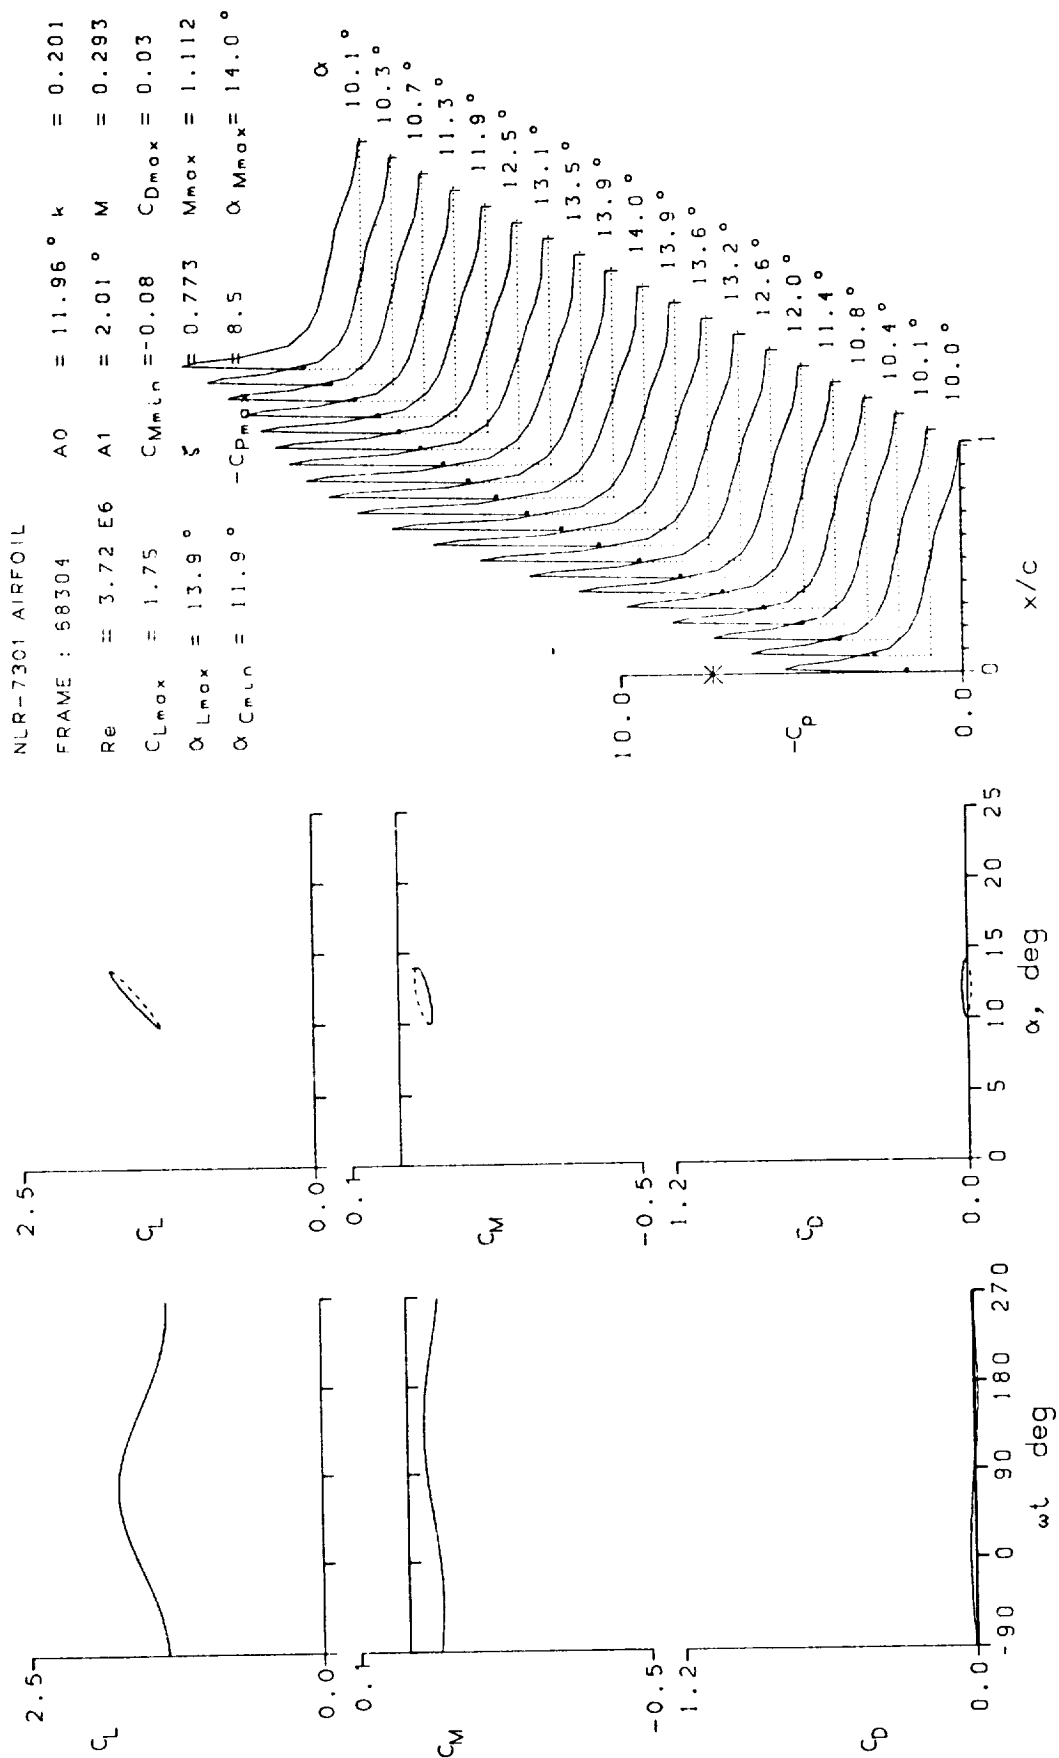


Figure 19.- Continued.

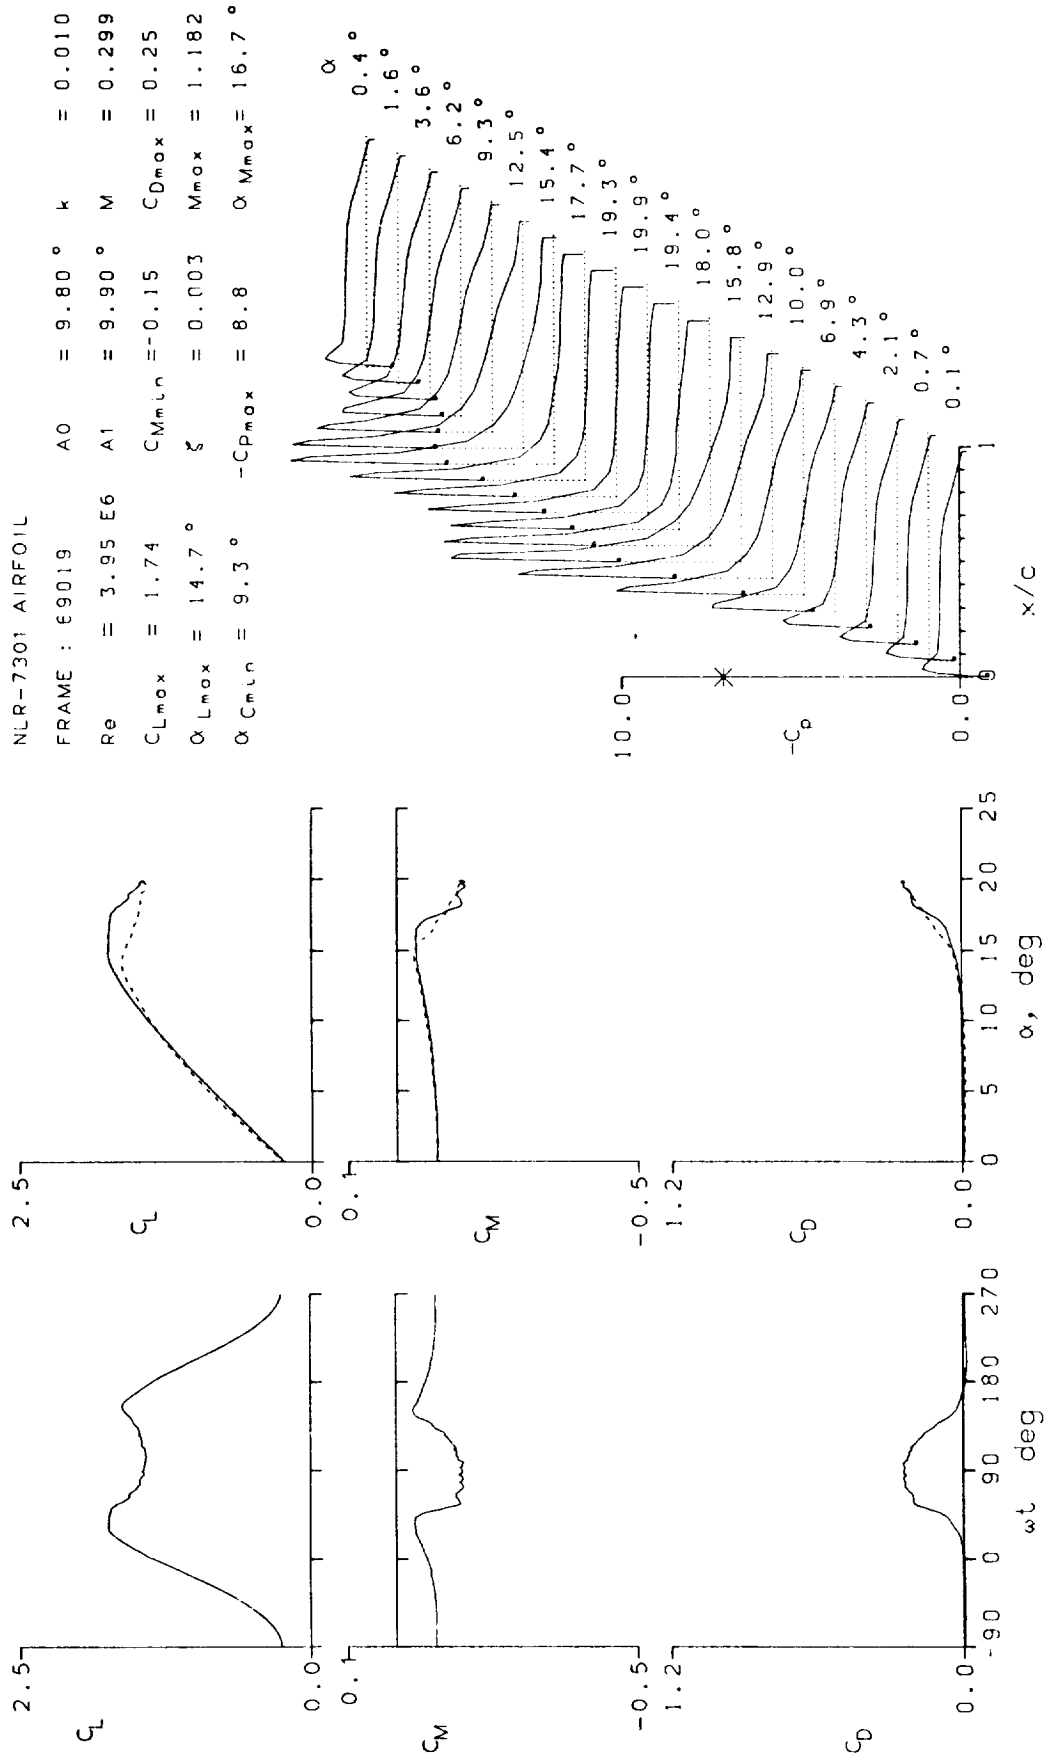


Figure 19.- Continued.

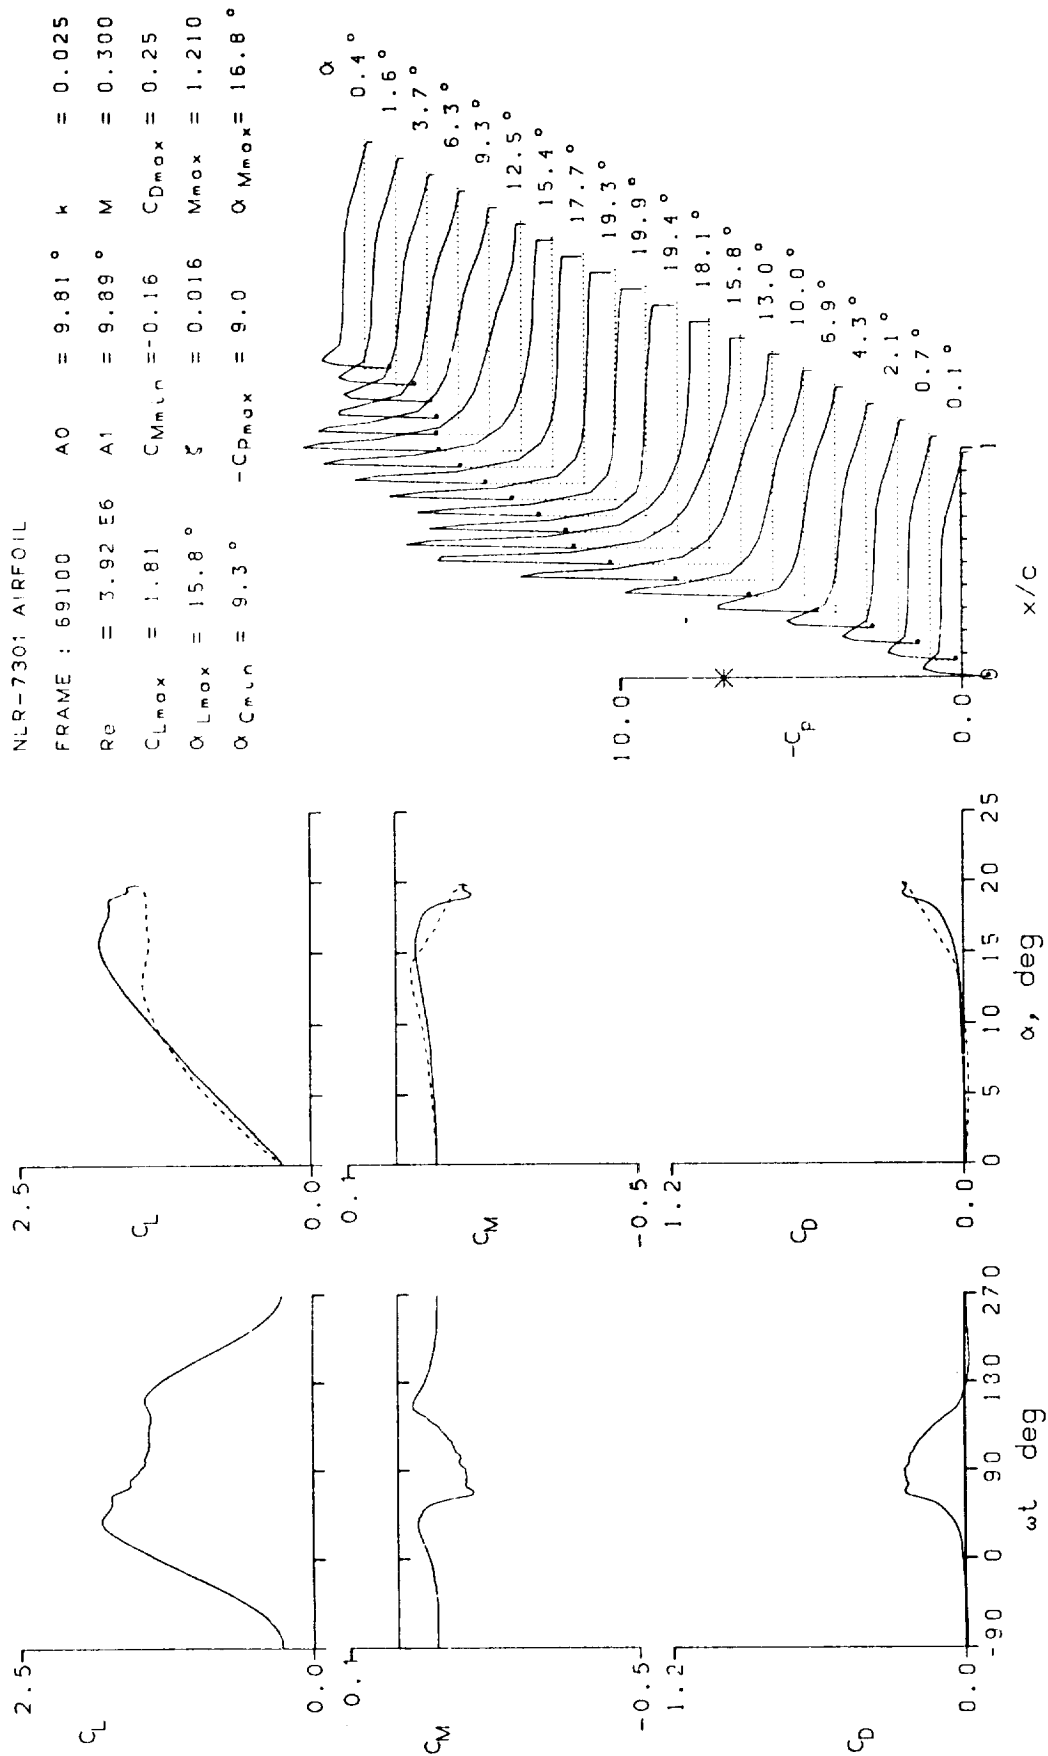


Figure 19.- Continued.

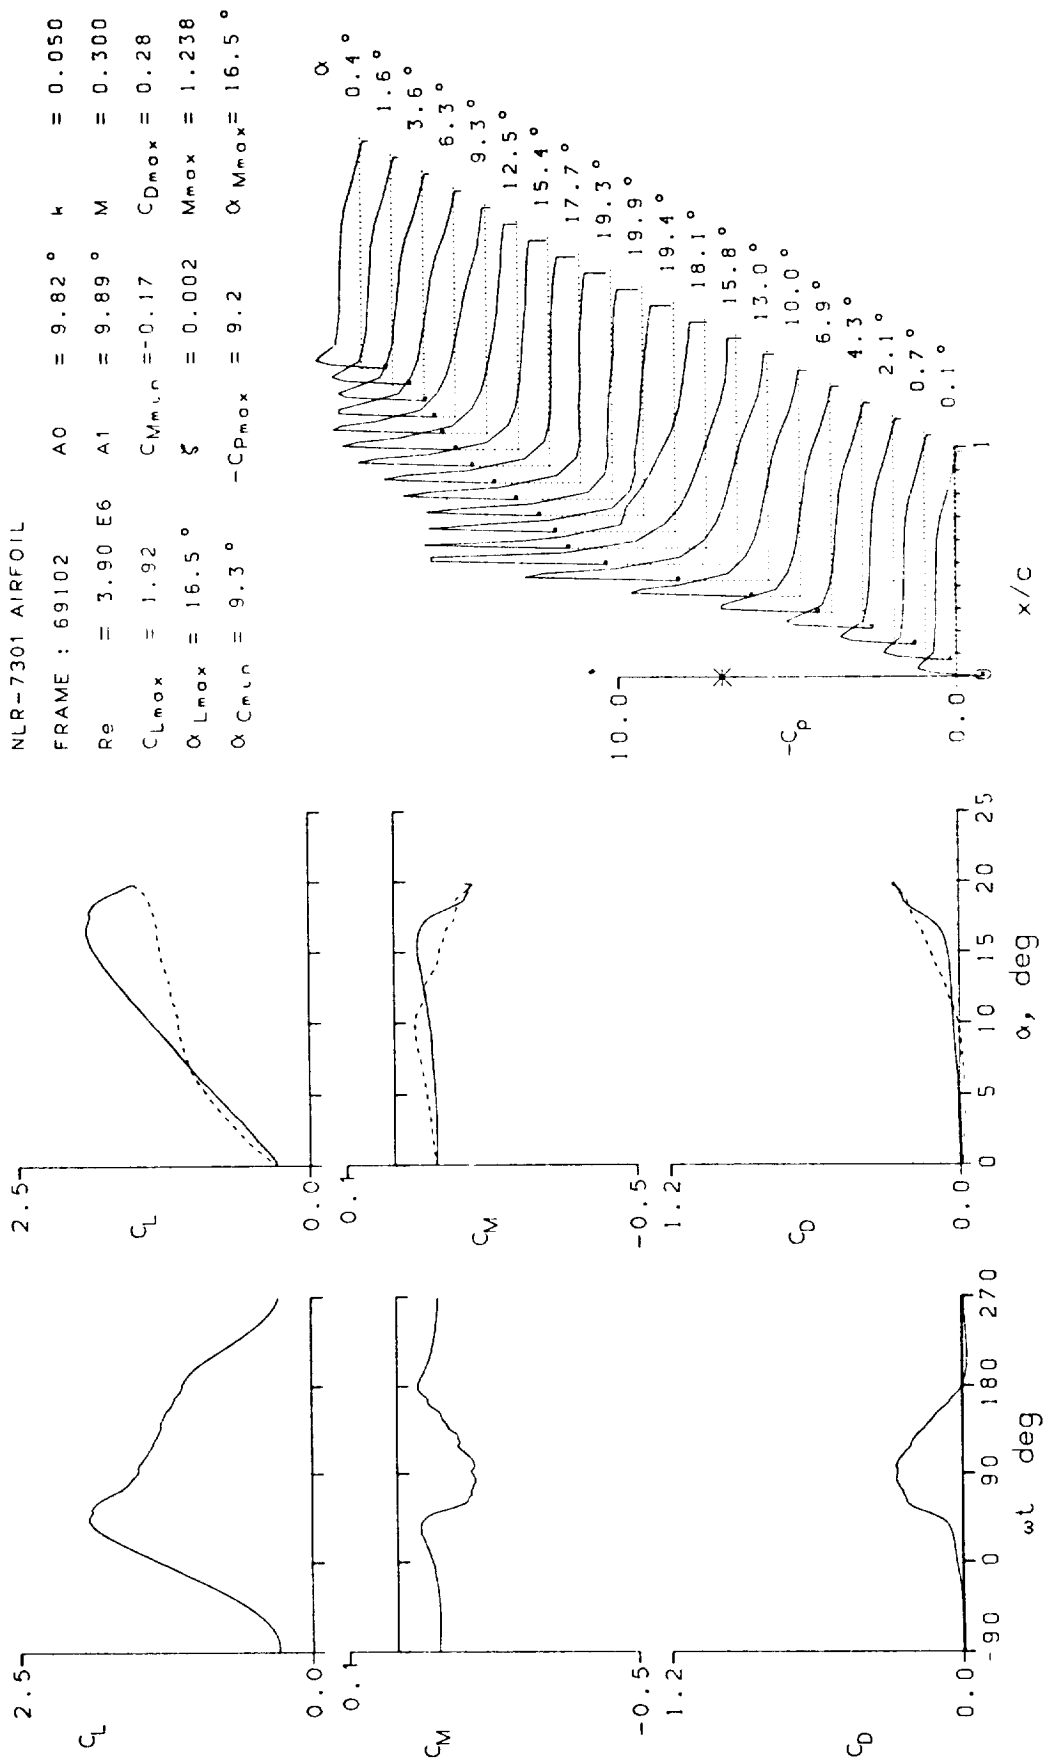


Figure 19.- Continued.

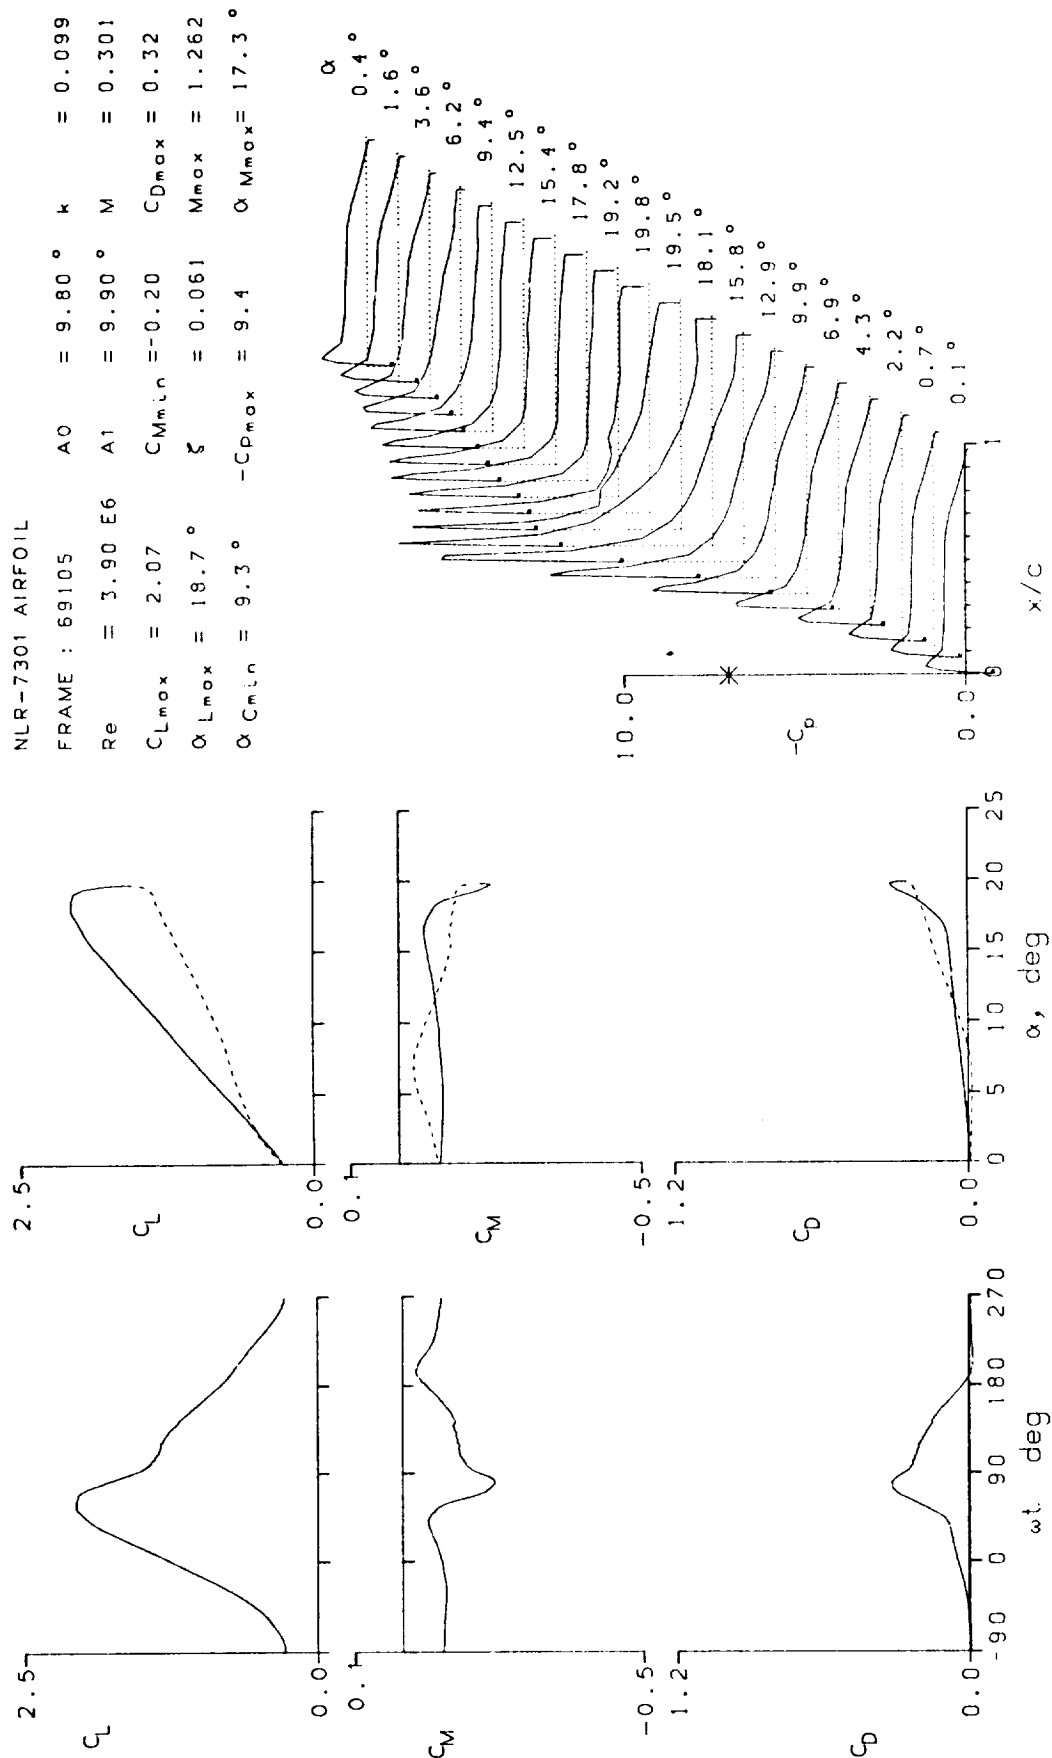


Figure 19.- Continued.

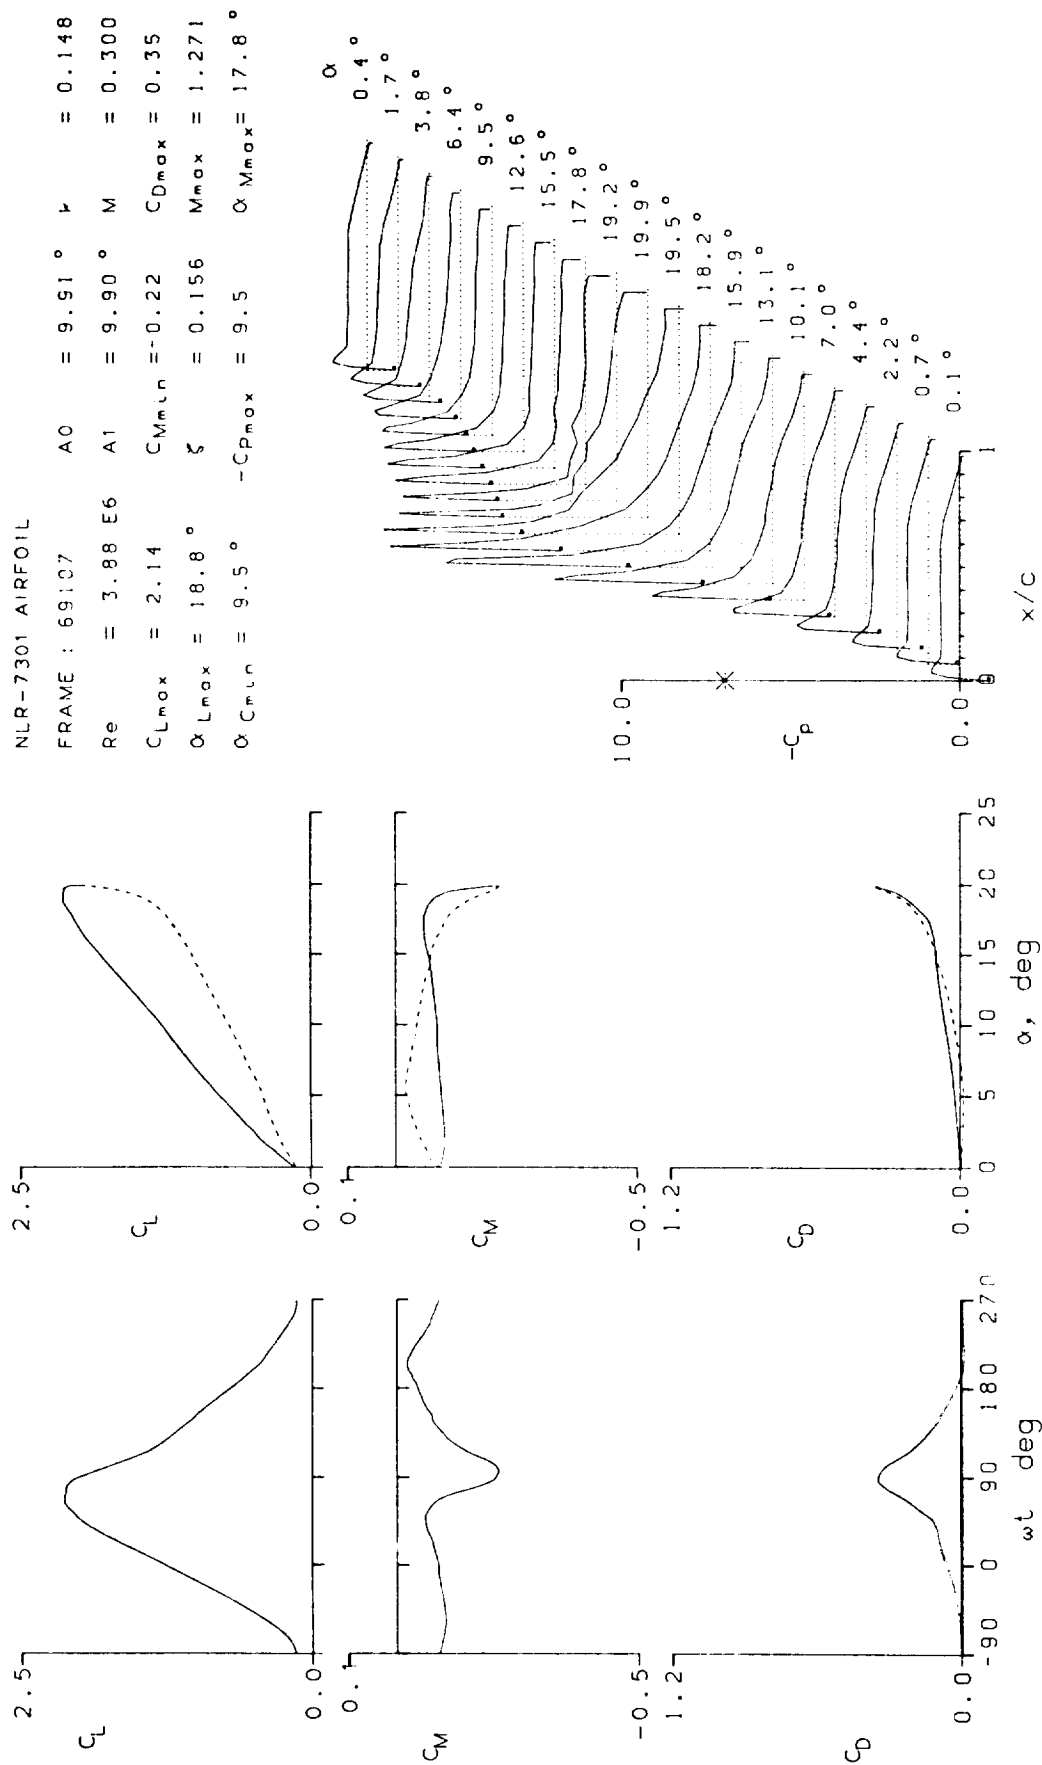


Figure 19.- Continued.

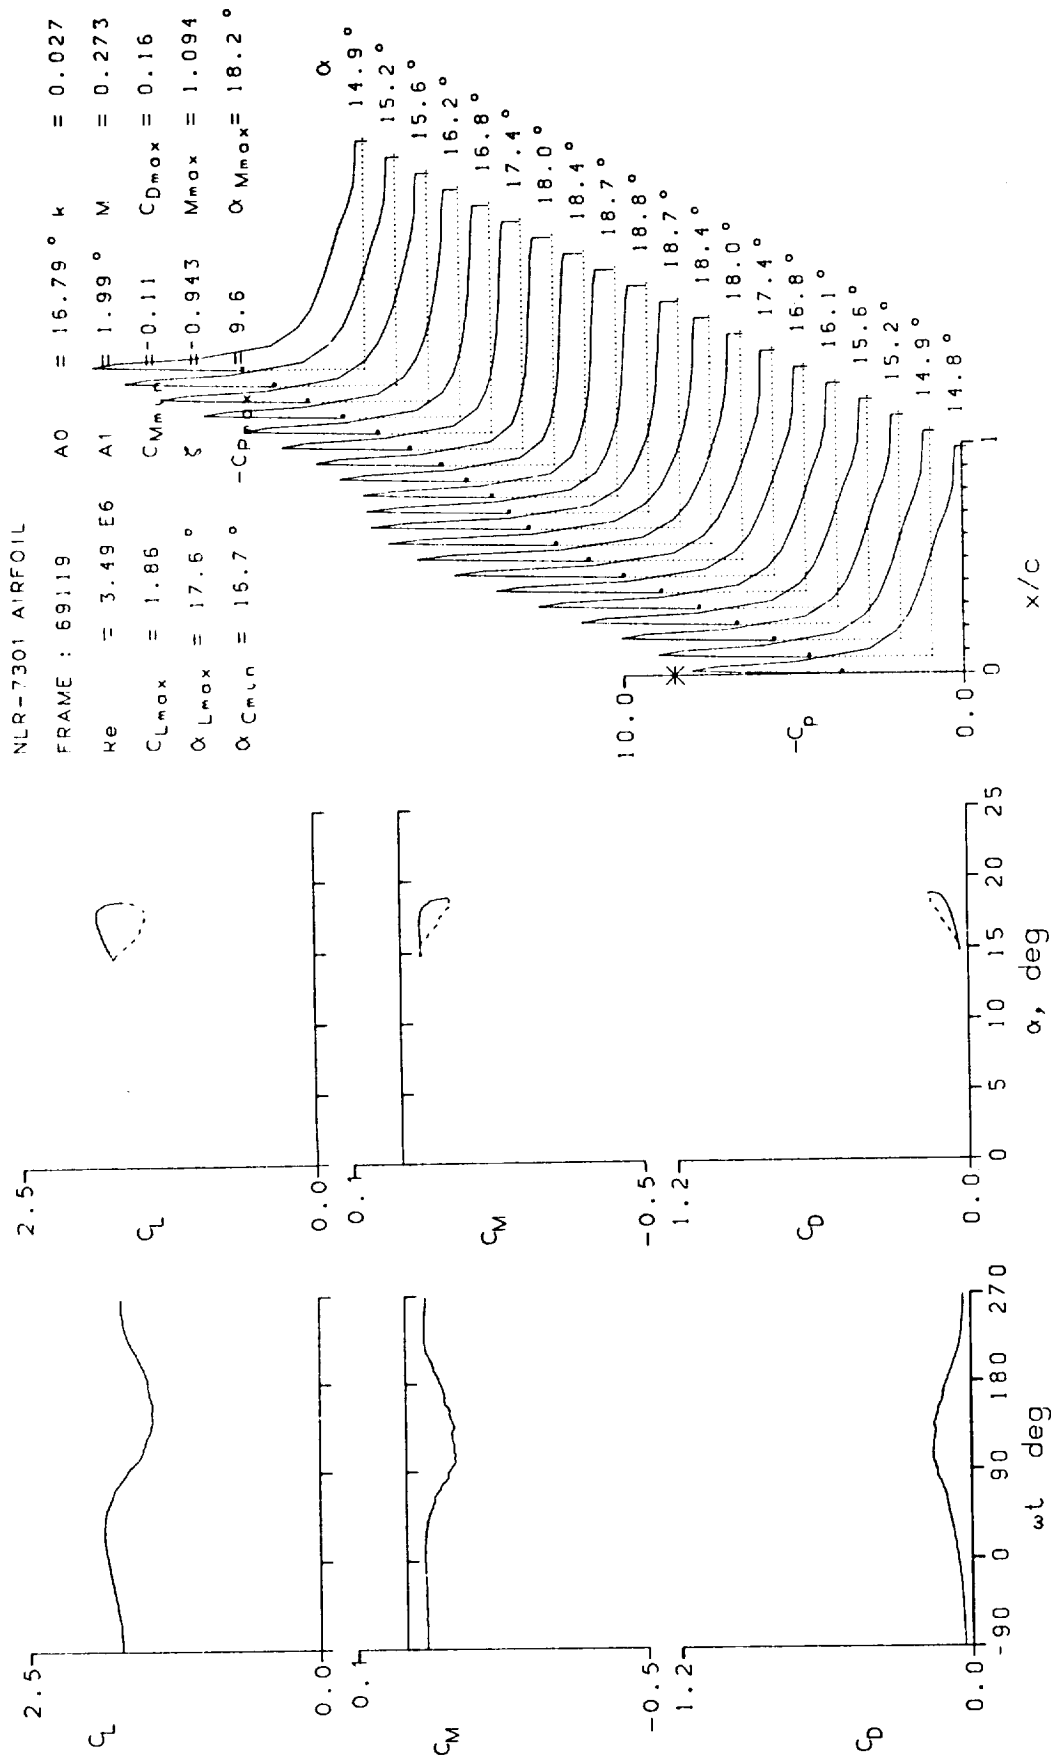


Figure 19.- Continued.


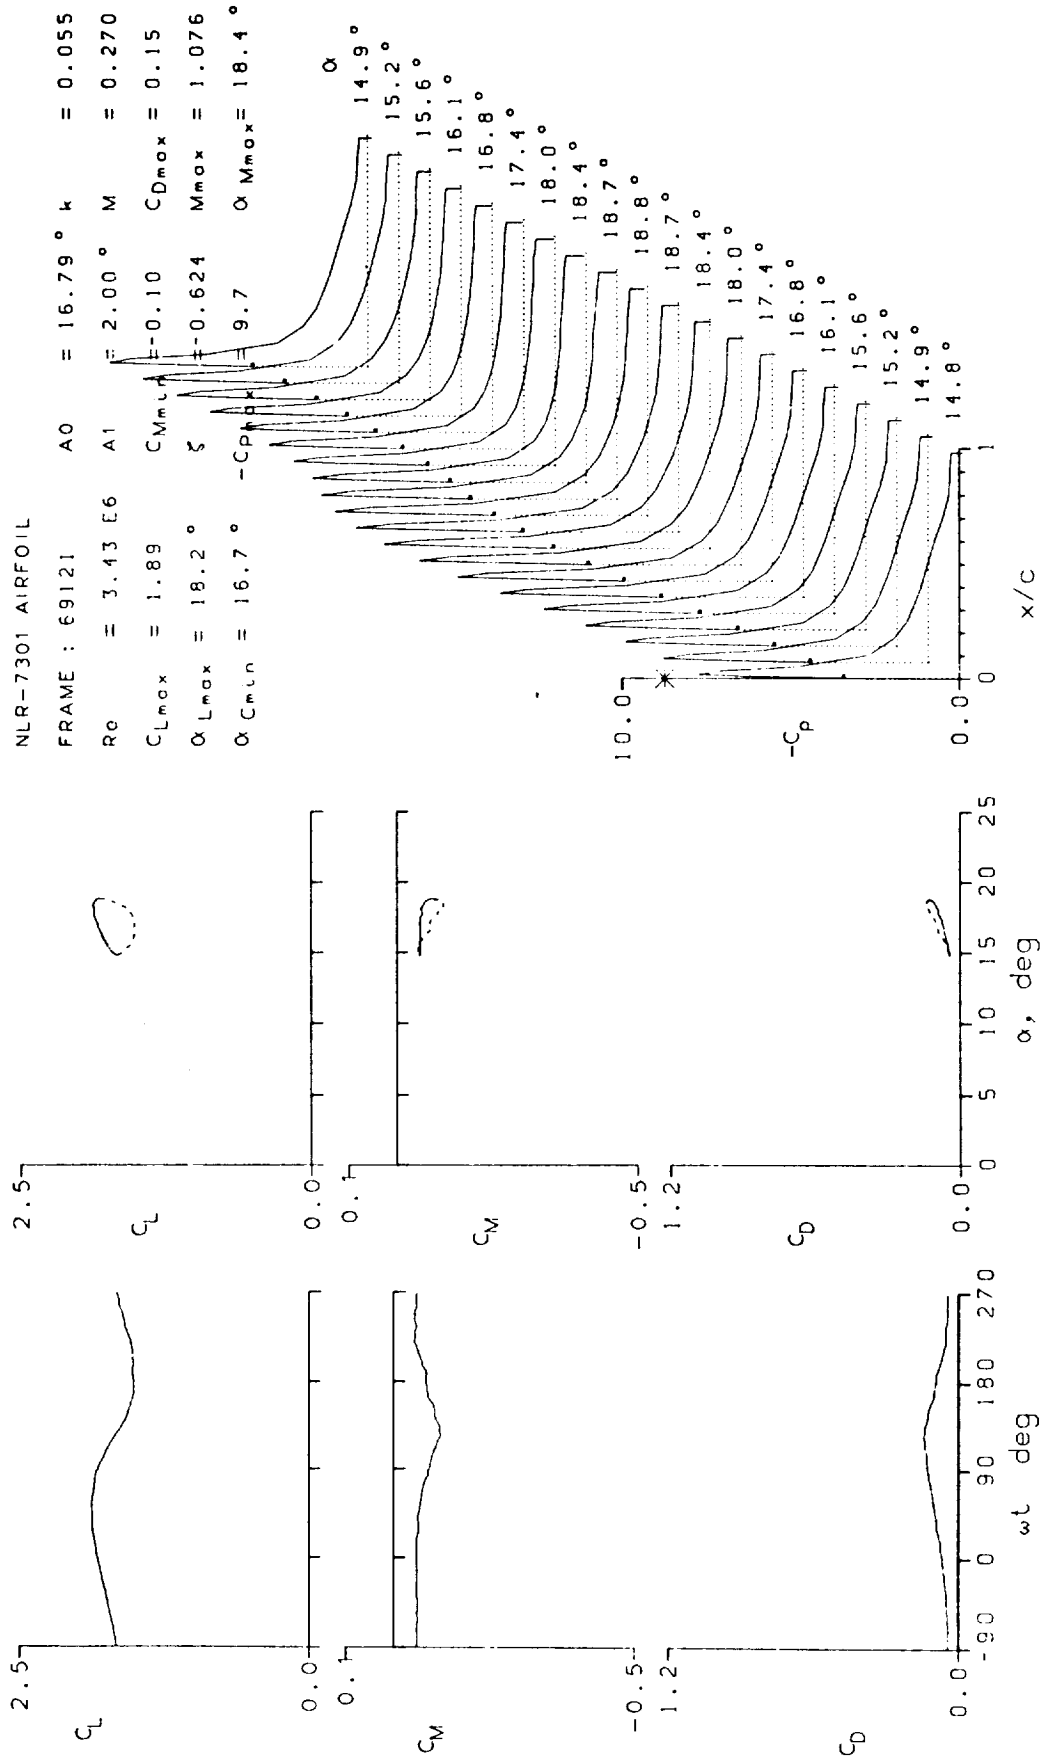


Figure 19.- Continued.

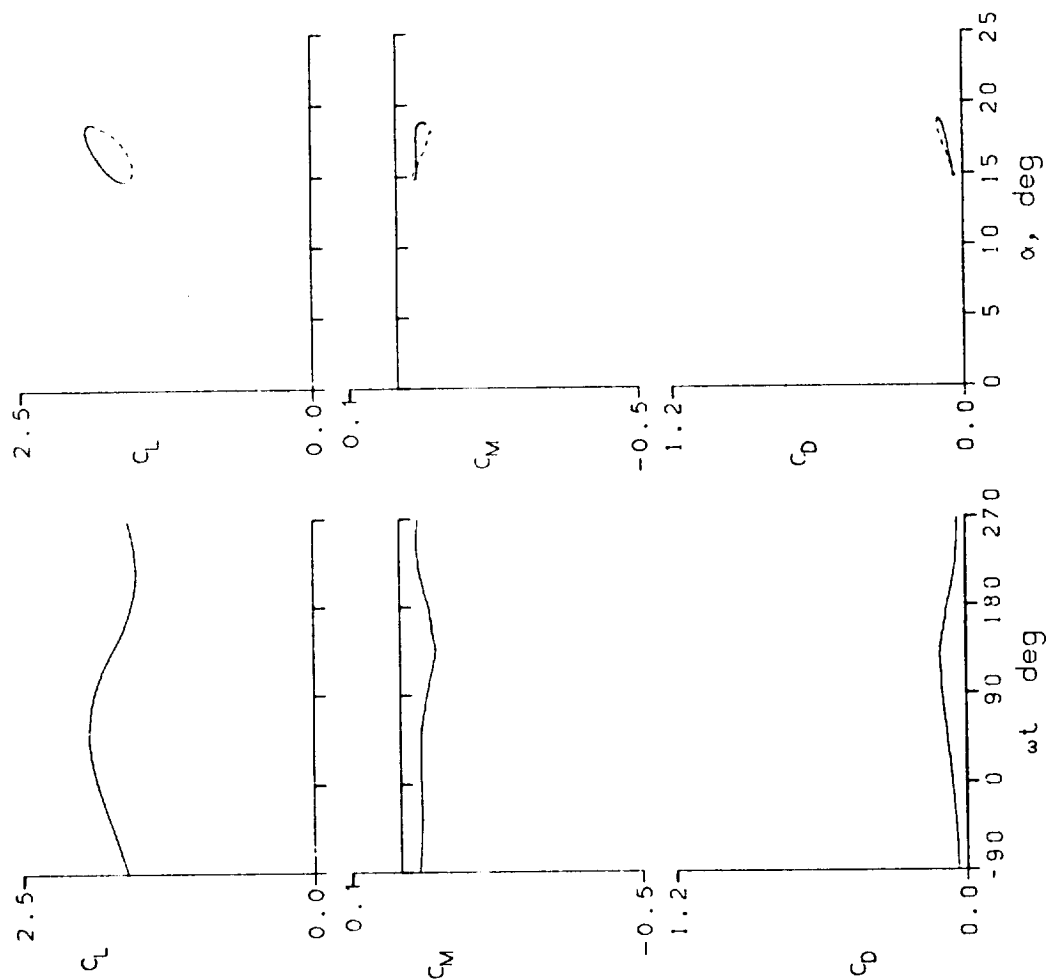

NLR-7301 AIRFOIL
 FRAME : 69123 $A_0 = 16.78^\circ$ $k = 0.110$
 $Re = 3.40 \text{ E}6$ $A_1 = 2.00^\circ$ $M = 0.268$
 $C_{L_{max}} = 1.93$ $C_{M_{min}} = -0.08$ $C_{D_{max}} = 0.11$
 $\alpha_{L_{max}} = 18.2^\circ$ $\xi = -0.441$ $M_{max} = 1.091$
 $\alpha_{C_{min}} = 16.7^\circ$ $-C_{D_{min}} = 10.0$ $\alpha_{M_{max}} = 18.4^\circ$

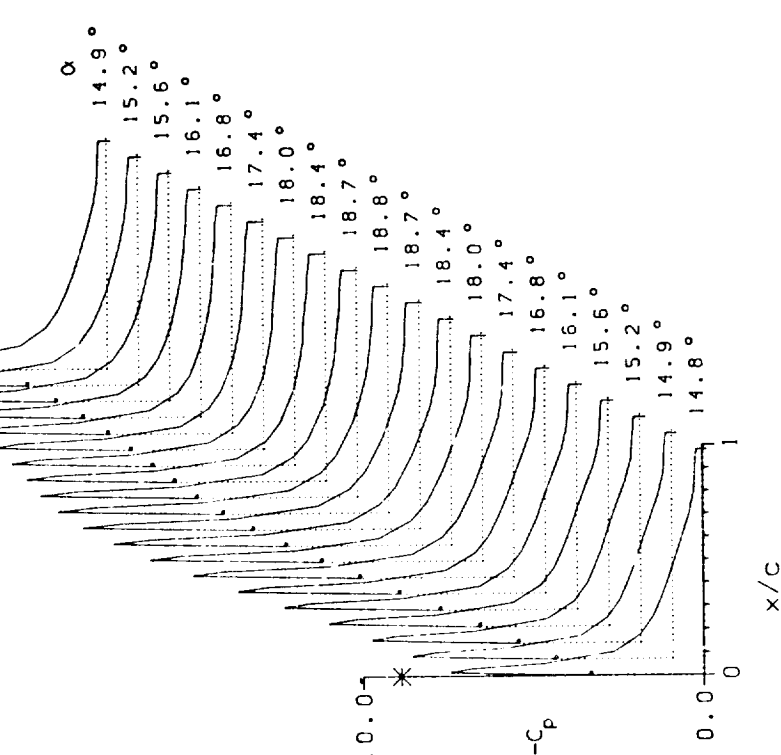


Figure 19.- Continued.

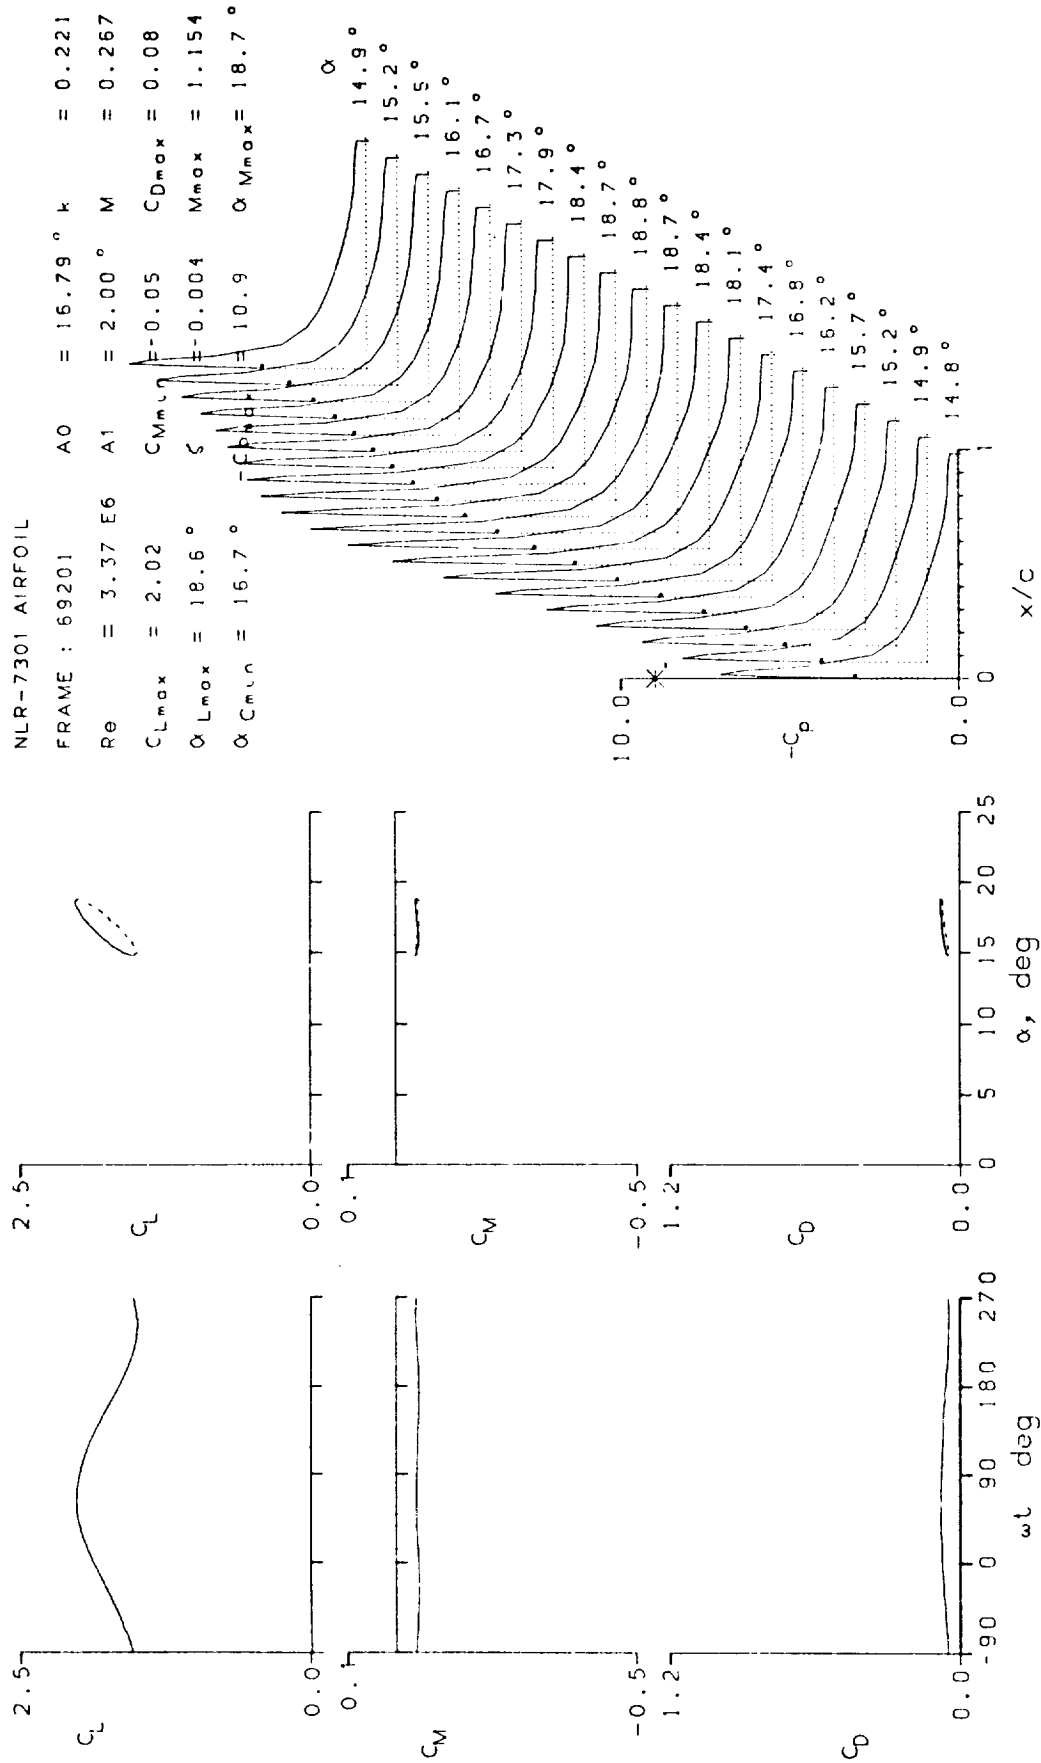
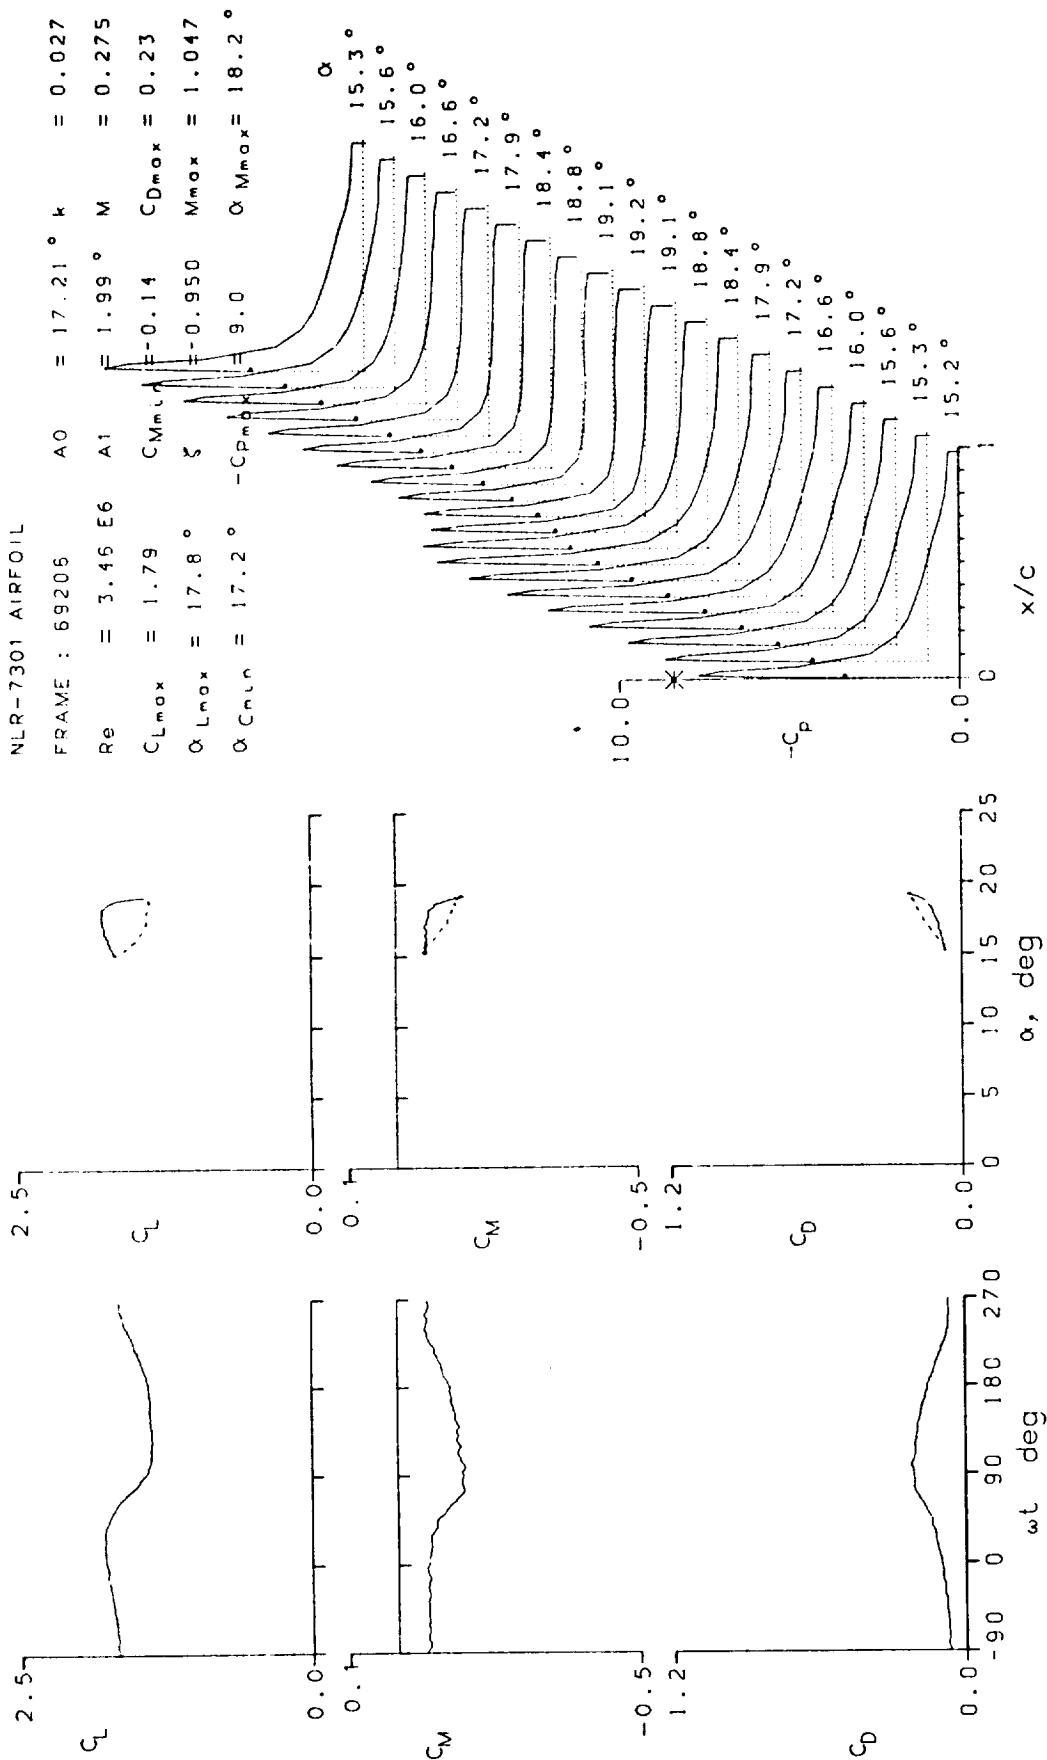


Figure 19.- Continued.




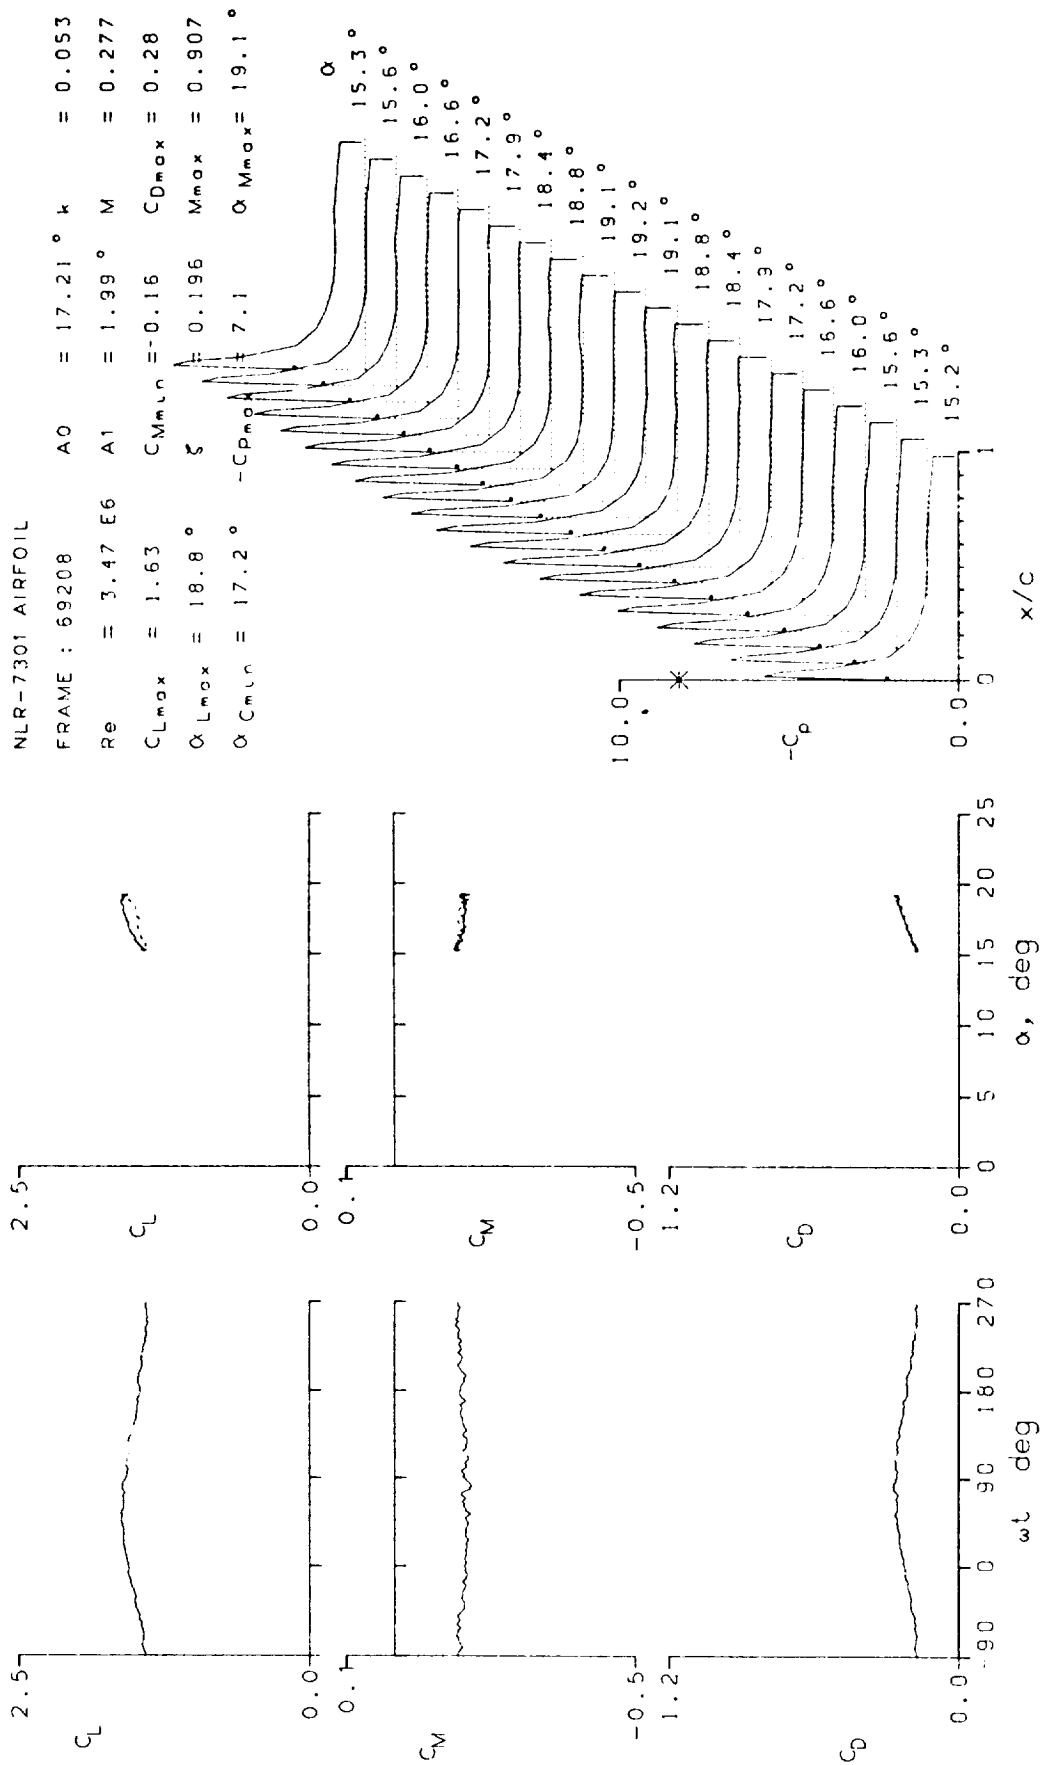


Figure 19.- Continued.

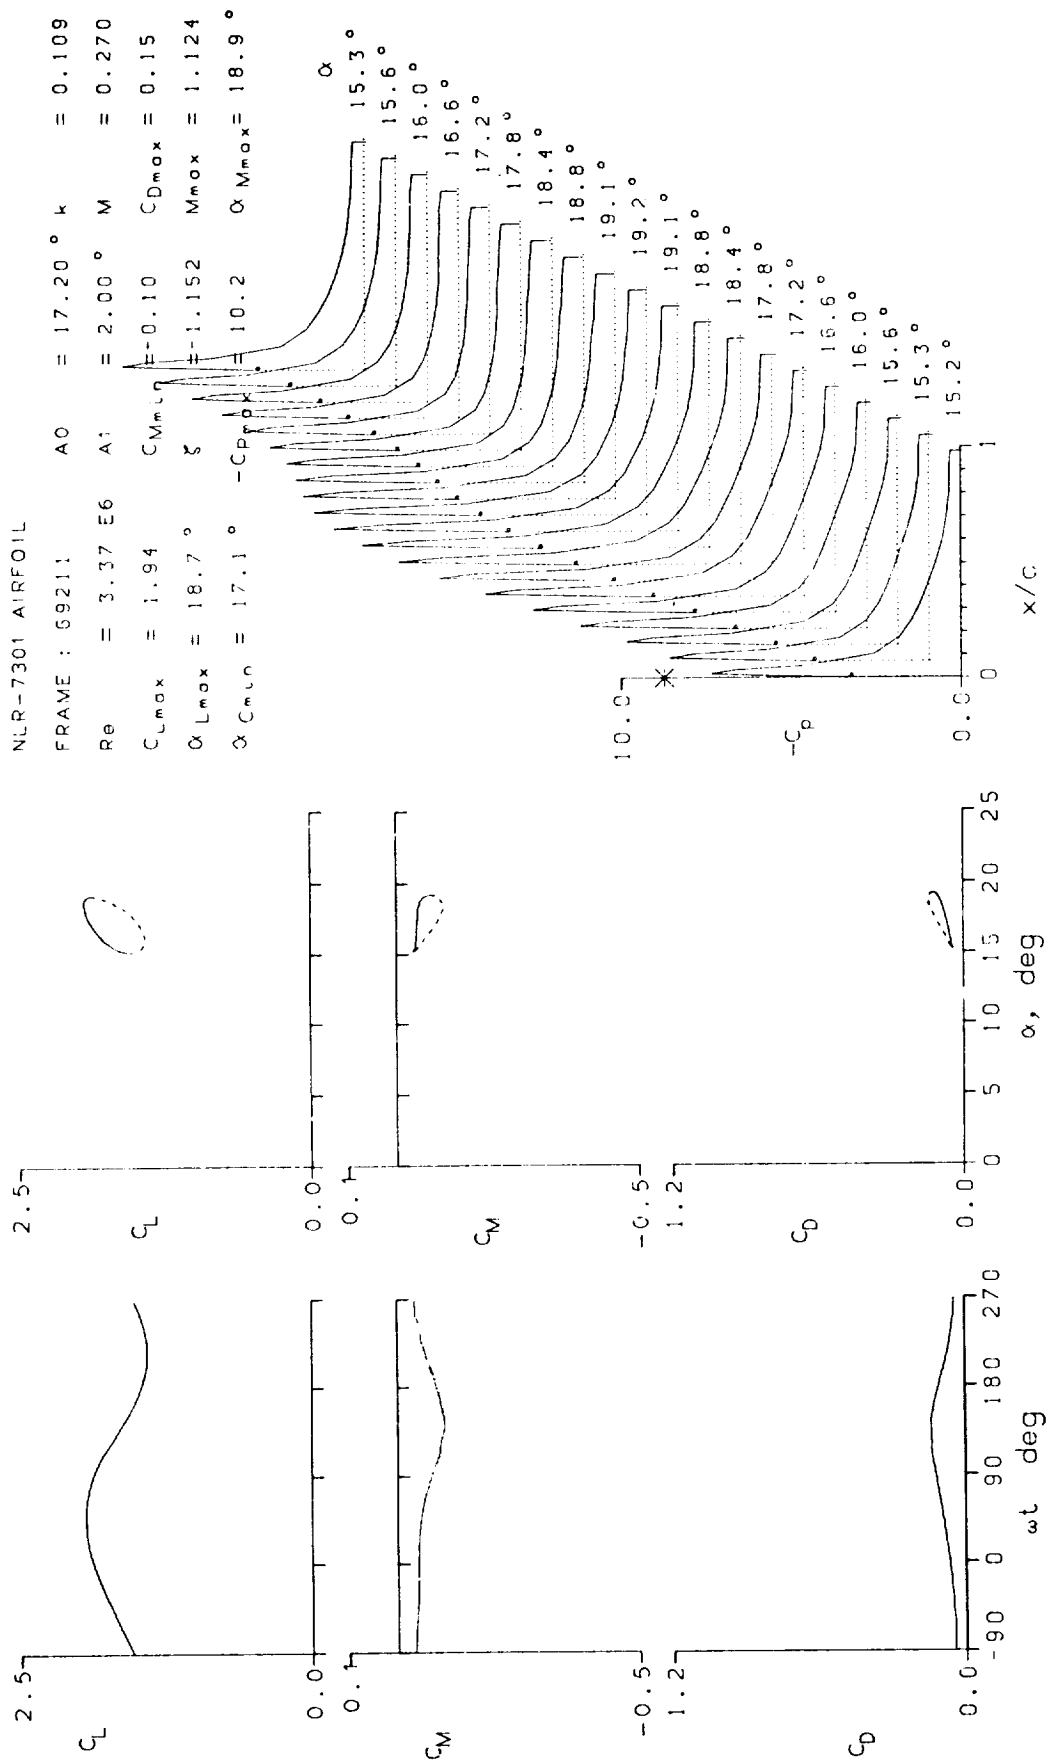

NLR-7301 AIRFOIL

FRAME : 69213	A0	= 17.19 °	k	= 0.162	
Re	= 3.39 E6	A1	= 2.00 °	M	= 0.272
C_{Lmax}	= 0.99	C_{Mmin}	= -0.21	C_{Dmax}	= 0.38
α_{Lmax}	= 18.5 °	ζ	= 1.062	M_{max}	= 0.418
α_{Cmin}	= 17.2 °	$-C_{pmax}$	= 1.3	α_{Mmax}	= 19.2 °

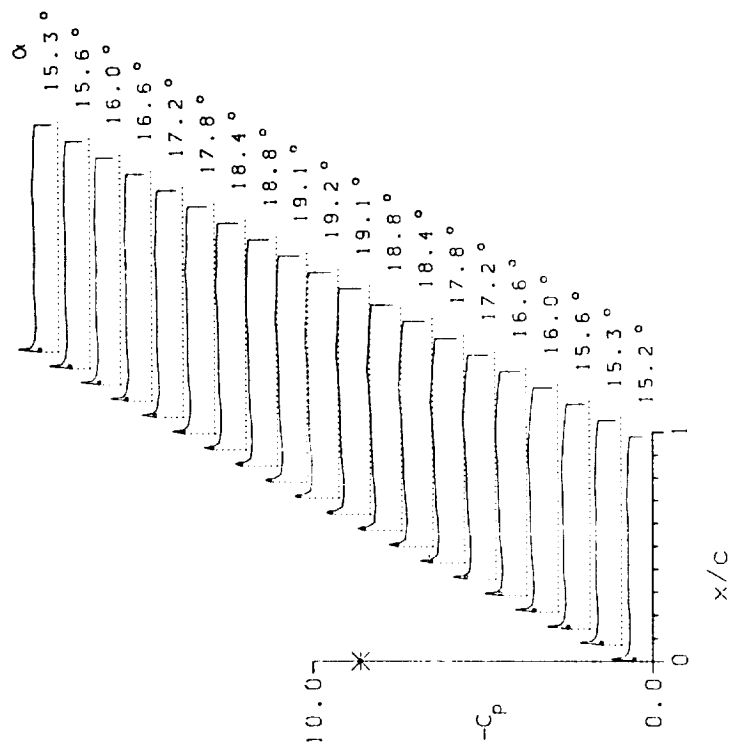
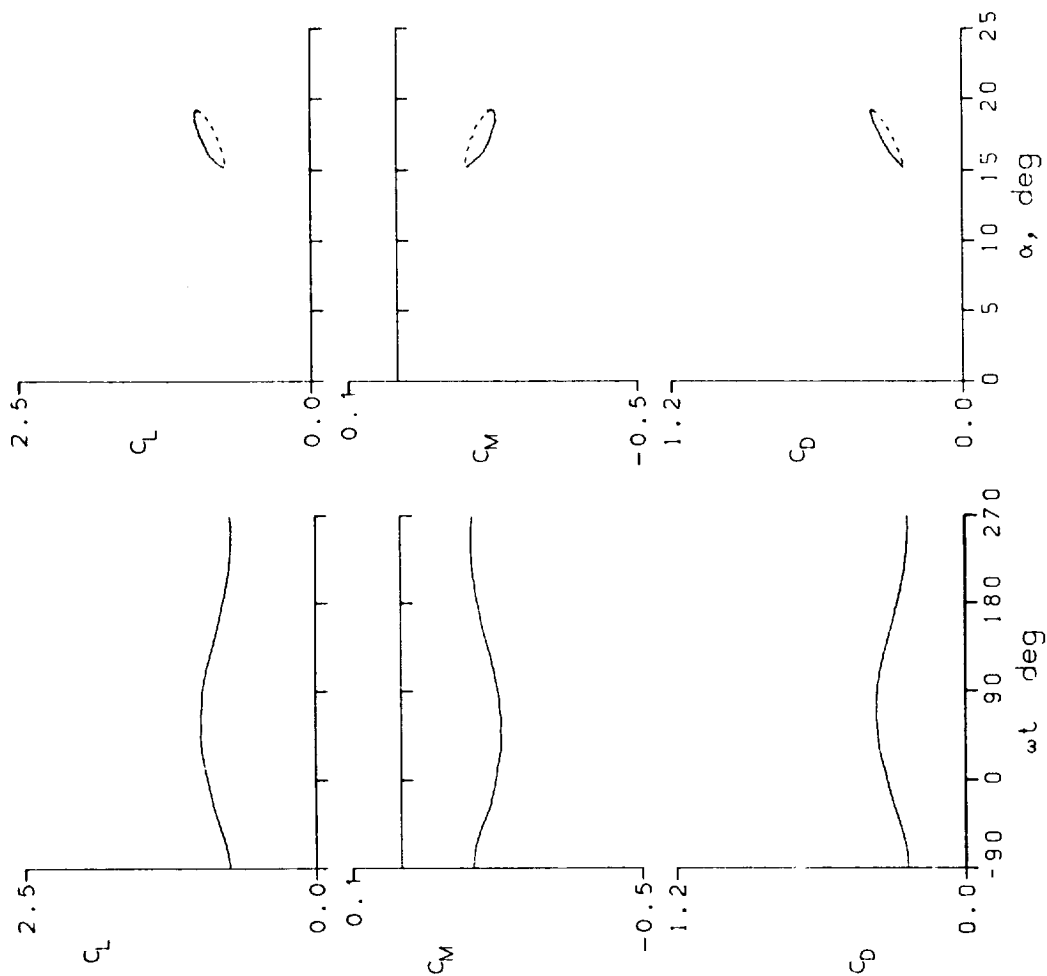


Figure 19.- Continued.

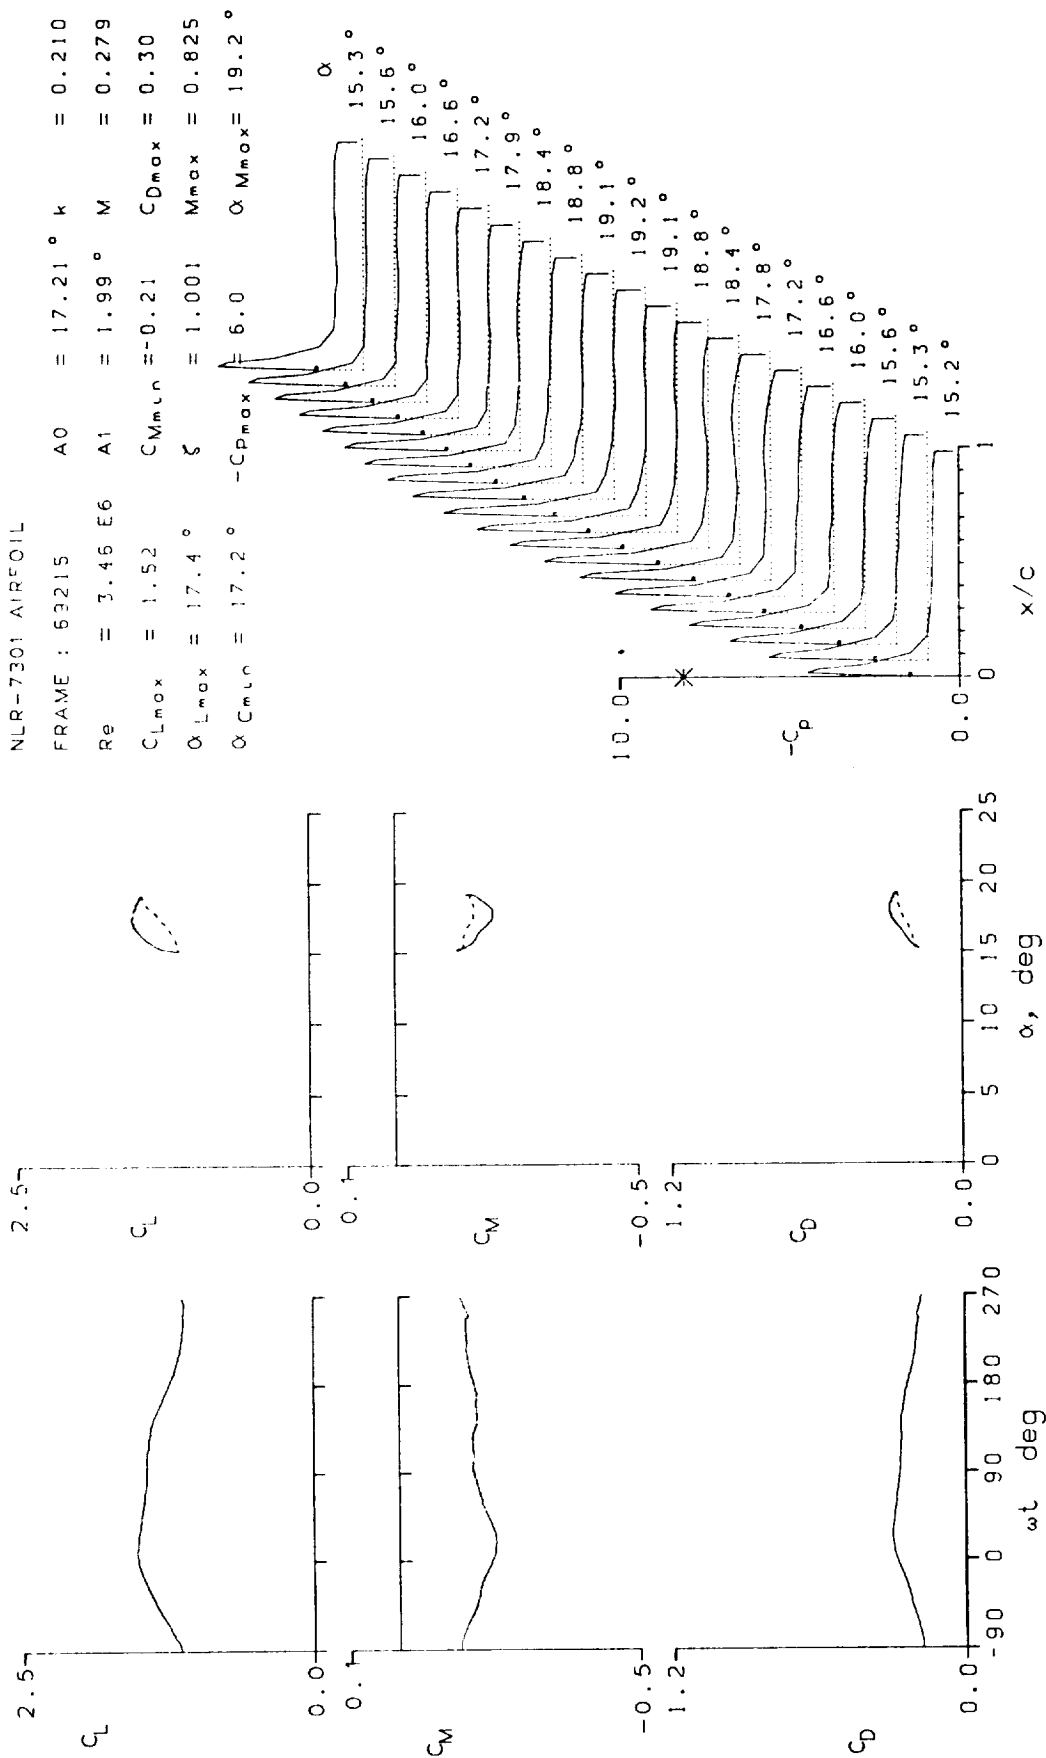


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 69223	A0 = 17.48 °	k = 0.221
Re = 3.29 E6	A1 = 2.00 °	M = 0.265
C _{Lmax} = 1.00	C _{Mmin} = -0.21	C _{Dmax} = 0.38
α _{Lmax} = 19.4 °	ξ = 0.813	M _{max} = 0.404
α _{Cmin} = 17.5 °	-C _{pmax} = 1.3	α _{Mmax} = 19.5 °

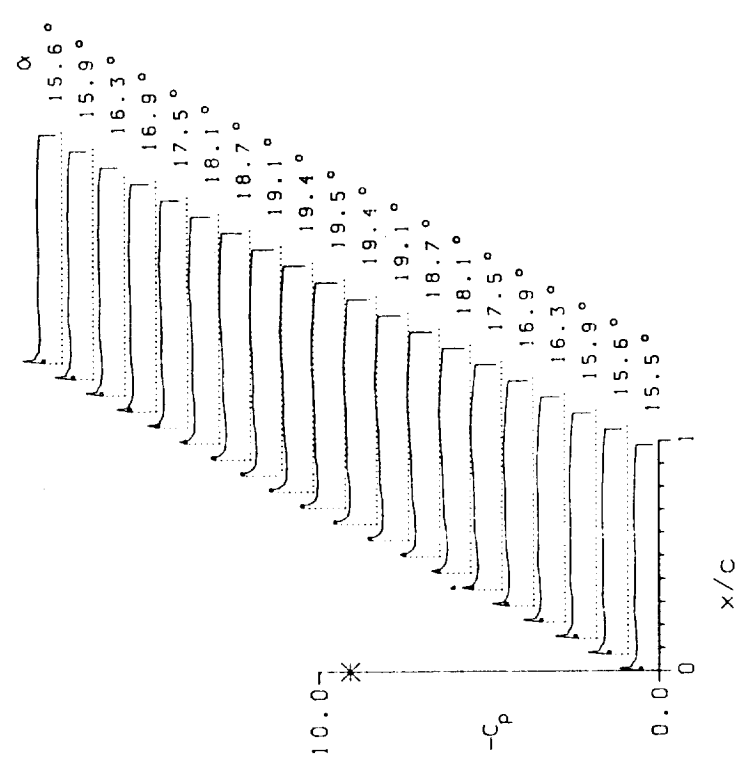
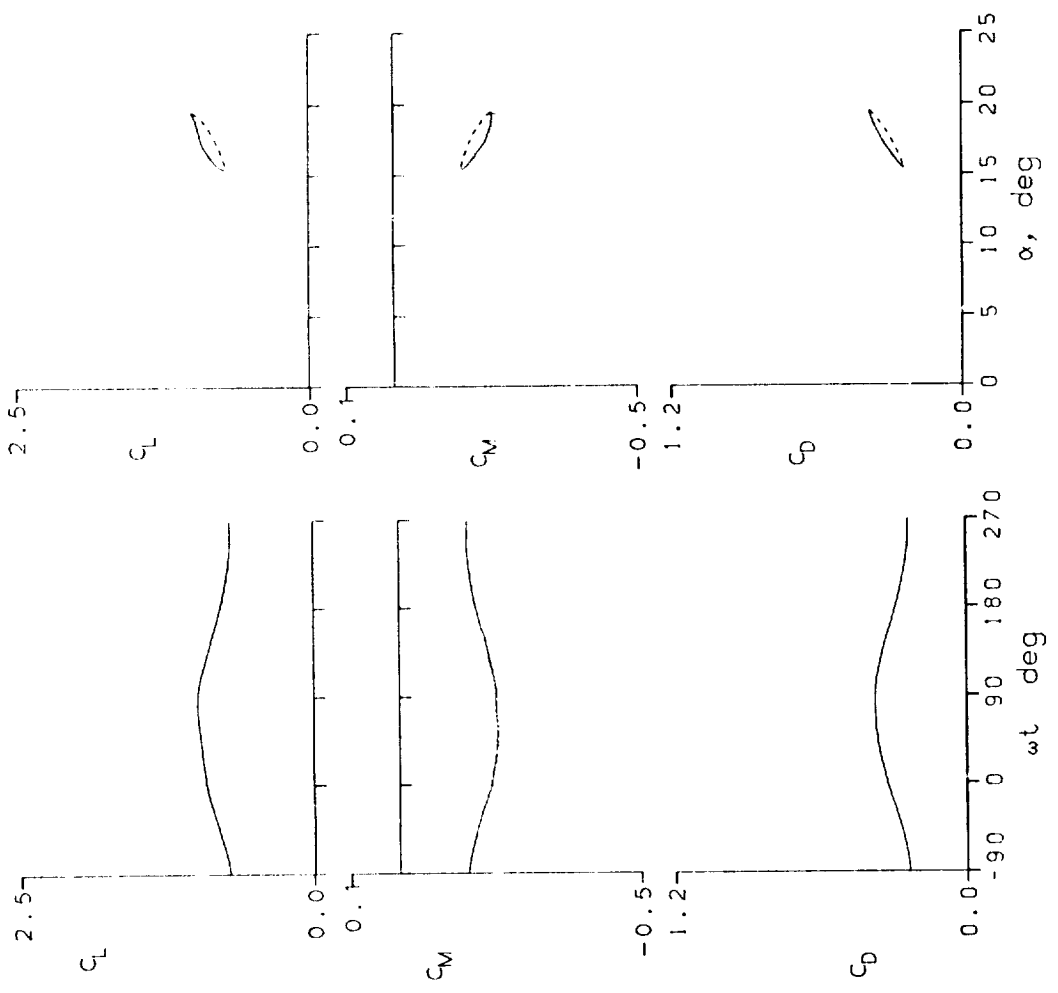


Figure 19.- Continued.

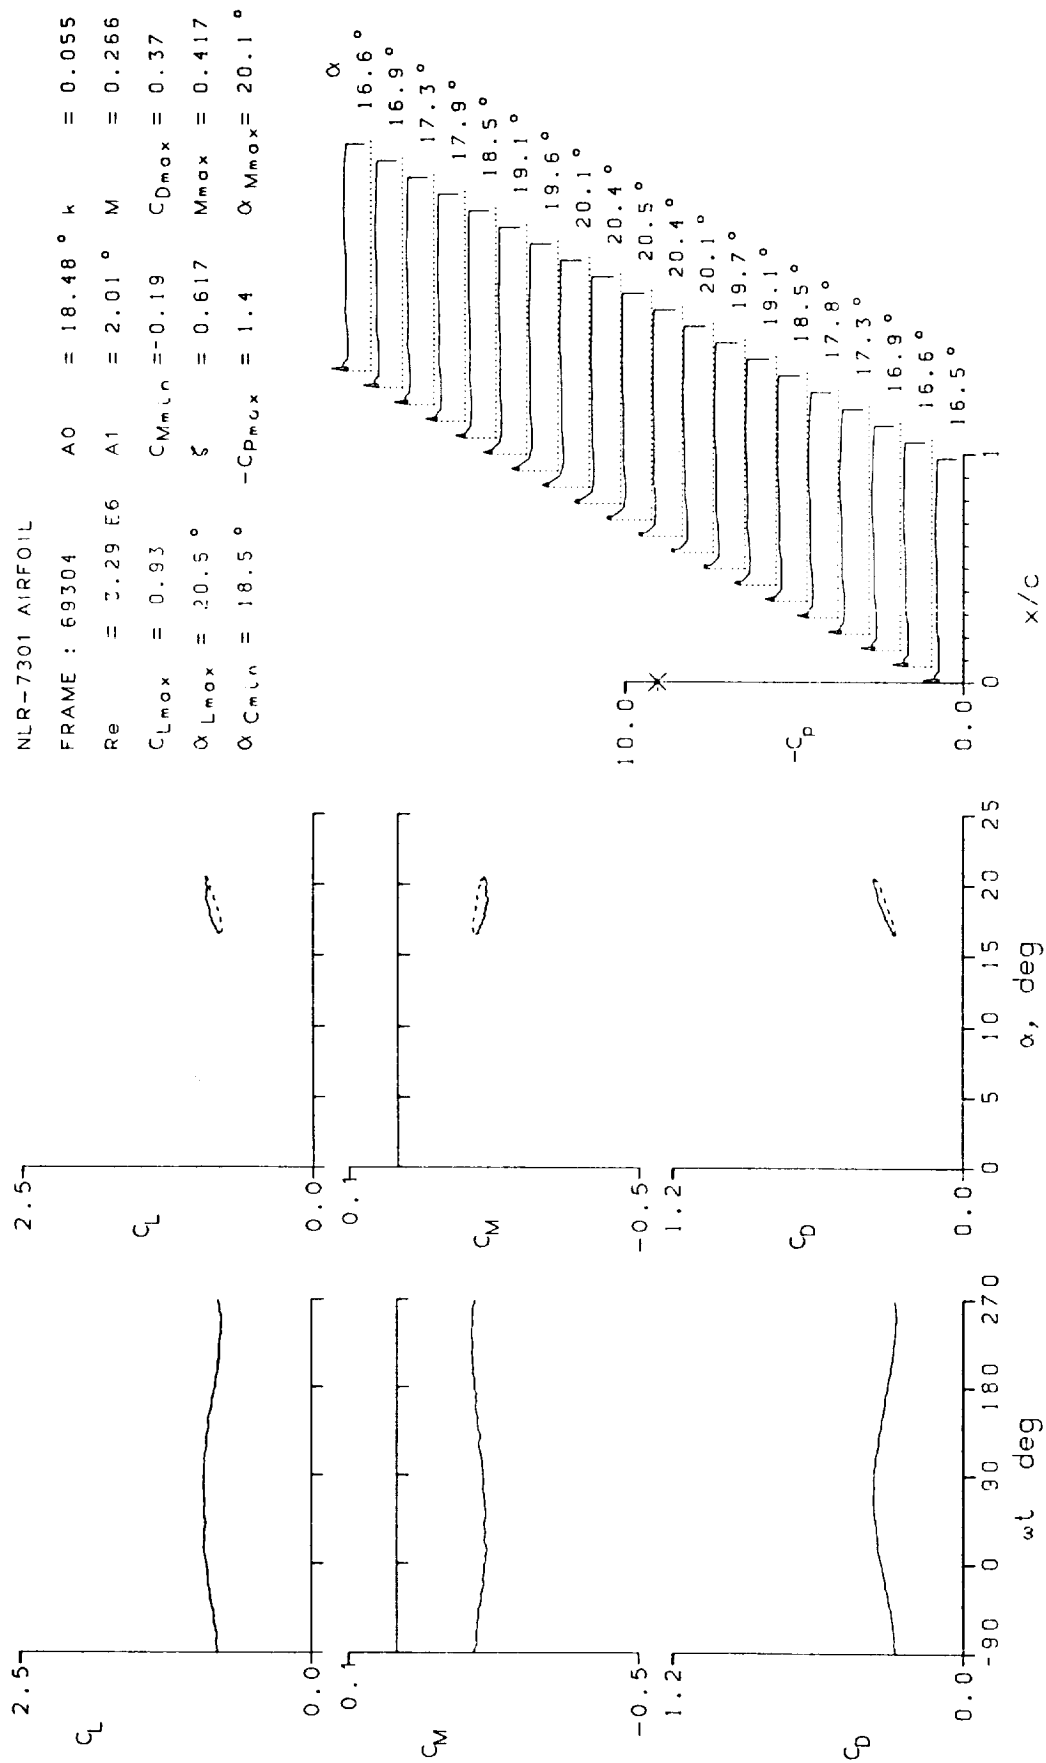


Figure 19.- Continued.

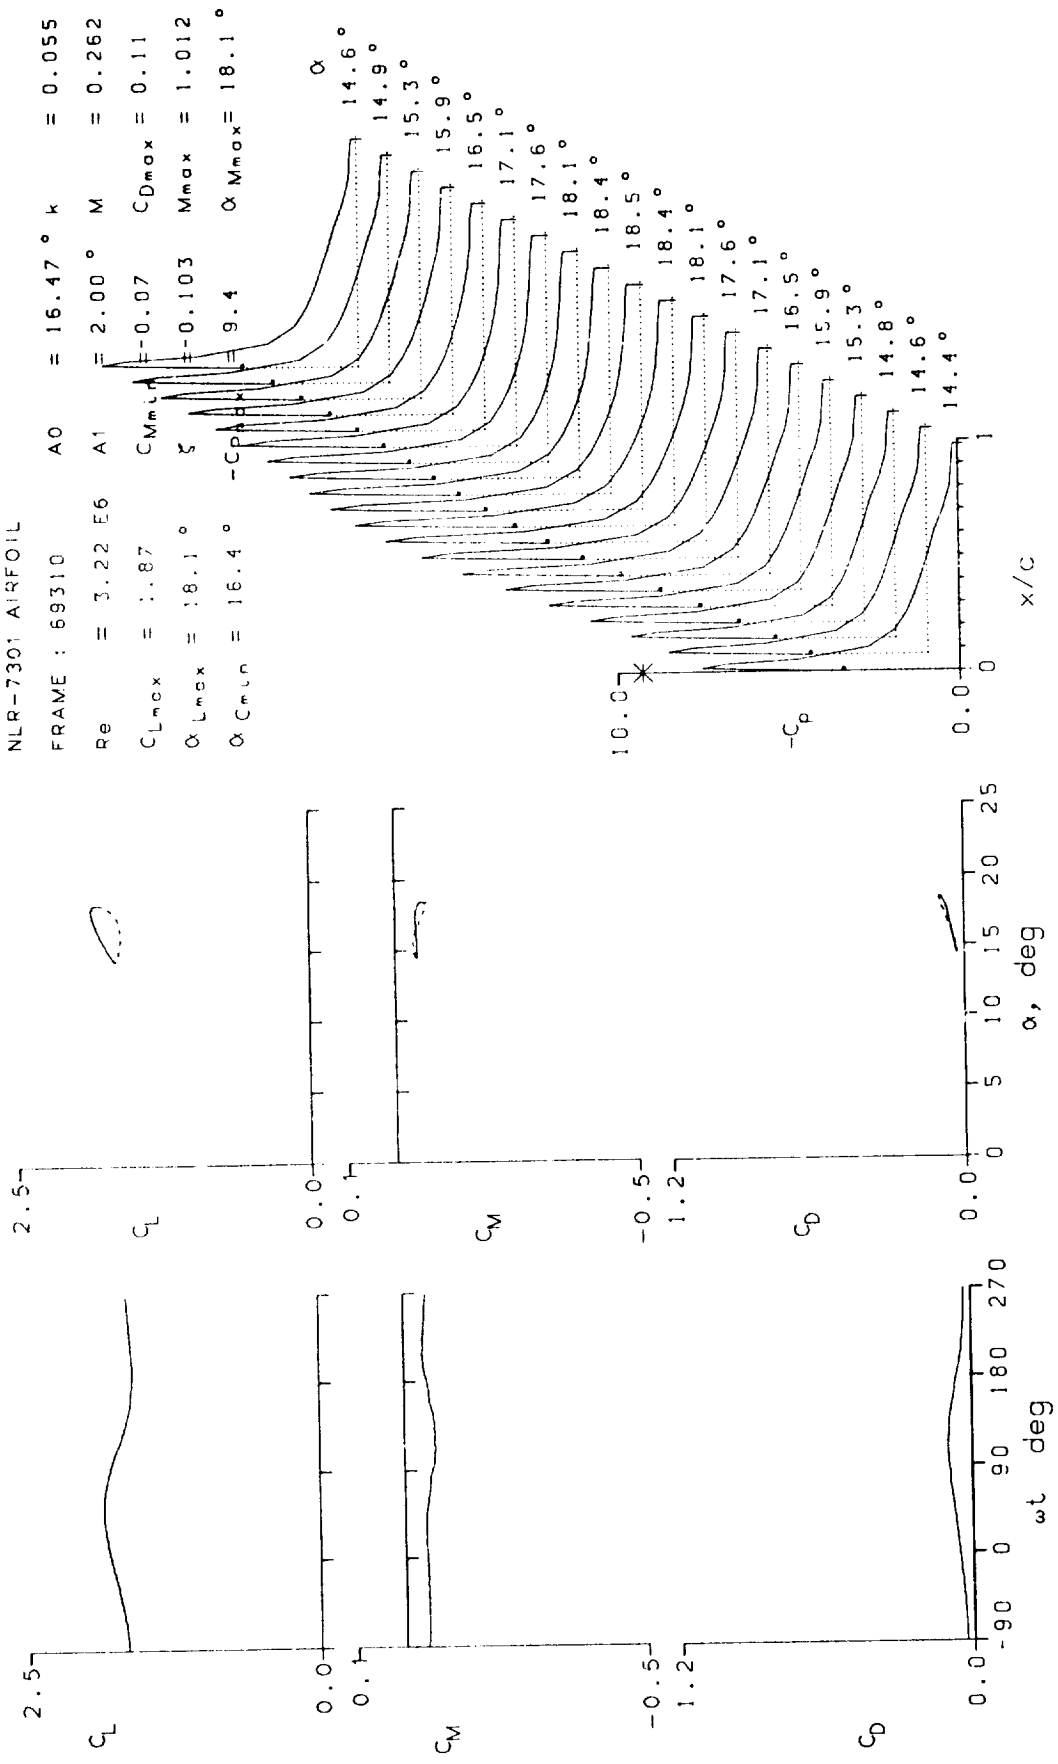


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 70019	A0	= 9.22 °	k	= 9.024	
Re	= 2.34 E6	A1	= 9.94 °	M	= 0.185
C_{Lmax}	= 1.88	C_{Mmin}	= -0.11	C_{Dmax}	= 0.15
α_{Lmax}	= 18.8 °	ξ	= 0.009	M_{max}	= 0.633
α_{Cmin}	= 9.7 °	$-C_{Pmax}$	= 9.1	α_{Mmax}	= 19.1 °

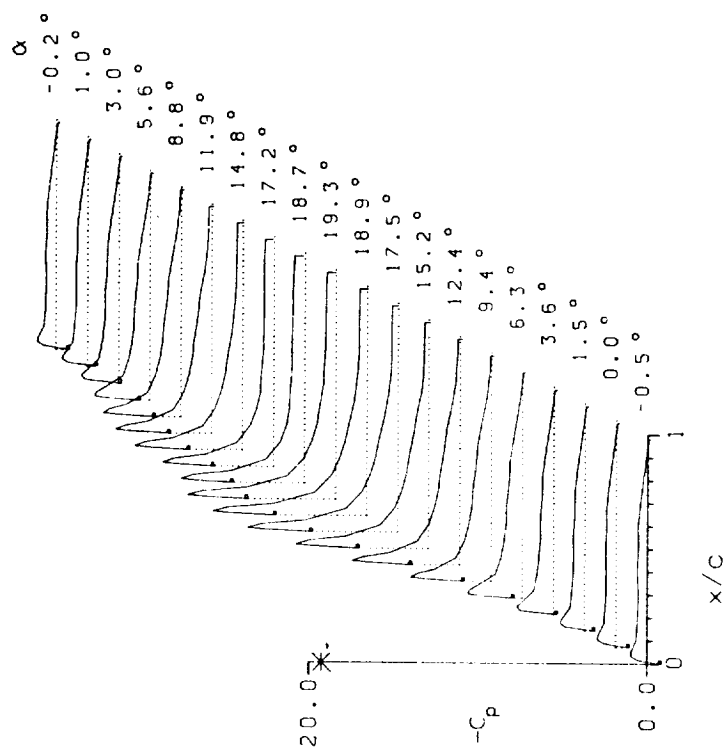
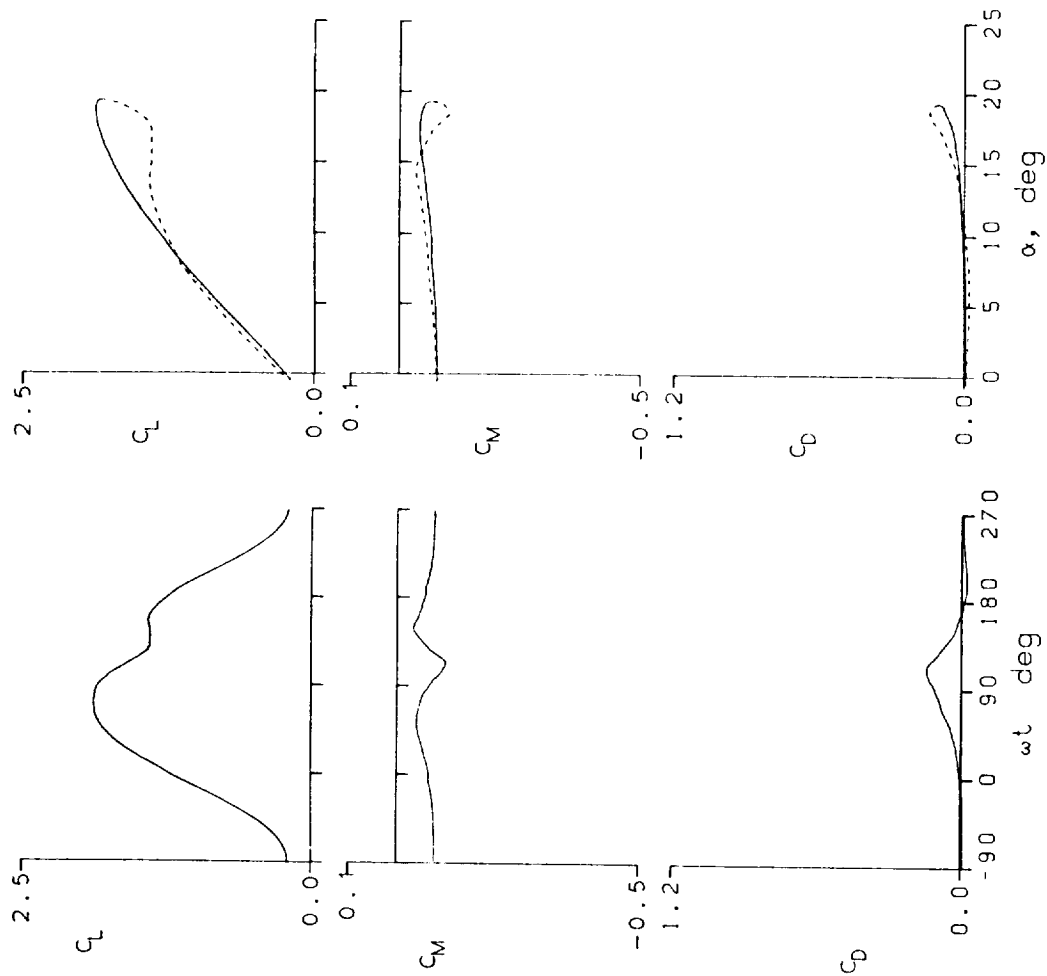


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 70021	A0 = 9.22 °	k = 0.097
Re = 2.34 E6	A1 = 9.94 °	M = 0.185
CLmax = 2.05	CMmin = -0.09	CDmax = 0.07
αLmax = 19.1 °	ξ = 0.236	Mmax = 0.672
αCMmin = 8.8 °	-CPmax = 10.2	αMmax = 19.3 °

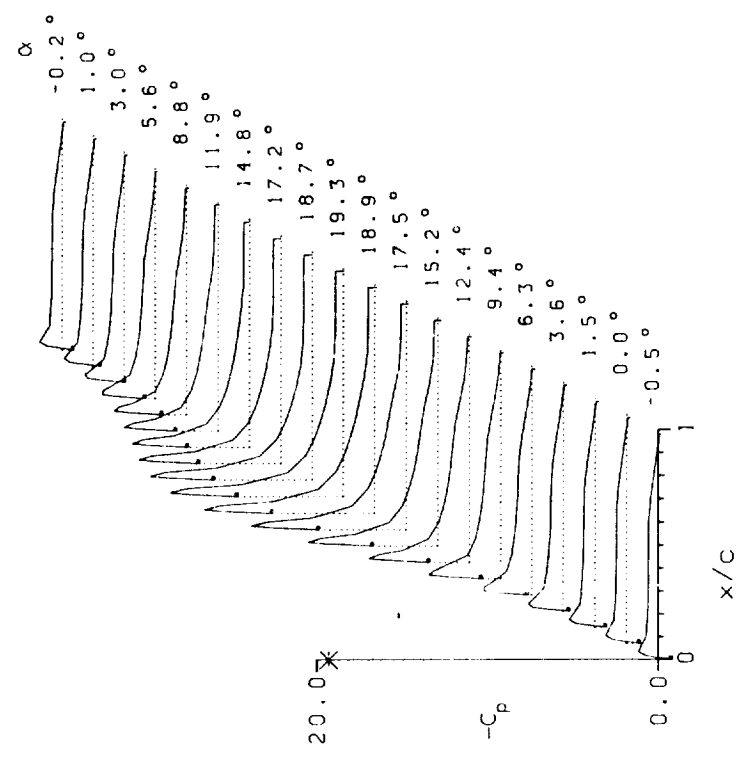
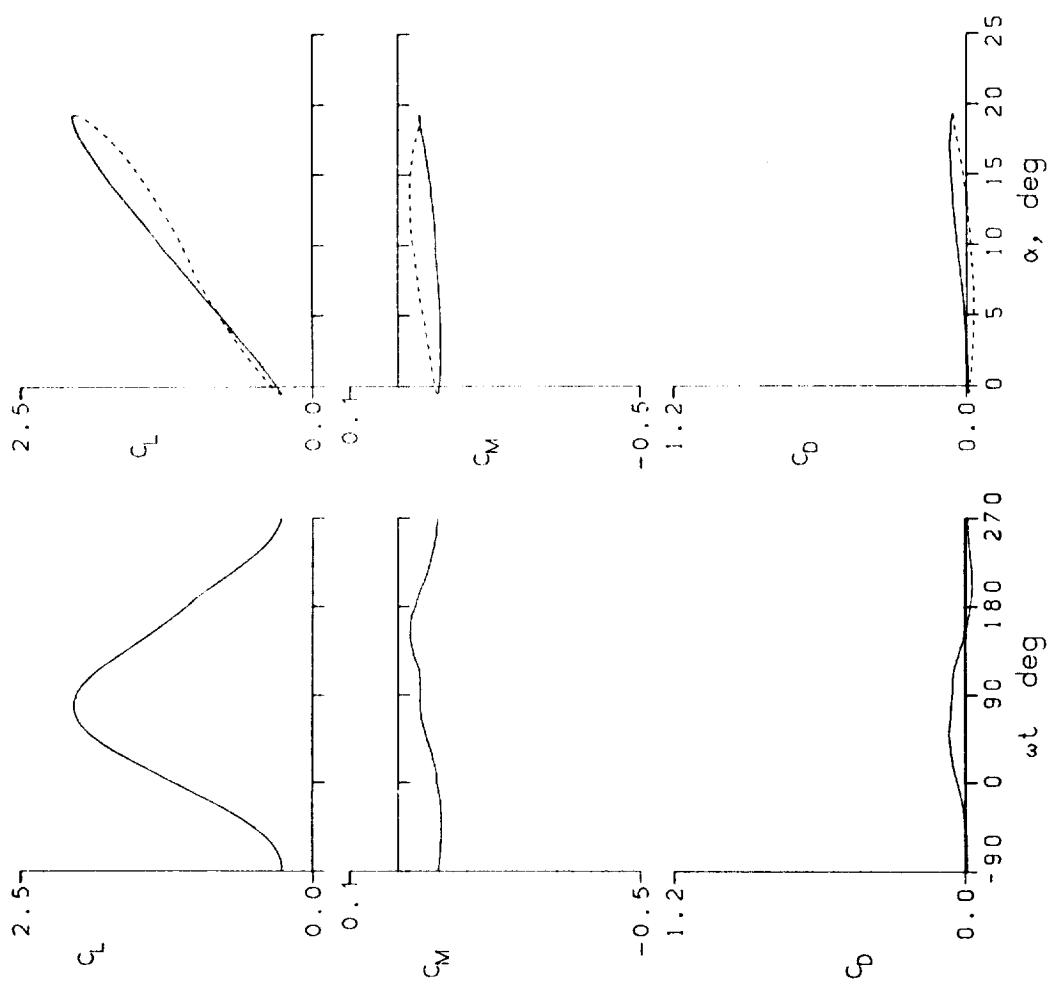


Figure 19.- Continued.

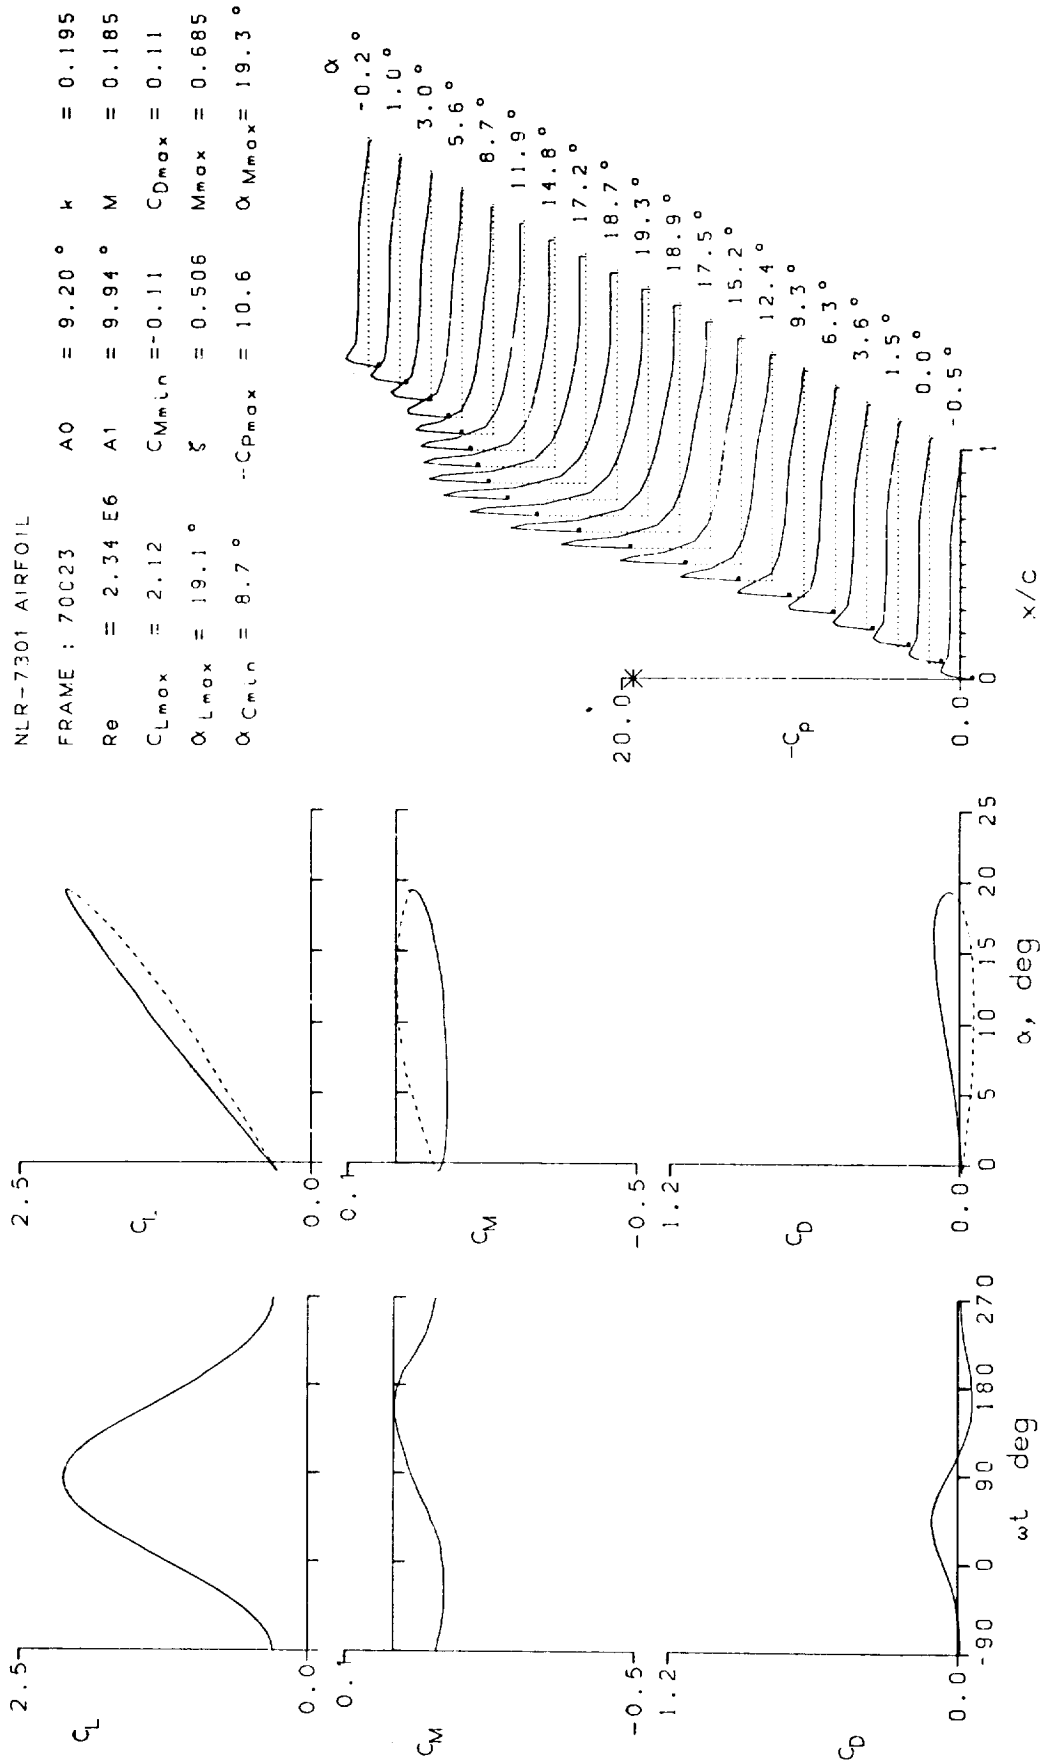


Figure 19.- Continued.

NLR-7301 AIRFOIL

FRAME : 70107	A0 = 5.48 °	k = 0.010
Re = 3.92 E6	A1 = 10.04 °	M = 0.301
$C_{Lmax} = 1.77$	$C_{Mmin} = -0.09$	$C_{Dmax} = 0.06$
$\alpha_{Lmax} = 15.5 °$	$\xi = 0.014$	$M_{max} = 1.185$
$\alpha_{Cmin} = 5.0 °$	$-C_{Pmax} = 8.7$	$\alpha_{Mmax} = 15.7 °$

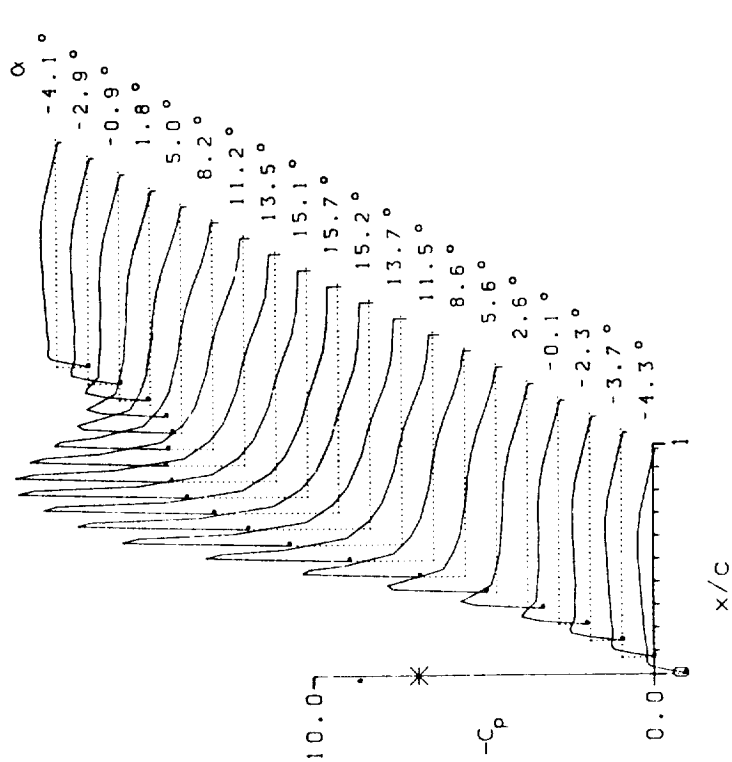
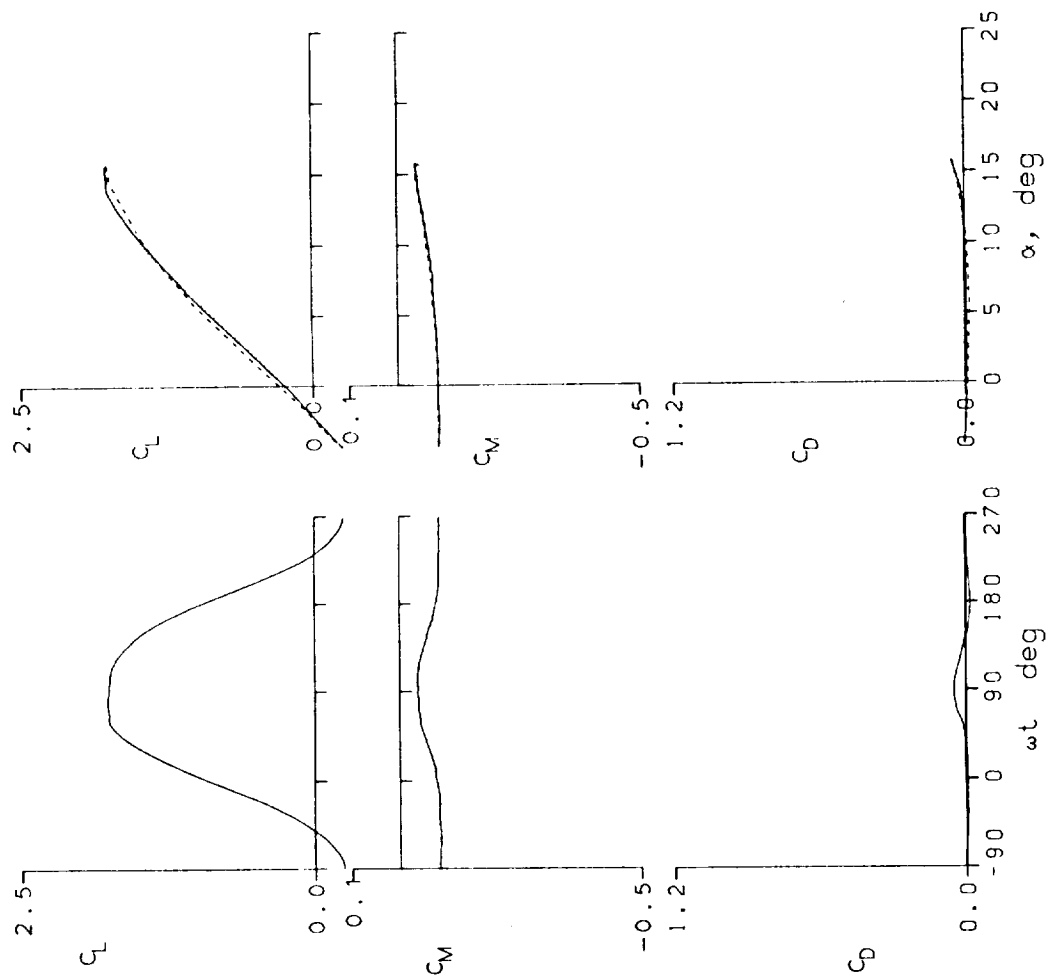


Figure 19.- Continued.

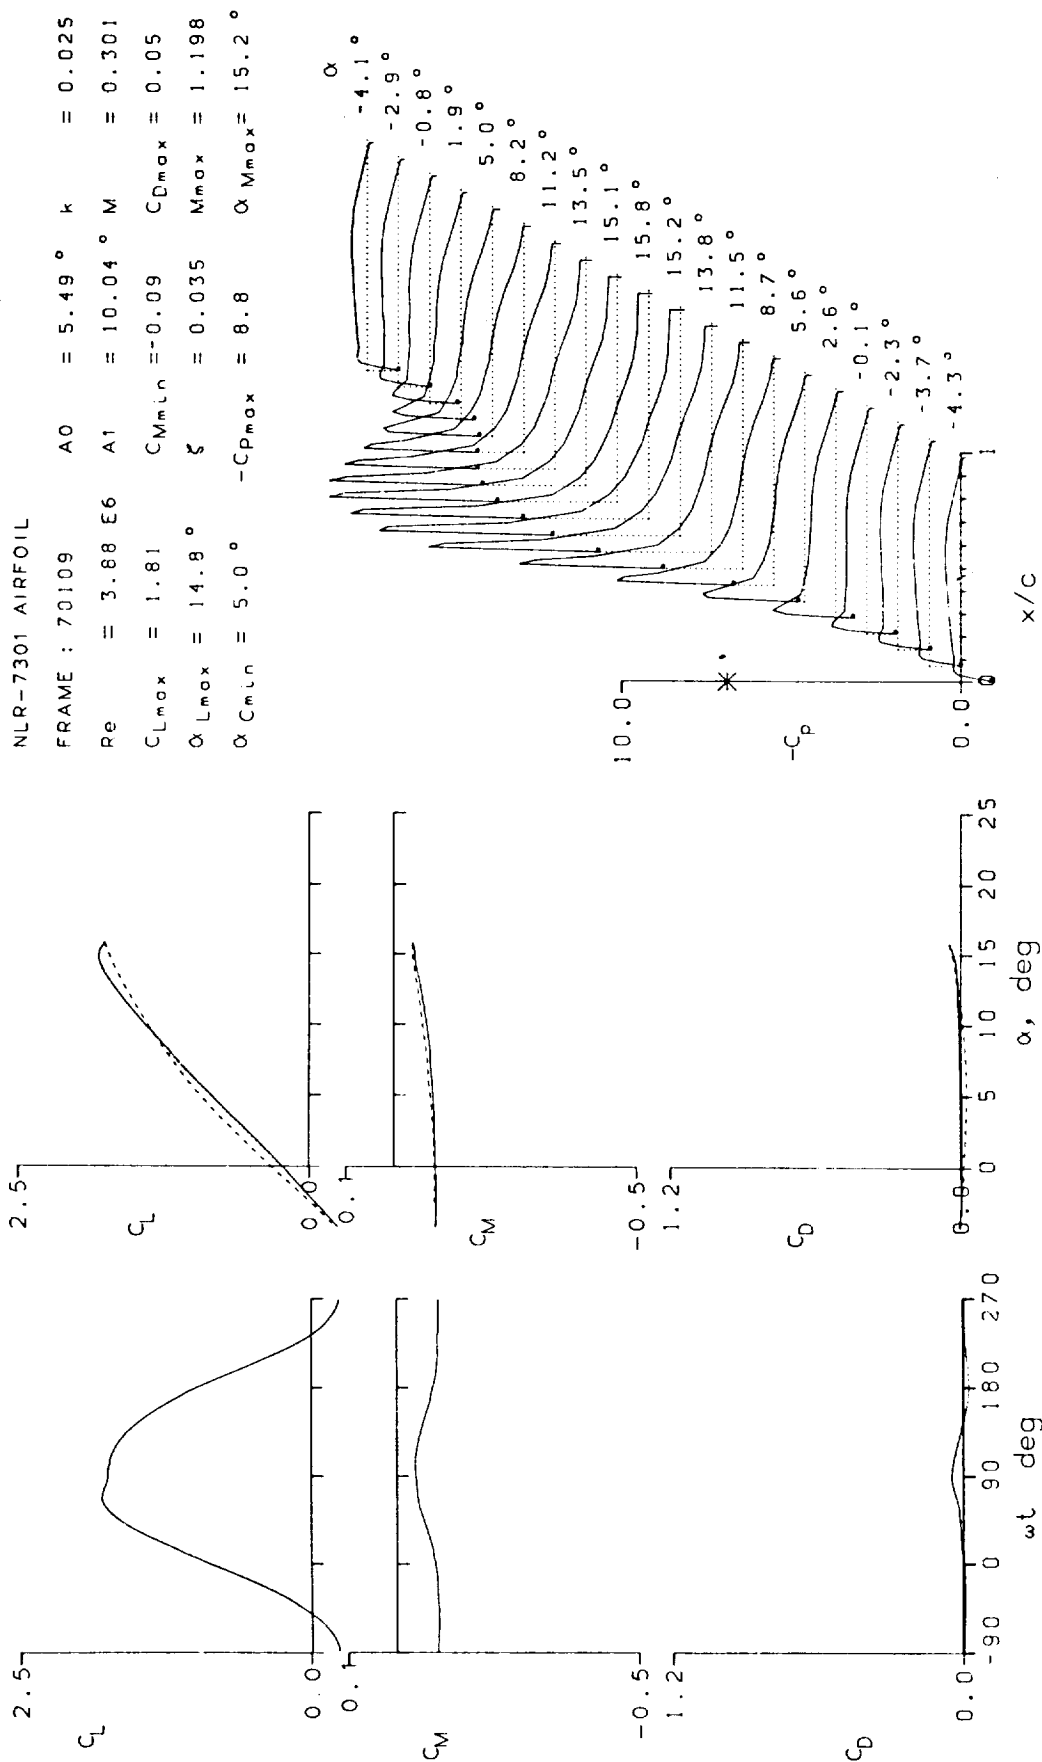


Figure 19.- Continued.

NLR-7301 AIRFOIL
 FRAME : 70113 $A_0 = 5.49^\circ$ $k = 0.049$
 $Re = 3.86 \text{ E } 6$ $A_1 = 10.05^\circ$ $M = 0.300$
 $C_{L_{max}} = 1.85$ $C_{M_{min}} = -0.09$ $C_{D_{max}} = 0.04$
 $\alpha_{L_{max}} = 15.2^\circ$ $\xi = 0.095$ $M_{max} = 1.222$
 $\alpha_{C_{min}} = 5.0^\circ$ $-C_{D_{max}} = 9.1$ $\alpha_{M_{max}} = 15.6^\circ$

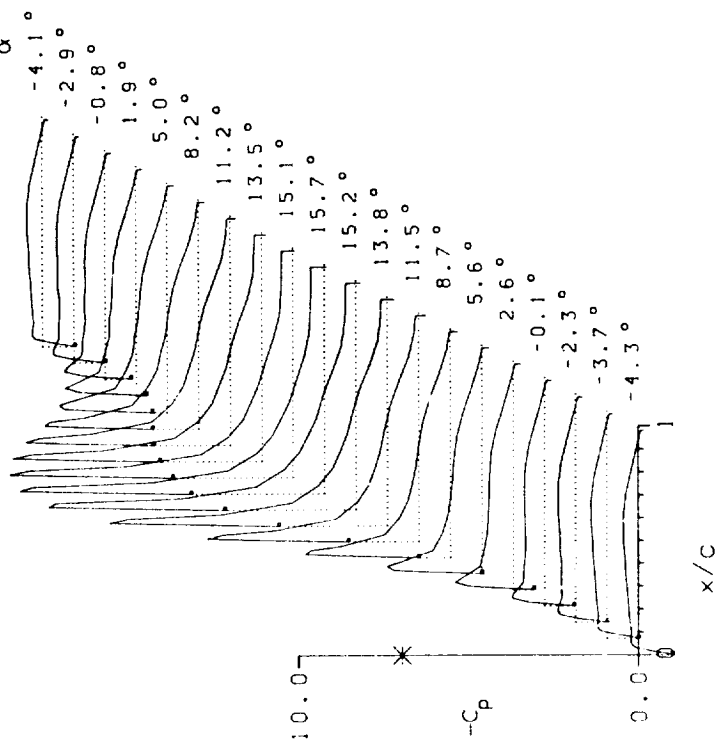
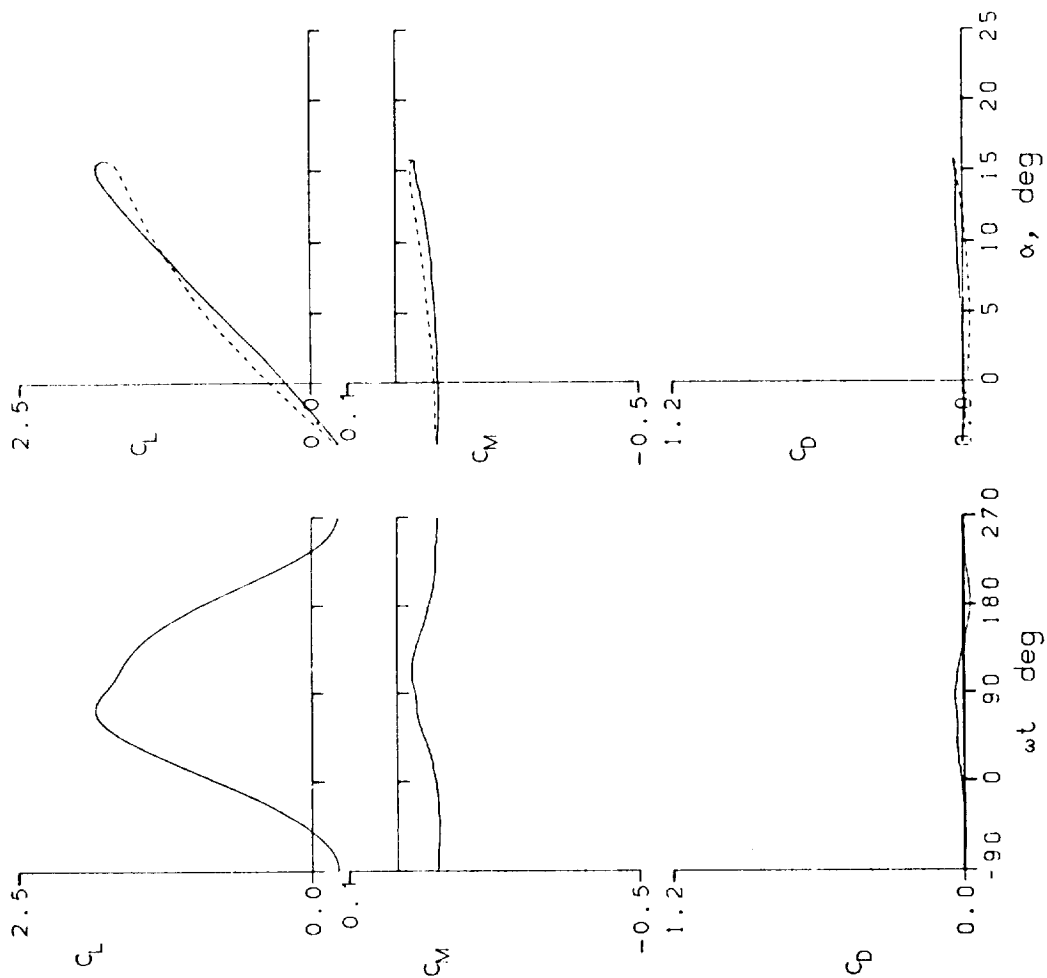


Figure 19.- Continued.


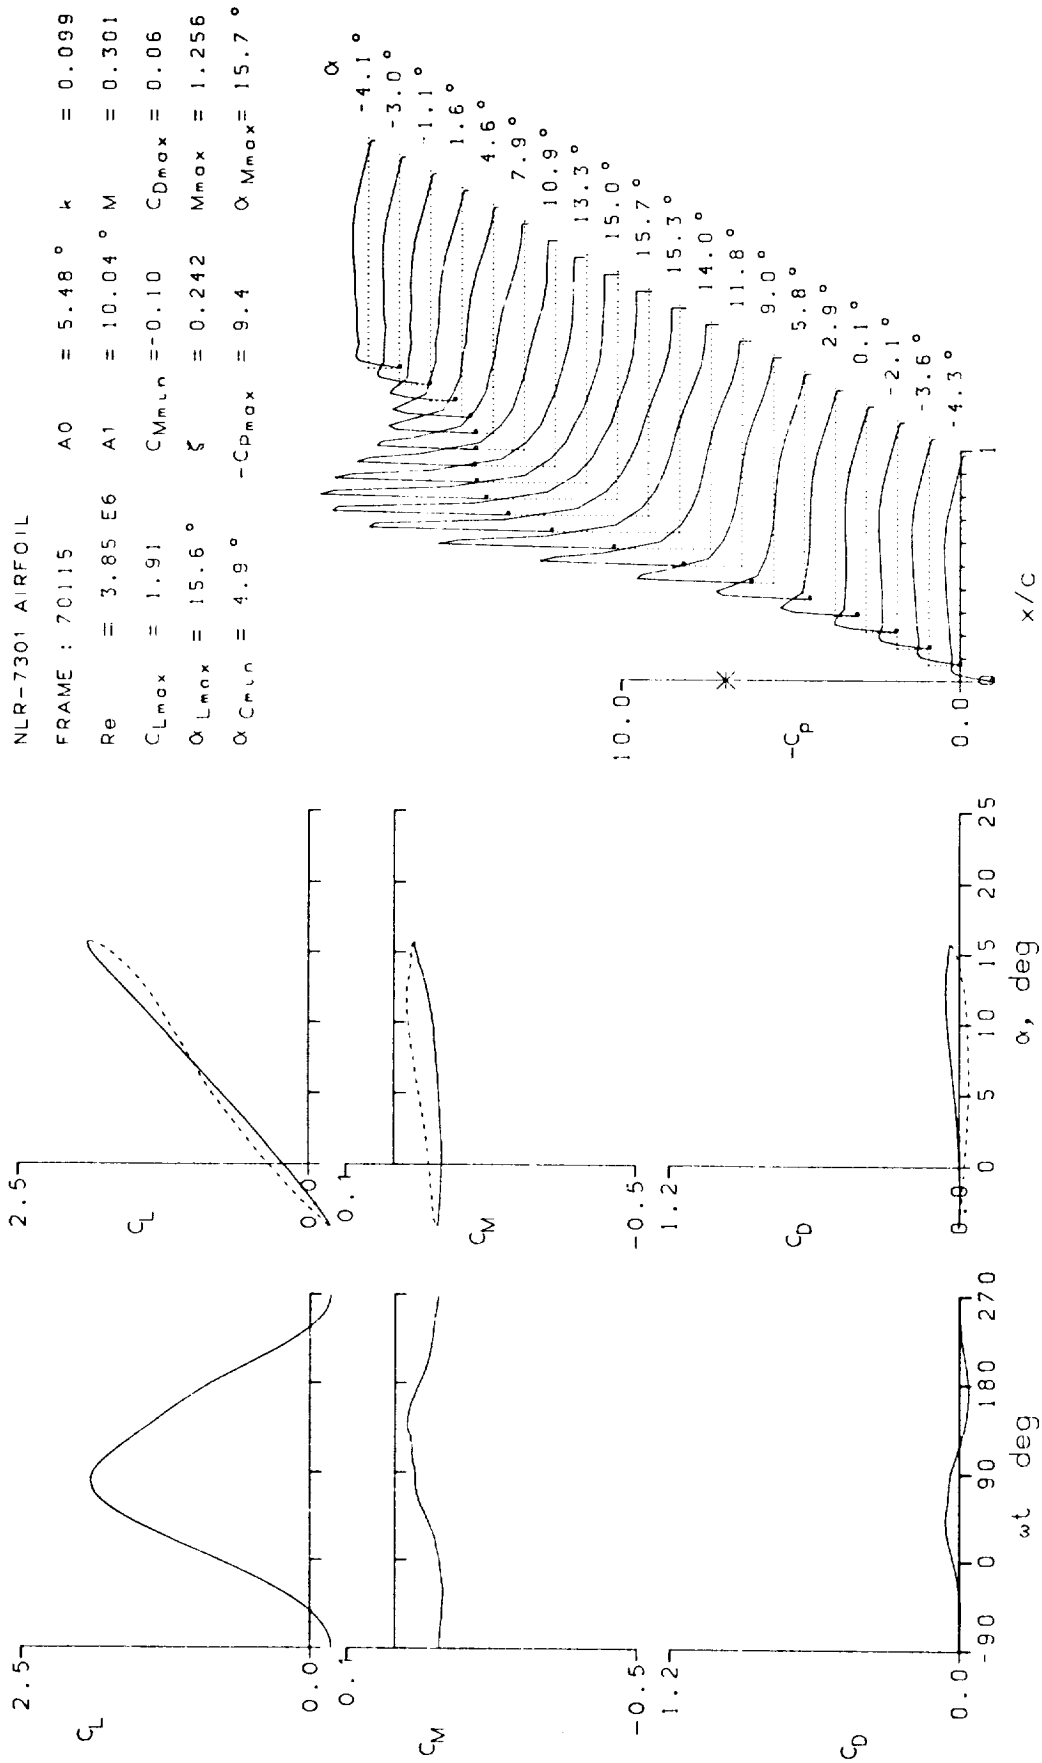


Figure 19.- Continued.

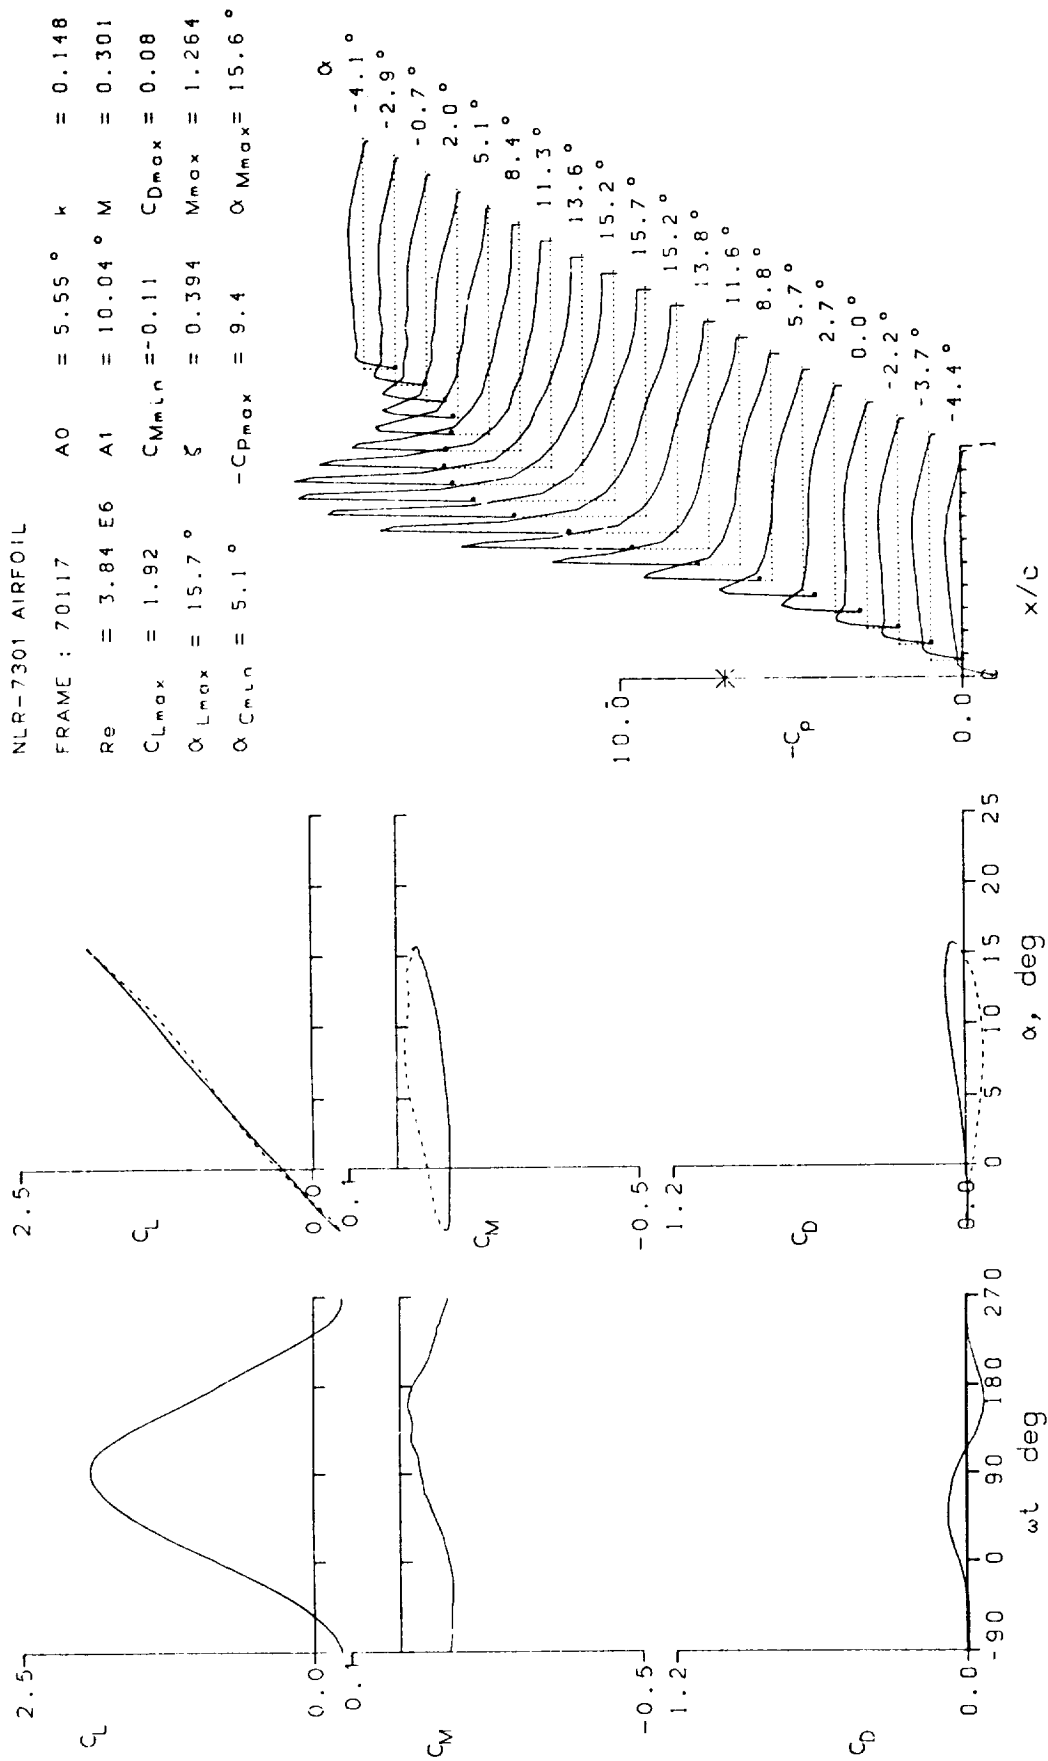

1. Report No. NASA TM 84245 USAAVRADCOM TR-82-A-8		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle AN EXPERIMENTAL STUDY OF DYNAMIC STALL ON ADVANCED AIRFOIL SECTIONS VOLUME II. PRESSURE AND FORCE DATA				5. Report Date September 1982	
				6. Performing Organization Code	
7. Author(s) K. W. McAlister, S. L. Pucci, W. J. McCroskey, and L. W. Carr				8. Performing Organization Report No. A-8925	
9. Performing Organization Name and Address NASA Ames Research Center, Moffett Field, Calif. 94035, and U.S. Army Aero- mechanics Laboratory (AVRADCOM), Ames Research Center, Moffett Field, Calif. 94035				10. Work Unit No. K-1585	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration, Washington, D.C. 20546, and U.S. Army Aviation R&D Command, St. Louis, MO 93166				13. Type of Report and Period Covered Technical Memorandum	
				14. Sponsoring Agency Code	
15. Supplementary Notes Point of Contact: K. W. McAlister, Ames Research Center, MS 215-1 Moffett Field, CA 94035, (415) 965-5892 or FTS 448-5892					
16. Abstract Experimentally derived force and moment data are presented for eight airfoil sections that were tested at fixed and varying incidence in a subsonic two-dimensional stream. Airfoil incidence was varied through sinusoidal oscillations in pitch over a wide range of amplitude and frequency. The surface pressure distribution, as well as the lift, drag, and pitching moment derived therefrom, are displayed in a uniform fashion to delineate the static and dynamic characteristics of each airfoil both in and out of stall.					
17. Key Words (Suggested by Author(s)) Dynamic stall, Maximum lift, Oscillating airfoils, Airfoil data, Boundary layer measurements, Unsteady pressure distributions				18. Distribution Statement Unlimited Subject Category - 02	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 647	
				22. Price* A26	